

# Blades: A Simulator for Attacks and Defenses in Federated Learning

Shenghui Li\*, Li Ju\*, Tianru Zhang\*, Edith Ngai†, and Thiemo Voigt\*‡

\*Uppsala University, Sweden

†The University of Hong Kong, China

‡ Research Institutes of Swede (RISE), Sweden

\*{shenghui.li, li.ju, tianru.zhang, thiemo.voigt}@it.uu.se, †chngai@eee.hku.hk

**Abstract**—Federated learning enables distributed training across a set of clients, without requiring any of the participants to reveal their private training data to a centralized entity or each other. Due to the nature of decentralized execution, federated learning is vulnerable to attacks from adversarial (Byzantine) clients by modifying the local updates to their desires. Therefore, it is important to develop robust federated learning algorithms that can defend Byzantine clients without losing model convergence and performances. In the study of robustness problem, a simulator can simplify and accelerate the implementation and evaluation of attack and defense strategies. However, there is a lack of open-source simulators to meet such needs. Herein, we present **Blades**, a scalable, extensible and easily configurable simulator to assist researchers and developers to efficiently implement and validate novel strategies against baseline algorithms in robust federated learning. **Blades** is built upon a versatile distributed framework Ray, making it effortless to parallelize single machine code from a single CPU to multi-core, multi-GPU or multi-node with minimal configurations. **Blades** contains built-in implementations of representative attack and defense strategies, and provides user-friendly interfaces to easily incorporate new ideas. We maintain the source code and documents at <https://github.com/bladesteam/blades>.

## I. INTRODUCTION

Federated learning has emerged as an attractive paradigm to build collaborative machine learning models across a set of clients while decoupling the data acquisition and computation at a server [1], [2]. By distributing the model learning process to the end users (e.g., intelligent devices), federated learning constructs a global model from user-specific local models, ensuring that users’ private data never leave the devices. However, the security of federated optimization becomes an important concern due to the distributed execution. Adversarial (Byzantine) clients can modify the local updates maliciously and upload them to the server during training time, posing a serious threat to the convergence of the optimization [3].

In the past few years, a number of Byzantine-robust approaches have appeared in the field of federated learning, aiming at guarding the distributed optimization against Byzantine clients and assuring the performance of the learned model [4], [5]. For instance, robust aggregation schemes are widely used to estimate the global update from a collection of local updates while mitigating the impact of the malicious behaviors. Typical schemes include *GeoMed* [6], *Krum* [7], *TrimmedMean* [8], and *Median* [8]. Similarly, different attack strategies are emerging, striving to circumvent those

defense schemes [9], [10]. Specifically, the A Little Is Enough (ALIE) attack can circumvent most robust aggregation schemes by taking advantage of empirical variance between the updates of clients if such variance is high enough, especially when the local datasets are not independent and identically distributed (Non-IID) [9], [11]. Thus, defending against adversarial attacks is still an open problem in federated learning [12].

In the context of robust federated optimization, simulation can be effectively utilized by researchers and developers to study the behaviors of attackers and validate the robustness of defense strategies before building and deploying in the wild. While several open-source frameworks have been developed to enable federated learning simulations [13], [14], [15], no comprehensive open-source toolbox currently exists to assist researchers and developers to simulate adversarial attacks and defenses.

This paper introduces **Blades**, a simulator for Byzantine-robust federated Learning with Attacks and Defenses Experimental Simulation, which is designed to specifically fill the need for studying attack and defense problems in federated learning. It is efficient in terms of execution time, as client and server operations are executed in a parallel manner. It provides numerous attack and defense mechanisms, and allows the end users to easily plug in customized or new techniques. Our key contributions can be summarized as follows:

- We introduce **Blades**, a scalable, extensible, and easily configurable simulator for studying attacks and defenses in federated learning environments.
- We implement representative attack strategies as well as the latest robust aggregation schemes for federated learning, which can accelerate the generation of benchmark results on new types of adversarial attacks and defenses in federated learning.

## II. BACKGROUND

### A. Federated Learning and Optimization

In federated learning, a collection of clients collaboratively learn a shared global model using their private datasets in a distributed manner, assisted by the coordination of a central

server. The goal is to solve an optimization problem of the form:

$$\min_{\mathbf{w}} F(\mathbf{w}) := \frac{1}{K} \sum_{k \in [K]} F_k(\mathbf{w}), \quad (1)$$

where  $K$  is the total number of clients,  $F_k(\cdot) = \mathbb{E}_{\mathbf{z} \sim \mathcal{D}_k}[\ell(\mathbf{w}; \mathbf{z})]$  is the expected risk of the  $k$ -th client,  $\mathcal{D}_k$  is the data distribution for the  $k$ -th client,  $\ell(\cdot; \cdot)$  is a user-specified loss function.

Common approaches for solving (1) are the generalized *FedAvg*-family algorithms [16]. At each round of communication, a subset of clients are selected (typically randomly) and the server broadcasts its global model to each client. In parallel, the clients run local optimization on their own loss function using private data, and send the update to the server. The server aggregates the received updates to generate the “pseudo-gradient”, which is then applied to update the global optimizer.

### B. Attacks and Defenses in Federated Learning

In traditional averaging-based federated learning algorithms, Byzantine clients can modify the mean of the updates to their desired direction [17]. Byzantine attacks can be categorized into targeted attacks and untargeted attacks [18], [3]. Targeted attacks, such as backdoor attacks, strive to make the global model misclassify some particular test samples [19], [20], [21], while untargeted attacks aim to degrade the overall performance of the global model indiscriminately [22]. Although different robust aggregation schemes have been proposed to mitigate the impact of the malicious behaviors [6], [7], [8], [8], the robustness is typically based on strong assumptions on the variance of the updates, which are often violated in practice. Moreover, the field is yet to be explored to defend against new types of attacks.

### C. Simulators for Federated Optimization

In federated learning, simulators can be used to provide a fast evaluation of the potential utility of a particular solution, and to investigate novel approaches, before making any real deployment. Recently, several federated learning simulators have been proposed with different foci and scopes. For example, LEAF [23] provides open-source federated datasets and metrics for evaluation; PrivacyFL [15] and Pysyft [14] focus on the privacy guarantees of federated learning algorithms. FLUTE [13] is designed for optimization and high-performance simulation of federated learning. However, there is a lack of focus on the simulation of robustness and security concerns. Therefore, we have developed *Blades*.

## III. THE BLADES SIMULATOR

### A. System Design

Figure 1 gives an overview of the architecture of *Blades*. The implementation is based on Python/PyTorch, using a scalable framework Ray[24] as the backend for the training and resource allocation. Ray provides two benefits to *Blades*: it allows users to customize computing resources (e.g., CPUs

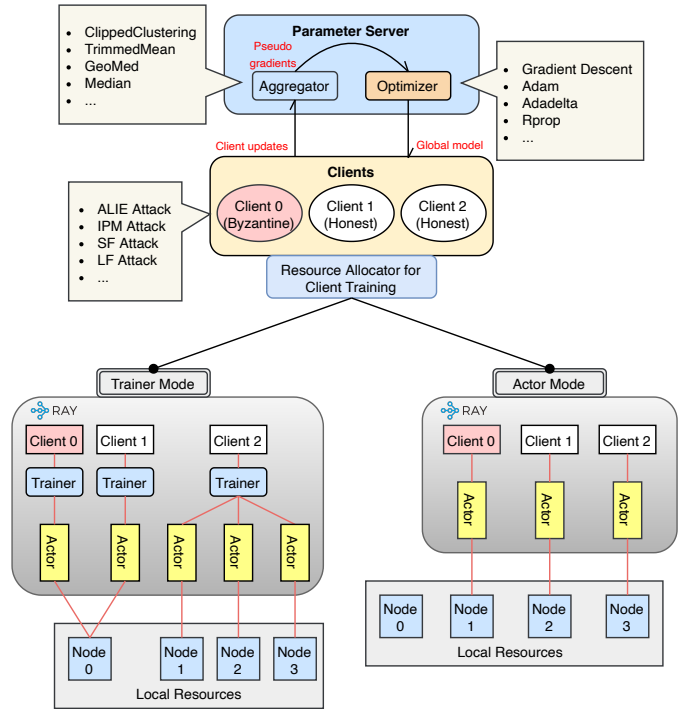


Fig. 1: Illustration of *Blades*: The simulator has trainer mode and actor mode, to meet different resource requirements. *Blades* provides implementations of attacks and defenses strategies and extensible interfaces for robust federated learning simulation.

and GPUs) to clients and servers conveniently and it makes *Blades* easily adapted to in-cluster large-scale distributed training based on the capabilities of the Ray cluster.

The backend of *Blades* offers two training modes, actor mode and trainer mode, to meet different needs of the simulations. The actor mode creates a fixed number of Ray actors and uniformly distributes computing resources to all Ray actors. Local training tasks of all clients are evenly divided and assigned to Ray actors. This mechanism enables scalability in terms of variable numbers of clients with fixed computing resources. In order to simulate resource heterogeneity of federated learning, the trainer mode is introduced. The trainer mode creates one Ray trainer object for each client, which can contain variable Ray actors even across different nodes. The trainer mode enables Distributed Data-Parallel Training (DDP) for local training and flexible resource configurations of each individual client.

Upon the backend, *Blades* consists of a collection of clients and a parameter server. In each round of local optimization, each selected client receives the global model from the parameter server and acquires a trainer/actor to perform local training using its private dataset. We provide the client-oriented programming design pattern [25], which can be used to program the local optimization of clients when they participate in training or coordination in the algorithm. For instance, the end users can easily specify the types of attacks. Other than

that, the users can also customize the behaviors of Byzantine clients using the interface we provide.

The parameter server plays the role of the defender, which strives to limit the potential influence of the attackers and updates the global model in a robust manner. Blades provides the latest robust aggregation schemes as the build-in defense mechanisms, including GeoMed [6], Krum [7], TrimmedMean [8], and Median [8]. In addition, we also provide user-friendly interfaces for the customization of new defense mechanisms.

### B. Key Features

The architecture of Blades introduced above provides the following characteristics:

**Specificity:** Different from existing federated learning simulators [15], [13], [14], Blades is specifically designed to simulate attacks and defenses. Thus we provide built-in implementations of representative attack strategies as well as robust aggregation schemes, so that users can efficiently validate their approaches and compare with existing solutions.

**Scalability:** Blades is scalable in terms of both clients and computing resources. In resource-constrained systems, it allows each trainer/actor to deal with multiple clients' requests sequentially, thus the scale of experiments is not limited by the number of trainers/actors. Based on Ray, Blades is deployable either on a single machine or a computing cluster.

**Extensibility:** Blades is highly compatible with Pytorch, allowing any combination of model, dataset and optimizer. It supports diverse federated learning configurations, including standardized implementations such as *FedSGD* and *FedAvg*, with Pytorch being the framework of choice for implementing the models. Blades allows the end users to incorporate new types of attacks, defenses, and optimization algorithms in a straightforward fashion.

### C. Use Case

The code block in Listing 1 illustrates how Blades abstracts the code complexity away from the users, enabling them to quickly configure system resources and perform experiments with attacks and defenses in a simple manner.

```

1 import ray
2 from blades.simulator import Simulator
3 from blades.datasets import CIFAR10
4 from blades.models.cifar10 import CCTNet
5
6 cifar10 = CIFAR10(num_clients=20, iid=True) #
7     built-in federated cifar10 dataset
8
9 # configuration parameters
10 conf_params = {
11     "dataset": cifar10,
12     "num_byzantine": 5, # number of byzantine
13     "attack": "IPM", # attack strategy
14     "aggregator": "Krum", # defense: robust
15     "num_actors": 4, # number of training
16     "seed": 1 # reproducibility
17 }

```

```

18 ray.init(num_gpus=2)
19 simulator = Simulator(**conf_params)
20
21 # runtime parameters
22 run_params = {
23     "model": CCTNet(), # global model
24     "server_optimizer": 'SGD', # server optimizer
25     "client_optimizer": 'SGD', # client optimizer
26     "loss": "crossentropy", # loss function
27     "global_rounds": 400, # number of global
28     "local_steps": 20, # number of steps
29     "per_round"
30 }
31 simulator.run(**run_params)

```

Listing 1: Simulating attacks and defenses using Blades.

## IV. EXPERIMENTS

In this section, we first evaluate part of the build-in attack and defense strategies. Then, we test the scalability of Blades in terms of both clients and computing resources. The model we used for all experiments is a lightweight Compact Convolutional Transformers (CCT) network [26] trained on the CIFAR-10 dataset [27].

### A. Attacks and Defenses Simulation

The attack and defense experiment include 20 clients, of which 5 of them are Byzantine clients. As suggested by Krizhevsky et al. [27], we use SGD with momentum (SGDM) for the server optimization. Due to space limitations, the detailed hyper-parameter setting is provided in the repository of Blades.

Fig. 2 depicts the overall comparison of the robust aggregation schemes with respect to test accuracy under different types of attacks, showing consistency with previous studies. When there is no momentum (i.e.,  $\beta = 0.0$ ), the observations under IPM attack are consistent with the prior work [10], i.e., when  $\epsilon$  is small enough ( $\epsilon = 0.5$  here), both Median and Krum are influenced by the attackers. Furthermore, it is known that ALIE attack circumvents most existing aggregation schemes and prevents the convergence of the optimization [9], [11], which is also reflected Fig. 2. Comparing the two rows of figures, we see a significant improvement of performance for most aggregation schemes when the momentum is applied (i.e.,  $\beta = 0.9$ ), as already shown by Krizhevsky et al. [27]. We conclude that the build-in implementations in Blades are able to correctly simulate the existing attack and defense strategies.

### B. Scalability Evaluation

The scalability is evaluated in terms of increasing the number of clients and increasing the computing resources.

With fixed resources, Blades is able to simulate variable numbers of clients in a simulation. As shown in Table. I, the number of clients increases from 16 to 512, which greatly outnumbers CPUs and GPUs. It is observed that with linear increase of number of clients, the average running time of each global round increases linearly with little standard deviation,

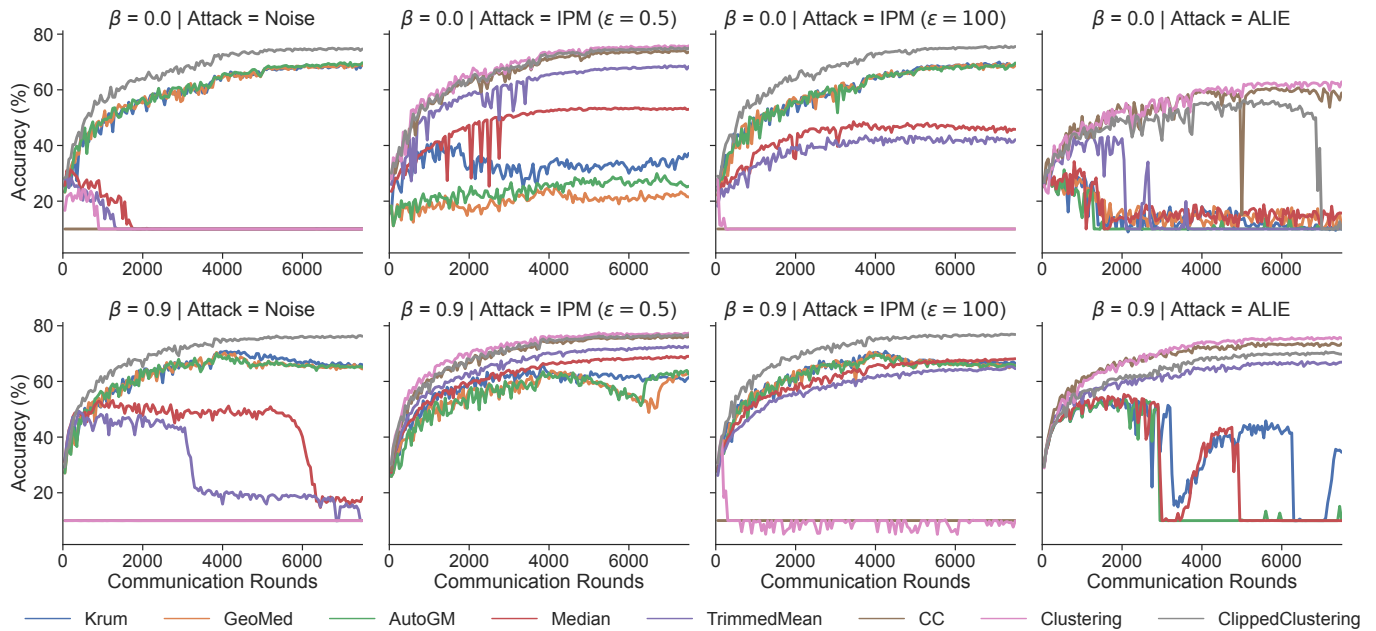


Fig. 2: Experiment for attack/defense validation - performances of built-in attack/defense algorithms on CIFAR-10 dataset with 20 clients, 5 of which are Byzantine. Although with different settings, the results reflect consistency with previous studies [10], [9], [11], [27], in terms of failure and success of the robust aggregation schemes.

indicating the stable and efficient communication and task distribution implementation in `Blades`.

# Clients	16	32	64	128	256	512
Avg(seconds)	1.41	2.48	4.51	9.10	17.58	34.53
Std(seconds)	0.05	0.07	0.11	0.18	0.38	0.73

TABLE I: Experiment for client scalability - average and standard deviation of running time per global round with increasing numbers of clients

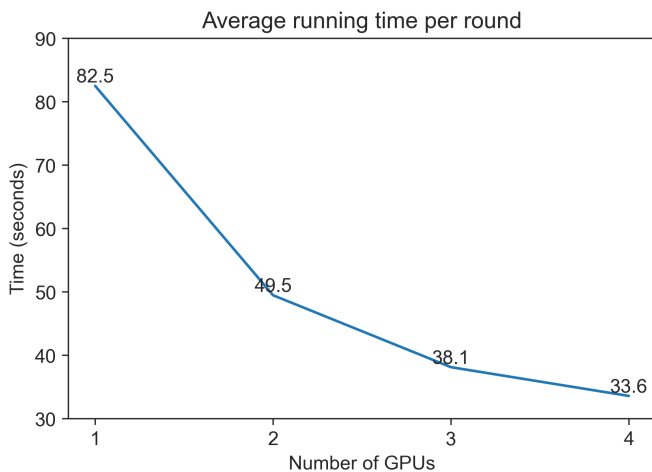


Fig. 3: Experiment for resource scalability - average running time per global round increasing numbers of GPUs

To evaluate the resource scalability of `Blades`, a fixed

simulation task of 480 clients is defined for `Blades` to be done on GPUs. Fig. 3 shows the time cost of each global round with different numbers of GPUs. Time cost for each global round reduces from 82.5s to 49.5s when number of GPU increases from 1 to 2, and the time cost reduces more if more GPUs are added. The speedup is not exactly the same as number of GPU because federated learning is not a perfectly parallelizable algorithms with considerable amount of aggregation work done in the centralized server. It can be concluded that the increase of computing resources significantly reduces the time cost of the simulation, and `Blades` is scalable with computing resources.

## V. CONCLUSION AND FUTURE WORK

In this paper we have presented `Blades`, a versatile and flexible platform for simulating federated learning attacks and defense with high performance. It provides scaling capabilities, several state-of-the-art federation approaches and related features, and a flexible API enabling extensions and the introduction of novel attack and defense strategies. In addition to models and tasks, `Blades` provides facilities for easy integration of arbitrary models and training scheme based on PyTorch. We also validate `Blades` with extensive experiments and conclude that `Blades` is scalable in terms of both clients number and computing resources. We will continue our efforts to address new challenges with new releases of `Blades`. We encourage the research community to explore new research using `Blades` and invite contributions to the public source repository.

## REFERENCES

- [1] B. McMahan, E. Moore, D. Ramage, S. Hampson, and B. A. y Arcas, "Communication-efficient learning of deep networks from decentralized data," in *Artificial intelligence and statistics*. PMLR, 2017, pp. 1273–1282.
- [2] J. Konečný, B. McMahan, and D. Ramage, "Federated optimization: Distributed optimization beyond the datacenter," *arXiv preprint arXiv:1511.03575*, 2015.
- [3] L. Lyu, H. Yu, and Q. Yang, "Threats to federated learning: A survey," *arXiv preprint arXiv:2003.02133*, 2020.
- [4] N. Rodríguez-Barroso, D. J. López, M. Luzón, F. Herrera, and E. Martínez-Cámara, "Survey on federated learning threats: concepts, taxonomy on attacks and defences, experimental study and challenges," *arXiv preprint arXiv:2201.08135*, 2022.
- [5] S. Hu, J. Lu, W. Wan, and L. Y. Zhang, "Challenges and approaches for mitigating byzantine attacks in federated learning," *arXiv preprint arXiv:2112.14468*, 2021.
- [6] Y. Chen, L. Su, and J. Xu, "Distributed statistical machine learning in adversarial settings: Byzantine gradient descent," *Proceedings of the ACM on Measurement and Analysis of Computing Systems*, 2017.
- [7] P. Blanchard, E. M. El Mhamdi, R. Guerraoui, and J. Stainer, "Machine learning with adversaries: Byzantine tolerant gradient descent," in *Proceedings of the 31st International Conference on Neural Information Processing Systems*, 2017.
- [8] D. Yin, Y. Chen, R. Kannan, and P. Bartlett, "Byzantine-robust distributed learning: Towards optimal statistical rates," in *International Conference on Machine Learning*. PMLR, 2018.
- [9] G. Baruch, M. Baruch, and Y. Goldberg, "A little is enough: Circumventing defenses for distributed learning," *Advances in Neural Information Processing Systems*, vol. 32, 2019.
- [10] C. Xie, O. Koyejo, and I. Gupta, "Fall of empires: Breaking byzantine-tolerant sgd by inner product manipulation," in *Uncertainty in Artificial Intelligence*. PMLR, 2020, pp. 261–270.
- [11] S. Li, C. H. E. Ngai, and T. Voigt, "An experimental study of byzantine-robust aggregation schemes in federated learning," 2022.
- [12] P. Kairouz, H. B. McMahan, B. Avent, A. Bellet, M. Bennis, A. N. Bhagoji, K. Bonawitz, Z. Charles, G. Cormode, R. Cummings *et al.*, "Advances and open problems in federated learning," *Foundations and Trends® in Machine Learning*, vol. 14, no. 1–2, pp. 1–210, 2021.
- [13] D. Dimitriadis, M. H. Garcia, D. M. Diaz, A. Manoel, and R. Sim, "Flute: A scalable, extensible framework for high-performance federated learning simulations," *arXiv preprint arXiv:2203.13789*, 2022.
- [14] A. Ziller, A. Trask, A. Lopardo, B. Szymkow, B. Wagner, E. Bluemke, J.-M. Nounahon, J. Passerat-Palmbach, K. Prakash, N. Rose *et al.*, "Pysyft: A library for easy federated learning," in *Federated Learning Systems*. Springer, 2021, pp. 111–139.
- [15] V. Mugunthan, A. Peraire-Bueno, and L. Kagal, "Privacyfl: A simulator for privacy-preserving and secure federated learning," in *Proceedings of the 29th ACM International Conference on Information & Knowledge Management*, 2020, pp. 3085–3092.
- [16] S. Reddi, Z. Charles, M. Zaheer, Z. Garrett, K. Rush, J. Konečný, S. Kumar, and H. B. McMahan, "Adaptive federated optimization," *arXiv preprint arXiv:2003.00295*, 2020.
- [17] S. Li, E. Ngai, and T. Voigt, "Byzantine-robust aggregation in federated learning empowered industrial iot," *IEEE Transactions on Industrial Informatics*, 2021.
- [18] M. S. Jere, T. Farnan, and F. Koushanfar, "A taxonomy of attacks on federated learning," *IEEE Security & Privacy*, vol. 19, no. 2, pp. 20–28, 2020.
- [19] C. Xie, K. Huang, P.-Y. Chen, and B. Li, "Dba: Distributed backdoor attacks against federated learning," in *International Conference on Learning Representations*, 2020.
- [20] E. Bagdasaryan, A. Veit, Y. Hua, D. Estrin, and V. Shmatikov, "How to backdoor federated learning," in *International Conference on Artificial Intelligence and Statistics*. PMLR, 2020, pp. 2938–2948.
- [21] S. Andreina, G. A. Marson, H. Möllering, and G. Karame, "Baffle: Backdoor detection via feedback-based federated learning," in *2021 IEEE 41st International Conference on Distributed Computing Systems (ICDCS)*. IEEE, 2021, pp. 852–863.
- [22] M. Fang, X. Cao, J. Jia, and N. Gong, "Local model poisoning attacks to byzantine-robust federated learning," in *29th USENIX Security Symposium (USENIX Security 20)*, 2020, pp. 1605–1622.
- [23] S. Caldas, S. M. K. Duddu, P. Wu, T. Li, J. Konečný, H. B. McMahan, V. Smith, and A. Talwalkar, "Leaf: A benchmark for federated settings," *arXiv preprint arXiv:1812.01097*, 2018.
- [24] P. Moritz, R. Nishihara, S. Wang, A. Tumanov, R. Liaw, E. Liang, M. Elibol, Z. Yang, W. Paul, M. I. Jordan *et al.*, "Ray: A distributed framework for emerging {AI} applications," in *13th USENIX Symposium on Operating Systems Design and Implementation (OSDI 18)*, 2018, pp. 561–577.
- [25] C. He, S. Li, J. So, X. Zeng, M. Zhang, H. Wang, X. Wang, P. Vepakomma, A. Singh, H. Qiu *et al.*, "Fedml: A research library and benchmark for federated machine learning," *arXiv preprint arXiv:2007.13518*, 2020.
- [26] A. Hassani, S. Walton, N. Shah, A. Abuduweili, J. Li, and H. Shi, "Escaping the big data paradigm with compact transformers," *arXiv preprint arXiv:2104.05704*, 2021.
- [27] A. Krizhevsky, G. Hinton *et al.*, "Learning multiple layers of features from tiny images," 2009.