

Fair Division with Two-Sided Preferences

Ayumi Igarashi¹, Yasushi Kawase¹, Warut Suksompong² and Hanna Sumita³

¹University of Tokyo

²National University of Singapore

³Tokyo Institute of Technology

Abstract

We study a fair division setting in which a number of players are to be fairly distributed among a set of teams. In our model, not only do the teams have preferences over the players as in the canonical fair division setting, but the players also have preferences over the teams. We focus on guaranteeing envy-freeness up to one player (EF1) for the teams together with a stability condition for both sides. We show that an allocation satisfying EF1, swap stability, and individual stability always exists and can be computed in polynomial time, even when teams may have positive or negative values for players. Similarly, a balanced and swap stable allocation that satisfies a relaxation of EF1 can be computed efficiently. When teams have nonnegative values for players, we prove that an EF1 and Pareto optimal allocation exists and, if the valuations are binary, can be found in polynomial time. We also examine the compatibility between EF1 and justified envy-freeness.

1 Introduction

The new season of a youth sports league is starting in three months, and the league organizers need to allocate the available players to the participating teams. How can they accomplish this task in a satisfactory way, so that all parties involved can look forward to the upcoming season instead of grumble about the allocation?

A principal consideration in such allocation tasks is fairness, and the problem of fairly dividing resources (in this case, players) among interested recipients (in this case, teams) has long been studied under the name of *fair division* [Brams and Taylor, 1996; Moulin, 2003]. One of the most prominent fairness notions is *envy-freeness*, which means that no team should envy another team based on the sets of players that they receive.¹ Even though an envy-free allocation may not exist (e.g., if there is one highly-coveted superstar), an intuitive relaxation called *envy-freeness up to one player*

(EF1)—that is, any envy that one team has toward another team can be eliminated upon the removal of some player in the envied team—can always be fulfilled [Lipton *et al.*, 2004]. Another relevant criterion is *balancedness*, which requires the players to be distributed as equally among the teams as possible.² Balancedness can be especially desirable when allocating players to sports teams, as each team may need to have a fixed number of players due to the rules of the sport. Assuming that teams have additive and nonnegative values for players, an allocation that is both EF1 and balanced always exists and can be found efficiently via a simple round-robin algorithm (see, e.g., Caragiannis *et al.* 2019, p. 7). In fact, this algorithm forms the basis of *draft* processes used in many sports leagues around the world.³

While EF1 provides a strong fairness guarantee with respect to the teams’ preferences, it overlooks the fact that the players may have preferences over the teams as well, for example, depending on their familiarity with the team managers or the proximity of their residence to the training grounds. Clearly, ignoring the preferences of the players may lead to a suboptimal allocation. As an extreme case, if every team is indifferent between all players, then swapping a pair of players keeps the teams as happy as before and may make both of the swapped players much happier. In addition to our sports league example, two-sided preferences also occur in the allocation of employees to different branches of a restaurant chain or volunteers to community service clubs. Moreover, the player preferences could signify the *suitability* of the teams for the players—for instance, the “players” could represent tasks (such as household chores or papers to be reviewed) and the “teams” have varying levels of ability to perform the tasks. Can we find an allocation that is fair to the teams and at the same time satisfies a stability condition with respect to the preferences of both sides?

1.1 Our Results

As is common in fair division, we assume that the teams have additive valuations over the players. Some of our results allow these values to be either positive or negative; this corresponds to the allocation of *indivisible goods and chores*

¹Due to the setting that we study, throughout this paper we will use the terms *team* and *player* in place of the standard fair division terms *agent* and *item*, respectively.

²One could view balancedness as EF1 with respect to the number of allocated players.

³Please refer to [http://wikipedia.org/wiki/Draft_\(sports\)](http://wikipedia.org/wiki/Draft_(sports))

Properties	Existence
EF[1,1] + balanced + swap stable	Yes (Thm. 3.2)
EF1 + balanced	No (Prop. 3.7)
balanced + individually stable	No (Prop. 3.8)
EF1 + swap stable + individually stable	Yes (Thm. 3.9)
EF1 + PO (nonnegative-value players)	Yes (Thm. 4.5)
EF1 + PO + team-PO (two teams)	Yes (Thm. 4.3)
EF1 + player-PO	No (Prop. 4.4)
EF1 + justified EF	No (Prop. 5.1)

Table 1: Summary of our results on whether each combination of properties can always be satisfied simultaneously, with the corresponding theorem or proposition number.

[Aziz *et al.*, 2022]. For consistency of terminology, we will use the terms *nonnegative-value players* and *nonpositive-value players* instead of *goods* and *chores*, respectively. We formally define the notions that we consider and outline some relationships between them in Section 2.

In Section 3, we focus on *swap stability*, the requirement that no swap between two players makes at least one of the four involved parties better off and none of them worse off. First, we observe that even with nonnegative-value players, starting with an arbitrary EF1 allocation and letting players make beneficial swaps may result in an allocation that violates EF1. Despite this fact, for teams with arbitrary (positive or negative) values over players, we present a polynomial-time algorithm that produces a balanced and swap stable allocation satisfying *EF[1,1]*, a relaxation of EF1 where one player may be removed from each of the envying team and the envied team.⁴ Since EF[1,1] reduces to EF1 for nonnegative-value players as well as for nonpositive-value players, we obtain the same result for EF1 in each of these cases. We then note two ways in which the arbitrary-value result cannot be improved: EF[1,1] cannot be strengthened to EF1, and we cannot simultaneously attain *individual stability*—the condition that no deviation of a player to another team makes the player better off and neither of the involved teams worse off. Nevertheless, we show that if we give up balancedness, both of these improvements become possible: an allocation that satisfies EF1, swap stability, and individual stability exists and can be found efficiently.

Next, in Section 4, we consider the notion of *Pareto optimality (PO)*—no allocation can make a party (i.e., either player or team) better off without making another party worse off—which is stronger than both swap stability and individual stability. We prove that deciding whether an allocation is PO or not is coNP-complete even for two teams with identical valuations, nonnegative-value players, and a balanced allocation. On the other hand, for two teams with arbitrary valuations, we show that an extension of the *generalized adjusted winner procedure* of Aziz *et al.* [2022] computes an

⁴When both positive and negative values are allowed, EF1 permits one player to be removed from either the envying team or the envied team (but not both) [Aziz *et al.*, 2022].

EF1 and PO allocation in polynomial time. For any number of teams and nonnegative-value players, we observe that an EF1 and PO allocation always exists. Moreover, we demonstrate that such an allocation can be found efficiently in two special cases: (i) the teams have binary valuations over the players, and (ii) there are three teams with identical valuations, and each player has a favorite team and is indifferent between the other two teams. We also provide a pseudopolynomial-time algorithm when the number of teams is constant.

Finally, in Section 5, we examine *justified envy*, a stability notion from the two-sided matching literature: player p_i is said to have justified envy toward another player p_j assigned to team k if k prefers p_i to p_j and p_i prefers k to her assigned team. Perhaps surprisingly, we show that an EF1 and justified envy-free allocation may not exist, even for two teams and nonnegative-value players who all prefer the same team. We then prove that deciding whether such an allocation exists is NP-complete even for nonnegative-value players who have strict preferences over the teams. On the other hand, if one adds the condition that there are two teams, we show that the problem becomes polynomial-time solvable.

Our (non-)existence results are summarized in Table 1.

1.2 Related Work

Even though fair division has given rise to a sizable literature, the vast majority of the literature assumes one-sided preferences—in our terminology, the teams have preferences over the players, but not vice versa. A small number of recent papers have combined fairness concepts with two-sided preferences. Freeman *et al.* [2021] considered many-to-many matching and proposed the notion of *double envy-freeness up to one match (DEF1)*, which requires EF1 to hold for both sides simultaneously. Note that in our many-to-one setting, DEF1 is meaningless on the player side because it is always trivially satisfied. Gollapudi *et al.* [2020] studied many-to-many matching in a dynamic setting; their positive results primarily hold for symmetric binary valuations, which are much more restrictive than the valuations that we allow. Patro *et al.* [2020] investigated fairness in two-sided platforms between producers and customers, but assumed that producers are indifferent between customers. We stress that none of these papers studied a model that suitably captures our motivating examples such as the allocation of sports players to teams.

While most fair division papers assume that the items (in our terminology, players) are goods and some assume that they are chores, a recent line of work has relaxed these assumptions by allowing items to be either goods or chores, with this evaluation possibly varying across agents (in our terminology, teams) [Aleksandrov and Walsh, 2020; Bérczi *et al.*, 2020; Kulkarni *et al.*, 2021; Aziz *et al.*, 2022].

Lastly, we remark that justified envy is commonly studied in two-sided matching. Indeed, it forms the basis of the stability notion in one-to-one matching [Gale and Shapley, 1962], and has also been used in many-to-one matching [Wu and Roth, 2018; Yokoi, 2020].

2 Preliminaries

For each positive integer z , let $[z] := \{1, \dots, z\}$. Let $T = [n]$ be the set of teams and $P = \{p_1, \dots, p_m\}$ the set of players;

we sometimes refer to either a team or a player as a *party*. Each player $p \in P$ has a weak transitive preference \succsim_p over the teams; denote by \succ_p and \sim_p the strict and equivalence part of \succsim_p , respectively.⁵ The *rank* of a team i for a player p is defined as 1 plus the number of teams j such that $j \succ_p i$. Each team $i \in T$ has a valuation function (or utility function) $v_i: 2^P \rightarrow \mathbb{R}$ over subsets of players. We assume that the valuations are additive, i.e., $v_i(P') = \sum_{p \in P'} v_i(\{p\})$ for all $i \in T$ and $P' \subseteq P$. For convenience, we write $v_i(p)$ instead of $v_i(\{p\})$. An *instance* consists of the teams and players, as well as the valuations and preferences of both sides. Sometimes we will consider the setting of *nonnegative-value players* (resp., *nonpositive-value players*), which means that $v_i(p) \geq 0$ (resp., $v_i(p) \leq 0$) for all $i \in T$ and $p \in P$.

An *allocation* $A = (A_1, A_2, \dots, A_n)$ is an ordered partition of P into n parts, where the part A_i is assigned to team i . We will investigate several fairness and stability notions for allocations. A basic fairness consideration on the team side is (almost) envy-freeness.

Definition 2.1. An allocation A is said to satisfy

- *EF1* if for all distinct $i, j \in T$, it holds that $v_i(A_i \setminus X) \geq v_i(A_j \setminus Y)$ for some $X \subseteq A_i$ and $Y \subseteq A_j$ with $|X \cup Y| \leq 1$;
- *EF[1,1]* if for all distinct $i, j \in T$, it holds that $v_i(A_i \setminus X) \geq v_i(A_j \setminus Y)$ for some $X \subseteq A_i$ and $Y \subseteq A_j$ with $|X|, |Y| \leq 1$.

EF1 was first studied for nonnegative-value players by Lipton *et al.* [2004] and subsequently extended to arbitrary-value players by Aziz *et al.* [2022], while EF[1,1] was recently introduced by Shoshan *et al.* [2023]. It follows immediately from the definition that EF1 implies EF[1,1]. Moreover, if all players yield nonnegative value, there is no reason to remove a player from A_i , so EF1 and EF[1,1] coincide in this case; an analogous statement holds for nonpositive-value players with A_i replaced by A_j .

Our next criterion is balancedness, which requires the players to be distributed as equally among the teams as possible.

Definition 2.2. An allocation A is said to be *balanced* if $||A_i| - |A_j|| \leq 1$ for all $i, j \in T$.

Observe that if there exists a constant $c \neq 0$ such that $v_i(p) = c$ for all $i \in T$ and $p \in P$, then both EF1 and EF[1,1] coincide with balancedness.

We now define stability concepts, several of which take into account the preferences of both sides. We say that a party is *better off* (resp., *worse off*) if it receives a better (resp., worse) outcome with respect to its valuation function (for a team) or preference (for a player).

Definition 2.3. Given an allocation A , a swap between players $p \in A_i$ and $q \in A_j$ (for some $i, j \in T$) is a *beneficial swap* if it makes at least one of the four involved parties better off and none of them worse off. A deviation of a player p to another team is a *beneficial deviation* if it makes p better off and neither of the teams involved worse off.

⁵All notions considered in this paper take into account only the players' ordinal preferences, so we do not assume cardinal utilities.

An allocation A is said to be *swap stable* if it does not admit a beneficial swap. It is said to be *individually stable* if it does not admit a beneficial deviation.⁶

Definition 2.4. An allocation A is said to be *Pareto dominated* by another allocation A' if no party is worse off in A' than in A and at least one party is better off; in this case, A' is a *Pareto improvement* of A . An allocation A is *Pareto optimal (PO)* if it is not Pareto dominated by any other allocation.

We define *team-Pareto dominated*, *team-Pareto optimal (team-PO)*, *player-Pareto dominated*, and *player-Pareto optimal (player-PO)* similarly, with “party” replaced by “team” and “player”, respectively.

Although PO clearly implies both swap stability and individual stability, it implies neither team-PO nor player-PO.

Proposition 2.5. *PO does not necessarily imply team-PO.*

Proof. Consider the following instance with $n = m = 2$:

- $v_1(p_1) = v_1(p_2) = v_2(p_1) = 1$ and $v_2(p_2) = 0$;
- $1 \succ_{p_1} 2$ and $2 \succ_{p_2} 1$.

The allocation $A = (\{p_1\}, \{p_2\})$ is team-Pareto dominated by the allocation $A' = (\{p_1, p_2\}, \emptyset)$, so A is not team-PO. However, A is PO since each player is already assigned to her unique favorite team. \square

Proposition 2.6. *PO does not necessarily imply player-PO.*

Proof. Consider the following instance with $n = m = 2$:

- $v_1(p_1) = v_1(p_2) = v_2(p_1) = v_2(p_2) = 1$;
- $1 \succ_{p_1} 2$ and $1 \succ_{p_2} 2$.

The allocation $A = (\{p_1\}, \{p_2\})$ is player-Pareto dominated by the allocation $A' = (\{p_1, p_2\}, \emptyset)$, so A is not player-PO. However, one can check that A is PO. \square

Finally, we define the concept of justified envy.

Definition 2.7. Given an allocation A , a player $p \in A_i$ is said to have *justified envy* toward a player $q \in A_j$ if $j \succ_p i$ and $v_j(p) > v_j(q)$. An allocation A is *justified envy-free (justified EF)* if no player has justified envy toward another player.⁷

There are no implication relations between justified EF and the three notions PO, swap stability, and individual stability.

- *Justified EF does not imply individual stability.* Consider an instance with $n = 2, m = 1, v_1(p_1) = 1, v_2(p_1) = 0$, and $1 \succ_{p_1} 2$. The allocation $A = (\emptyset, \{p_1\})$ is justified EF, but it is not individually stable. This also means that justified EF does not imply PO.

⁶This is analogous to the notion of *contractual individual stability* in hedonic games [Aziz and Savani, 2016]. If we only require that the deviation does not make the player's new team worse off (as in *individual stability* in hedonic games), then supposing that all players yield nonnegative value, the only stable allocations are ones in which every player is assigned to one of her most preferred teams.

⁷One could also consider a weaker version of justified envy where one of the two sides may be indifferent—this leads to a stronger version of justified EF. Our non-existence result (Proposition 5.1) carries over to this version as well.

Algorithm 1: For computing an EF[1,1], swap stable, and balanced allocation

- 1 Construct a complete bipartite graph $G = (Q, P; E)$ with weight function $w: E \rightarrow \mathbb{R}$ where $Q = [m]$ and $w(q, p) = v_{f(q)}(p)$ for each $(q, p) \in Q \times P$; // The set Q mimics the available positions within the teams
 - 2 Compute a perfect matching $\mu \subseteq Q \times P$ such that the weight of the edge adjacent to vertex $1 \in Q$ is as large as possible, and subject to this condition, the weight of the edge adjacent to vertex $2 \in Q$ is as large as possible, and so on until vertex $m \in Q$; // Simulate round-robin with only the players' values being assigned to teams
 - 3 Let $E^* = \{(q, p) \in Q \times P \mid w(q, p) = w(q, \mu_q)\}$; // Keep edges that are as good for the teams as those in μ
 - 4 Compute a perfect matching μ^* in $G^* = (Q, P; E^*)$ such that the sum over all players $p \in P$ of the rank of team $f(\mu_p^*)$ for player p is minimized;
 - 5 Return the allocation A such that p is allocated to team $f(q)$ for each $(q, p) \in \mu^*$;
-

- *Justified EF does not imply swap stability.* Consider an instance with $n = m = 2$, $v_1(p_1) = v_2(p_2) = 1$, $v_1(p_2) = v_2(p_1) = 0$, $1 \sim_{p_1} 2$, and $1 \sim_{p_2} 2$. The allocation $A = (\{p_2\}, \{p_1\})$ is justified EF, but it is not swap stable.
- *PO does not imply justified EF.* This follows from the fact that an EF1 and PO allocation exists for every instance with nonnegative-value players (Theorem 4.5) but there is an instance with nonnegative-value players in which no EF1 and justified EF allocation exists (Proposition 5.1). This also means that neither swap stability nor individual stability implies justified EF.

3 Swap Stability

In this section, we focus on swap stability. A natural idea for obtaining an EF1 and swap stable allocation is to start with an arbitrary EF1 allocation and let players swap as long as a beneficial swap exists. Note that determining whether beneficial swaps exist (and, if so, finding such a swap) can be done in polynomial time since we can simply check all pairs of players. However, as can be seen in the following example, this approach does not always result in an EF1 allocation, even for nonnegative-value players.

Example 3.1. Consider the following instance with $n = 3$ and $m = 6$:

- $v_i(p_j) = 0$ for $i \in [2]$ and $j \in [6]$;
- $v_3(p_1) = v_3(p_2) = 1$ and $v_3(p_3) = v_3(p_4) = v_3(p_5) = v_3(p_6) = 0$;
- each player has a unique favorite team and is indifferent between the other two teams: p_1 and p_2 prefer team 1, p_4 and p_5 prefer team 2, and p_3 and p_6 prefer team 3.

The allocation $A = (\{p_1, p_4\}, \{p_2, p_5\}, \{p_3, p_6\})$ is EF1. The swap between p_2 and p_4 is the unique beneficial swap; let A' be the allocation after this swap. The allocation A' is swap stable, but it is not EF1 because team 3 envies team 1 by more than one player.

In spite of this example, we show that an EF[1,1] and swap stable allocation that is moreover balanced always exists and can be found efficiently.

Theorem 3.2. *For any instance, a balanced allocation that satisfies EF[1,1] and swap stability exists and can be computed in polynomial time.*

Since EF[1,1] reduces to EF1 for nonnegative-value players as well as for nonpositive-value players, Theorem 3.2 implies the following corollary.

Corollary 3.3. *For any nonnegative-value player instance, a balanced allocation that satisfies EF1 and swap stability exists and can be computed in polynomial time. The same holds for any nonpositive-value player instance.*

Our algorithm for Theorem 3.2 proceeds in a round-robin manner. However, instead of assigning a player to a team in each turn as is usually done, we only assign a player's *value* to the team; this ensures that more possibilities are available in later turns. Then, among the allocations that satisfy the determined values for teams, we compute an allocation that minimizes the sum of the players' ranks for the teams. Formally, the algorithm is described as Algorithm 1. For each positive integer q , we denote by $f(q)$ the unique integer in $[n]$ such that $f(q) \equiv q \pmod{n}$. Also, for a matching μ with $(q, p) \in \mu$, we define the notation μ_q and μ_p so that $\mu_q = p$ and $\mu_p = q$. Note that each $q \in Q$ corresponds to a copy of team $f(q)$. For example, given an instance with $n = 3$ and $m = 7$, we construct a bipartite graph G with $|Q| = |P| = 7$. The vertices $1, 4, 7 \in Q$ correspond to copies of team 1, the vertices $2, 5 \in Q$ correspond to copies of team 2, and the vertices $3, 6 \in Q$ correspond to copies of team 3.

It is clear that the allocation produced by Algorithm 1 is balanced. To establish Theorem 3.2, we prove the remaining properties of the algorithm, including its polynomial running time, in the following three lemmas.

Lemma 3.4. *The output allocation A of Algorithm 1 is EF[1,1].*

Proof. By definition of EF[1,1], we need to show that, for all distinct $i, j \in T$, we have $v_i(A_i \setminus X) \geq v_i(A_j \setminus Y)$ for some $X \subseteq A_i$ and $Y \subseteq A_j$ with $|X|, |Y| \leq 1$. The statement holds trivially if $m \leq n$ since each team receives at most one player, so assume that $m > n$. Fix arbitrary distinct $i, j \in T$. We consider three cases. (In what follows, μ and μ^* are as defined in Algorithm 1.)

First, suppose that $|A_i| = |A_j|$. Let $k := |A_i| \geq 1$. Then,

$$\begin{aligned} v_i(A_i \setminus \{\mu_{n(k-1)+i}^*\}) &= \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}^*) = \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}) \\ &\geq \sum_{\ell=1}^{k-1} v_i(\mu_{n\ell+j}) = \sum_{\ell=2}^k v_i(\mu_{n(\ell-1)+j}) \\ &= \sum_{\ell=2}^k v_i(\mu_{n(\ell-1)+j}^*) = v_i(A_j \setminus \{\mu_j^*\}), \end{aligned}$$

where $v_i(\mu_{n(\ell-1)+i}) \geq v_i(\mu_{n\ell+j})$ holds because otherwise the weight of the edge in μ adjacent to vertex $n(\ell-1) + i \in Q$ can be increased without decreasing the weights of the edges adjacent to vertices $1, 2, \dots, n(\ell-1) + i - 1 \in Q$, contradicting the definition of μ .

Next, suppose that $|A_i| > |A_j|$; in particular, it must be that $i < j$. Let $|A_i| = k$ and $|A_j| = k - 1$. Applying a similar argument as in the case $|A_i| = |A_j|$, we have

$$\begin{aligned} v_i(A_i \setminus \{\mu_{n(k-1)+i}^*\}) \\ &= \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}^*) = \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}) \\ &\geq \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+j}) = \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+j}^*) = v_i(A_j). \end{aligned}$$

Finally, suppose that $|A_i| < |A_j|$; in particular, it must be that $i > j$. Let $|A_i| = k - 1$ and $|A_j| = k$. Applying a similar argument once more, we have

$$\begin{aligned} v_i(A_i) &= \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}^*) = \sum_{\ell=1}^{k-1} v_i(\mu_{n(\ell-1)+i}) \\ &\geq \sum_{\ell=1}^{k-1} v_i(\mu_{n\ell+j}) = \sum_{\ell=2}^k v_i(\mu_{n(\ell-1)+j}) \\ &= \sum_{\ell=2}^k v_i(\mu_{n(\ell-1)+j}^*) = v_i(A_j \setminus \{\mu_j^*\}). \end{aligned}$$

Hence, in all three cases, the allocation A is EF[1,1]. \square

Lemma 3.5. *The output allocation A of Algorithm 1 is swap stable.*

Proof. Let us consider a swap between players μ_q^* and μ_r^* , where $q, r \in Q$ with $q < r$. Suppose that this swap is *possibly* a beneficial swap, i.e., $v_{f(q)}(\mu_q^*) \leq v_{f(q)}(\mu_r^*)$, $v_{f(r)}(\mu_r^*) \leq v_{f(r)}(\mu_q^*)$, $f(q) \preceq_{\mu_q^*} f(r)$, and $f(r) \preceq_{\mu_r^*} f(q)$. We will show that this swap cannot make any of the involved parties better off. Denote by μ^{**} the matching that results from this swap.

If $v_{f(q)}(\mu_q^*) < v_{f(q)}(\mu_r^*)$, the matching μ can be improved by using μ^{**} instead, a contradiction. So $v_{f(q)}(\mu_q^*) = v_{f(q)}(\mu_r^*)$. Similarly, if $v_{f(r)}(\mu_r^*) < v_{f(r)}(\mu_q^*)$, then because $v_{f(q)}(\mu_q^*) = v_{f(q)}(\mu_r^*)$, the matching μ can again be improved by using μ^{**} instead, a contradiction. So $v_{f(r)}(\mu_r^*) = v_{f(r)}(\mu_q^*)$. Hence, the matching μ^{**} after the swap remains a feasible perfect matching in G^* . As μ^* minimizes the sum of the players' rank for teams among the perfect matchings in G^* , we get $f(q) \sim_{\mu_q^*} f(r)$ and $f(r) \sim_{\mu_r^*} f(q)$. Therefore, the swap is not a beneficial swap, and the allocation A is swap stable. \square

Lemma 3.6. *Algorithm 1 can be implemented to run in polynomial time.*

Proof. We first focus on computing the matching μ in Line 2. The weight $w(1, \mu_1)$ can be found by simply taking the largest weight of an edge adjacent to vertex $1 \in Q$ in G .

Given $w(1, \mu_1), \dots, w(i-1, \mu_{i-1})$, to determine $w(i, \mu_i)$, we delete all edges (q, p) with $1 \leq q \leq i-1$ such that $w(q, p) \neq w(q, \mu_q)$ from G , change the weight of all edges (q, p) with $i+1 \leq q \leq m$ to 0, and compute a maximum-weight perfect matching in the resulting graph. Note that this matching can be found in time $O(m^3)$ [Tomizawa, 1971].

Once we have $w(1, \mu_1), \dots, w(m, \mu_m)$, we can construct G^* in Line 4 by keeping only the edges in G such that $w(q, p) = w(q, \mu_q)$. Finally, to compute μ^* , we reassign the weight of each edge (q, p) in G^* to be the rank of player p for team $f(q)$ and find a minimum-weight perfect matching in G^* ; again, this matching can be found in time $O(m^3)$. \square

Next, we observe two ways in which Theorem 3.2 cannot be improved: the condition EF[1,1] cannot be strengthened to EF1, and it is not possible to add individual stability to the list of guarantees. In fact, the first observation was also made by Shoshan *et al.* [2023], although their work only deals with one-sided preferences.

Proposition 3.7 ([Shoshan *et al.*, 2023]). *Even for two teams with identical valuations, there does not necessarily exist a balanced EF1 allocation.*

Proof. Consider an instance with $n = m = 2$ such that both teams have value 1 for p_1 and -1 for p_2 . Clearly, no balanced allocation is EF1. \square

Proposition 3.8. *Even for two teams and nonnegative-value players, there does not necessarily exist a balanced and individually stable allocation.*

Proof. Consider an instance with $n = m = 2$ such that team 1 has value 1 for each player, team 2 has value 0 for each player, and both players strictly prefer team 1 to team 2. The only individually stable allocation assigns both players to team 1, but this allocation is not balanced. \square

Nevertheless, if we give up balancedness, we can attain EF1, swap stability, and individual stability simultaneously. To this end, we combine our Algorithm 1 with the *double round-robin algorithm* introduced by Aziz *et al.* [2022]. In the first phase, the players who yield nonnegative value to at least one team are allocated by Algorithm 1 in the forward order of the teams, while in the second phase, the remaining players are allocated by Algorithm 1 in the backward order of the teams. Intuitively, EF1 is guaranteed because, for each pair of teams i and j with $i < j$, i does not envy j in the first phase whereas j does not envy i in the second phase. Moreover, we add a sufficient number of dummy players, who yield value 0 to every team and are indifferent between all teams, in order to guarantee individual stability. This leads to each team receiving at least one dummy player, and a beneficial deviation in the resulting situation can be captured by a beneficial swap between the deviating player and a dummy player. The algorithm is formally described as Algorithm 2.

Theorem 3.9. *For any instance, Algorithm 2 returns an EF1, swap stable, and individually stable allocation in polynomial time.*

Algorithm 2: For computing an EF1, swap stable, and individually stable allocation

- 1 Partition P into $P^+ := \{p \in P \mid \max_{i \in T} v_i(p) \geq 0\}$ and $P^- := \{p \in P \mid \max_{i \in T} v_i(p) < 0\}$;
 - 2 Let \hat{P}^+ consist of P^+ together with $(n-1)|P^+| + n$ dummy players, where each dummy player yields value 0 to every team and is indifferent between all teams;
 - 3 Let \hat{P}^- consist of P^- together with $(n-1)|P^-| + n$ dummy players, where each dummy player yields value 0 to every team and is indifferent between all teams;
 - 4 Let A^+ be the allocation obtained by executing Algorithm 1 on \hat{P}^+ with the teams in the forward order $1, 2, \dots, n$;
 - 5 Let A^- be the allocation obtained by executing Algorithm 1 on \hat{P}^- with the teams in the backward order $n, n-1, \dots, 1$;
 - 6 Return the allocation A which is the union of A^+ and A^- with the dummy players removed;
-

Proof. We show that Algorithm 2 has the desired properties. Since Algorithm 1 runs in polynomial time, so does Algorithm 2. Note that $|\hat{P}^+| = n(|P^+| + 1)$ and $|\hat{P}^-| = n(|P^-| + 1)$, so every team has at least one dummy player in each of A^+ and A^- . Also, as Algorithm 1 outputs a swap stable allocation, each of the allocations A^+ and A^- is swap stable. In addition, each player $p \in P^+$ is allocated to a team that values her nonnegatively, i.e., $v_i(p) \geq 0$ for all $i \in T$ and $p \in A_i^+$. Indeed, if $v_j(p) \geq 0 > v_i(p)$ for some $i, j \in T$ and $p \in A_i^+$, the swap between p and a dummy player in A_j^+ would lead to a better matching than μ in Algorithm 1, a contradiction.

We now prove that the allocation A returned by Algorithm 2 is EF1, swap stable, and individually stable.

EF1 Consider any pair of teams i and j where $i < j$.

First, consider i 's envy for j . In the first phase, i has priority over j and both teams receive the same number of players, so i does not envy j with respect to A^+ (i.e., $v_i(A_i^+) \geq v_i(A_j^+)$). Also, as A^- is EF[1,1], there exist $X \subseteq A_i^-$ and $Y \subseteq A_j^-$ such that $|X|, |Y| \leq 1$ and $v_i(A_i^- \setminus X) \geq v_i(A_j^- \setminus Y)$. Hence, we obtain

$$\begin{aligned} v_i(A_i \setminus X) &= v_i(A_i^+) + v_i(A_i^- \setminus X) \\ &\geq v_i(A_j^+) + v_i(A_j^- \setminus Y) \\ &\geq v_i(A_j^+) + v_i(A_j^-) = v_i(A_j); \end{aligned}$$

here, the second inequality holds because each player in Y yields negative value to every team. Thus, i does not envy j by more than one player.

Next, consider j 's envy for i . In the second phase, j has priority over i and both teams receive the same number of players, so j does not envy i with respect to A^- (i.e., $v_j(A_j^-) \geq v_j(A_i^-)$). Also, as A^+ is EF[1,1], there exist $X' \subseteq A_j^+$ and $Y' \subseteq A_i^+$ such that $|X'|, |Y'| \leq 1$ and $v_j(A_j^+ \setminus X') \geq v_j(A_i^+ \setminus Y')$. Note that $v_j(X') \geq 0$ since j only receives players with nonnegative value in the first phase. Hence, we obtain

$$\begin{aligned} v_j(A_j) &= v_j(A_j^+) + v_j(A_j^-) \geq v_j(A_j^+ \setminus X') + v_j(A_j^-) \\ &\geq v_j(A_i^+ \setminus Y') + v_j(A_i^-) = v_j(A_i \setminus Y'). \end{aligned}$$

Thus, j does not envy i by more than one player.

Swap stability Suppose to the contrary that the swap between some $p \in A_i$ and $q \in A_j$ is a beneficial swap in A . Since each of A^+ and A^- is swap stable, it cannot be that $p, q \in P^+$ or $p, q \in P^-$. Thus, without loss of generality, we may assume that $p \in P^+$ and $q \in P^-$. We have $v_i(p) \geq 0$ but $v_i(q) < 0$, which means that the swap is not beneficial for team i , a contradiction.

Individual stability Suppose to the contrary that there is a beneficial deviation of player p from team i to team j in A . If $p \in P^+$ (resp., $p \in P^-$), the swap between p and a dummy player in A_j^+ (resp., A_j^-) would be a beneficial swap in A^+ (resp., in A^-), contradicting the swap stability of A^+ (resp., A^-). \square

4 Pareto Optimality

In this section, we turn our attention to Pareto optimality, which is a stronger requirement than both swap stability and individual stability. Firstly, while it is easy to check whether an allocation is swap stable or individually stable by checking for all (polynomial number of) possible beneficial swaps or deviations, the same is not true for PO.

Theorem 4.1. *Deciding whether an allocation is PO or not is coNP-complete, even for two teams with identical valuations, nonnegative-value players, and a balanced allocation.*

Proof. Checking that an allocation is Pareto dominated by another given allocation can be done in polynomial time, so the problem is in coNP. To prove coNP-hardness, we reduce from SUBSET SUM. An instance of SUBSET SUM consists of positive integers b_1, \dots, b_r and s ; it is a Yes-instance if and only if the sum of some subset of the b_i 's is exactly s .

Given an instance $(b_1, \dots, b_r; s)$ of SUBSET SUM, we create two teams with identical valuations for $2r$ players; the values are $b_1, \dots, b_r, s, 0, 0, \dots, 0$, where 0 occurs $r-1$ times. Player p_{r+1} (with value s) prefers team 1 to team 2, while all other players prefer team 2 to team 1. Consider a balanced allocation in which the first r players are in team 1 while the other r players are in team 2. We claim that this allocation admits a Pareto improvement if and only if $(b_1, \dots, b_r; s)$ is a Yes-instance. Indeed, if $\sum_{i \in I} b_i = s$ for some $I \subseteq [r]$, then exchanging players p_i for $i \in I$ with p_{r+1} yields a Pareto improvement: both teams are indifferent while all players involved are better off. For the converse direction, note that an exchange that yields a Pareto improvement cannot involve

Algorithm 3: For computing an EF1 and PO allocation for two teams

- 1 Assign each player with zero value for both teams to a team that she prefers (breaking ties arbitrarily), and assume from now on that P is the set of remaining players;
 - 2 Let $P_1^* = \{p \in P \mid v_1(p) \geq 0, v_2(p) \leq 0\}$ and $P_2^* = \{p \in P \mid v_1(p) \leq 0, v_2(p) \geq 0\}$;
 - 3 Let $P^+ = \{p \in P \mid v_1(p) > 0, v_2(p) > 0\}$ and $P^- = \{p \in P \mid v_1(p) < 0, v_2(p) < 0\}$;
 - 4 Assume without loss of generality that the players in $P^+ \cup P^-$ are p_1, p_2, \dots, p_r , and relabel them so that $|v_1(p_1)|/|v_2(p_1)| \leq |v_1(p_2)|/|v_2(p_2)| \leq \dots \leq |v_1(p_r)|/|v_2(p_r)|$. Moreover, for players with the same ratio, place them in the following order:
 - (1) those in P^+ who strictly prefer team 2 and those in P^- who strictly prefer team 1;
 - (2) those in $P^+ \cup P^-$ who like both teams equally;
 - (3) those in P^+ who strictly prefer team 1 and those in P^- who strictly prefer team 2;
 - 5 Let $(A_1, A_2) \leftarrow (P^+ \cup P_1^*, P^- \cup P_2^*)$;
 - 6 **for** $i \leftarrow 1, 2, \dots, r$ **do**
 - 7 **if** team 2 does not envy team 1 by more than one player **then break**;
 - 8 **if** $p_i \in P^+$ **then** Move player p_i from team 1 to team 2 (i.e., $A_1 \leftarrow A_1 \setminus \{p_i\}$ and $A_2 \leftarrow A_2 \cup \{p_i\}$);
 - 9 **else** Move player p_i from team 2 to team 1 (i.e., $A_1 \leftarrow A_1 \cup \{p_i\}$ and $A_2 \leftarrow A_2 \setminus \{p_i\}$);
 - 10 **return** (A_1, A_2) ;
-

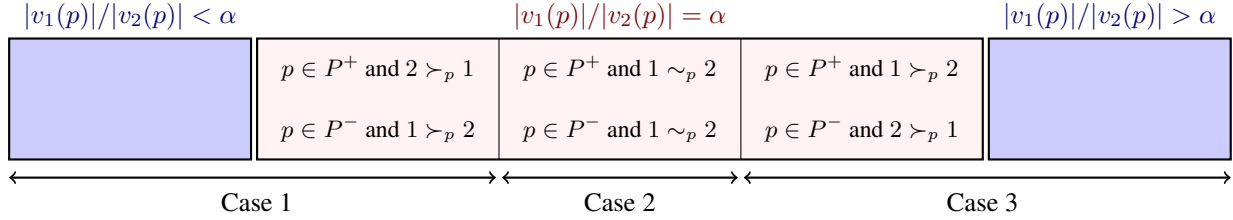


Figure 1: The order of players in $P^+ \cup P^-$ in the proof of Theorem 4.3.

p_{r+2}, \dots, p_{2r} , so such an exchange must involve p_{r+1} along with a subset $P' \subseteq \{p_1, \dots, p_r\}$. Since the teams have identical valuations, this exchange can be a Pareto improvement only when the b_i 's corresponding to P' sum up to exactly s . \square

Note that even though the same decision problem is also coNP-complete for two teams with one-sided preferences [Aziz *et al.*, 2019, Thm. 1], it becomes trivial for any number of teams with identical valuations and one-sided preferences, because every allocation is PO in that case.

In light of Theorem 4.1, we cannot hope to reach a PO allocation in polynomial time by starting with an arbitrary allocation and iteratively finding Pareto improvements. However, a PO allocation can be efficiently computed by simply assigning each player to a team with the highest value for her, breaking ties in favor of a team that the player prefers most. Can we attain PO along with fairness for the teams? The next example shows that round-robin-based algorithms such as Algorithms 1 and 2 do not work, even for two teams with identical valuations and nonnegative-value players.

Example 4.2. Consider the following instance with $n = 2$ and $m = 8$:

- For $i \in [2]$, $v_i(p_1) = v_i(p_2) = 4$, $v_i(p_3) = v_i(p_4) = 3$, $v_i(p_5) = v_i(p_6) = 2$, and $v_i(p_7) = v_i(p_8) = 1$;
- $1 \succ_{p_j} 2$ for $j \in \{1, 2, 7, 8\}$ and $2 \succ_{p_j} 1$ for $j \in \{3, 4, 5, 6\}$.

Given this instance, Algorithms 1 and 2 return an allocation A that assigns to each team exactly one player from each of the sets $\{p_1, p_2\}$, $\{p_3, p_4\}$, $\{p_5, p_6\}$, and $\{p_7, p_8\}$. However, A is Pareto dominated by the allocation $A' = (\{p_1, p_2, p_7, p_8\}, \{p_3, p_4, p_5, p_6\})$.

Nevertheless, for two teams and arbitrary-value players, we can find an EF1 and PO allocation by extending the *generalized adjusted winner procedure* of Aziz *et al.* [2022]. The algorithm operates in a similar way as Aziz *et al.*'s algorithm but we need to employ a tie-breaking rule among players with the same ratio between the teams' values.

Theorem 4.3. *Given any instance with two teams, there exists an algorithm that outputs an allocation that is EF1, PO, and team-PO in time $O(m^2)$.*

Proof. The algorithm is shown as Algorithm 3. Since it is a version of the generalized adjusted winner procedure with specific tie-breaking, EF1, team-PO, and the running time follow from the work of Aziz *et al.* [2022]. In particular, the tie-breaking in Line 4 takes time $O(m)$ and does not add to the overall running time.

It remains to show that the output allocation is PO. First, players with zero value for both teams are already assigned to a team that they prefer, and such players do not affect the utility of either team no matter which team they are assigned to, so we may safely ignore them. We claim that at any point from Line 5 onward, the allocation A in the algorithm is PO.

Suppose to the contrary that there exists a Pareto improvement $A' = (A'_1, A'_2)$ of A . Since this intermediate allocation A is team-PO [Aziz *et al.*, 2022], we have

$$v_1(A_1) = v_1(A'_1) \quad \text{and} \quad v_2(A_2) = v_2(A'_2). \quad (1)$$

We can assume that players in P_1^* and P_2^* stay in team 1 and 2, respectively, because transferring such a player makes neither team better off and at least one team worse off, contradicting team-PO. Thus, in the following argument, we assume that only players in $P^+ \cup P^-$ are exchanged. In addition, we observe from the proof of Aziz *et al.* [2022] that, for some value α , $|v_1(p)|/|v_2(p)| = \alpha$ for all $p \in (A_1 \cap A'_2) \cup (A_2 \cap A'_1)$ (i.e., the exchanged players between A and A'). We derive a contradiction by splitting the argument according to p_i , the last player we moved in the for-loop (see Figure 1). If we did not move any player, we can apply the argument in Case 1.

Case 1 Suppose that one of the following holds:

- (i) $|v_1(p_i)|/|v_2(p_i)| < \alpha$;
- (ii) $|v_1(p_i)|/|v_2(p_i)| = \alpha$ and $p_i \in P^+$ with $2 \succ_{p_i} 1$; or
- (iii) $|v_1(p_i)|/|v_2(p_i)| = \alpha$ and $p_i \in P^-$ with $1 \succ_{p_i} 2$.

We see that every player p in $A_1 \cap P^-$ (resp., $A_2 \cap P^+$) with the ratio $|v_1(p)|/|v_2(p)| = \alpha$, if exists, strictly prefers team 1 (resp., team 2), so such a player cannot be exchanged for a Pareto improvement. Thus, $A_1 \cap A'_2$ (resp., $A_2 \cap A'_1$) consists only of players in P^+ (resp., P^-). Because $(A_1 \cap A'_2) \cup (A_2 \cap A'_1)$ is nonempty, the utility of team 1 is lower in A' than in A , which implies that A' cannot be a Pareto improvement.

Case 2 Suppose that $|v_1(p_i)|/|v_2(p_i)| = \alpha$, $p_i \in P^+ \cup P^-$, and $1 \sim_{p_i} 2$. Every player p in $A_1 \cap (P^+ \cup P^-)$ with the ratio α weakly prefers team 1, while every p in $A_2 \cap (P^+ \cup P^-)$ with the ratio α weakly prefers team 2. Note that any player in $(A_1 \cap A'_2) \cup (A_2 \cap A'_1)$ likes both teams equally, because players in $P^+ \cup P^-$ with ratio α and a strict preference are already allocated to their preferred team. This together with the team-PO of A implies that no player is better off in A' than in A . Thus, A' is not a Pareto improvement.

Case 3 Suppose that one of the following holds:

- (i) $|v_1(p_i)|/|v_2(p_i)| > \alpha$;
- (ii) $|v_1(p_i)|/|v_2(p_i)| = \alpha$ and $p_i \in P^+$ with $1 \succ_{p_i} 2$; or
- (iii) $|v_1(p_i)|/|v_2(p_i)| = \alpha$ and $p_i \in P^-$ with $2 \succ_{p_i} 1$.

We see that every player p in $A_1 \cap P^+$ (resp., $A_2 \cap P^-$) with the ratio α , if exists, strictly prefers team 1 (resp., team 2), so such a player cannot be exchanged for a Pareto improvement. Thus, $A_1 \cap A'_2$ (resp., $A_2 \cap A'_1$) consists only of players in P^- (resp., P^+). Because $(A_1 \cap A'_2) \cup (A_2 \cap A'_1)$ is nonempty, the utility of team 2 is lower in A' than in A , which implies that A' cannot be a Pareto improvement.

In each of the three cases, we arrive at a contradiction. Therefore, we conclude that A is PO. \square

Although EF1, PO, and team-PO can be guaranteed simultaneously in the case of two teams, EF1 and player-PO are already incompatible in this case.

Proposition 4.4. *Even for two teams with identical valuations and nonnegative-value players, there does not necessarily exist an EF1 and player-PO allocation.*

Proof. Consider an instance with $n = 2$ and $m = 4$ such that each team has value 1 for each player and every player prefers team 1 to team 2. The only player-PO allocation assigns all players to team 1, but this allocation is not EF1. \square

Note also that since PO is a strengthening of individual stability, Proposition 3.8 implies that we cannot guarantee PO and balancedness simultaneously.

We now move on to the general setting where the number of teams can be arbitrary. Unfortunately, even for nonpositive-value players and one-sided preferences, it is unknown whether EF1 and PO can always be satisfied together [Ebadian *et al.*, 2022; Garg *et al.*, 2022]. We therefore restrict our attention to nonnegative-value players in the remainder of this section. By building upon a well-known result of Caragiannis *et al.* [2019], we can establish the existence of an EF1 and PO allocation. For any allocation A , its *Nash welfare* is defined as the product $\prod_{i \in T} v_i(A_i)$. An allocation is said to be a *maximum Nash welfare (MNW) allocation* if it maximizes the Nash welfare among all allocations.⁸

Theorem 4.5. *For any instance with nonnegative-value players, there exists an EF1 and PO allocation.*

Proof. Let \mathcal{W} be the set of all MNW allocations, and let A be an allocation that is PO within \mathcal{W} —such an allocation must exist because otherwise there would be an infinite sequence of Pareto improvements in \mathcal{W} . It is known that every MNW allocation is EF1 [Caragiannis *et al.*, 2019], so A is EF1. We claim that A is PO within the set of all allocations. Suppose to the contrary that there is a Pareto improvement A' of A . Since $v_i(A'_i) \geq v_i(A_i)$ for all $i \in T$, A' must also be an MNW allocation. However, this contradicts the assumption that A is PO within \mathcal{W} . \square

Given Theorem 4.5, a natural question is whether there exists a polynomial-time algorithm that computes an allocation guaranteed by the theorem. However, this question is open even for one-sided preferences.⁹ We demonstrate next that, in two special cases, such an algorithm exists. The first case is when the teams have *binary valuations*, meaning that each team has value either 0 or 1 for each player. In this case, it turns out that Algorithm 2 computes an EF1 and PO allocation in polynomial time.¹⁰

Theorem 4.6. *For any instance with binary valuations, Algorithm 2 computes an EF1 and PO allocation in polynomial time.*

⁸If the maximum possible Nash welfare is 0, an MNW allocation should yield nonzero utility to the largest possible number of teams and, subject to that, maximize the product of utilities of these teams.

⁹A pseudopolynomial-time algorithm for this problem was given by Barman *et al.* [2018].

¹⁰With binary valuations, the set \hat{P}^- in Algorithm 2 is empty, so the algorithm can be simplified.

Algorithm 4: For computing an EF1 and PO allocation for three teams with the conditions of Theorem 4.7

```

1 for  $i \leftarrow 1, 2, 3$  do
2    $\lfloor$  Assign each player with zero value of type  $S_i$  to team  $i$ ;
3 while there is at least one unassigned player do
4   Let  $i$  be a team with the least current value. If there is more than one such team, choose a team  $i$  for which there is at
   least one unassigned player of type  $S_i$ , if possible;
5   if there is an unassigned player of type  $S_i$  then Assign any such player to team  $i$ ;
6   else if there is only one type of players left then Assign any remaining player to team  $i$ ;
7   else Denote the other two types by  $S_j$  and  $S_k$ . Let  $f(S_j)$  be the total value that team  $j$  would receive if all
   unassigned players of type  $S_j$  were assigned to it (in addition to the already assigned players in team  $j$ ), and define
    $f(S_k)$  analogously for team  $k$ . Assign a player of the type with the higher  $f$ -value to team  $i$ , breaking ties between
   types arbitrarily and breaking ties among players in favor of higher-value players;
8 return the current allocation  $(A_1, A_2, A_3)$ ;

```

Proof. Since EF1 and polynomial-time computability were already shown in the proof of Theorem 3.9, it is sufficient to establish PO.

Let A be the outcome of Algorithm 2, and suppose to the contrary that there is a Pareto improvement A' of A . For each player p , we denote by $A(p)$ and $A'(p)$ the team that p is allocated to in A and A' , respectively. Note that $A'(p) \succsim_p A(p)$ for all $p \in P$ and $v_i(A'_i) \geq v_i(A_i)$ for all $i \in T$. We claim that $v_{A(p)}(p) \geq v_{A'(p)}(p)$ for each player p . Indeed, if this is not the case, then $v_{A(p)}(p) = 0$ and $v_{A'(p)}(p) = 1$ and moreover $A'(p) \succsim_p A(p)$. However, a similar proof as that for individual stability in Theorem 3.9 shows that such a deviation by p from $A(p)$ to $A'(p)$, which hurts neither p nor $A(p)$ and strictly helps $A'(p)$, cannot exist, thereby proving the claim.

Now, since A' is a Pareto improvement of A , we have

$$\sum_{p \in P} v_{A(p)}(p) = \sum_{i \in T} v_i(A_i) \leq \sum_{i \in T} v_i(A'_i) = \sum_{p \in P} v_{A'(p)}(p).$$

Since $v_{A(p)}(p) \geq v_{A'(p)}(p)$ for all $p \in P$, we must have $v_{A(p)}(p) = v_{A'(p)}(p)$ for all $p \in P$ and $v_i(A_i) = v_i(A'_i)$ for all $i \in T$. Thus, we can construct a better matching than μ^* in Algorithm 1 on \widehat{P}^+ (Line 4 of Algorithm 2) by a round-robin sequence in which each team i picks players in A'_i as early as possible, because the Pareto improvement makes no player worse off and at least one player strictly better off. However, this contradicts the definition of μ^* . \square

Next, we focus on the case of three teams with identical valuations and specific player preferences.

Theorem 4.7. *Suppose that there are $n = 3$ teams with identical valuations, all players yield nonnegative value, and each player prefers one team and is indifferent between the other two teams. Then, there exists an algorithm that computes an EF1 and PO allocation in polynomial time.*

Proof. The algorithm is shown as Algorithm 4, where for $i \in [3]$, we denote by S_i the type of players who prefer team i . It is clear that the algorithm runs in polynomial time. Since the algorithm always assigns a player to a team i with the least current value, no other team envies i by more than one player at this point. Hence, the same is true for all pairs of teams

during the entire execution of the algorithm, which means that the allocation is EF1.¹¹

We now show that the allocation is PO. Assume without loss of generality that the types run out in the order S_1, S_2, S_3 . In particular, team 1 may receive players of all three types, team 2 may only receive players of type S_2 and S_3 , and team 3 may only receive players of type S_3 . Suppose for contradiction that there exists a Pareto improvement $A' = (A'_1, A'_2, A'_3)$ of the output allocation A . Denoting the common team valuation by v , we have $v(A_i) = v(A'_i)$ for all $i \in \{1, 2, 3\}$. Since all players with zero value are already with their preferred team in A , they must remain with their team in A' . Moreover, since A_3 only contains players of type S_3 and $v(A_3) = v(A'_3)$, it must be that $A_3 = A'_3$. So, from A to A' , some players of type S_3 are moved from A_2 to A'_1 , while some players of type S_2 or S_3 (at least one player of type S_2) are moved from A_1 to A'_2 , where both sets of players have the same total value. We will show that every player of type S_2 in A_1 has a strictly larger value than the total value of all players of type S_3 in A_2 . This is sufficient to obtain the desired contradiction.

Consider the moment when the algorithm assigns the last player p of type S_2 to team 1. Since players of type S_3 run out after those of type S_2 , there is at least one player of type S_3 available at this moment. The choice of the algorithm to assign a player of type S_2 to team 1 implies that $f(S_2) \geq f(S_3)$. After p 's assignment, $f(S_2)$ decreases by $v(p)$, so it holds that $f(S_3) - f(S_2) \leq v(p)$ at this point. Now, because players of type S_2 have not run out before p 's assignment, the first assignment of a player \widehat{p} of type S_3 to team 2 must occur after p 's assignment. Between p 's assignment and \widehat{p} 's assignment, some players of type S_3 may be assigned to team 1—this only decreases $f(S_3)$. Hence, directly before \widehat{p} 's assignment, we still have $f(S_3) - f(S_2) \leq v(p)$. Moreover, at this point, the partial allocation A'' satisfies $v(A''_2) < v(A''_3)$ (if $v(A''_2) = v(A''_3)$, the algorithm should have assigned \widehat{p} to team 3 due to the tie-breaking rule in Line 4), and only players of type S_3 are left, i.e., $v(A''_2) = f(S_2)$. Therefore, the total value of players of type S_3 assigned to team 2 is at most

¹¹Alternatively, the algorithm can be seen as a special case of Lipton *et al.* [2004]'s *envy cycle elimination algorithm* for identical valuations.

$f(S_3) - v(A_3'') < f(S_3) - v(A_2'') = f(S_3) - f(S_2) \leq v(p)$, i.e., this value is strictly less than $v(p)$. On the other hand, by the tie-breaking on players, every player of type S_2 assigned to team 1 has value at least $v(p)$. This completes the proof. \square

Finally, we provide a pseudopolynomial-time algorithm for the case where the number of teams is constant.

Theorem 4.8. *For any instance with a constant number of teams, each of which has a nonnegative integer value for each player, an EF1 and PO allocation can be computed in pseudopolynomial time.*

Proof. Let $v_{\max} := \max_{i \in T, p \in P} v_i(p)$. We construct a table H which classifies all possible utility vectors for teams that can be attained by allocating the first j players p_1, \dots, p_j . The entry $H(\mathbf{u}, j)$ indicates whether there exists an allocation A of players p_1, \dots, p_j such that $\mathbf{u} = (v_1(A_1), \dots, v_n(A_n))$. Moreover, if there exists such an allocation, $H(\mathbf{u}, j)$ is an allocation that maximizes the players' happiness lexicographically with respect to the reverse player order (i.e., maximizes player p_j 's happiness, then maximizes player p_{j-1} 's happiness, and so on) among such allocations. Note that the utility of a team for an allocation is an integer belonging to the range $[0, m \cdot v_{\max}]$. Hence, the size of the table H is $O(m \cdot (1 + m \cdot v_{\max})^n)$, which is pseudopolynomial when n is a constant. We can fill in the entries of the table according to the following recursive formula, where χ_i denotes the i th unit vector of length n , that is, the k th coordinate is 1 if $k = i$ and 0 otherwise.

- For $j = 0$, the entry $H(\mathbf{u}, j)$ is $(\emptyset, \dots, \emptyset)$ if $\mathbf{u} = \mathbf{0}$, and \perp otherwise.¹²
- For $j = 1, 2, \dots, m$, the entry $H(\mathbf{u}, j)$ is \perp if $H(\mathbf{u} - v_i(p_j) \cdot \chi_i, j - 1) = \perp$ for all $i \in T$. Otherwise, let i^* be a team that p_j prefers the most among the teams i such that $H(\mathbf{u} - v_i(p_j) \cdot \chi_i, j - 1) \neq \perp$. If there are multiple such teams, we select a team that yields a lexicographically optimal allocation for p_1, \dots, p_{j-1} with respect to the reverse player order. Then, the entry is the allocation such that p_1, \dots, p_{j-1} are allocated as in $H(\mathbf{u} - v_{i^*}(p_j) \cdot \chi_{i^*}, j - 1)$ while p_j is allocated to i^* .

The entries $H(\mathbf{u}, j)$ can be computed in $O(nm)$ time each in a bottom-up manner, so we can construct the table H in $O(nm^2 \cdot (1 + m \cdot v_{\max})^n)$ time. Now, by using the table, we can pick a utility vector \mathbf{u}^* that corresponds to an MNW allocation (of all m players). Similarly to the proof of Theorem 4.5, we can then conclude that the allocation $H(\mathbf{u}^*, m)$ is EF1 and PO. \square

5 Justified Envy-Freeness

In this section, we consider justified EF. Note that if $m = n$ and all players yield nonnegative value to every team, the existence of an EF1 and justified EF allocation follows from the celebrated result in two-sided matching of Gale and Shapley [1962] (with arbitrary tie-breaking). We show that, perhaps surprisingly, this guarantee cannot be extended to the case $m > n$.

¹²The symbol \perp stands for a “null” value.

Proposition 5.1. *Even for two teams and nonnegative-value players who prefer the same team, there may not exist an EF1 and justified EF allocation.*

Proof. Consider an instance with $n = 2$ and $m = 4$ such that team 1 has value 3, 3, 2, 2 for the four players, respectively, team 2 has value 1, 1, 0, 0, respectively, and all players strictly prefer team 1 to team 2. Team 2 needs at least one of p_1 and p_2 in order for EF1 to be fulfilled—assume without loss of generality that it receives p_2 . Given this, team 1 needs at least one of p_3 and p_4 in order for EF1 to be fulfilled—assume without loss of generality that it receives p_3 . However, this results in p_2 having justified envy toward p_3 . \square

Can we efficiently determine whether an EF1 and justified EF allocation exists in a given instance? The following theorem gives a negative answer, provided that $P \neq NP$.

Theorem 5.2. *Even for nonnegative-value players with strict preferences, deciding whether there exists an EF1 and justified EF allocation is NP-complete.*

Proof. The problem clearly belongs to NP. We prove the hardness by reducing from INDEPENDENT SET, the problem of deciding whether a graph G admits an independent set of size k . Consider an instance (G, k) of INDEPENDENT SET, where $G = (V, E)$. Without loss of generality,¹³ assume that $k \geq 2$ and $|E| \geq |V| \geq 4$. We construct an instance of our problem as follows.

We set $\tau := 2 + |E|$, which will be the number of teams in our instance, and $\eta := |V| + (k + 1)(\tau - 1) + 3$, which will be the number of players in our instance. Clearly, $\eta > \tau$ since $(k + 1)(\tau - 1) > \tau$ for $\tau \geq 2$. We set $\varepsilon \in (0, 1)$ such that $\varepsilon < \min\{\frac{1}{\eta - 2}, 1 - \frac{k}{k + 1}\}$; hence, we have $1 > (\eta - 2)\varepsilon$ and $(k + 1)(1 - \varepsilon) > k$.

Create one special team s . For each edge $e \in E$, create an edge team t_e . For each vertex $w \in V$, create a vertex player p_w . The special team s assigns value 1 to each vertex player p_w for $w \in V$. Each edge team t_e assigns value 1 to a vertex player p_w if w is an endpoint of edge e and value 0 otherwise. Create an injective map $\phi: V \rightarrow E$; this is possible since $|V| \leq |E|$. Each vertex player p_w prefers s the most and $\phi(w)$ the second most, and has an arbitrary preference over the other teams (including one that will be defined later).

For the special team s , we create the following gadget I that forces s to get k vertex players in our desired allocation. The gadget I consists of two teams s and d , two players a and b , and $(k + 1)(\tau - 1) + 1$ players c_j for $j \in [(k + 1)(\tau - 1) + 1]$. Let $C = \{c_1, c_2, \dots, c_{(k + 1)(\tau - 1) + 1}\}$. Players a and b prefer s the most and d the second most, and have an arbitrary preference over the other teams. Each $c_j \in C$ has an arbitrary (strict) preference over the teams. Teams s and d are the only teams that have positive value for the players in the gadget I . Team s assigns value 1 to each of a and b and value $(1 - \varepsilon)$ to each player $c_j \in C$. Team d assigns value 1 to each of a and b , and value ε to the remaining players (including

¹³If $k = 1$ or $|V| \leq 3$, the problem is trivial. If $|V| > |E|$, we repeatedly remove an isolated vertex and decrease k by 1 each time until $|V| \leq 2|E|$, then add an isolated clique of size $|V|$ and increase k by 1.

		player a	player b	player c_j ($c_j \in C$)	player p_w ($w \in V$)
Preferences		$s \succ d \succ \dots$	$s \succ d \succ \dots$	arbitrary	$s \succ \phi(w) \succ \dots$
Valuations	team s	1	1	$1 - \varepsilon$	1
	team t_e ($e \in E$)	0	0	0	1 (if w is an endpoint of e) or 0 (otherwise)
	team d	1	1	ε	ε

Table 2: Player preferences and team valuations in the proof of Theorem 5.2.

those outside the gadget). See Table 2 for a summary of the players' preferences and teams' valuations in our constructed instance. This completes the description of our construction, which clearly runs in polynomial time.

To finish the proof, we show that there exists an allocation A satisfying EF1 and justified EF if and only if there exists an independent set $S \subseteq V$ of size k in G .

First, we show that if there exists an allocation A satisfying EF1 and justified EF, then there exists an independent set $S \subseteq V$ of size k in G . Suppose that there exists such an allocation A . We first claim that in A , team s must receive at least k vertex players. To see this, consider the gadget I . Observe that d must be allocated at least one of the players a and b . Indeed, if d receives no player, then since $\eta > \tau$, there is a team that is allocated at least two players positively valued by d , contradicting the EF1 property of A . Hence, d is allocated at least one player. Moreover, if d is allocated neither a nor b , then these two players must be allocated to team s , since otherwise either a or b would have justified envy toward a player allocated to the team d ; however, this would violate the EF1 condition from the viewpoint of d since the maximum value d can achieve from players other than a and b is $(\eta - 2)\varepsilon$, which is strictly less than 1. Thus, at least one of a and b must be allocated to team d ; without loss of generality, assume that b is allocated to d . This means that none of the players $c_j \in C$ can be allocated to team s , since otherwise b would have justified envy toward such a player. Hence, at most $\tau - 1$ teams receive a player from C ; since $|C| = (k + 1)(\tau - 1) + 1$, at least one team $t \neq s$ gets at least $(k + 2)$ such players. Thus, the value that team s can obtain from the gadget I is at most 1, and there is a team t that receives a subset of players whose total value is at least $(k + 2)(1 - \varepsilon)$ from the viewpoint of team s . Since A is EF1, team s must receive value at least $(k + 1)(1 - \varepsilon) - 1$, which is strictly greater than $k - 1$, from outside of the gadget I . The only way this is possible is for team s to receive at least k vertex players.

Now, let S' denote the set of vertices in V that correspond to the vertex players allocated to team s . We have seen that S' contains at least k vertices. We claim that S' forms an independent set in G . To see this, suppose for contradiction that S' contains a pair of vertices that form an edge e in G . Then, the edge team t_e does not receive the players positively valued by itself and therefore envies team s by more than one player, a contradiction. Thus, S' is an independent set of size at least k , and any subset $S \subseteq S'$ of size k forms an independent set as well.

Conversely, suppose that there exists an independent set S of size k in G . Take an edge e^* such that $\phi(w) = e^*$ for some

$w \in S$; note that since ϕ is injective, we have $e^* \neq \phi(w)$ for all $w \in V \setminus S$. Consider the following allocation A . First, it allocates all the vertex players p_w with $w \in S$ to s and each of the remaining $|V| - k$ vertex players p_w to the edge team $t_{\phi(w)}$; then, it allocates player a to team s and player b to team d ; finally, it allocates the players $c_j \in C$ to the teams other than s in such a way that the edge team t_{e^*} receives $k + 2$ such players and every other team receives $k + 1$ such players.

We first show that A is EF1.

- Consider team s . Team s gets value $k + 1$. Team d gets value $1 + (k + 1)(1 - \varepsilon)$ from the viewpoint of s and the envy of s would disappear by removing player b . Every edge team t_e with $\phi(w) = e$ for some $w \in V \setminus S$ gets value at most $1 + (k + 1)(1 - \varepsilon)$ from the viewpoint of s and the envy of s would disappear upon removing the vertex player p_w allocated to t_e . The edge team t_{e^*} gets value $(k + 2)(1 - \varepsilon)$ from the viewpoint of s and the envy of s would disappear upon removing one of the players allocated to t_{e^*} . Every other edge team t_e with $e \neq e^*$ and $e \neq \phi(w)$ for all $w \in V \setminus S$ obtains value at most $(k + 1)(1 - \varepsilon)$ from the viewpoint of s and therefore s does not envy t_e .
- Consider an arbitrary edge team t_e . Team t_e does not envy d since d does not receive a vertex player. Team t_e does not envy s by more than one player since s is allocated at most one vertex player p_w corresponding to an endpoint of e . Team t_e does not envy edge team $t_{e'}$ with $e' \neq \phi(w)$ for all $w \in V \setminus S$ since t_e assigns value 0 to players in C . Team t_e may envy edge team $t_{e'}$ with $e' = \phi(w)$ for some $w \in V \setminus S$ but the envy can be eliminated by removing the vertex player allocated to $t_{e'}$.
- Consider team d . Team d does not envy the other teams since d receives value $1 + (k + 1)\varepsilon$ and every team other than d gets value at most 1 from the viewpoint of d after removing some player assigned to the team (recall that $1 > (\eta - 2)\varepsilon \geq (k + 2)\varepsilon$).

Now, it remains to show that A satisfies justified EF.

- Consider an arbitrary vertex player p_w . Each player p_w with $w \in S$ does not have justified envy toward the other players since she is allocated to her first choice. Each player p_w with $w \notin S$ is allocated to the edge team $t_{\phi(w)}$ and she may envy the players allocated to s ; however, these players are valued at $1 = v_s(p_w)$ by s , which means the envy is not justified.
- Consider player a . Player a does not envy the other players since she is allocated to her first choice.

Algorithm 5: For deciding whether an EF1 and justified EF allocation exists under the conditions of Theorem 5.3

```

1 Let  $P_1$  be the set of players who prefer team 1, and  $P_2 = P \setminus P_1$ ; // Players in  $P_2$  prefer team 2
2 Let  $V_1 = \{v_1(p) \mid p \in P\}$  and  $V_2 = \{v_2(p) \mid p \in P\}$ ;
3 Let  $W_1 = \{(x_1, n_1) \mid \text{either } x_1 \in V_1 \text{ and } n_1 \in [m], \text{ or } x_1 = -\infty \text{ and } n_1 = 0\}$ ; //  $x_1$  represents the maximum value
   for team 1 of a player in  $P_1$  assigned to team 2, and  $n_1$  represents the number of players attaining this maximum value
4 Let  $W_2 = \{(x_2, n_2) \mid \text{either } x_2 \in V_2 \text{ and } n_2 \in [m], \text{ or } x_2 = -\infty \text{ and } n_2 = 0\}$ ; //  $x_2$  represents the maximum value
   for team 2 of a player in  $P_2$  assigned to team 1, and  $n_2$  represents the number of players attaining this maximum value
5 for  $(x_1, n_1) \in W_1$  and  $(x_2, n_2) \in W_2$  do
6   Assign all players  $p \in P$  such that  $v_1(p) < x_1$  to team 2, and all players  $p \in P$  such that  $v_2(p) < x_2$  to team 1;
7   Assign all players  $p \in P_1$  such that  $v_1(p) > x_1$  to team 1, and all players  $p \in P_2$  such that  $v_2(p) > x_2$  to team 2;
8   if there is a conflict in the preceding assignments (i.e., some player has been assigned to both teams) then continue;
9   Let  $Q_1$  be the players from  $P_1$  who are still unassigned; //  $v_1(p) = x_1$  for every  $p \in Q_1$ 
10  Let  $Q_2$  be the players from  $P_2$  who are still unassigned; //  $v_2(p) = x_2$  for every  $p \in Q_2$ 
11  Among the players in  $Q_1$ , assign to team 2 the ones with the highest value for team 2 (breaking ties arbitrarily) so
   that there are a total of  $n_1$  players  $p \in P_1$  with  $v_1(p) = x_1$  assigned to team 2;
12  if the preceding assignment is not possible then continue;
13  Assign all remaining players in  $Q_1$  to team 1;
14  Among the players in  $Q_2$ , assign to team 1 the ones with the highest value for team 1 (breaking ties arbitrarily) so
   that there are a total of  $n_2$  players  $p \in P_2$  with  $v_2(p) = x_2$  assigned to team 1;
15  if the preceding assignment is not possible then continue;
16  Assign all remaining players in  $Q_2$  to team 2;
17  if the resulting allocation is EF1 then return this allocation;
18 return None;

```

- Consider player b . Player b may envy the players allocated to s , but these players are valued at $1 = v_s(b)$ by s , which means the envy is not justified.
- Consider player $c_j \in C$. Since every team values c_j no more than any other player, any envy that c_j has toward another player is not justified.

This completes the proof. \square

Despite Theorem 5.2, the problem becomes efficiently solvable if there are two teams. Note that this special case covers the example in the proof of Proposition 5.1.

Theorem 5.3. *For two teams and nonnegative-value players with strict preferences, there is a polynomial-time algorithm that decides whether an EF1 and justified EF allocation exists (and, if so, computes such an allocation).*

Proof. Let P_1 be the set of players who prefer team 1, and define P_2 analogously. Given an allocation, we let x_1 be the maximum value for team 1 of a player in P_1 who is assigned to team 2, and let n_1 be the number of players attaining this maximum value. If there is no such player, we let $x_1 = -\infty$ and $n_1 = 0$. Define x_2 and n_2 analogously. The idea behind the algorithm is that, once we fix x_1, n_1, x_2, n_2 , we can efficiently check whether there is an EF1 and justified EF allocation consistent with these values. This allows us to iterate over all possible values of these parameters. The pseudocode of the algorithm is given as Algorithm 5.

To see that the algorithm is correct, consider an EF1 and justified EF allocation with the associated values x_1, n_1, x_2, n_2 . If a player $p \in P$ with $v_1(p) < x_1$ is assigned to team 1, then a player $p' \in P_1$ with $v_1(p') = x_1$ assigned to team 2 would have justified envy toward p . Hence, any player

$p \in P$ with $v_1(p) < x_1$ must be assigned to team 2; this is also vacuously true if $x_1 = -\infty$. Moreover, by definition of x_1 , any player $p \in P_1$ with $v_1(p) > x_1$ must be assigned to team 1. Analogous arguments apply to v_2 . It follows that the relevant players must be assigned as in Lines 6 and 7 of Algorithm 5. Moreover, once these assignments are made, justified EF is guaranteed.

At this point, the players who may still be unassigned are players $p \in P_1$ with $v_1(p) = x_1$ and players $p \in P_2$ with $v_2(p) = x_2$. Let Q_1 be the set of players $p \in P_1$ with $v_1(p) = x_1$ who are still unassigned, and define Q_2 analogously. Since team 1 is indifferent between players in Q_1 , in order to check whether EF1 can be satisfied, it suffices to assign to team 2 a subset of these players with the highest value for team 2, with the size of the subset chosen so that the definition of n_1 is fulfilled. A similar statement holds for Q_2 . The correctness of the algorithm then follows from the fact that it checks all possible values of x_1, n_1, x_2, n_2 .

The number of possible values of (x_1, n_1, x_2, n_2) is $O(m^4)$, and for each (x_1, n_1, x_2, n_2) the algorithm takes time $O(m)$. Hence, Algorithm 5 runs in time $O(m^5)$. \square

Finally, we prove that if the two teams have identical valuations, then an EF1 and justified EF allocation always exists.

Theorem 5.4. *For two teams with identical valuations and nonnegative-value players, there exists an EF1 and justified EF allocation. Moreover, such an allocation can be computed in polynomial time.*

Proof. To show the theorem, we will align the players on a path so that the values form a “valley”, and apply a discrete “cut-and-choose” algorithm to construct an EF1 and justified EF allocation.

Formally, given a valuation function v and a path $\mathcal{P} = (p_1, p_2, \dots, p_t)$ of players, p_j is a *lumpy tie* if

$$v(\{p_1, \dots, p_j\}) \geq v(\{p_{j+1}, \dots, p_t\})$$

and

$$v(\{p_1, \dots, p_{j-1}\}) \leq v(\{p_j, \dots, p_t\}).$$

Such a player exists, e.g., by taking a player p_j with the smallest index j such that $v(\{p_1, \dots, p_j\}) \geq v(\{p_{j+1}, \dots, p_t\})$. Using the notion of a lumpy tie, Bilò *et al.* [2022, Def. 3.1] developed the following cut-and-choose algorithm over a path that computes an EF1 allocation for two teams with identical valuations in polynomial time.

Algorithm 6: Discrete cut-and-choose over a path

```

1 Input  $\mathcal{P} = (p_1, p_2, \dots, p_t)$  and valuation function  $v$ ;
2 Let  $p_j$  denote the leftmost lumpy tie of the path  $\mathcal{P}$ ;
3 Let  $L = \{p_1, \dots, p_{j-1}\}$  and  $R = \{p_{j+1}, \dots, p_t\}$ ;
4 if  $v(L) \geq v(R)$  then
5   return  $A = (L, R \cup \{p_j\})$ ;
6 else
7   return  $A = (L \cup \{p_j\}, R)$ ;
```

Now, consider an instance consisting of two teams with the same non-negative valuation v . For $i \in [2]$, denote by S_i the set of players who prefer team i over the other team (ties broken arbitrarily). Relabel the players in $S_1 = \{y_1, y_2, \dots, y_\ell\}$ so that $v(y_1) \leq v(y_2) \leq \dots \leq v(y_\ell)$, and relabel the players in $S_2 = \{z_1, z_2, \dots, z_h\}$ so that $v(z_1) \leq v(z_2) \leq \dots \leq v(z_h)$. Consider the path $\mathcal{P}^* := (y_\ell, \dots, y_1, z_1, \dots, z_h)$.

Apply Algorithm 6 to \mathcal{P}^* and v . Let A denote the resulting allocation. The allocation A is EF1 [Bilò *et al.*, 2022, Prop. 3.2]. To show that A is justified EF, assume first that the leftmost lumpy tie over \mathcal{P}^* is a player y_i for some $i \in [\ell]$. Every player z_k for $k \in [h]$, as well as every player y_j with $j > i$, is already allocated to her favorite team. Consider a player y_j with $j \leq i$ who is allocated to team 2. The player y_j may envy a player $y_{j'}$ with $j' \geq i$ who is allocated to team 1; however, since $v(y_{j'}) \geq v(y_j)$, this envy is not justified. The proof proceeds similarly if the leftmost lumpy tie over \mathcal{P}^* is a player z_i for some $i \in [h]$. \square

6 Conclusion and Future Work

In this work, we have investigated the setting of fair division with two-sided preferences, which serves to model the allocation of players to sports teams, employees to branches of a restaurant chain, or volunteers to community service clubs. We showed that EF1, swap stability, and individual stability are compatible in this setting, and an allocation satisfying these properties can be computed in polynomial time even when the teams may have positive or negative values for the players. If all players yield nonnegative value to the teams, an EF1 and PO allocation always exists, and such an allocation can be found efficiently provided that the values are binary. Furthermore, we demonstrated that an EF1 and justified EF allocation does not always exist and determining whether such an allocation exists is NP-complete.

For future work, it would be worth examining the interplay between other common (one-sided) fairness notions and two-sided stability conditions such as swap stability and justified EF. For instance, while we have focused on the important fairness notion of EF1, one might try to achieve an approximation of *maximin share fairness (MMS)* [Budish, 2011; Kurokawa *et al.*, 2018], either in place of or in conjunction with EF1. Note that EF1 implies a $1/n$ -approximation of MMS for nonnegative-value players [Amanatidis *et al.*, 2018], so our relevant results also hold for this approximation. It could also be interesting to extend our results to accommodate teams with varying *entitlements* [Farhadi *et al.*, 2019; Chakraborty *et al.*, 2021]; this would allow us to capture restaurant branches or community service clubs of different sizes. Finally, one could attempt to bring other concepts from the rich matching literature into consideration as well.

Acknowledgments

This work was partially supported by JSPS KAKENHI Grant Numbers JP17K12646, JP20K19739, JP21K17708, and JP21H03397, by JST PRESTO Grant Numbers JPMJPR2122 and JPMJPR20C1, by Value Exchange Engineering, a joint research project between Mercari, Inc. and the RIISE, by the Singapore Ministry of Education under grant number MOE-T2EP20221-0001, and by an NUS Start-up Grant. We would like to thank the anonymous reviewers for their valuable comments.

References

- Martin Aleksandrov and Toby Walsh. Two algorithms for additive and fair division of mixed manna. In *Proceedings of the 43rd German Conference on Artificial Intelligence (KI)*, pages 3–17, 2020.
- Georgios Amanatidis, Georgios Birmpas, and Evangelos Markakis. Comparing approximate relaxations of envy-freeness. In *Proceedings of the 27th International Joint Conference on Artificial Intelligence (IJCAI)*, pages 42–48, 2018.
- Haris Aziz and Rahul Savani. Hedonic games. In Felix Brandt, Vincent Conitzer, Ulle Endriss, Jérôme Lang, and Ariel D. Procaccia, editors, *Handbook of Computational Social Choice*, chapter 15, pages 356–376. Cambridge University Press, 2016.
- Haris Aziz, Péter Biró, Jérôme Lang, Julien Lesca, and Jérôme Monnot. Efficient reallocation under additive and responsive preferences. *Theoretical Computer Science*, 790:1–15, 2019.
- Haris Aziz, Ioannis Caragiannis, Ayumi Igarashi, and Toby Walsh. Fair allocation of indivisible goods and chores. *Autonomous Agents and Multi-Agent Systems*, 36(1):3:1–3:21, 2022.
- Siddharth Barman, Sanath Kumar Krishnamurthy, and Rohit Vaish. Finding fair and efficient allocations. In *Proceedings of the 19th ACM Conference on Economics and Computation (EC)*, pages 557–574, 2018.

- Kristóf Bérczi, Erika R. Bérczi-Kovács, Endre Boros, Fekadu Tolessa Gedefa, Naoyuki Kamiyama, Telikepalli Kavitha, Yusuke Kobayashi, and Kazuhisa Makino. Envy-free relaxations for goods, chores, and mixed items. *CoRR*, abs/2006.04428, 2020.
- Vittorio Bilò, Ioannis Caragiannis, Michele Flammini, Ayumi Igarashi, Gianpiero Monaco, Dominik Peters, Cosimo Vinci, and William S. Zwicker. Almost envy-free allocations with connected bundles. *Games and Economics Behavior*, pages 197–221, 2022.
- Steven J. Brams and Alan D. Taylor. *Fair Division: From Cake-Cutting to Dispute Resolution*. Cambridge University Press, 1996.
- Eric Budish. The combinatorial assignment problem: Approximate competitive equilibrium from equal incomes. *Journal of Political Economy*, 119(6):1061–1103, 2011.
- Ioannis Caragiannis, David Kurokawa, Hervé Moulin, Ariel D. Procaccia, Nisarg Shah, and Junxing Wang. The unreasonable fairness of maximum Nash welfare. *ACM Transactions on Economics and Computation*, 7(3):12:1–12:32, 2019.
- Mithun Chakraborty, Ayumi Igarashi, Warut Suksompong, and Yair Zick. Weighted envy-freeness in indivisible item allocation. *ACM Transactions on Economics and Computation*, 9(3):18:1–18:39, 2021.
- Soroush Ebadian, Dominik Peters, and Nisarg Shah. How to fairly allocate easy and difficult chores. In *Proceedings of the 21st International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, pages 372–380, 2022.
- Alireza Farhadi, Mohammad Ghodsi, MohammadTaghi Hajiaghayi, Sebastien Lahaie, David Pennock, Masoud Seddighin, Saeed Seddighin, and Hadi Yami. Fair allocation of indivisible goods to asymmetric agents. *Journal of Artificial Intelligence Research*, 64:1–20, 2019.
- Rupert Freeman, Evi Micha, and Nisarg Shah. Two-sided matching meets fair division. In *Proceedings of the 30th International Joint Conference on Artificial Intelligence (IJCAI)*, pages 203–209, 2021.
- David Gale and Lloyd S. Shapley. College admissions and the stability of marriage. *American Mathematical Monthly*, 69(1):9–15, 1962.
- Jugal Garg, Aniket Murhekar, and John Qin. Fair and efficient allocations of chores under bivalued preferences. In *Proceedings of the 36th AAAI Conference on Artificial Intelligence (AAAI)*, pages 5043–5050, 2022.
- Sreenivas Gollapudi, Kostas Kollias, and Benjamin Plaut. Almost envy-free repeated matching in two-sided markets. In *Proceedings of the 16th International Conference on Web and Internet Economics (WINE)*, pages 3–16, 2020.
- Rucha Kulkarni, Ruta Mehta, and Setareh Taki. Indivisible mixed manna: on the computability of MMS+PO allocations. In *Proceedings of the 22nd ACM Conference on Economics and Computation (EC)*, pages 683–684, 2021.
- David Kurokawa, Ariel D. Procaccia, and Junxing Wang. Fair enough: Guaranteeing approximate maximin shares. *Journal of the ACM*, 64(2):8:1–8:27, 2018.
- Richard J. Lipton, Evangelos Markakis, Elchanan Mossel, and Amin Saberi. On approximately fair allocations of indivisible goods. In *Proceedings of the 5th ACM Conference on Economics and Computation (EC)*, pages 125–131, 2004.
- Hervé Moulin. *Fair Division and Collective Welfare*. MIT Press, 2003.
- Gourab K. Patro, Arpita Biswas, Niloy Ganguly, Krishna P. Gummadi, and Abhijnan Chakraborty. FairRec: Two-sided fairness for personalized recommendations in two-sided platforms. In *Proceedings of the 29th Web Conference (WWW)*, pages 1194–1204, 2020.
- Hila Shoshan, Noam Hazon, and Erel Segal-Halevi. Efficient nearly-fair division with capacity constraints. In *Proceedings of the 22nd International Conference on Autonomous Agents and Multiagent Systems (AAMAS)*, 2023. Forthcoming.
- Nobuaki Tomizawa. On some techniques useful for solution of transportation network problems. *Networks*, 1(2):173–194, 1971.
- Qingyun Wu and Alvin E. Roth. The lattice of envy-free matchings. *Games and Economic Behavior*, 109:201–211, 2018.
- Yu Yokoi. Envy-free matchings with lower quotas. *Algorithmica*, 82(2):188–211, 2020.