

How Adults Understand What Young Children Say

Stephan C. Meylan^{a,b,†}, Ruthe Foushee^c, Nicole H. Wong^a, Erika Bergelson^b, and Roger P. Levy^a

^a*Department of Brain and Cognitive Sciences, Massachusetts Institute of Technology*

^b*Department of Psychology and Neuroscience, Duke University*

^c*Department of Psychology, University of Chicago*

March 18, 2024

Abstract

Children’s early speech often bears little resemblance to adult speech in form or content, and yet caregivers often find meaning in young children’s utterances. Precisely how caregivers are able to do this remains poorly understood. We propose that successful early communication—a building block of language development—relies not just on children’s growing linguistic knowledge, but also on adults’ sophisticated inferences. These inferences, we further propose, are optimized for fine-grained details of how children speak. We evaluate these ideas using a set of candidate computational models of spoken word recognition based on deep learning and Bayesian inference, which instantiate competing hypotheses regarding the information sources used by adults to understand children. We find that the best-performing models (evaluated on datasets of adult interpretations of child speech) are those that have strong prior expectations about what children are likely to want to communicate, rather than the actual phonetic contents of what children say. We further find that adults’ behavior is best characterized as well-tuned to specific children: the more closely a word recognition model is tuned to the particulars of an individual child’s actual linguistic behavior, the better it predicts adults’ inferences about what the child has said. These results offer a comprehensive investigation into the role of caregivers as child-directed *listeners*, with broader consequences for theories of language acquisition.

Keywords

language development, speech recognition, Bayesian inference, communication, psycholinguistics

How children learn their first language from the world around them has proven to be an enduring question in psychology, cognitive science, linguistics, and related disciplines (Chomsky, 1965; Pinker, 1979; Saffran et al., 1996; Landauer & Dumais, 1997; Dupoux, 2018). The degree to which adult caregivers influence the outcome of the language learning process has been central to research on this topic (Hoff, 2006; Onnis, 2017; Markus et al., 2000; Roseberry et al., 2014; Rowland et al., 2003; Stein et al., 2008). However, prior work has focused almost exclusively on adults’ role as speakers in child-centric interactions (Huttenlocher et al., 1991; Hart & Risley, 1995; Rowe, 2012; Golinkoff et al., 2019; Cartmill et al., 2013; Weizman & Snow, 2001; Newport, 1975; Bergelson et al., 2019; Cristia et al., 2019, though see Golinkoff, 1986; Golinkoff & Gordon, 1988; Tomasello et al., 1990). We argue here, however, that adults’ role as speakers represents only one aspect of the “work” that adults put in to communication with young children: successful adult-child communication also depends on adults’ highly sophisticated *listening* behavior, which enables them to understand potentially variable and noisy linguistic input. This allows adults to make sense of children’s early language productions, which often deviate substantially from their own.

In this paper we ask what inferential mechanisms allow adults to interpret young children’s highly variable speech. First, what leads adults to determine that a child’s vocalization¹ is even interpretable, versus unintelligible? Second, to what degree do the words interpreted by adults reflect the *phonetic productions* produced by children, versus adult beliefs about what they expect children to say? Intuitively, if a child says “ah wan du weed,” an adult will most likely take her to mean *I want to read*, not *I want to weed*. In such an example, adult beliefs about the child’s communicative intent override standard perceptual cues to word identity. However, this idea has not been tested formally, let alone at scale. Understanding how adults interpret children’s early speech is important because these interpretations help drive how caretakers respond and act.

In what follows, we test this *child-directed listening* (CDL) hypothesis: that adult listeners go far beyond the phonetic productions to interpret the speech of young children. Under this hypothesis, how adults listen to

¹We focus here on the case of children producing spoken language, though the current proposal readily extends to signed languages.

[†] Corresponding author

children can be characterized as an instance of “noisy-channel” communication (Shannon, 1951) where listeners overcome the imperfect acoustic information, linguistic ambiguity, and speaker variability present in everyday conversation by relying on their constantly-updating expectations about what speakers are likely to say (Levy, 2008b; Gibson et al., 2013; Meylan et al., 2021). Specifically, adult listeners consider possible interpretations of the phonetic input they receive in terms of both the interpretation’s plausibility in context and its perceptual similarity to typical adult pronunciations.

Under this theory, adult interpretation of young children’s speech rests on a specialized set of expectations: that even young children will produce intelligible speech, that children will use some words and constructions more often than others, and that children’s pronunciations will vary systematically from adult ones. That is, while the phonetic form [wid] (pronounced “weed”) might typically suggest *weed* as an adult speaker’s intended word when judged solely based on acoustic information, an adult caregiver might instead assume that a *child*’s intended word was *read*—especially at storytime.

Though we envision that some version of this process is active *across* the early years of speech production, here we focus on adults’ interpretations of child speech from ages one to four years. This is because we expect adult beliefs to play the greatest role in informing their interpretation when children’s pronunciations differ the most from those of adults. We use a collection of audio recordings of caregiver-child interactions (the Providence corpus, Demuth et al., 2006; Demuth & McCullough, 2009), and take transcribers’ annotations in the adult language as our proxy for caregivers’ interpretations of what young children said. We then try to recover the word identities from the phonetic input and surrounding linguistic context using a suite of computational cognitive models of spoken word recognition. We are then able to compare the models’ guesses to what adult transcribers *actually* recovered in a corpus of child-produced speech. These models instantiate competing hypotheses about the information sources that adults use in inference, including the degree to which adults leverage knowledge of syntax and discourse structure when listening to children.

We also test if adults’ inferences are distinctively *child*-directed, or distinct from how adults find words in the speech of other adults. To do this, we compare models adapted to a large dataset of recordings from the child language environment (MacWhinney, 2000) with models adapted to other input data: one adapted to a large dataset of general-topic written texts, as well as one adapted to a dataset of adult-to-adult conversations (Godfrey et al., 1992). We also compare two different ways of capturing the probability that a child would pronounce an adult word with a particular form.

Our analyses reveal that the best models of what adults interpret children as saying are those with strong priors (*i.e.*, expectations about what children are likely to say). The best-performing models capture adult beliefs that young children will generally produce grammatical utterances (*e.g.*, *two dogs* rather than *two dog*), refer to people and things in the broader discourse context (*e.g.*, *cat* if a cat has been recently mentioned), and are more likely to talk about child-relevant words (*e.g.*, *read* rather than *weed*). Such models are much better predictors of the words found by adults than ones that rely exclusively on the phonetic productions of children. We also find that incorporating child-specific patterns of deviations from adult pronunciations into models improves their predictions of what adults will understand children to have said, but to a lesser extent than prior expectations. We discuss how adults’ inferences that go beyond children’s phonetic productions may provide critical support for early dyadic caregiver-child communication and how this in turn may drive the incremental refinement of children’s earliest language knowledge.

Modeling Setup and Experiments

We treat the challenge of understanding what children mean—here, inferring the identity of a word used by a particular child in a particular linguistic context—as an instance of Bayesian inference (Fig. 1). In our characterization, an adult listener seeks to recover an adult word from the phonetic form produced by the child, *e.g.*, finding *read* in the child’s production “weed” (phoneme string [wid]), Table 1A.

To combine the contributions of adult expectation with the phoneme string produced by the child, we adopt a Bayesian model of spoken word recognition (in the vein of Norris & McQueen, 2008; see also Norris et al., 2016; Kleinschmidt & Jaeger, 2015). The model assigns a posterior probability to each candidate word interpretation w , taking into account the perceptual input data d (*i.e.*, the child’s phoneme string), and the linguistic and non-linguistic context c :

$$P(w|d, c) = \frac{P(d|w, c)P(w|c)}{\sum_{w' \in V} P(d|w', c)P(w'|c)}. \quad (1)$$

This formulation cashes out the intuition that the degree of belief that the child said word w reflects the combination of (a) fit to perceptual data produced by the child and (b) the listener’s linguistic and non-linguistic expectations. “Fit to perceptual data” is evaluated via the likelihood function, $P(d|w, c)$. For the current work, we assume that adults take a child’s pronunciation of a word to be independent of the broader linguistic context

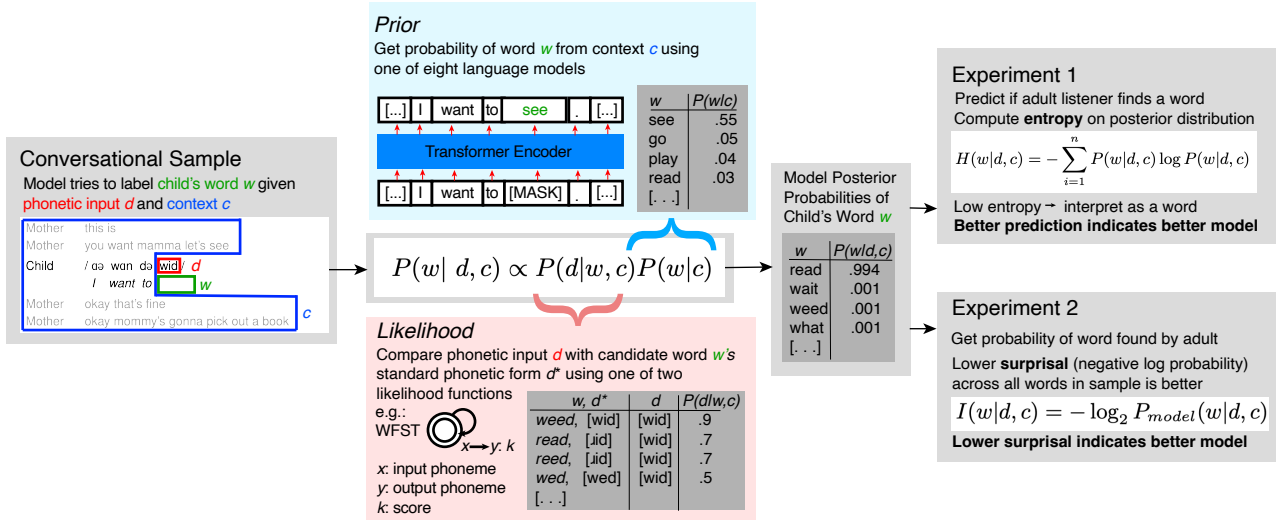


Figure 1: Schematic overview of the Bayesian spoken word recognition models tested in Exp. 1 and 2. These models take samples of child speech as input and try to predict the identity of a missing word using the surrounding context and the phonetic signal provided by the child. Each model makes use of (i) a prior (light blue box), in the form of a probabilistic language model that predicts the missing word w based on the context c ; and (ii) a likelihood (light pink box), in the form of either an edit distance function or weighted finite-state transducer (WFST) that scores the observed phonetic input d for each candidate w . The prior and likelihood are combined using Bayesian inference to form a posterior distribution (light gray box) over candidate words w given c and d , which is evaluated against human annotations in two ways: first, how well it predicts whether an adult listener takes the input to be an intelligible word or treats it as unintelligible (Expt. 1.); second, for intelligible input how well it predicts which word is found by the adult listener (Expt. 2).

in which it appears, i.e. we approximate $P(d|w, c) \approx P(d|w)$, though this assumption could be relaxed in future work.

The listener’s expectations are captured by the prior probability $P(w|c)$ of the word w in context c (before perceptual input is taken into account). Here we focus on the linguistic context, though we note that non-linguistic information could be leveraged here as well (see also Levy, 2008a). The denominator in Equation 1 reflects the summed strength of all competitor words w' in the vocabulary V . Thus, the model guesses upon seeing *both* the phonetic data and the surrounding context (technically a Bayesian *posterior*) constitute a probability distribution over candidate words, with favored word interpretations receiving higher probabilities than disfavored ones. In what follows, we discuss the likelihood and then the prior of the set of models under consideration.

Likelihood

In Expts. 1 and 2, we test two different functions for the likelihood, $P(d|w)$, which captures fit to the perceptual data. In the simplest likelihood, we use a transformation of string edit distance (*i.e.*, the Levenshtein distance) between the phoneme string representing the adult pronunciation of the candidate word (w) and the phoneme string produced by the child (d). More specifically, we use exponentiated negative edit distance (Levy, 2008b):

$$P(d|w) \propto e^{-\beta \times \text{dist}(d^*:w, d)} \quad (2)$$

where dist is the Levenshtein distance (minimal number of deletions, insertions and substitutions) between citation form d^* for candidate word w , designated here ($d^* : w$), and the observed child phoneme string (d). To illustrate, given the child’s production “weed” [wid], the likelihood term for the candidate word *weed* will be higher than the likelihood term for the candidate word *read* because the child’s production is identical to what would be expected for *weed*, whereas the expected adult phonetic form for *read*, [ɹid], differs by one phoneme. The free parameter β scales these likelihoods: as β approaches 0, the likelihood function approaches a constant.

However, this treatment of edit distance ignores the fact that children are more likely to make certain substitutions compared to others: *e.g.*, that “weed” ([wid]) is a relatively likely child pronunciation for *read*, while *e.g.*, “bead” ([bid]) is not, and that children are generally more likely to omit parts of the phonetic form rather than include spurious additional content (*e.g.*, that “ree” ([ɹi]) is more likely as a child pronunciation of *read* than “shreed” ([ʃɹid]). An edit distance-based likelihood may not fully capture adults’ abilities to use the child’s phonetic form to inform their interpretation. For this reason, we also include a more sophisticated model of child pronunciation by using a weighted finite state string transducer (WFST; Mohri et al., 2002; Gorman et al., 2020). The transducer captures the probability of various non-conventional child pronunciations of words

Table 1: Example model inputs and guesses for four of the sixteen Bayesian spoken word recognition models we test. Each model receives a phoneme sequence and the surrounding utterance or utterances (A, B) and produces a probability distribution over possible word interpretations for what the word indicated by the empty square may be (C). The sample models’ top 4 guesses are shown ordered left to right by their model-estimated probability; the word recovered by the transcriber is indicated with italics (only on left side, A, since no word was recovered by transcribers on the right, B). Model guesses in C reflect both fit to the child-produced data (i.e. based on the phonetic input from the child) as well as model parameters that differentially consider what children are likely to say (D), as instantiated by different probabilistic language models. This basic setup generated model guesses both in cases where transcribers interpret children’s speech as a word (A) or treat it as unintelligible (B).

Inputs to Model	A. Transcriber Finds a Word (<i>read</i>)		B. Transcriber Labels Form as Unintelligible	
	Mother	this is	Mother	do you want ta put some beans in your eggs?
	Mother	you want mamma let’s see	Child	no
	Child	/ aə wən də wɪd / <i>I want to</i> <input type="text"/>	Child	/ ju meɪk yoʊ fet / <i>you make your</i> <input type="text"/>
	Mother	okay that’s fine	Mother	can I make one?
	Mother	okay mommy’s gonna pick out a book	Mother	no
Language Model	C. Highest POSTERIOR Probability Model Guesses for <input type="text"/> (using WFST Likelihood)			
CDL+CONTEXT	<i>read</i> (0.994)	wait (0.001)	weed (0.001)	what (0.001) [...]
BERT+CONTEXT	<i>read</i> (0.49)	see (0.28)	play (0.04)	know (0.04) [...]
CHILDES-1GRAM	<i>read</i> (0.39)	with (0.25)	what (0.12)	would (0.04) [...]
UNIFORMPRIOR	weed (0.37)	worried (0.17)	reed (0.06)	<i>read</i> (0.06) [...]
Language Model	D. Highest PRIOR Probability Model Guesses for <input type="text"/>			
CDL+CONTEXT	see (0.55)	go (0.05)	play (0.04)	<i>read</i> (0.03) [...]
BERT+CONTEXT	<i>read</i> (.49)	see (.28)	play (.04)	know (.04) [...]
CHILDES-1GRAM	I (.04)	a (.03)	the (.03)	yeah (.03) no (0.03) [...]
UNIFORMPRIOR	<i>All word identities equiprobable a priori</i>			

(i.e., ones that differ from those of adults) based on phoneme-to-phoneme correspondences and differences between the typical adult production and the child’s production. We fit the parameters of a WFST to maximize the probability of a large dataset of adult form / child pronunciation pairs (e.g., adult *read* versus child *weed*; see Materials and Methods).

In Expt. 3 we introduce a third likelihood function where we fit a WFST for each individual child in the Providence corpus. This captures the intuition that listeners may learn how individual children are likely to deviate from pronunciations in adult speech. Given the primary goal of evaluating adults’ prior expectations when listening to children, we test child-specific likelihoods only in combination with child-specific priors (see Expt. 3, below).

Prior

The inferential process sketched in Equation 2, as well as the *read* and *weed* example above, foreshadow the potential inadequacy of the phonetic input alone: if children often produce non-conventional pronunciations (like [wɪd] for *read*), adults may need to rely on their prior beliefs about what children are likely to want to communicate, as well as information available in the broader linguistic or non-linguistic context. We thus test a variety of priors (informing $p(w|c)$ in Equation 2), each of which operationalizes a different hypothesis about the information sources that adults use to recognize children’s speech. These priors take the form of eight distinct probabilistic language models: computational models that return a probability distribution over word guesses for an unseen word in a given linguistic context (Table 1C). When a prior is combined with one of the three likelihoods described in the previous section, the combined model yields a posterior distribution (e.g., Table 1D).

As a null hypothesis that adults solely use the phonetic input supplied by the child, we include a UNIFORMPRIOR model where all English mono- and bi-syllabic words in the child language environment are equally likely *a priori* and the model must rely on the perceptual input to identify the child’s intended word. We also include a unigram, or frequency-based model (CHILDES 1GRAM) which uses the normalized frequencies of words in a large previously-collected sample of speech from English-learning children and their caregivers in this age range. This model reflects the hypothesis that adults expect young children to use specific words, but do not expect them to use adult-like syntactic structures or adhere to common patterns of discourse, such as alternating turn-based contributions.

Our other models use the Transformer-based BERT architecture (Vaswani et al., 2017; Devlin et al., 2019) and capture expectations regarding these higher-order patterns in linguistic structure. Among these Transformer-based models we cross two features. First, we vary whether the models can see only the immediate sentence context (ONEUTT) versus 20 preceding and following utterances (CONTEXT) when predicting what a child would be likely to say.² Second, we compare the base BERT model, which is trained on Wikipedia, news articles, and book text, with versions that have been additionally “fine-tuned” to be able to better predict child-specific constructions (CDL), or else to predict the constructions that are common in adult-to-adult conversation (SWITCHBOARD). This fine-tuning procedure consists of updating weights in the BERT model to be able to best predict missing words (*i.e.*, masked language modeling) in the same speech sample used to train the CHILDES 1GRAM model. All models consider a vocabulary of 7,997 possible English words; we provide additional details on each model’s architecture, the vocabulary under consideration, and the training data in Materials and Methods.

While fine-tuning our models on a broad swath of interactions in the home environments of English-learning children is an important step towards characterizing adult expectations, it fails to capture how adult expectations might vary with child age and linguistic maturity. To investigate this, we fine-tuned two additional models by splitting the child language dataset into two sets of transcripts: those from child ages of 11 through 29 months versus 30 through 48 (approximating a median split of child-produced tokens in that dataset). Beyond age ranges, we additionally fine-tuned a set of models on individual children (see Materials and Methods).

Evaluation

Our evaluation tests whether our models can predict what adults interpreted children as saying in this “guess the word” setup. More specifically, we take the posterior probabilities of word identities yielded by each of these 16 models (eight priors \times two likelihoods) and test how well they predict adult interpretations of child phoneme strings. To do this, we leverage the fact that our test corpus (the Providence corpus, covering $n = 6$ children, 11 – 48 months old, and containing 460,000 utterances; Demuth et al., 2006; Demuth & McCullough, 2009) contains matched pairs of phonetic transcriptions and English adult word interpretations provided by trained annotators.

In Experiment 1, we test our models’ ability to predict whether transcribers deemed a particular vocalization to be a word versus flagged it as unintelligible. We divide our set of child phoneme strings into instances where transcribers posited a word interpretation (Table 1A) and instances where they did not (Table 1B).

We take the entropy of the model’s posterior distribution over candidate words w , $P(w|d, c)$, as the key quantity predicting whether a given perceptual input token d in context c will be interpreted as a word or as unintelligible:

$$H(w|d, c) = - \sum_{i=1}^n P(w|d, c) \log P(w|d, c), \quad (3)$$

We assume that the lower the entropy, the more likely d will be deemed to be intelligible and assigned a word interpretation. We assess each model’s performance by the area under its receiver operating characteristic curve (AUC; Fawcett, 2006). We evaluated 43,993 phonetic sequences that transcribers assigned a word interpretation, and 6,756 instances where they did not (see Materials and Methods).

In Experiment 2, we test these Bayesian spoken word recognition models in their ability to reproduce transcribers’ word interpretations. Focusing on only these cases where transcribers interpreted children’s productions as transcribable words, we compute the surprisal (Levy, 2008b; Hale, 2001) or self-information that each model assigns to the transcriber’s interpretation w ,

$$I(w|d, c) = -\log_2 P_{model}(w|d, c), \quad (4)$$

and then take the average across the 43,993 instances where transcribers found words in our dataset for each model (see Materials and Methods).³ The lower the average surprisal of the transcriber’s word interpretation, the better the model reflects adult inferences about child speech. In addition, we report the average rank of the transcriber’s word interpretations for each model (ideal model performance would result in a mean rank of 1, where the transcriber’s word is always the highest ranked word interpretation according to the model). We also report the percentage of correct top guesses, which captures how often the word found by the annotator is the highest ranked interpretation under each model.

²Twenty utterances is the approximate upper limit of what the BERT model can use for context when predicting the identity of a missing word. In practice, BERT’s attentional mechanisms learn that words in the same utterance or adjoining utterances are typically the most useful for predicting the identity of a missing word.

³*i.e.*, the per-instance log-likelihood of the data under each model. We adopt this transformation for ease of presentation, but caution against interpreting these numbers as representative of real-time difficulty of language processing (Levy, 2008b; Hale, 2001) given that many of our models can use both preceding *and following* linguistic context to predict a word’s identity.

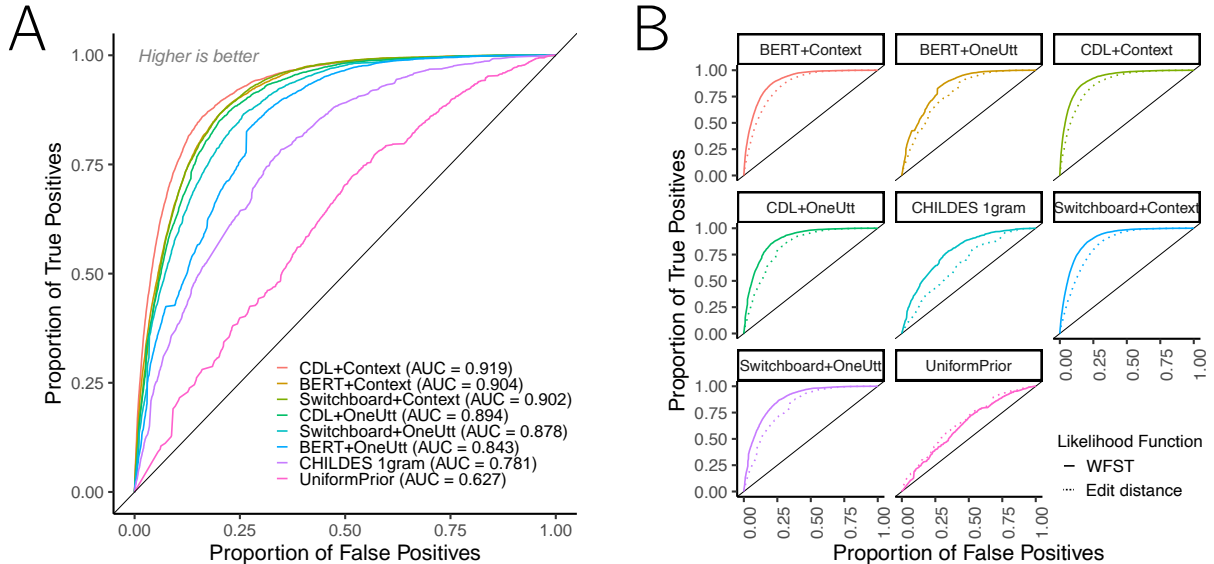


Figure 2: **A.** Classification performance by model when predicting if adults will provide a word interpretation versus flag a vocalization as unintelligible ($n = 43,993$ and $n = 6,756$, respectively). In panel A, all models use the WFST-based likelihood. The solid line with slope = 1 indicates chance performance. A larger area under the curve (AUC) corresponds to better classification performance. **B.** Classification performance on the same task comparing models using the WFST-based likelihood (dashed lines) with those using the simpler edit distance-based likelihood (dotted lines). Priors are matched within each panel. Each model that uses a WFST-based likelihood outperforms the one using an edit distance-based likelihood except for the UNIFORMPRIOR.

In Experiment 3, we investigate additional age-based and child-specific fine-tuning of the prior. For the age-based priors, we compute the posterior surprisal averaged across a sample of child vocalizations per each 6-month age bin. To evaluate the child-specific models, we run each model on the six child-specific test sets. We hypothesize that each model fine-tuned on a specific child will assign a *lower* surprisal to adult interpretations than that assigned by any of the models fine-tuned on the other children.

Results

Expt. 1: Predicting Whether Adults Find Words

Prior

We evaluated the statistical significance of differences in classifier performance, operationalized as area-under-the-curve (AUC), with pairwise DeLong’s tests between all models (DeLong et al., 1988). The CDL+CONTEXT model, reflecting rich linguistic beliefs tuned specifically to child language productions, had the highest AUC (.919); this model best replicates the behavior of adult listeners in predicting whether adults found a given vocalization to be intelligible (Figure 2A). All pairwise comparisons were significant (Z ranging from 2.754 to 75.97; p ranging from $< 10^{-6}$ - .006), except for the second and third best-performing models, BERT+CONTEXT and SWITCHBOARD+CONTEXT, which had nearly identical AUCs ($Z = 1.29$, $p = .195$). Two models performed notably worse than the others: the UNIFORMPRIOR and CHILDES 1GRAM models, which assign constant prior entropy (prior probabilities of candidates do not change as a function of context in either model). Under these two models, prior entropy is constant for all instances of a word type (CHILDES 1GRAM) or across all word types (UNIFORMPRIOR), consequently these classifiers rely heavily on the contribution of the perceptual data, and they perform much closer to chance. This analysis provides evidence that a prior that is tuned specifically to child language and uses the surrounding utterance context (*i.e.*, our CDL+CONTEXT model) is best able to replicate adult inferences, particularly as to which vocalizations are likely to be interpreted as words by adults.

Likelihood

Word recognition models making use of the WFST-based likelihood outperform those using the Levenshtein distance-based likelihood in all cases with the exception of the UNIFORMPRIOR, where the Levenshtein distance-based likelihood yielded a marginally better fit to transcriber judgments of intelligibility (Figure 2B). All differences between models using the two likelihoods are significant per DeLong’s test (Z between 5.3 and 17.87, all $ps < 10^{-6}$). This suggests that the likelihood that takes into account common child pronunciations is the

Table 2: Average surprisal, rank of transcriber interpretations, and percentage of top-1 guesses for priors from eight spoken word recognition models (left) and posteriors reflecting two likelihood functions (center, right). The best performing prior and posterior are indicated in bold.

Language Model Prior	Prior			Posterior with WFST Likelihood			Posterior with Lev. Dist. Likelihood		
	Average Surprisal* (bits [†])	Average Rank [‡]	Correct Top Guess	Average Surprisal* (bits [†])	Average Rank [‡]	Correct Top Guess	Average Surprisal* (bits [†])	Average Rank [‡]	Correct Top Guess
CDL+CONTEXT	3.30	50.21	55%	0.63	2.41	90%	1.15	7.89	83%
SWITCHBOARD+CONTEXT	4.10	110.46	49%	0.85	4.61	87%	1.52	13.95	78%
BERT+CONTEXT	4.63	140.99	45%	1.02	6.16	84%	1.69	18.52	76%
CDL+ONEUTT	5.06	124.31	36%	1.09	7.39	83%	1.90	23.37	74%
SWITCHBOARD+ONEUTT	6.46	362.90	28%	1.52	15.19	78%	2.62	45.06	68%
BERT+ONEUTT	7.35	494.18	4%	1.81	17.34	75%	2.53	42.93	66%
CHILDES-1GRAM	8.79	314.09	3%	2.26	15.89	69%	3.76	49.00	51%
UNIFORMPRIOR	12.97	3998.00	0%	4.61	62.50	32%	4.87	138.31	32%

* The difference in average probability assigned to the transcriber interpretation is 2^{diff} , where diff is the difference between two model scores.

[†] Paired *t*-tests yield statistically significant pairwise differences between all model surprisal values, $p < 10^{-5}$.

[‡] Ranks are taken out of a vocabulary of 7,997 possible words.

better approximation of the listening behavior of adults. We investigate the reasons in greater detail in Expt. 2.

Expt. 2: Predicting Words Recovered By Adults

While Exp. 1 compared model performance in determining whether an intelligible word was produced or not, Expt. 2 digs into the specifics of word identity, asking whether our Bayesian spoken word recognition models recover the same words as adult transcribers. This reflects the idea that models must not only effectively predict what will be treated as a word, but also how adults will interpret a given vocalization.

Prior

The rows of Table 2 show comparisons of models using different priors (paired *t*-tests yield statistically significant differences between all adjacently ranked model pairs, all $p < 0.0001$ after Bonferroni correction for multiple comparisons). By both average surprisal and average rank measures, models taking broader context into account better predict adult inferences (CONTEXT outperforms ONEUTT outperforms 1GRAM and UNIFORMPRIOR). Additionally, models fine-tuned on child speech (CDL) outperform models fine-tuned on adult speech (SWITCHBOARD), which in turn outperform models based on written text (BERT). The best performing model uses broad context and reflects expectations fine-tuned for child speech (CONTEXT outperforms ONEUTT). Indeed, in 76% of vocalizations interpreted as words, the transcriber’s word interpretation is in the top 5 guesses for the CDL+CONTEXT prior (that is, the model’s guess *before* observing the child’s phonetic production).

Likelihood

The relative performance of the priors is mirrored in the posteriors (Table 2, columns 4 and 5; 6 and 7). Indeed, the contribution of the prior is so important that the best model (CDL+CONTEXT) makes better predictions about the word interpretation *before* it observes the phoneme string produced by the child (3.30 bits surprisal, average rank 50.21, 55% correct top guess) than the model with minimally informative prior word expectations does with access to the phonetic form (UNIFORMPRIOR; 4.61 bits surprisal, average rank 62.50, 32% correct top guess). The relative performance we find across models suggests that the model that is best able to predict adult transcribers’ interpretations reflects: (1) adults’ broader expectations regarding linguistic context, (2) children’s likely communicative intent, and (3) children’s pronunciation patterns. In contrast, a model that uses only the phonetic signal (UNIFORMPRIOR) is a poor characterization of adult listening behaviors.

To better understand the contribution of priors, we stratified our sample by the similarity of children’s pronunciations to the standard adult form of the word interpretation assigned by transcribers. We then compared a linear regression predicting posterior surprisal using the interaction of model and edit distance versus one using only edit distance. The former model substantially outperforms the latter (BIC = 1,611,854 vs. BIC = 2,639,878), suggesting that models differ in their ability to replicate adult interpretations depending on the fidelity of the child pronunciation to the adult form. While most models assign high probabilities to the word found by annotators when the child’s pronunciation is close to the adult form, the BERT-based priors are a much

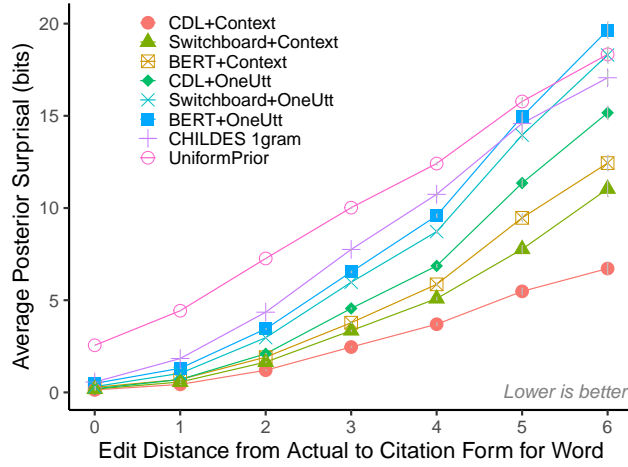


Figure 3: Average posterior surprisal of the transcribers’ recovered word interpretation under each model, plotted according to the similarity of the child production to the standard adult pronunciation (x-axis). Vertical error bars (gray) indicate the standard error of the mean. Priors yield comparable predictions for pronunciations that are similar to those of adults (low edit distance). However, models with sophisticated knowledge of syntax and discourse structure, which are fine-tuned to child language and consider the broader linguistic context, assign a much lower surprisal (higher probability) to the words recovered by transcribers when pronunciations deviate from the adult language (high edit distance).

better match to adults when the child’s production is relatively *dissimilar* (right side of Figure 3). For example, for child productions that are two edits away from the adult form ($x = 2$ in Fig. 3), the CDL+CONTEXT model assigns approximately 64 times the probability to the transcribers’ interpretations compared to the model that only uses the phonetic input UNIFORMPRIOR. This difference in probabilities becomes yet more pronounced at higher edit distances: at six edits, the CDL+CONTEXT model assigns transcribers’ interpretations 5,928 times the probability as the UNIFORMPRIOR model. This analysis provides clear evidence that adult listeners rely heavily on their prior expectations when interpreting child vocalizations that differ substantially from words in the adult language.

While the above analyses highlight the critical importance of the prior regardless of the choice of likelihood, we sought to further understand why models using the the WFST-based likelihood consistently outperform those using the edit distance-based one. We visualize the probability over phoneme-level edits from the fitted WFST as a transition matrix (Figure 4A). Most phonemes are likely to be pronounced correctly by children, as captured by the highest values along the diagonal. However, English-learning children are very likely to omit many phonemes (leftmost column in Figure 4A). This contrasts with the edit distance-based likelihood, which considers insertions and deletions as equally probable. Nonzero values off of the diagonal capture many common approximations in the speech of English-learning children: [f] in place of [θ] (*think* → *fink*), [w] in place of [r] (*read* → *weed*), and [s] in place of [ʃ] (*fish* → *fiss*). The model also captures children’s propensity to add an unstressed mid central vowel ə (i.e., the default vowel in a relaxed vocal tract) to change the prosodic structure of words to make them easier pronounce, especially to break up consonant clusters (e.g., pronouncing “black” as “bulack,” [blæk] → [bələk]).

We next tested whether the improvement observed under the WFST-based likelihood is driven by its ability to capture children’s articulatory approximations or their deletions. We compute the average posterior probability of transcribers’ interpretations stratify by whether the child’s pronunciation is shorter, the same length, or longer than the adult citation form. If the improvement comes from better accounting for the child’s articulatory approximations, then the model with the WFST-based likelihood will show a improvement in performance when the child’s form is of comparable length to the adult citation form. If, by contrast, the improvement comes from expecting children to *delete* many phonemes, then the model should assign much higher posterior probability to the transcriber’s interpretations than the edit-distance based likelihood when the child produces a much *shorter* form. Figure 4B provides evidence in favor of the latter hypothesis: the WFST’s improvement over the Levenshtein distance likelihood in predicting adult interpretations is greatest when children omitted many phonemes (towards the left of the graph).

Expt. 3: Fitting Models to Developmental Age and Specific Children

The results presented so far involve only a small degree of model fine-tuning, to general datasets of child or adult spoken language. We now further ask whether fine-tuning prior expectations or likelihood functions to

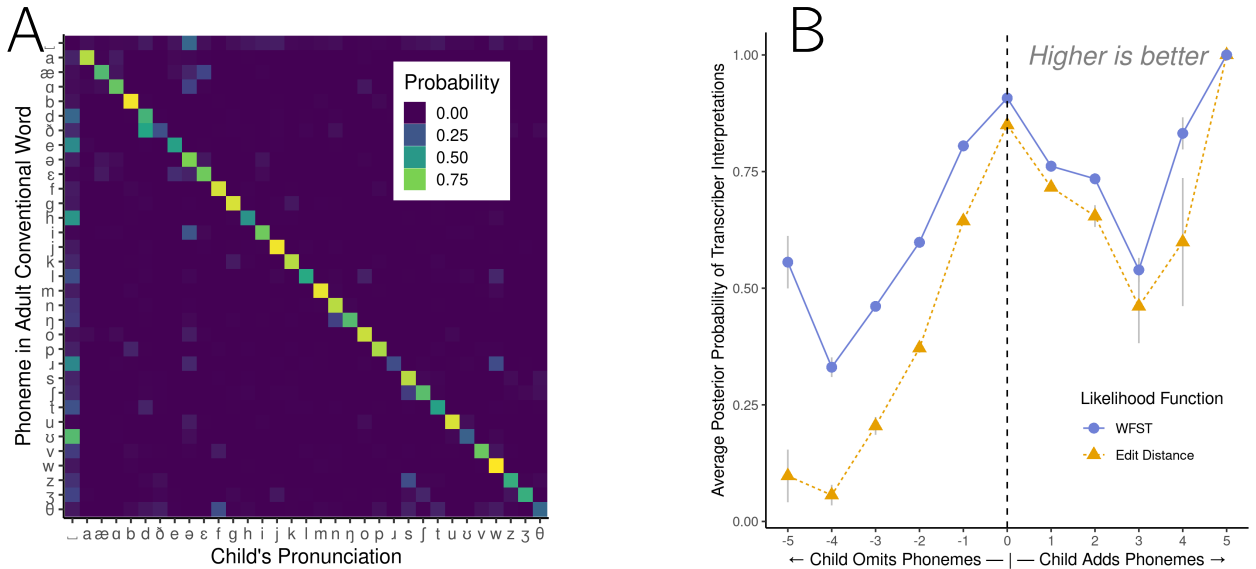


Figure 4: **A.** Substitution probabilities for the WFST-based likelihood. $\sqcup \rightarrow *$ indicates insertion (top row), while $* \rightarrow \sqcup$ indicates deletion (leftmost column). Off-diagonal entries reflect common deviations from adult pronunciations made by English-learning children: [f] in place of [θ] (*think* \rightarrow *fink*), [w] in place of [ɹ] (*read* \rightarrow *weed*), [s] in place of [ʃ] (*fish* \rightarrow *fiss*). The leftmost column captures that children are likely to delete many phonemes altogether. **B.** Average posterior probability of words found by adult transcribers under two variants of the CDL+CONTEXT model: one using the WFST-based likelihood, and one using the Levenshtein Distance-based likelihood. While the two variants show comparable performance in cases where children include unexpected additional sounds in their pronunciation, the one using the WFST-based likelihood is a better fit to adult data when children drop many of the phonemes that make up the conventional pronunciation of the word (left side of graph).

specific developmental ages and even to specific children’s language production leads to better fits of what adults infer specific children to mean. To test whether additional fine-tuning can capture finer-grained adult expectations, we fine-tune two separate models, one on a language sample for 11-29 month old children and one from 30 to 48 months. The model trained on the speech of young children (CDL+YOUNGER+CONTEXT) demonstrates better word recognition performance for speech from young children, while a model trained on the speech of older children (CDL+OLDER+CONTEXT) demonstrates better word recognition on the speech of older children (Fig. 5). To test the for statistical significance of this difference, we fit a mixed effects model predicting surprisal using the interaction of model type and child age and a maximal random effects structure (Barr et al., 2013). The age by model type interaction term in this model reveals that the model trained on younger children (CDL+YOUNGER+CONTEXT) assigns higher surprisal to transcriber-found words at older ages ($\beta = .115$, $SE = .017$, $Pr(> |t|) < 10^{-5}$).

Besides tuning to the linguistic input of children of a specific age, an adult may also become attuned to the particular topics, constructions, and words that a specific child prefers. Our modeling results shows strong evidence for this hypothesis: the adult interpretation data for each child are better predicted by a model fine-tuned on the production data for that child than by models fine-tuned on the production data for any other child for five of six children (Fig. 6A, $p=.002$ by Monte Carlo simulation).⁴ When combined with child-specific likelihood functions, posterior surprisal values are lowest for child-specific word recognition models in all six cases (Fig. 6; $p < .0001$ by Monte Carlo simulation). Taken together, these two analyses of age- and child-specific models demonstrate that child-directed listening models can be made yet more representative of adult inferential behaviors by further fine-tuning to specific children and developmental time periods.

Discussion

Here we find strong evidence of “child-directed listening:” sophisticated expectations on the part of adults regarding what messages children are most likely to communicate in early speech. Broadly, this includes adult expectations that even young children will produce syntactically-structured, topically coherent, and child-relevant language; more narrowly, this includes expectations for specific words and constructions in specific discourse contexts. We show that Bayesian cognitive models of spoken word recognition that use sophisticated neural network-based priors can capture these implicit beliefs and produce interpretations of children’s early

⁴Scores for this analysis reflect a different test set than those in Table 2, and cannot be compared directly.

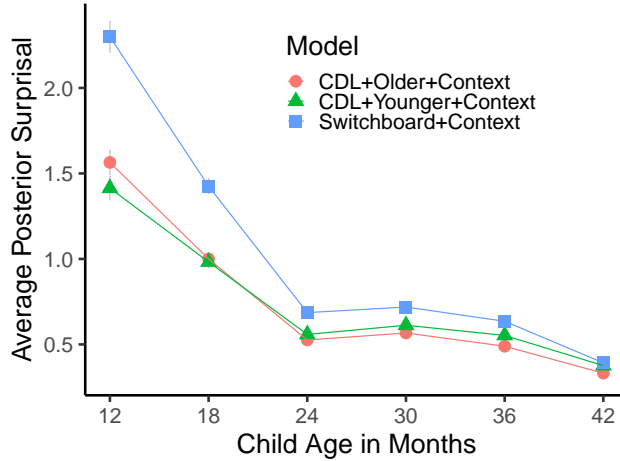


Figure 5: Average posterior surprisal of fine-tuned model guesses by child age. A model fine-tuned on language usage from younger children does better at recovering transcriber interpretations from young children and slightly worse for those from older ones, while a model fine-tuned on conversations with older children shows the opposite pattern. Both outperform a model trained on adult-to-adult conversational speech.

language that are very similar to adults. By contrast, simpler models—such as a model of word recognition that relies on only the phonetic data produced by the child (UNIFORMPRIOR) or one without knowledge of language structure (CHILDES 1GRAM)—recover very different word interpretations. This illustrates the richness of the inferences made by adults in the process of early communication, and points to ways in which adult cognition may facilitate communication between young children and adults.

While the current results do not speak directly to whether children learn more effectively as a consequence of child-directed listening, we outline below how this ability may have substantial implications for the nature of the learning challenge faced by children. We then discuss the implications of the current work for methods of evaluating children’s linguistic knowledge, and note several limitations.

First and foremost, these results invite a reconsideration of the nature of feedback in early language development. For example, if we assume that successful communication is itself reinforcing, child-directed listening supports feedback to the child learner even in the absence of child-directed speech. For example, a caregiver who interprets a child’s production of “uh” to mean “up” may not say anything in response to the child’s production, but instead may provide a different form of feedback by picking the child up. This, in turn, leads to new puzzles: if adult caregivers can help many otherwise deficient attempts at communication succeed, what pressures children to get better?

Second, this deeper understanding of the adult helps to clarify how children’s earliest language productions can serve as speech acts—linguistic productions that effect change in or via the listener—even as their knowledge of adult-like linguistic structure is still emerging (*e.g.*, Dore, 1975). In this way, child-directed listening might provide scaffolding to support the gradual emergence of linguistic structure in support of communication. The adult expectations described here are most effective at supporting inference when the range of expected messages from the child is most restricted, *i.e.*, in early development, when adults expect young children to use only a few words. Adult expectations are less useful as children begin to use language to express a greater range of messages. Instead, communication will increasingly depend on the child’s ability to distinctively articulate a growing inventory of words and multi-word constructions.

A serious consideration of child-directed listening has several implications for our most common tools for assessing child language: parental reports of vocabulary and transcribed speech. Children’s articulatory maturity and vocabulary size are often evaluated through parent report (*e.g.*, Communicative Development Inventories, Fenson et al., 2007), but caregiver biases have long been recognized as a potential confound in the yielded data (Frank et al., 2021). The current work suggests that such biases may emerge as a natural consequence of adult inferential processes: for example, if it is easier for adults to identify nouns in children’s speech by virtue of their prior expectations, they may be more likely to over-report nouns in their children’s vocabularies. The current work may be extended into quantitative methods to gauge and correct for such biases.

Analyses of early language development also make extensive use of transcriptions of early speech. The reported frequency of many grammatical phenomena of interest (*e.g.*, English past-tense verbs or plural markers) in large language corpora may depend heavily on transcribers’ inferential processes as listeners. For example, transcribers may think that children produce plurals when the broader linguistic context suggests it, but not the child’s actual speech (*e.g.*, thinking they hear an “s” in “Want two cookie” because this is consistent with English grammatical rules). Child-directed listening provides a way to understand how transcriptions of child

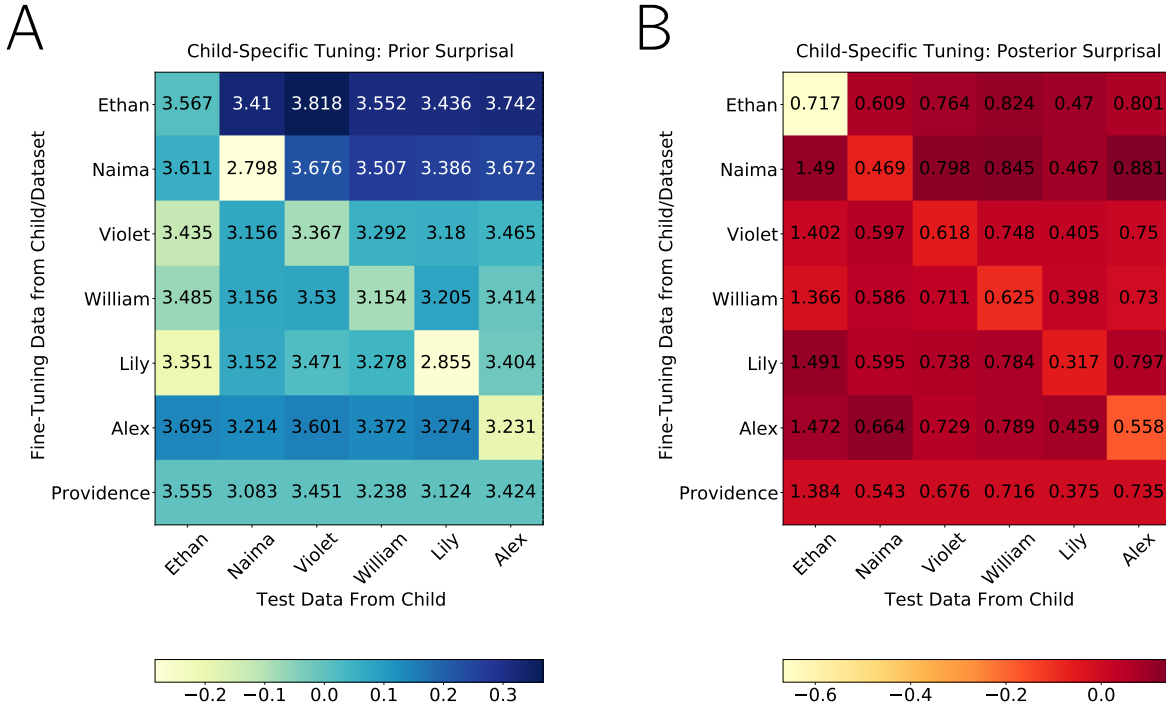


Figure 6: **A.** Average prior surprisal and **B.** average posterior surprisal under the WFST-based likelihood for eight spoken word recognition models (lower is better). The first six are fine-tuned on transcripts from specific children, while the remaining one is trained on a broader dataset: all children in the Providence corpus (Providence). Colors are normalized with respect to the baseline performance of a model trained on data from all six children (final row); children are ordered by median age of their productions in the corpus. In A, the best-scoring prior is the one fine-tuned on other transcripts from that specific child for five of six children. This suggests that adults—even transcribers—adapt to the constructions, topics and lexical choices of specific children. When combined with likelihoods tuned to each specific child (B), models fine-tuned to specific children always outperform those fine-tuned to other children on each child’s test data.

speech may systematically diverge from the language abilities of child learners.

We note two limitations with the current work. First, this model makes the simplifying assumption that children’s speech always reflects communicative goals, and that adults *should* try to interpret vocalizations in all cases as words in the adult language. However, children often babble (Oller, 2000) and produce echoic speech (Keenan, 1977), which likely serve alternative objectives (*e.g.*, motor practice) rather than concerted efforts to communicate. In the absence of annotations regarding *which* vocalizations were properly communicative in our dataset, we have assumed that communicative goals motivate all vocalizations in this age range. Relatedly, we make the simplifying assumption that children’s vocabulary items are limited to those in the adult language; in reality, children may make up words that caretakers treat as if they were conventional and even use themselves (*e.g.* the whole family saying “see-soo” for “cereal”).

Second, we make the simplifying assumption that inferences made by adult transcribers in the lab are representative of the inferences made by adult caregivers in the moment. Transcribers have less shared history and only limited access to the broader non-linguistic context relative to adult caregivers who are interpreting their children’s speech in realtime. However, transcribers have substantial exposure to child language (often from the same child), along with opportunities to replay the child’s speech. We also note that transcribers may use speech and actions on the part of adult caregivers in the dataset to inform their interpretations of children’s speech (*e.g.*, the parent responding to “ah wan du weed” with “let’s find a book!”). In such cases, transcribers’ interpretations may be especially representative of the inferences made by caregivers. Nonetheless, potential differences in the inferential capacities of caregivers relative to other adult “listeners” should be tested experimentally.

Conclusion

We present a suite of Bayesian models of spoken word recognition to characterize the process of *child-directed listening*, or how adult caregivers find meaning in the noisy and often non-conventional speech productions

of young children. We find that models that capitalize on recent neural architectures in their priors — when trained specifically on the child language environment, and taking advantage of the broader linguistic context to make predictions — are best able to simulate how adults interpret noisy child speech. We further find that models that encode common articulatory approximations and omissions of child learners in their likelihoods outperform simpler baselines. This research paves the way for understanding how children become mature language users: they are supported in part by well-attuned child-directed inferences by their listeners.

Materials and Methods

Data Retrieval and Processing

Utterances from both parents and children and phonological transcripts from children from the Providence corpus (Demuth et al., 2006; Demuth & McCullough, 2009) were retrieved through *chldes-db 2020.1* (Sanchez et al., 2019). The dataset contains broad phonetic transcriptions by trained transcribers for a subset of children’s speech in the Phonbank format (Rose & MacWhinney, 2014). Wherever transcribers identified English words in children’s speech, transcripts were seeded with phonetic transcriptions with adult citation forms from the CMU pronunciation dictionary (henceforth CMU dictionary); thereafter a separate group of phonology-focused transcribers edited the transcriptions word-by-word to reflect children’s actual productions. Other phonetic material was transcribed directly. Further details regarding participants, coding procedure, and evaluations of inter-annotator agreement can be found in Demuth & McCullough, 2009.

For the current work, we identified instances where adult transcribers assigned a conventional American English interpretation to a child’s vocalizations. More specifically, we identified tokens produced by children in the intersection of four criteria: (1) possessing mono- or bi-syllabic phonetic forms (motivated below in *Limiting to One and Two-Syllable Vocalizations*) (2) possessing *no* unintelligible (CHILDES code *xxx*) or phonology-only (*yyy*) tokens in the same utterance (3) whose gloss is present as a token in BERT (motivated below in *Tokenization*) (4) whose gloss is included in the CMU pronouncing Dictionary.

We also identified instances where the transcribers did not assign a conventional English interpretation. These instances had to meet the first criterion above, but received the special gloss code of *yyy*. This code indicates that the vocalization could receive a phonetic transcript, but not an adult English interpretation (compare with Phonbank’s *xxx* code, indicating that a vocalization was unintelligible in both respects, often as a consequence of environmental noise). Following best practices from machine learning for ensuring generalizability to new data, we split the dataset into **validation** and **evaluation** partitions and developed model architectures with respect to validation, and ran our models on samples in the test partition *after* committing to the model architectures and fitting procedures.

Limiting to One and Two-Syllable Vocalizations

We restricted our analysis to one- and two- syllable vocalizations produced by the child. Vocalizations with many syllables are more likely to contain multiple words, which would require considering multi-word sequences as possible interpretations, which would in turn require a more complex modeling approach. Single syllable vocalizations can only contain at most one word (though they may contain clitics such as *’ll*, as in *I’ll*), thereby simplifying the hypothesis space under consideration to a single word type in the candidate vocabulary. Syllables were counted by enumerating the number of vowel nuclei separated by consonants.

Candidate Vocabulary

The vocabulary considered by each model was the intersection of (1) words in the CMU dictionary with one or two syllables and (2) tokens present in BERT (motivated below) (3) tokens that appeared four or more times in CHILDES (to limit to words that might reasonably be said by English-learning children). The final vocabulary included 7,997 orthographic words. Each orthographic word could map to one or more pronunciations, for example that *read* could be pronounced as [iɪd] or [ɹɛd], and that *red* could also be pronounced as [ɹɛd]. In total we considered 8,943 possible pronunciations. We reconciled differences in IPA conventions between the Providence Corpus and the CMU dictionary following a procedure detailed in our codebase (osf.io/v7c3e/).

Priors: Language Models

For each child vocalization, we retrieve prior probabilities over candidate word interpretations using a suite of probabilistic language models. As a “best” prior architecture capable of capturing long-distance syntactic dependencies, discourse patterns, and child-specific constructions we use BERT (Devlin et al., 2019), which has demonstrated extremely competitive performance for single-word completion tasks, including automatic speech recognition (Salazar et al., 2020). By virtue of its attentional mechanisms, BERT is able to effectively model long distance dependencies (Jawahar et al., 2019), and capture speech register and discourse-level information. We compute the probabilities for the masked word $P(w)$ from BERT, using a language modeling head with the **transformers** library (Wolf et al., 2020). We treat the identities of words *other than the masked word* as sufficiently reliable to predict the identity of the masked position in the utterance (cf. Salazar et al., 2020). For each masked phoneme sequence, we take the real-valued vector of predictions corresponding to the model’s full vocabulary, extract the activations corresponding to the candidate vocabulary above, and compute the softmax to yield a vector of probabilities over each of the candidate words in the vocabulary.

For fine tuning, we initialized a standard BERT model, then updated the weights to best predict the identities of words in a new training set — in this case, utterances from 80% of North American English and UK English CHILDES transcripts. This dataset consists of 4,119,182 utterances and 15,885,051 words (an additional 20% of transcripts were held out for validation). This fine-tuned model (CDL+ONEUTT) should be expected to be more representative of adult linguistic expectations in understanding child speech than the standard model for three reasons. First, it should assign higher probability to words that are common in speech to and from children. Second, it should assign higher probability to non-sentence fragments, which are ubiquitous in conversational speech but somewhat less prevalent in adult-directed written language. Third, it may prove capable of developing an expectation for the dyadic, back-and-forth structure of scenes typically captured in transcripts.

To test for the advantages of fine-tuning on utterances from the child language environment, we fine-tune another model (SWITCHBOARD+ONEUTT) on a large adult-to-adult conversational speech corpus, the Switchboard corpus (Godfrey et al., 1992). This training sample includes 95,786 utterances and 1,175,384 words in the training sample. While we expect that fine-tuning on a conversational model will produce a model that expects shorter utterances, a higher proportion of sentence fragments, and more filled pauses, it does not contain the conversational topics and constructions preferred by children.

Scope of Linguistic Context

In addition to fine-tuning the model, we manipulate whether prior estimates reflect access to the larger discourse context as captured by the transcript before and after a particular vocalization. Because these models are meant to be representative of *caregiver* expectations, these models condition their predictions regarding word identity on what the caregiver and child *both* say, both before and after the masked token. We create priors parallel to those above by allowing the model to see 20 utterances preceding and following each mask during inference (CDL+CONTEXT, BERT+CONTEXT, and SWITCHBOARD+CONTEXT).

Speaker Identity

One option for fine-tuning models is to include speaker identities as tokens (*e.g.*, [CGV] for caregiver and [CHI] for child) and include them in the fine-tuning process. This allows the model to condition its predictions on the current speaker, for example providing different completions for “[CHI] I want to [MASK]” vs. “[CGV] I want to [MASK].” Fine-tuned models with speaker information uniformly outperformed ones without, so for brevity we report on only these in the current paper. Both Switchboard and standard BERT models are trained on written data that lacks speaker identifiers, so this information cannot be used in inference for these models.

Tokenization

The standard BERT model has its own vocabulary, which imposes limitations on the vocabulary in the analysis. Standard implementations of BERT split longer words into “word pieces,” or most common repeated sub-sequences. In English, this often yields an approximation of morphological segmentation (*e.g.*, *fishing* → *fish* *##ing*), but many word pieces are not morphemes (unless the model is specifically trained to yield such, *e.g.*, Hofmann et al., 2021). For the purposes of predicting a masked word, BERT predicts only one word piece. We limit the vocabulary to word-initial word pieces like *fish*, and exclude continuations like *##ing* from consideration.⁵

In addition to the BERT models, we also test two simpler priors. The first is a simple smoothed unigram model estimated from counts in CHILDES. This model, CHILDES 1GRAM, assigns probability to all word types proportional to their counts in the same CHILDES dataset used in fine-tuning the CDL BERT models, above. To avoid assigning zero probability to any unseen words (*i.e.*, words in the Providence corpus but not in CHILDES), we add a small pseudocount (.001) smoothing to all counts before computing probabilities. The second simpler prior is the UNIFORMPRIOR model, which assigns equal probability to all words ($1/|V|$, where $|V|$ is the number of candidates). This provides the comparison case of a maximally uninformative prior.

Likelihood

For the likelihood, $P(d|w)$, we tested three distinct likelihood functions. We describe the simplest model first to develop intuitions regarding model behavior. In the simplest likelihood, we use a transformation of string edit distance between the phoneme sequence for each candidate word interpretation and the phoneme string produced by the child. Specifically, we use exponentiated negative edit distance (Levy, 2008b):

⁵Hence we do *not* consider each phonetic sequence as a possible continuation of the preceding word, though this is logically possible.

$$P(d|w) \propto e^{-\beta \times \text{dist}(d^*:w, d)} \quad (5)$$

where *dist* is the edit distance (or Levenshtein distance, or the minimal number of deletions, insertions and substitutions) between citation form d^* for candidate word w , designated here $(d^* : w)$, and the observed child phonetic form (d) . If a word w has more than one citation form, *e.g.*, *read* can be pronounced as [ɹɪd] or as [ɹæd], we iterate over all pronunciations and take the smallest distance. The free parameter β scales these likelihoods: as β approaches 0, all likelihoods approach 1.

This treatment of edit distance does not take into account phoneme similarity, *i.e.*, that certain phonemes are more perceptually similar, that children are more likely to make certain substitutions or deletions compared to others (*e.g.*, that [wɪd] is a relatively likely child pronunciation for *read*, [ɹɪd]), or that certain edits are more likely in combination. This means that an edit distance-based likelihood may not fully capture adults' abilities to use the phonetic form to inform their interpretation. For this reason, we include a more sophisticated model of child pronunciation in the form of a *weighted finite state string transducer* (Mohri et al., 2002; Gorman et al., 2020). A transducer is a probabilistic or deterministic mapping between strings in an input language and strings in an output language.

Here, we train the mapping on pairs of citation forms for words coupled with children's pronunciations from the Providence corpus. Following (J. Novak et al., 2016), we learn an alignment between adult and child pronunciation through expectation maximization (Dempster et al., 1977) using the **BaumWelch** library (Gorman, 2021) (using a learning rate of 1.0, representing weights in the tropical semiring, and normalizing so that the weights of all arcs leaving a state with the same input label sum to one).

We then learn a *joint* unigram model (Galescu & Allen, 2001; see also pair language models, J. R. Novak et al., 2012) over the aligned pairs (*i.e.*, each event in the n -gram model is a combination of an input symbol and an output symbol). With this WFST model, we can then estimate the probability that each possible candidate word w would generate the child's observed pronunciation d .

The transducer yielded by the training procedure in the main text encodes joint probabilities of edits (input-output pairs) on strings. Our goal then is to estimate the probability of a given output string (the phonetic form produced by the child) given an input string (the conventional adult form), similar to the edit distance-based likelihood above. Thus we adopt a similar likelihood function,

$$P(d|w) \propto e^{-\lambda \times \theta_{\text{WFST}}(d^*:w, d)}. \quad (6)$$

Whereas Levenshtein distance relies on a single minimum edit distance between the input and output string, the WFST relies instead on the aggregate weight of paths through a finite state machine, $\theta_{\text{WFST}}(d^* : w, d)$, which captures the probabilities of the different edit sequences that would transform the adult conventional form into the child's produced form. We create a finite state machine, $\text{FSM}(d^*, d)$, for each combination of 7,997 word identities in the candidate vocabulary and phonetic form produced by the child. Computationally, this involves composing a finite state acceptor for the conventional adult form d^* for each possible word identity with the transducer learned above, and then composing that machine with the finite state acceptor for the child's produced phonetic form, d . We then enumerate the weights along all paths through the finite state machine,

$$\theta_{\text{WFST}}(d^* : w, d) = -1 \times \log \left(\sum_{\text{path} \in \text{FSM}(d^*, d)} P(\text{path}) \right). \quad (7)$$

Following the chain rule, each path reflects the product of the conditional probabilities of its component arcs:

$$P(\text{path}) = \prod_{\text{arc} \in \text{path}} P_{\text{FSM}(d^*, d)}(\text{arc}). \quad (8)$$

To obtain the *conditional* probabilities appropriate for this computation (rather than a joint probability, as yielded by expectation maximization) we normalize the arc probabilities the probability of all *possible* outputs given the input (all arcs from a given state),

$$P_{\text{FSM}(d^*, d)}(\text{arc}) = \frac{P(d_i^* \rightarrow d_i)}{\sum_{s \in \mathbb{S}} P(d_i^* \rightarrow s)}, \quad (9)$$

where s indicates each possible output symbol in the symbol set \mathcal{S} . In the unigram case, the probability of edit $d_i^* \rightarrow d_i$ is not conditioned on any history, thus we simply divide by the summed probability of all possible edits where d_i is the input symbol. Note that this WFST-based likelihood would yield probabilities proportional to the simpler edit distance-based likelihood if the probability (*i.e.*, cost) of all edits is equal to 1 in Eq. 9 and only the lowest cost path were considered. As with the simpler edit-distance-based likelihood, we iterate over all pronunciations for a given orthographic word and take the path weights associated with the citation form that assigns the highest probability to the observed data.

For the edit distance-based likelihood, we evaluated posterior surprisal estimates for values of β between 1.5 and 4.5 by 0.1 increments, and take the value that assigns the highest posterior probability to a sample of 5,000 transcriber word interpretations. We confirmed that the resulting scores were convex across the parameter range and that the highest scoring parameter value was not on the edge of the range of possible values. In the case of the WFST-based likelihood, we grid sample the scaling parameter λ , analogous to β for the edit distance-based likelihood, although we focus on the range 0-2 by 0.1 increments.

The third likelihood function we test (Expt. 3) reflects the same approach as above, however we fit a separate WFST for each child, and follow the an analogous fitting procedure.

Age and Child-Specific Fine Tuning

For age-specific fine-tuning, we fine-tuned separate BERT models on language samples from the CHILDES dataset from children at or below 30 months, vs. above. 20% of transcripts were held out for model validation. We then evaluated these models on the same test set as all other models, such that the results in Fig. 5 are comparable to the scores in Tab. 2.

The child-specific fine-tuning analysis required fine-tuning on language samples from the Providence corpus, which requires a special procedure to clearly separate training, validation, and test data. The free parameter in the likelihood function (β for edit distance-based likelihood and λ for the WFST-based one) is fit separately for every combination of dataset and child. To achieve this, we created age-stratified selections of randomly selected transcripts per each year-long developmental interval as test and validation sets, and apportioned the remainder to our training set.

Model and Data Availability

All model training and analysis code, as well as the fine-tuned model pre-processed child transcripts can be accessed through our Open Science Foundation repository at osf.io/v7c3e/.

Acknowledgements

We thank Jessica Mankewitz, Sathvik Nair, and Rachel Jansen for providing feedback on early drafts as well as members of the Computational Psycholinguistics Lab at MIT and the Bergelson Lab at Duke for valuable discussion. We thank Kyle Gorman for several helpful technical consultations. Sophia Zhi contributed to the implementation of the model. This work was supported by NSF grants BCS-1551866, BCS-1844710, and BCS-2121074; NIH grant 1F32HD097982; and the Simons Center for the Social Brain.

References

- Barr, D. J., Levy, R., Scheepers, C., & Tily, H. J. (2013, Apr). Random effects structure for confirmatory hypothesis testing: Keep it maximal. *Journal of Memory and Language*, 68(3).
- Bergelson, E., Casillas, M., Soderstrom, M., Seidl, A., Warlaumont, A. S., & Amatuni, A. (2019). What do north american babies hear? a large-scale cross-corpus analysis. *Developmental Science*, 22(1), e12724.
- Cartmill, E. A., Armstrong, B. F., Gleitman, L. R., Goldin-Meadow, S., Medina, T. N., & Trueswell, J. C. (2013). Quality of early parent input predicts child vocabulary 3 years later. *Proceedings of the National Academy of Sciences USA*, 110(28), 11278–11283.
- Chomsky, N. (1965). *Aspects of the theory of syntax*. MIT press.
- Cristia, A., Dupoux, E., Gurven, M., & Stieglitz, J. (2019). Child-directed speech is infrequent in a forager-farmer population: a time allocation study. *Child Development*, 90(3), 759–773.
- DeLong, E., DeLong, D., & Clarke-Pearson, D. (1988). Comparing the areas under two or more correlated receiver operating characteristic curves: a nonparametric approach. *Biometrics*, 44(3), 837–845.
- Dempster, A. P., Laird, N. M., & Rubin, D. B. (1977). Maximum likelihood from incomplete data via the em algorithm. *Journal of the Royal Statistical Society: Series B (Methodological)*, 39(1), 1–22.
- Demuth, K., Culbertson, J., & Alter, J. (2006). Word-minimality, epenthesis and coda licensing in the early acquisition of English. *Language and Speech*, 49(2), 137–174.
- Demuth, K., & McCullough, E. (2009). The prosodic (re) organization of children’s early english articles. *Journal of Child Language*, 36(1), 173–200.
- Devlin, J., Chang, M.-W., Lee, K., & Toutanova, K. (2019). BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1* (pp. 4171–4186). Association for Computational Linguistics.
- Dore, J. (1975). Holophrases, speech acts and language universals. *Journal of Child Language*, 2(1), 21–40.
- Dupoux, E. (2018). Cognitive science in the era of artificial intelligence: A roadmap for reverse-engineering the infant language-learner. *Cognition*, 173, 43–59.
- Fawcett, T. (2006). An introduction to roc analysis. *Pattern Recognition Letters*, 27(8), 861–874.
- Fenson, L., et al. (2007). *Macarthur-Bates communicative development inventories*. Paul H. Brookes Publishing Company Baltimore, MD.
- Frank, M., Braginsky, M., Yurovsky, D., & Marchman, V. (2021). *Variability and consistency in early language learning: The wordbank project*. MIT Press.
- Galescu, L., & Allen, J. F. (2001). Bi-directional conversion between graphemes and phonemes using a joint n-gram model. In *4th ISCA Tutorial and Research Workshop (ITRW) on Speech Synthesis*.
- Gibson, E., Bergen, L., & Piantadosi, S. (2013). Rational integration of noisy evidence and prior semantic expectations in sentence interpretation. *Proceedings National Academy of Sciences U.S.A.*, 110(20), 8051–8056.
- Godfrey, J., Holliman, E., & McDaniel, J. (1992). Switchboard: Telephone speech corpus for research and development. In *Acoustics, speech, and signal processing, ieee international conference on* (Vol. 1, pp. 517–520).
- Golinkoff, R. M. (1986). ‘i beg your pardon?’: the preverbal negotiation of failed messages. *Journal of Child Language*, 13(3), 455–476.
- Golinkoff, R. M., & Gordon, L. (1988). What makes communication run? characteristics of immediate successes. *First Language*, 8(23), 103–124.
- Golinkoff, R. M., Hoff, E., Rowe, M. L., Tamis-LeMonda, C. S., & Hirsh-Pasek, K. (2019). Language Matters: Denying the Existence of the 30-Million-Word Gap Has Serious Consequences. *Child Development*, 90(3), 985–992.

- Gorman, K. (2021). *Baum-welch expectation maximization library*.
- Gorman, K., Ashby, L., Goyzueta, A., McCarthy, A., Wu, S., & You, D. (2020). The sigmorphon 2020 shared task on multilingual grapheme-to-phoneme conversion. In *Proceedings of the 17th SIGMORPHON Workshop on Computational Research in Phonetics, Phonology, and Morphology* (pp. 40–50).
- Hale, J. (2001). A probabilistic Earley parser as a psycholinguistic model. In *Second meeting of the North American chapter of the Association for Computational Linguistics*.
- Hart, B., & Risley, T. (1995). *Meaningful differences in the everyday experience of young american children*. Paul H Brookes Publishing.
- Hoff, E. (2006). How social contexts support and shape language development. *Developmental Review*, 26(1), 55–88.
- Hofmann, V., Pierrehumbert, J., & Schütze, H. (2021, August). Superbizarre is not superb: Derivational morphology improves BERT’s interpretation of complex words. In *Proceedings of the 59th annual meeting of the association for computational linguistics and the 11th international joint conference on natural language processing (volume 1: Long papers)* (pp. 3594–3608). Online: Association for Computational Linguistics. Retrieved from <https://aclanthology.org/2021.acl-long.279> doi: 10.18653/v1/2021.acl-long.279
- Huttenlocher, J., Haight, W., Bryk, A., Seltzer, M., & Lyons, T. (1991). Early vocabulary growth: relation to language input and gender. *Developmental Psychology*, 27(2), 236.
- Jawahar, G., Sagot, B., & Seddah, D. (2019, July). What does BERT learn about the structure of language? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics* (pp. 3651–3657). Association for Computational Linguistics.
- Keenan, E. O. (1977). Making it last: Repetition in children’s discourse. In *Child Discourse* (pp. 125–138). Elsevier.
- Kleinschmidt, D. F., & Jaeger, T. F. (2015). Robust speech perception: recognize the familiar, generalize to the similar, and adapt to the novel. *Psychological Review*, 122(2), 148.
- Landauer, T. K., & Dumais, S. T. (1997). A solution to Plato’s problem: The latent semantic analysis theory of acquisition, induction, and representation of knowledge. *Psychological Review*, 104(2), 211.
- Levy, R. (2008a, Mar). Expectation-based syntactic comprehension. *Cognition*, 106(3), 1126–1177.
- Levy, R. (2008b). A noisy-channel model of human sentence comprehension under uncertain input. In *Proceedings of the 2008 conference on Empirical Methods in Natural Language Processing* (pp. 234–243).
- MacWhinney, B. (2000). *The childes project: Tools for analyzing talk. transcription format and programs* (Vol. 1). Psychology Press.
- Markus, J., Mundy, P., Morales, M., Delgado, C. E. F., & Yale, M. (2000). Individual differences in infant skills as predictors of child-caregiver joint attention and language. *Social Development*, 9(3), 302–315. Retrieved from <https://onlinelibrary.wiley.com/doi/abs/10.1111/1467-9507.00127> doi: <https://doi.org/10.1111/1467-9507.00127>
- Meylan, S., Nair, S., & Griffiths, T. (2021). Evaluating models of robust word recognition with serial reproduction. *Cognition*, 210, 104553.
- Mohri, M., Pereira, F., & Riley, M. (2002). Weighted finite-state transducers in speech recognition. *Computer Speech & Language*, 16(1), 69–88.
- Newport, E. L. (1975). *Motherese: the speech of mothers to young children*. University of Pennsylvania.
- Norris, D., & McQueen, J. M. (2008, Apr). Shortlist B: a Bayesian model of continuous speech recognition. *Psychological Review*, 115(2), 357–395.
- Norris, D., McQueen, J. M., & Cutler, A. (2016, Jan). Prediction, Bayesian inference and feedback in speech recognition. *Language, Cognition, and Neuroscience*, 31(1), 4–18.
- Novak, J., Minematsu, N., & Hirose, K. (2016). Phonetisaurus: Exploring grapheme-to-phoneme conversion with joint n-gram models in the wfst framework. *Natural Language Engineering*, 22(6), 907–938.

- Novak, J. R., Minematsu, N., & Hirose, K. (2012). Wfst-based grapheme-to-phoneme conversion: Open source tools for alignment, model-building and decoding. In *Proceedings of the 10th International Workshop on Finite State Methods and Natural Language Processing* (pp. 45–49).
- Oller, D. K. (2000). *The emergence of the speech capacity*. Psychology Press.
- Onnis, L. (2017, 05). Caregiver communication to the child as moderator and mediator of genes for language. *Behavioural Brain Research*, 325(Pt B), 197–202.
- Pinker, S. (1979). Formal models of language learning. *Cognition*, 7(3), 217–283.
- Rose, Y., & MacWhinney, B. (2014). *The PhonBank project*.
- Roseberry, S., Hirsh-Pasek, K., & Golinkoff, R. M. (2014). Skype me! Socially contingent interactions help toddlers learn language. *Child Dev*, 85(3), 956–970.
- Rowe, M. L. (2012). A longitudinal investigation of the role of quantity and quality of child-directed speech in vocabulary development. *Child Development*, 83(5), 17620–1774.
- Rowland, C. F., Pine, J. M., Lieven, E. V., & Theakston, A. L. (2003, Aug). Determinants of acquisition order in wh-questions: re-evaluating the role of caregiver speech. *Journal of Child Language*, 30(3), 609–635.
- Saffran, J. R., Aslin, R. N., & Newport, E. L. (1996). Statistical learning by 8-month-old infants. *Science*, 274(5294), 1926–1928.
- Salazar, J., Liang, D., Nguyen, T. Q., & Kirchhoff, K. (2020, July). Masked language model scoring. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics* (pp. 2699–2712). Online: Association for Computational Linguistics.
- Sanchez, A., Meylan, S., Braginsky, M., MacDonald, K., Yurovsky, D., & Frank, M. (2019). childes-db: A flexible and reproducible interface to the child language data exchange system. *Behavior Research Methods*, 51(4), 1928–1941.
- Shannon, C. (1951). Prediction and Entropy of Printed English. *Bell Systems Technical Journal*, 30, 50–64.
- Stein, A., Malmberg, L. E., Sylva, K., Barnes, J., & Leach, P. (2008, Sep). The influence of maternal depression, caregiving, and socioeconomic status in the post-natal year on children’s language development. *Child Care Health and Development*, 34(5), 603–612.
- Tomasello, M., Conti-Ramsden, G., & Ewert, B. (1990). Young children’s conversations with their mothers and fathers: Differences in breakdown and repair. *Journal of Child Language*, 17(1), 115–130.
- Vaswani, A., Shazeer, N., Parmar, N., Uszkoreit, J., Jones, L., Gomez, A. N., ... Polosukhin, I. (2017). Attention is all you need. In (pp. 5998–6008).
- Weizman, Z. O., & Snow, C. E. (2001). Lexical input as related to children’s vocabulary acquisition: effects of sophisticated exposure and support for meaning. *Developmental Psychology*, 37(2), 265–279.
- Wolf, T., Debut, L., Sanh, V., Chaumond, J., Delangue, C., Moi, A., ... Rush, A. M. (2020, October). Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations* (pp. 38–45). Online: Association for Computational Linguistics.