

Personal Entity, Concept, and Named Entity Linking in Conversations

Hideaki Joko
Radboud University
hideaki.joko@ru.nl

Faegheh Hasibi
Radboud University
f.hasibi@cs.ru.nl

ABSTRACT

Building conversational agents that can have natural and knowledge grounded interactions with humans requires understanding user utterances. Entity Linking (EL) is an effective and widely used method for understanding natural language text and connecting it to external knowledge. It is, however, shown that existing EL methods developed for annotating documents are suboptimal for conversations, where personal entities (e.g., “my cars”) and concepts are essential for understanding user utterances. In this paper, we introduce a collection and a tool for entity linking in conversations. We collect EL annotations for 1327 conversational utterances, consisting of links to named entities, concepts, and personal entities. The dataset is used for training our toolkit for conversational entity linking, CREL. Unlike existing EL methods, CREL is developed to identify both named entities and concepts. It also utilizes coreference resolution techniques to identify personal entities and references to the explicit entity mentions in the conversations. We compare CREL with state-of-the-art techniques and show that it outperforms all existing baselines.

CCS CONCEPTS

• **Information systems** → **Users and interactive retrieval; Question answering**; Information extraction.

KEYWORDS

Entity Linking; Conversational System; Datasets

ACM Reference Format:

Hideaki Joko and Faegheh Hasibi. 2022. Personal Entity, Concept, and Named Entity Linking in Conversations. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (Conference acronym 'XX)*. ACM, New York, NY, USA, 5 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

1 INTRODUCTION

Understanding user utterances in conversational systems is fundamental to creating natural and informative interactions with users. Entity Linking (EL) is a powerful text understanding technique that has been extensively explored in previous studies [12, 24] and shown to be effective in question-answering and retrieval

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.

Conference acronym 'XX, June 03–05, 2022, Woodstock, NY

© 2022 Association for Computing Machinery.
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00
<https://doi.org/XXXXXXXX.XXXXXXX>

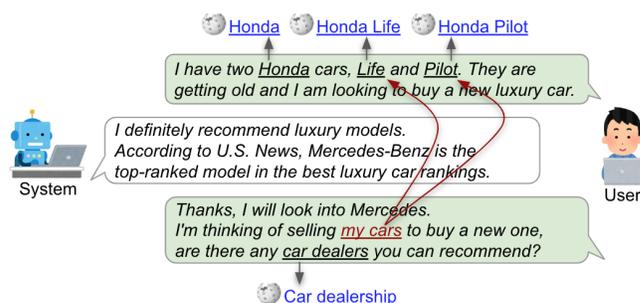


Figure 1: Example of entity linking in conversations.

tasks [4, 5, 9, 10, 31, 34]. However, EL approaches developed for documents prove to be suboptimal for conversations, to the extent that state-of-the-art EL models are outperformed by outdated models when evaluated on conversational EL datasets [12]. The reasons are three-fold: (i) **Personal entity annotation**: Conversations often contain personal statements, referring to entities by their pronouns; e.g., “my cars.” Identifying personal entities is essential for building personalized knowledge graphs [1, 18, 27, 28] and also generating personalized responses to users [13, 21]. Existing approaches for annotating documents, or even conversations [24, 26, 32], do not identify and link personal entity mentions. (ii) **Concept annotation**: EL models developed for documents or short texts mainly focus on annotating named entities [3, 29]. In conversations, however, both named entities and concepts contribute to machine understanding of text [12] and should be annotated. (iii) **Training data**: Existing EL approaches are trained on well-written texts, while conversations have multiple (informal) turns with information spread over the turns.

In this paper, we overcome the above challenges and provide a toolkit and a training dataset as two resources for EL in conversations. The challenges are addressed in the following ways.

Personal Entity Annotation. We detect *personal entity mentions* (e.g., “my cars”), find their corresponding *explicit entity mentions* (e.g., “Life” and “Pilot”), and link them to the corresponding entities in the knowledge graph (see Figure 1). An analogy can be drawn between this task and coreference resolution, as they both aim to find mentions referring to the same entity [14, 15, 17, 25]. In contrast, personal entity mentions are sparse and different from common pronominal expressions that are resolved in coreference resolution, which implies that state-of-the-art coreference resolution methods are insufficient for resolving personal entities. We therefore identify personal entity mentions in a separate module and utilize coreference resolution techniques to map them to their explicit entity mentions.

Concept Annotation. While open-domain knowledge graphs (e.g., Wikipedia) contain both named entities and concepts, conventional EL approaches are optimized for annotating only named entities, which hampers their performance for annotating conversations [3, 29, 30, 36]. Specifically, the performance of named entity and concept linking in the widely used REL entity linker [29] varies dramatically (F-score of 43.1 and 2.5, respectively). We mitigate this problem by training a mention detection model that can identify both concepts and named entity mentions in conversations and optimize the entity disambiguation model of REL [29] for all entity types. Our methods for personal entity, concept and named entity linking are integrated into our conversational EL tool, which is provided as a resource to the community. We show that this method outperforms state-of-the-art EL models.

Training Data. A key to solving the aforementioned problems is training data. Existing studies on conversational entity linking either use private proprietary datasets [24] or public datasets with insufficient number of conversations for both training and evaluation purposes [12]. In this work we, build on the existing ConEL dataset [12] and address its shortcomings in our new dataset: (i) In ConEL, each personal entity mention is mapped to only a single explicit entity, while in real conversations, personal entity mentions can have multiple corresponding entities (see Figure 1); (ii) ConEL contain limited number of conversations with personal entities, as it synthesizes conversations mainly from question-answering and task-oriented benchmarks with limited number of personal statements. Additionally, the ConEL-PE dataset [12], generated by annotating real social chats, contains only 25 annotated conversations, which cannot be used for training purposes. Our newly developed dataset, referred to as *ConEL-2*, consists of 1327 utterances, annotated with personal entities, concepts, and named entities. This dataset has been used for training and evaluation of our conversational EL tool.

In summary, this work makes the following resources available to the community:¹

- An open-source tool for entity linking in conversations, which can uniquely identify personal entities, concepts, and named entities. Our developed conversational EL methods outperform state-of-the-art baselines.
- A large dataset containing EL annotations for conversations, which can be used for training and evaluation purposes.

2 METHOD

Our conversational entity linking approach consists of two components; (1) personal entity linking and (2) concept and named entity linking.

2.1 Personal Entity Linking

Inspired by coreference resolution approaches [14–17], our model identifies personal entity mentions and their entity antecedents from conversation history. We, however, disentangle mention detection from entity antecedent assignment and employ a BERT-based model (cf. Sect. 2.2) for detecting entity mentions and a rule-based

approach [18] for identifying personal entity mentions. We specifically follow Joko et al. [12] to identify personal mentions starting with “my” or “our”.

Similar to [15], we denote the start and end token representations of mentions as:

$$m^s = GeLU(\mathbf{W}^s v) \quad m^e = GeLU(\mathbf{W}^e v),$$

where \mathbf{W}^s and \mathbf{W}^e are trainable weights and v is contextualized representation of a token. We use LongFormer [2] to obtain contextualized embeddings as it can accommodate the long conversation history. The input to the LongFormer model is the current turn and conversational history, and the hidden state at the output of the last layer of the model is used as v . Assuming mention m_{bf} appears before mention m_{af} , the compatibility score between the two mentions is computed by:

$$\begin{aligned} score(m_{bf}, m_{af}) = & m_{bf}^s \cdot B^{ss} \cdot m_{af}^s + m_{bf}^s \cdot B^{se} \cdot m_{af}^e \\ & + m_{bf}^e \cdot B^{es} \cdot m_{af}^s + m_{bf}^e \cdot B^{ee} \cdot m_{af}^e, \end{aligned} \quad (1)$$

where B represents trainable weights and superscripts s and e denote start and end tokens of a mention. Equation 1 is computed for all pairs of personal entity mentions and explicit entity mentions. During inference, personal and explicit entity mention pairs with the *score* higher than threshold τ are selected.

2.2 Concept and Named Entity Linking

Entity linking typically involves two subtasks: (i) identifying mention boundaries and (ii) disambiguating mentions using a knowledge graph. In order to utilize existing advancements on these two subtasks, we need to adapt them to the conversational setup. For mention detection (MD), this translates to adapting MD models to the conversational domain and identifying mentions of both named entities and concepts. We employ the vanilla BERT [6] architecture and fine-tune it to predict BIO labels, corresponding to begin, inside, and outside of mentions. The BERT model utilized in this work is pre-trained on conversational datasets such as DailyDialogues [19], OpenSubtitles [20], Debates [35], and Blogs [23].

For entity disambiguation, we train REL [29] disambiguation approach on our ConEL-2 dataset. REL is one of the state-of-the-art EL tools that is optimized for document annotation, but its disambiguation approach, considering both the local and global context of mentions, can be seamlessly adapted to conversations. Our entity linking method, consisting of the aforementioned MD and ED models is named CREL, which is an extension of REL tool for conversations.

3 THE CONEL-2 COLLECTION

To Facilitate the development of EL approaches for conversations, we construct the ConEL-2 collection. We draw the conversations from an existing conversational dataset. For selecting the dataset, we focus on social chat datasets as personal entities are mainly found in social chat conversations [12]. We choose the Wizard of Wikipedia (WoW) [7] dataset, which contains multi-domain multi-turn conversations collected from actual interactions between two people. The selected dialogues are annotated in three stages: (i) identifying personal entity mentions, (ii) pairing personal and explicit entity mentions, and (iii) entity linking. Unless stated otherwise,

¹<https://github.com/informagi/conversational-entity-linking-2022>

Step 1: Read this dialogue.

SYSTEM: *I think science fiction is an amazing genre for anything.*
 USER: *I'm a huge fan of science fiction myself!*
 SYSTEM: *Awesome! I really love how sci-fi storytellers focus on ...*
 USER: *I agree. My favorite theme of science fiction is time travel.*

Step 2: Select the appropriate text span that represents the user's personal object or thing that can be referred to.

My favorite
 My favorite theme
 ...
 My favorite theme of science fiction
 ...
 None of the above

Figure 2: Annotation interface for identifying personal entity mentions (stage 1 of annotation process).

Table 1: Statistics of the ConEL-2 collection. Personal entity annotations represent the number of annotations for personal entity mentions, with or without corresponding explicit entity mention in the dialogue.

	Train	Val	Test
Conversations	174	58	58
User utterances	800	267	260
NE and concept annotations	1428	523	452
Personal entity annotations	268	89	73

each HIT is annotated by three turkers, and additional turkers are added when needed based on our quality check strategies.

Stage 1: Identifying personal entity mentions. In this stage, we ask turkers to identify text spans referring to personal entities (i.e., personal entity mentions). First, we extract conversations that contain “my” or “our” in at least one user utterance, which amounts to 7,888 out of 22,311 conversations in the WoW dataset. To make the annotation process technically and financially feasible, we randomly select 1,000 conversations from the extracted dialogues. We then show the dialogue history and a set of candidate mentions to the turkers and ask them to find the best personal entity mention; the interface is shown in Fig. 2. Candidate mentions are text spans starting with “my” or “our,” followed by a maximum of 10 subsequent words. Our statistics on the collected annotations show that 98.9% of the HITs were agreed upon by two or more turkers, with a Fleiss’ kappa of 0.864. We move forward with the 985 conversations, where at least two turkers agreed on all personal entity mentions of the conversation.

Stage 2: Pairing personal and explicit entity mentions. In this stage, we ask turkers to find the corresponding explicit entity mention for a given personal entity mention. For example, in Figure. 1, the personal entity mention “my cars” is shown to turkers, and they are asked to find the corresponding explicit entity mention “Life” and “Pilot.” We create a pool of candidate explicit entity mentions by using existing EL tools: TagMe [8], WAT [22], REL [29], and GENRE [3]. The detected mentions are manually processed and meaningless duplicates such as “a restaurant” and “restaurant” are

Table 2: Personal entity linking results.

	ConEL-2 (Val)			ConEL-2 (Test)			ConEL-PE		
	P	R	F	P	R	F	P	R	F
S2E [15]	.375	.415	.394	.292	.302	.297	.317	.481	.382
W2V [12]	.324	.508	.395	.458	.429	.443	.436	.630	.515
S2E _{conv} ⁻	.494	.615	.548	.450	.571	.503	.400	.741	.519
S2E _{conv}	.714	.538	.614	.673	.524	.589	.613	.704	.655

resolved. Turkers are then given the option to select one corresponding explicit entity mention or the “not in dialogue” option if the corresponding entity mention is not found in the dialogue. Fleiss’ kappa for the inter-annotator agreement is 0.434, which is considered moderate. To improve the annotation quality, two extra annotations are collected for tasks where two turkers agreed on one option. We then select all conversations with equal or more than three turkers agreed upon one option (either an explicit entity mention or the “not in dialogue” option). This selection amounts to 290 conversations, which are passed to the next step.

We note that one of the shortcomings of the existing ConEL dataset is identifying only one explicit entity mention for each personal mention (cf. Section 1). In ConEL-2, we address this issue and ask turkers to find another corresponding explicit entity mention for all extracted conversations if any.

Stage 3: Entity linking In this stage, we ask turkers to select the corresponding Wikipedia article to the given entity mention, e.g., mapping the mention “car dealers” the entity “Car dealership” in Figure 1. We first use the EL tools described in the stage 2 to create the pool of candidate mention-entity pairs. Noisy mentions such as “please” and “I am” are manually removed from the pool. We also include top-10 Wikipedia search² results using mentions as queries. Turkers are then asked to select one of the candidate entities for each entity mention if any.

The statistics show 98.7% of the HITs were upon by two or more turkers a Fleiss’ kappa of 0.839, which highlights the high quality of our annotation process. We therefore include all annotation results which are agreed by at least two turkers. For the remaining 1.3% of the non-agreed HITs, we recollected two extra annotations for each and select the entity which is agreed by the majority of turkers. The annotation results are shown in Table 1. We split the dataset to train, validation, and test set with the 60%-20%-20% ratio.

4 RESULTS

4.1 Personal Entity Linking

Experimental Setup. We take the LongFormer-large model³ [2] pre-trained on OntoNote Release 5.0 [11], and fine-tune it on the training set of the ConEL-2 dataset. This model is referred to as S2E_{conv}. We perform training with the batch size of 8 and learning rate of 1e-5 using AdamW optimizer. For evaluation, we use validation and test sets of the ConEL-2 datasets as well as the ConEL-PE dataset [12]. ConEL-PE contains 25 dialogues from the WoW dataset. We only use personal entity annotations for this evaluation.

²https://www.mediawiki.org/wiki/API:Main_page

³<https://huggingface.co/allenai/longformer-large-4096>

Table 3: Concept and named entity linking results. F_{MD} and F_{EL} represent the F1 scores for mention detection and entity disambiguation, respectively.

	ConEL-2 (Val)		ConEL-2 (Test)		ConEL	
	F_{MD}	F_{EL}	F_{MD}	F_{EL}	F_{MD}	F_{EL}
GENRE [3]	.290	.252	.320	.299	.350	.211
REL [29]	.304	.244	.279	.231	.462	.245
TagMe [8]	.559	.478	.611	.504	.510	.375
WAT [22]	.616	.539	.613	.519	.416	.336
REL*(BERT _{conv})	.748	.652	.716	.587	.551	.424
REL*(BERT _{WP-conv})	.697	.624	.708	.592	.508	.399
REL*(BERT _{NER-conv})	.723	.635	.693	.576	.548	.407
CREL	.742	.651	.729	.597	.559	.429

Table 4: Overall entity linking results, annotating both personal entities (PE) and concepts and named entities (EL).

EL	PE	ConEL-2 (Val)			ConEL-2 (Test)			ConEL-PE		
		P	R	F	P	R	F	P	R	F
REL	W2V	.523	.159	.244	.516	.159	.243	.488	.206	.290
REL	S2E _{conv}	.523	.162	.248	.522	.165	.250	.466	.206	.286
GENRE	W2V	.468	.180	.260	.569	.223	.320	.537	.256	.347
GENRE	S2E _{conv}	.589	.169	.263	.675	.217	.328	.646	.256	.367
TagMe	W2V	.504	.407	.451	.530	.440	.481	.528	.518	.523
TagMe	S2E _{conv}	.612	.395	.480	.621	.434	.511	.636	.518	.571
WAT	W2V	.506	.489	.497	.545	.464	.501	.536	.628	.579
WAT	S2E _{conv}	.585	.490	.534	.582	.464	.516	.571	.648	.607
CREL	W2V	.636	.589	.612	.607	.554	.579	.573	.714	.635
CREL	S2E _{conv}	.712	.593	.647	.634	.566	.598	.600	.724	.656

Baselines. We compare our model with the Wikipedia2Vec-based method (W2V) [12], where antecedent assignment is based on similarity between Wikipedia2vec [33] embeddings of entities and personal entity mentions. We also report on the official S2E model⁴ [15] and its variation S2E_{conv}, where fine-tuning is performed only on our conversational dataset (without using OntoNote dataset).

Results. We measured the performance of our rule-based personal entity mention detection approach and obtained precision, recall, and F1 of 0.908, 0.898, and 0.903, respectively. This indicates that identifying personal entity mentions can be handled effectively by a simple approach. Assigning entity antecedents, on the hand, is a challenging task.

Table 2 shows the results for personal entity linking. We observe that S2E_{conv} fine-tuned on both OntoNote and conversational datasets outperforms all baselines. It also indicates that, fine-tuning on conversational data substantially improves personal entity linking performance (S2E vs. S2E_{conv} results).

4.2 Concept and NE Linking

Experimental Setup. For mention detection, we fine-tune bert-base-cased-conversational⁵ on our training data with the batch size of 16, learning rate of 5e-5, and AdamW optimizer. For ED, we train the REL ED model, following the same training procedure

⁴<https://github.com/yuvalkirstain/s2e-coref>

⁵<https://huggingface.co/DeepPavlov/bert-base-cased-conversational>

as van Hulst et al. [29]. For evaluation, we use the ConEL-2 and ConEL [12] datasets are used. ConEL consists of 100 conversations that are collected from three different conversational tasks (question answering, task-oriented, and social chat) and annotated with concepts and NEs. Only concept and NE annotations are used for this evaluation.

Baselines. REL [29], GENRE [3], TagMe [8], and WAT [22] are strong publicly available EL tools that are used as our baselines. Additionally, we train three BERT-based MD models: (i) BERT_{conv}: The bert-base-uncased model⁶, fine-tuned on our training data. (ii) BERT_{WP-conv}: Similar to BERT_{conv}, but fine-tuned on the Wikipedia anchor links from [3] before fine-tuning on ConEL-2 training data. (iii) BERT_{NER-conv}: The bert-base-NER model⁷, fine-tuned on our training data. The fine-tuning procedures are the same as CREL. We combine these models with the REL ED model trained on conversations (denoted as REL*) and report on their results.

Results. The results are reported in Table 3. F_{MD} and F_{EL} are the F1 scores for MD and EL, respectively. The results show that the REL and GENRE, while being state-of-the-art EL toolkits, perform worse than TagMe and WAT. This is because REL and GENRE are intended to detect only NEs, while TagMe and WAT are able to identify concepts as well. Comparing CREL with REL* methods, we observe that adaptation of BERT for conversational domain plays an important role in conversational entity linking, reflected by the highest score for ConEL-2 (test) and ConEL datasets.

4.3 Overall Performance

Putting all the pieces together, we report on the overall performance of our model for linking personal entities, concepts and NEs. For this experiment, we report only on the ConEL-2 and ConEL-PE datasets, as ConEL does not have annotations for personal entities. The results are shown in Table 4. We notice at first glance that our proposed personal entity linking extension (S2E_{conv}) leads to improved F-scores compared to W2V in most cases. The results also show that our EL tool (CREL with S2E_{conv}) achieves the highest F-score for all sets, reinforcing the importance of adapting EL approaches for conversations.

5 CONCLUSION

In this paper, we tackled the problem of entity linking in conversational settings, where not only named entities but also concepts and personal entities are important. To this end, we collected conversational entity annotations, which allows us to train and evaluate entity linking in conversations. Additionally, based on the collected annotations, we develop a conversational EL tool. Our empirical results show that our EL tool achieved the highest performance over conventional EL tools, where their focus is on documents. The collected annotations and our EL tool with detailed instructions are publicly available as a research resource for further study in conversation.

⁶<https://huggingface.co/bert-base-uncased>

⁷<https://huggingface.co/dslim/bert-base-NER>

REFERENCES

- [1] Krisztian Balog and Tom Kenter. 2019. Personal Knowledge Graphs: A Research Agenda. In *Proceedings of the 2019 ACM SIGIR International Conference on Theory of Information Retrieval (ICTIR '19)*. 217–220.
- [2] Iz Beltagy, Matthew E. Peters, and Arman Cohan. 2020. Longformer: The Long-Document Transformer. *arXiv:2004.05150* (2020).
- [3] Nicola De Cao, Gautier Izacard, Sebastian Riedel, and Fabio Petroni. 2021. Autoregressive Entity Retrieval. In *Proceedings of International Conference on Learning Representations (ICLR)*.
- [4] Jeffrey Dalton, Laura Dietz, and James Allan. 2014. Entity Query Feature Expansion Using Knowledge Base Links. In *Proceedings of the 37th International ACM SIGIR Conference on Research & Development in Information Retrieval (SIGIR '14)*. 365–374.
- [5] Arash Dargahi Nobari, Arian Askari, Faegheh Hasibi, and Mahmood Neshati. 2018. Query Understanding via Entity Attribute Identification. In *Proceedings of the 27th ACM International Conference on Information and Knowledge Management (CIKM '18)*. 1759–1762.
- [6] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*. 4171–4186.
- [7] Emily Dinan, Stephen Roller, Kurt Shuster, Angela Fan, Michael Auli, and Jason Weston. 2019. Wizard of Wikipedia: Knowledge-Powered Conversational Agents. In *International Conference on Learning Representations*.
- [8] Paolo Ferragina and Ugo Scaiella. 2010. TAGME: On-the-fly Annotation of Short Text Fragments (by Wikipedia Entities). In *Proceedings of the 19th ACM international conference on Information and knowledge management*. 1625–1628.
- [9] Emma J Gerritse, Faegheh Hasibi, and Arjen P. de Vries. 2022. Entity-aware Transformers for Entity Search. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '22)*.
- [10] Faegheh Hasibi, Krisztian Balog, and Svein Erik Bratsberg. 2016. Exploiting Entity Linking in Queries for Entity Retrieval. In *Proceedings of the 2016 ACM on International Conference on the Theory of Information Retrieval (ICTIR '16)*. 209–218.
- [11] Eduard Hovy, Mitchell Marcus, Martha Palmer, Lance Ramshaw, and Ralph Weischedel. 2006. OntoNotes: The 90% Solution. In *Proceedings of the Human Language Technology Conference of the NAACL, Companion Volume: Short Papers*. Association for Computational Linguistics, 57–60.
- [12] Hideaki Joko, Faegheh Hasibi, Krisztian Balog, and Arjen P. de Vries. 2021. Conversational Entity Linking: Problem Definition and Datasets. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '21)*.
- [13] Chaitanya K Joshi, Fei Mi, and Boi Faltings. 2017. Personalization in Goal-oriented Dialog. In *NIPS Conversational AI Workshop*.
- [14] Mandar Joshi, Omer Levy, Luke Zettlemoyer, and Daniel Weld. 2019. BERT for Coreference Resolution: Baselines and Analysis. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*. 5802–5807.
- [15] Yuval Kirstain, Ori Ram, and Omer Levy. 2021. Coreference Resolution without Span Representations. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*. 14–19.
- [16] Kenton Lee, Luheng He, Mike Lewis, and Luke Zettlemoyer. 2017. End-to-end Neural Coreference Resolution. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, 188–197.
- [17] Kenton Lee, Luheng He, and Luke Zettlemoyer. 2018. Higher-Order Coreference Resolution with Coarse-to-Fine Inference. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*. Association for Computational Linguistics, 687–692.
- [18] X. Li, G. Tur, D. Hakkani-Tür, and Q. Li. 2014. Personal knowledge graph population from user utterances in conversational understanding. In *2014 IEEE Spoken Language Technology Workshop (SLT)*. 224–229.
- [19] Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. 2017. DailyDialog: A Manually Labelled Multi-turn Dialogue Dataset. *Asian Federation of Natural Language Processing*, 986–995.
- [20] Pierre Lison and Jörg Tiedemann. 2016. OpenSubtitles2016: Extracting Large Parallel Corpora from Movie and TV Subtitles. In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC'16)*. European Language Resources Association (ELRA), 923–929.
- [21] Liangchen Luo, Wenhao Huang, Qi Zeng, Zaiqing Nie, and Xu Sun. 2019. Learning Personalized End-to-end Goal-oriented Dialog. In *Proceedings of the AAAI Conference on Artificial Intelligence*.
- [22] Francesco Piccinno and Paolo Ferragina. 2014. From TagME to WAT: A New Entity Annotator. In *Proceedings of the first international workshop on Entity recognition and disambiguation*. 55–62.
- [23] J Schler, M Koppel, S Argamon, and JW Pennebaker. 2006. Effects of Age and Gender on Blogging in Proceedings of 2006 AAAI Spring Symposium on Computational Approaches for Analyzing Weblogs. In *Proceedings of 2006 AAAI Spring Symposium on Computational Approaches for Analyzing Weblogs*.
- [24] Mingyue Shang, Tong Wang, Mihail Eric, Jiangning Chen, Jiyang Wang, Matthew Welch, Tiantong Deng, Akshay Grewal, Han Wang, Yue Liu, Yang Liu, and Dilek Hakkani-Tur. 2021. Entity Resolution in Open-domain Conversations. In *Proceedings of the 2021 Annual Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)*.
- [25] Sameer Singh, Arnabg Subramanya, Fernando Pereira, and Andrew McCallum. 2011. Large-Scale Cross-Document Coreference Using Distributed Inference and Hierarchical Models. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, 793–803. <https://aclanthology.org/P11-1080>
- [26] Md Tahmid Rahman Laskar, Cheng Chen, Aliaksandr Martynovich, Jonathan Johnston, Xue-Yong Fu, Shashi Bhushan TN, and Simon Corston-Oliver. 2022. BLINK with Elasticsearch for Efficient Entity Linking in Business Conversations. *arXiv e-prints* (2022), arXiv–2205.
- [27] Anna Tiguova, Andrew Yates, Paramita Mirza, and Gerhard Weikum. 2019. Listening between the Lines: Learning Personal Attributes from Conversations (*WWW '19*). 1818–1828.
- [28] Anna Tiguova, Andrew Yates, Paramita Mirza, and Gerhard Weikum. 2020. CHARM: Inferring Personal Attributes from Conversations. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. 5391–5404.
- [29] Johannes M. van Hulst, Faegheh Hasibi, Koen Dercksen, Krisztian Balog, and Arjen P. de Vries. 2020. REL: An Entity Linker Standing on the Shoulders of Giants. In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '20)*. 2197–2200.
- [30] Ledell Wu, Fabio Petroni, Martin Josifoski, Sebastian Riedel, and Luke Zettlemoyer. 2020. Scalable Zero-shot Entity Linking with Dense Entity Retrieval. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, 6397–6407.
- [31] Chenyan Xiong, Jamie Callan, and Tie-Yan Liu. 2017. Word-Entity Duet Representations for Document Ranking. In *Proceedings of the 40th International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR '17)*. 763–772.
- [32] Liyan Xu and Jinho D Choi. 2022. Online Coreference Resolution for Dialogue Processing: Improving Mention-Linking on Real-Time Conversations. *arXiv preprint arXiv:2205.10670* (2022).
- [33] Ikuya Yamada, Akari Asai, Jin Sakuma, Hiroyuki Shindo, Hideaki Takeda, Yoshiyasu Takefuji, and Yuji Matsumoto. 2020. Wikipedia2Vec: An Efficient Toolkit for Learning and Visualizing the Embeddings of Words and Entities from Wikipedia. In *Conference on Empirical Methods in Natural Language Processing: System Demonstrations*. 23–30.
- [34] Ikuya Yamada, Ryuji Tamaki, Hiroyuki Shindo, and Yoshiyasu Takefuji. 2018. Studio Ousia's Quiz Bowl Question Answering System. In *The NIPS '17 Competition: Building Intelligent Systems*. Springer International Publishing, 181–194.
- [35] Justine Zhang, Ravi Kumar, Sujith Ravi, and Cristian Danescu-Niculescu-Mizil. 2016. Conversational Flow in Oxford-style Debates. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, 136–141.
- [36] Wenzheng Zhang, Wenyue Hua, and Karl Stratos. 2022. EntQA: Entity Linking as Question Answering. In *International Conference on Learning Representations*.