

GAAMA 2.0: An Integrated System that Answers Boolean and Extractive Questions

Scott McCarley, Mihaela Bornea, Sara Rosenthal, Anthony Ferritto,
Md Arafat Sultan, Avirup Sil, Radu Florian

IBM Research AI
Yorktown Heights, NY
jsmc@us.ibm.com

Abstract

Recent machine reading comprehension datasets include extractive and boolean questions but current approaches do not offer integrated support for answering both question types. We present a multilingual machine reading comprehension system and front-end demo that handles boolean questions by providing both a YES/NO answer and highlighting supporting evidence, and handles extractive questions by highlighting the answer in the passage. Our system, GAAMA 2.0, is ranked first on the TYDI QA leaderboard at the time of this writing. We contrast two different implementations of our approach. The first includes several independent stacks of transformers allowing easy deployment of each component. The second is a single stack of transformers utilizing adapters to reduce GPU memory footprint in a resource-constrained environment.

1 Introduction

Current machine reading comprehension (MRC) systems (Alberti et al., 2019; Chakravarti et al., 2019; Ferritto et al., 2020b) typically feature a single model targeted at supplying short extractive answer spans, but boolean questions demand non-extractive yes/no answers, as well as supporting evidence. We demonstrate here a system that, given a question, predicts the expected answer type and provides direct YES/NO answers with supporting evidence to boolean questions, or provides short answers to extractive questions.¹ See examples of both question types in Figure 1.

We highlight several capabilities, beyond those of traditional extractive MRC, that are necessary for our demonstration: the system must distinguish boolean and extractive questions, must be able to generate a non-extractive YES/NO answer if the

¹core capabilities of our system are available at <https://github.com/primeqa/>

1. Is the Mississippi the longest river in the world? **NO**

As a result, the length measurements of many rivers are only approximations (see also coastline paradox). In particular, **there seems to exist disagreement as to whether the Nile[3] or the Amazon[4] is the world’s longest river.** The Nile has traditionally been considered longer, but in 2007 and 2008 some scientists claimed that the Amazon is longer[5][6][7] by measuring the river plus the adjacent Pará estuary and the longest connecting tidal canal.[8]

2. Roughly, how much oxygen makes up the Earth crust? **almost half of the crust’s mass**

Diatomic oxygen gas constitutes 20.8% of the Earth’s atmosphere. However, monitoring of atmospheric oxygen levels show a global downward trend, because of fossil-fuel burning. Oxygen is the most abundant element by mass in the Earth’s crust as part of oxide compounds such as silicon dioxide, making up **almost half of the crust’s mass.**

Figure 1: Examples of boolean and factoid questions. The factoid question requires an extractive answer; the boolean question requires a YES/NO answer and extracted supporting evidence

question is boolean, and must be able to recognize unanswerable questions regardless of whether it produces an extractive or non-extractive answer.

These new capabilities are needed because the development of MRC has been driven by training with extractive datasets (Rajpurkar et al., 2016; Kwiatkowski et al., 2019), while boolean questions have been explored in isolation (Clark et al., 2019). Therefore, extractive questions are typically handled by a pointer network which locates the start and end token of the answer span in the passage. On the other hand, boolean questions are handled by a binary classifier that classifies an entire passage with a YES or NO answer, ignoring the need to also provide concise supporting evidence for the answer. While these models are individually well-understood, we elucidate the design considerations that are necessary to present these capabilities to the user in an integrated manner.

The backend of the system is shown in Figure 2. In addition to GAAMA (Go Ahead Ask Me

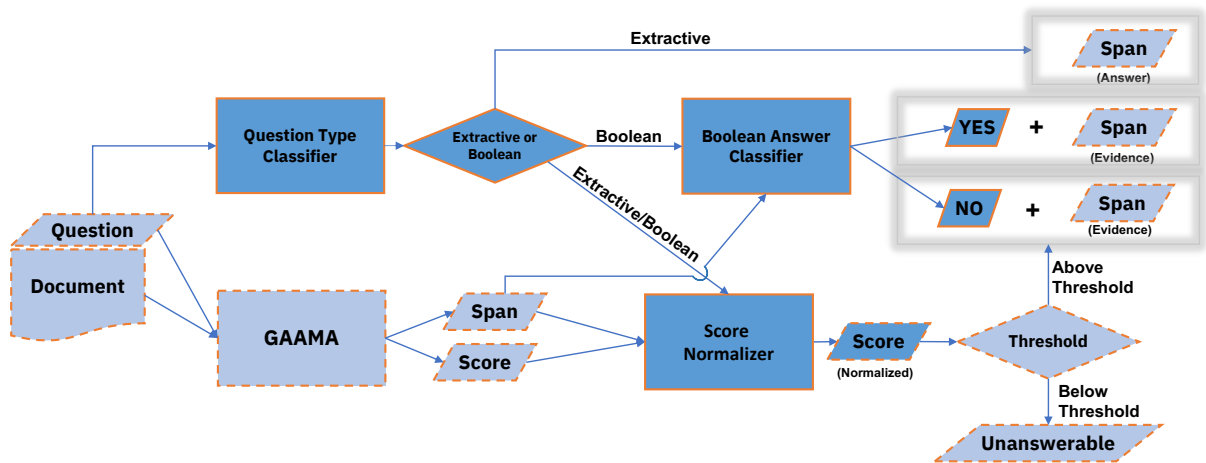


Figure 2: System diagram: Pale blue boxes are the components of a traditional MRC system; dark blue boxes are the additional components that are necessary for proper handling of both boolean and extractive questions. See Section 3 for a full explanation.

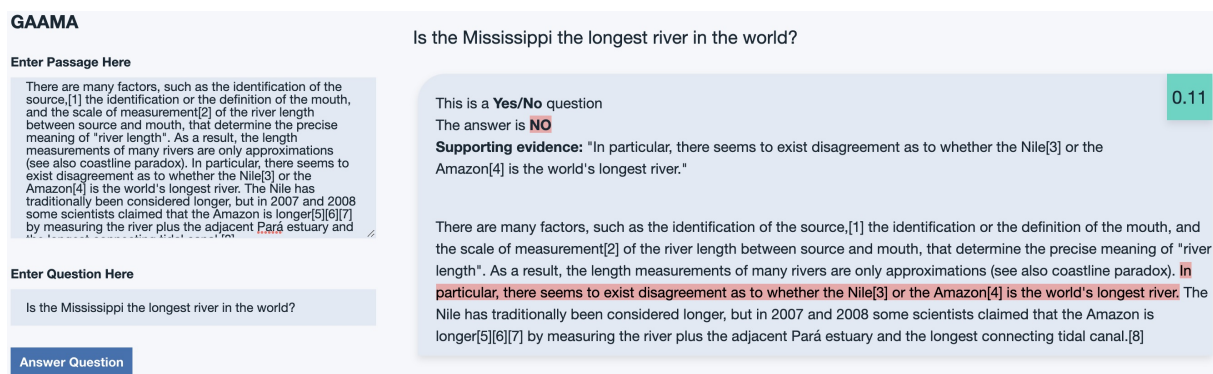


Figure 3: A screenshot of our demo. The left side is user input. On the right side, the system response identifies the question as a yes/no question, provides a succinct answer NO, and identifies the supporting evidence.

Anything) (Chakravarti et al., 2019, 2020), the core of our traditional MRC system, our system incorporates a *question type classifier* to distinguish boolean and extractive questions, a *boolean answer classifier* to provide YES/NO answers to the boolean questions, and a *score normalizer* component designed to improve the identification of unanswerable questions.

The user interface of our system is shown in Figure 3. When our system is presented with a boolean question, it indicates that it has identified the question as boolean. It provides a direct YES/NO answer, and provides supporting evidence, which is highlighted in the paragraph.

The contributions of this paper are:

1. We provide an integrated system architecture and front-end demo that appropriately handles extractive *and* boolean questions. We describe and analyze each component of our pipeline.

2. We investigate parameter sharing via adapters (Houlsby et al., 2019a) as a modeling choice to reduce the GPU memory footprint of the system in a resource-constrained environment.
3. We present end-to-end MRC results on the TYDI QA (Clark et al., 2020) dataset, which has a mixture of extractive and boolean questions. Our system backend achieves state-of-the-art results on the TYDI QA leaderboard.

2 Related Work

Our demo is an extension of prior works GAAMA (Chakravarti et al., 2019) and M-GAAMA (Ferritto et al., 2020b). Both are QA demos with the former being English-*only* and the latter being cross-lingual. We add the capability to answer both extractive *and* boolean questions in one integrated multilingual system, thus creating GAAMA 2.0.

Other QA demos include: ARES (Ferritto et al.,

2020a), a QA demo that features ensembling of several MRC systems, BERTSerini (Yang et al., 2019), which leverages the Anserini IR toolkit (Yang et al., 2017) to extract relevant documents given a question in English only, NAMER (Zhang et al., 2021b) for multi-hop knowledge base QA, and Talk to Papers (Zhao and Lee, 2020) for QA in academic search.

We make use of two datasets in developing our system: TYDI QA (Clark et al., 2020) and BoolQ-X (Rosenthal et al., 2021). TYDI QA is a multilingual MRC dataset containing questions in multiple languages. 10% of the questions are boolean. The TYDI QA boolean question annotations include the paragraph the answer is found in and a label: YES or NO. A boolean question can also be unanswerable. BoolQ-X is an enhancement of BoolQ (Clark et al., 2019), a large dataset of over 18k boolean questions. BoolQ-X modifies the short passages of BoolQ, to make it more suitable for MRC by expanding the original answer passage while preserving its context in the original Wikipedia document. Other datasets that contain a mixture of boolean and extractive questions are Natural Questions (Kwiatkowski et al., 2019) and MS Marco (Nguyen et al., 2016). These datasets are only English and contain a smaller percentage of boolean questions than TYDI QA.

3 System Components

A diagram of the system is illustrated in Figure 2. The light blue boxes depict a traditional MRC system. The question and passage are jointly passed to GAAMA which finds an answer span in the passage, and a score. If the score is below a threshold, the question is assumed to be unanswerable. The additional components required for our system are shown in the dark blue boxes in Figure 2. The *question type classifier* determines if the question is boolean or extractive. If the question is extractive, the span produced by GAAMA is assumed to be the extracted answer span. On the other hand, if the question is boolean, the question/passage pair are passed to a *boolean answer classifier* that decides if the passage supports an answer of YES or NO. The span produced by GAAMA is then treated as supporting evidence for the boolean answer. The output of the question type classifier is also used by the *score normalizer*, which enables the thresholding mechanism to more reliably determine if the question is answerable.

3.1 GAAMA

GAAMA is a single component that extracts a candidate answer span from the question/document pair. This component extends a traditional extractive question answering system (Ferritto et al., 2020b), and is implemented with a pointer network head on the 24 layer xlm-roberta-large (Conneau et al., 2020). We use multi-teacher knowledge distillation to distill the knowledge of both a TYDI QA model and a Natural Questions model into a single robust student model, using all training examples from the two datasets. Synthetic training data was also used in this model (Chen et al., 2020). Our model is trained with the short answer for extractive questions, and the passage as a span for boolean questions, as the TYDI QA training data does not provide a short answer for boolean questions. At runtime, this component is agnostic to the difference between boolean and extractive questions, producing only a span of extracted text.

3.2 Question Type classifier

The question type classifier takes as input the question, and returns a label that distinguishes boolean and extractive questions. It is a multilingual transformer-based (MBERT (Devlin et al., 2019)) classifier. The question type classifier was trained and evaluated on the answerable subset of the TYDI QA questions. Even though there are boolean questions that are unanswerable, we cannot use these questions to train or evaluate our model because TYDI QA did not provide labels to indicate whether the unanswerable questions were boolean. The classifier achieved an F1 score of 99.2% on boolean questions, and 94.6% on factoid questions for the TYDI QA dev set. Our model achieves high F1 score for all TYDI QA languages. Because this accuracy was extremely high, we did not pursue further refinements. We believe this task performs well because there are certain words that signal with high likelihood that a question is boolean or not. For example, in English, questions starting with *is*, *does*, and *are* are usually boolean questions while the 5 W questions (*who*, *what*, *why*, *where*, *when*) indicate extractive questions.

3.3 Boolean Answer Classifier

The boolean answer classifier is a binary classifier that predicts a YES or NO answer to the question, given a boolean question and a passage. This component is only invoked if the question type classifier

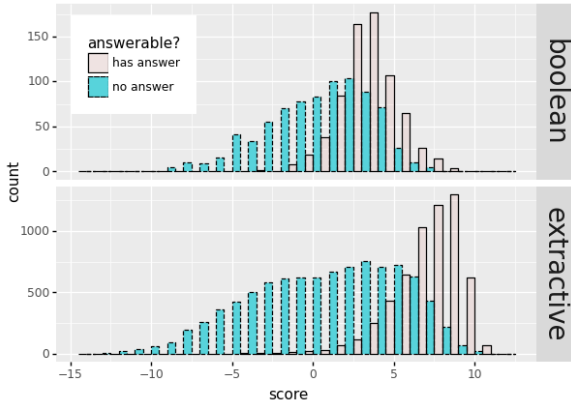


Figure 4: Score distributions of answerable and non-answerable questions differ between boolean and extractive questions.

has determined that the question is boolean.

We trained the classifier using upstream system output: boolean questions from TYDI QA data, as selected by our question type classifier, along with the corresponding system output passages selected by the GAAMA component. There are often multiple passages containing the correct answer and GAAMA may find one not in gold. This also mimics what occurs during real-world use of this component. In addition, we supplemented the TYDI QA training data with questions and 200 word passages selected from BoolQ-X (Rosenthal et al., 2021), which is more compatible with the MRC task and the TYDI QA data than BoolQ.

A simple baseline for the boolean answer classifier is to answer all boolean questions with YES. This is a particularly strong baseline for TYDI QA since the boolean data is so skewed with 80% of answers being YES. This majority baseline has a YES/NO F1 of 90.1/0.0 for TYDI QA and 77.0/0.0 for BoolQ-X. While the F1 for YES is high for both datasets, the F1 for NO is 0.0. In addition a system that always answers YES would of course not be satisfying to a user. Our boolean answer classifier obtains a YES/NO F1 of 91.0/44.5 on the TYDI QA dev set and 81.3/65.7 on the BoolQ-X dev set. Our YES F1 is similar to the TYDI QA baseline and we achieve a large improvement for NO. Further, on the more balanced BoolQ-X dataset, we achieve a large improvement for both classes. We remind the reader that BoolQ-X is designed to reflect more realistic conditions that are compatible with the MRC task and should not be compared with scores from the original BoolQ.

In addition to training the classifier with the full

		Boolean (YN)		Extractive (MA)	
Threshold		Above	Below	Above	Below
w/o SN	YN	259	826	14	16
	MA	31	37	5,590	1,195
	NA	22	776	1,430	8,137
w/ SN	YN	781	304	13	17
	MA	56	12	5,432	1,353
	NA	128	670	1,230	8,673

Table 1: Confusion matrices with and without the score normalizer (SN) on TYDI QA DEV. The columns are the predictions: Y/N and extractive answers that score above or below the threshold. Predictions below the threshold are marked as unanswerable. The rows are the gold labels: YN for the boolean questions, MA for the questions with a minimal (extractive) answer, and NA are the questions with no answer.

passage, we also experimented with classifying the minimal answer span produced by GAAMA that is used as evidence. We found that it is preferable to expand the context seen by the classifier beyond the spans produced by the upstream MRC system, rather than using the MRC system output spans as-is. Note that this is a very data-specific heuristic. While evaluating TYDI QA we use the paragraph boundaries provided in the dataset, but in the demo system we simply expand the system-generated spans into wider windows based on fixed offsets surrounding the begin and end of the spans.

3.4 Score normalizer

The score normalizer scales the score produced by GAAMA for the answer span to the $[0, 1]$ interval, conditioned on question type. This score is used to determine whether the question is answerable or not. The initial distribution of scores from GAAMA are strikingly different depending upon whether the question is boolean or extractive. This effect is illustrated in Figure 4. The answer spans in the TYDI QA dataset are typically a few words. However, since the boolean questions do not have answer spans, we supply the candidate paragraph as the evidence span for supervision during training. This mismatch in span length, and the infrequency of boolean questions causes the scores of boolean questions to be assigned a low confidence, often below the threshold making the majority of boolean questions unanswerable. This threshold is determined by the official TYDI QA evaluation script.

Table 1 shows the confusion matrix for our system with and without using score normalization.

	System	MA
DEV	GAAMA	68.6
	GAAMA 2.0	72.6
TEST	GAAMA 2.0	72.3
	GAAMA-DM-Syn-ARES	68.0
	PoolingFormer	67.6

Table 2: End-to-End results on half of the TYDI QA dev set and TYDI QA test set. Test set results are evaluated by the TYDI QA leaderboard. We show the F1 score on the Minimal Answer (MA) prediction task. Our GAAMA 2.0 TYDI QA leaderboard submission was called GAAMA-Syn-Bool-Single-Model.

The question type classifier identifies the majority of boolean questions correctly, however the majority of the gold YN questions (**826**) are *below* the threshold as shown in the first line of the table. After the application of the score normalizer, the bulk (**781**) of the gold YN questions are now above the threshold in the fourth line of Table 1. Meanwhile, the score normalizer did not have a significant impact on the gold minimal answer (MA) for extractive questions, that already had the correct predictions, only 2% moved from above to below the threshold. Further, we increased the number of questions correctly identified as unanswerable, 2% of the extractive NA questions moved from above to below threshold.

The score normalizer is implemented as a logistic regression classifier using the output of the question type classifier and the span score of the GAAMA system as features. It generates a probability of whether the question/passage pair is marked as *answerable* or *unanswerable*. We used the TYDI QA annotations to find the labels for training the score normalizer. For Table 1 we built a score normalizer from a held out 10% of the TYDI QA train. The new score is the probability of the *answerable* class.

4 End-to-End MRC Results

In this section we present the end-to-end results of our system, as measured on TYDI QA. We divide the TYDI QA dev in two parts. The first half was used for calibrating the score normalizer for the end-to-end system and the second half was used for validating our model during development. We validate our approach on the official test set used in the TYDI QA leaderboard via blind submission. All experiments were implemented using the Huggingface frameworks from (Wolf et al., 2020).

GAAMA configs	F1	# params ($\times 10^6$)	size (MiB)
<i>Separate</i>	72.6	1680	3204
<i>Adapters</i>	73.0	563	1074

Table 3: A comparison of GAMMA 2.0 using separate models and adapters. The F1 score is the minimal answer reported by running the end-to-end system on the TYDI QA dev set.

In Table 2, we show minimal answer (MA) TYDI QA results on the second half of the TYDI QA dev set. Our baseline system, GAAMA, is an xlm-roberta model trained on the TYDI QA data as described in Section 3.1. This system does not handle boolean questions. The GAMMA 2.0 system implements the architecture in Figure 2, including the *question type classifier*, the *boolean answer classifier* and the *score normalizer* components. Our experiments show a clear gain of 4 F1 points which is credited to the correct prediction of boolean questions. It is worth noting that our pipeline does not hurt the performance of extractive questions. Based on the analysis in Table 1, only 0.01% of the extractive (MA) gold questions that have an answer are incorrectly classified as boolean. An additional 0.01% of the gold questions that have no answer (NA) in TYDI QA have an incorrect boolean prediction. We showed in Section 3.4 that we don’t affect the performance of extractive questions and our gains are purely on handling boolean questions.

A blind submission of our system, GAAMA-Syn-Bool-Single-Model (GAAMA 2.0) to the TYDI QA leaderboard² achieved state of the art performance on the hidden test set. The TYDI QA leaderboard has attracted research targeting different aspects of the document level, multilingual question answering task. To the best of our knowledge GAAMA 2.0 is the only TYDI QA submission that handles boolean questions. There is a notable improvement of over 4 F1 points compared to the next best system, GAAMA-DM-Syn-ARES, and almost 5 F1 points compared to the third place system, PoolingFormer. GAAMA-DM-Syn-ARES is a variation of the GAAMA system featuring an ensemble (Ferritto et al., 2020a) of systems targeting representations with long document dependencies (Zheng et al., 2020). These features are not included in the GAAMA baseline we use.

²<https://ai.google.com/research/tydiqa,asof2022-01-12>

PoolingFormer (Zhang et al., 2021a) also focussed on modeling long dependencies in documents and they modify the self attention mechanism in the transformers to enable long input sequences. It is worth noting that our system can work with these and other MRC approaches.

5 Parameter sharing approach

In the baseline implementation of our system, each of the transformer-based classifiers is a separate stack of transformers, fine-tuned independently for its particular task³. This implementation is convenient because the components can be developed and deployed independently. Each of the classifiers can be deployed in a microservice in a separate docker container. The containers may be deployed on either the same machine or different machines, depending upon the availability of GPUs. The communication between the microservices can be easily handled by the flow compiler of (Chakravarti et al., 2019). On the other hand, deploying multiple transformer-based classifiers is expensive, since they must remain resident in GPU memory. In practice this requires separate GPUs for each of our three transformer-based classifiers.

To address this concern, we also experiment with adapter-based models. With adapters (Houlsby et al., 2019b), multiple stacks of transformers can be replaced with a single stack of transformers, and a set of *adapters*, which have $< 1\%$ of the number of parameters of the corresponding transformer stack. Only the parameters in the adapter need to be fine-tuned for a particular task - the parameters of the transformer stack itself are shared between the multiple tasks. Adapters have been used successfully for many classification tasks.

Adapters are typically applied to the shared parameters of a transformer stack pretrained solely for masked language modeling (Pfeiffer et al., 2020b, 2021). In contrast, we view our span extraction transformer as the base task, and train the other tasks as adapters on top of the span extraction transformer stack. This allows the other components to leverage the MRC data our span extraction model was trained on. Further, training our span extractor is a specialized process involving distillation from multiple teacher models, and is not easily amenable

³Although a single joint transformer model for all components of our model is conceivable, we do not explore this approach because the capabilities of the components are developed independently, and the cost of repeated retrainings of a joint model during development would be prohibitive.

to the adapter framework.

We implement the query type classifier and the boolean answer classifier with adapters inserted into our span extractor model, using the framework of (Pfeiffer et al., 2020a). The adapter-based question type classifier achieves an F1 score of 99.6% on boolean questions, and 97.3% on extractive questions on the TYDI QA dev set. This is notably better than the original implementation. The adapter-based boolean answer classifier also achieved comparable or better performance to the original implementation with a YES/NO F1 score of 90.9/41.5⁴ for TYDI QA and 83.0/68.8 for BoolQ-X. We compare end-to-end MRC performance of both approaches in Table 3. The F1 scores are similar for both approaches, while the adapter system reduces our memory footprint significantly.

6 Conclusion

We present a demonstration of a machine reading comprehension system that can answer both boolean questions and factoid questions in an integrated system. When a question is boolean, it provides a direct YES/NO answer and highlights the supporting text. When a question is extractive it highlights the answer span found in the text. These new capabilities require adding additional components to a traditional MRC system: a *question type classifier*, a *boolean answer classifier* and a *score normalizer*. Each component is an important part of the design needed to successfully answer boolean questions. Our back-end system achieves a four point improvement over the comparable system without boolean questions and achieves state-of-the-art results on the TYDI QA leaderboard.

Finally, we contrast the merits of two different implementation approaches. In one, we implement each of the components in a separate microservice for flexibility. In the other, we apply a single transformer via adapters to reduce the GPU memory footprint and associated expense. The adapters also enabled the question type classifier and boolean answer classifier components to leverage additional training data not directly useful to the boolean questions. In the future we would like to explore incorporating other question and answer types into our demo, such as how-to questions that require a list as answer.

⁴The drop in F1 of NO in the TYDI QA set is likely negligible because of the small size and the extreme skew.

References

- Chris Alberti, Kenton Lee, and Michael Collins. 2019. [A bert baseline for the natural questions](#).
- Rishav Chakravarti, Anthony Ferritto, Bhavani Iyer, Lin Pan, Radu Florian, Salim Roukos, and Avirup Sil. 2020. Towards building a robust industry-scale question answering system. In *Proceedings of the 28th International Conference on Computational Linguistics: Industry Track*, pages 90–101.
- Rishav Chakravarti, Cezar Pendus, Andrzej Sakrajda, Anthony Ferritto, Lin Pan, Michael Glass, Vittorio Castelli, J William Murdock, Radu Florian, Salim Roukos, and Avi Sil. 2019. [CFO: A framework for building production NLP systems](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP): System Demonstrations*, pages 31–36, Hong Kong, China. Association for Computational Linguistics.
- Yanda Chen, Md Arafat Sultan, and Vittorio Castelli. 2020. [Improved synthetic training for reading comprehension](#).
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. [BoolQ: Exploring the surprising difficulty of natural yes/no questions](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2924–2936, Minneapolis, Minnesota. Association for Computational Linguistics.
- Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. 2020. [TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages](#). *Transactions of the Association for Computational Linguistics*, 8:454–470.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 8440–8451, Online. Association for Computational Linguistics.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 4171–4186, Minneapolis, Minnesota. Association for Computational Linguistics.
- Anthony Ferritto, Lin Pan, Rishav Chakravarti, Salim Roukos, Radu Florian, J. William Murdock, and Avi Sil. 2020a. [ARES: A reading comprehension ensembling service](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 31–37, Online. Association for Computational Linguistics.
- Anthony Ferritto, Sara Rosenthal, Mihaela Bornea, Kazi Hasan, Rishav Chakravarti, Salim Roukos, Radu Florian, and Avi Sil. 2020b. [A multilingual reading comprehension system for more than 100 languages](#). In *Proceedings of the 28th International Conference on Computational Linguistics: System Demonstrations*, pages 41–47, Barcelona, Spain (Online). International Committee on Computational Linguistics (ICCL).
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin De Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019a. [Parameter-efficient transfer learning for NLP](#). In *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pages 2790–2799. PMLR.
- Neil Houlsby, Andrei Giurgiu, Stanislaw Jastrzebski, Bruna Morrone, Quentin de Laroussilhe, Andrea Gesmundo, Mona Attariyan, and Sylvain Gelly. 2019b. [Parameter-efficient transfer learning for nlp](#). In *ICML*.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Matthew Kelcey, Jacob Devlin, Kenton Lee, Kristina N. Toutanova, Llion Jones, Ming-Wei Chang, Andrew Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: a benchmark for question answering research](#). *Transactions of the Association of Computational Linguistics*.
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. [MS MARCO: A human generated machine reading comprehension dataset](#). In *CoCo@NIPS*.
- Jonas Pfeiffer, Aishwarya Kamath, Andreas Rücklé, Kyunghyun Cho, and Iryna Gurevych. 2021. [AdapterFusion: Non-destructive task composition for transfer learning](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 487–503, Online. Association for Computational Linguistics.
- Jonas Pfeiffer, Andreas Rücklé, Clifton Poth, Aishwarya Kamath, Ivan Vulić, Sebastian Ruder, Kyunghyun Cho, and Iryna Gurevych. 2020a. [Adapterhub: A framework for adapting transformers](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP 2020): Systems Demonstrations*, pages 46–54, Online. Association for Computational Linguistics.

- Jonas Pfeiffer, Ivan Vulić, Iryna Gurevych, and Sebastian Ruder. 2020b. [MAD-X: An Adapter-Based Framework for Multi-Task Cross-Lingual Transfer](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 7654–7673, Online. Association for Computational Linguistics.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas. Association for Computational Linguistics.
- Sara Rosenthal, Mihaela Bornea, Avirup Sil, Radu Florian, and Scott McCarley. 2021. Do answers to boolean questions need explanations? yes. *arXiv preprint arXiv:2112.07772*.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. [Transformers: State-of-the-art natural language processing](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45, Online. Association for Computational Linguistics.
- Peilin Yang, Hui Fang, and Jimmy Lin. 2017. [Anserini: Enabling the use of lucene for information retrieval research](#). SIGIR. ACM.
- Wei Yang, Yuqing Xie, Aileen Lin, Xingyu Li, Luchen Tan, Kun Xiong, Ming Li, and Jimmy Lin. 2019. [End-to-end open-domain question answering with bertserini](#).
- Hang Zhang, Yeyun Gong, Yelong Shen, Weisheng Li, Jiancheng Lv, Nan Duan, and Weizhu Chen. 2021a. Poolingformer: Long document modeling with pooling attention. *arXiv preprint arXiv:2105.04371*.
- Minhao Zhang, Ruoyu Zhang, Lei Zou, Yinnian Lin, and Sen Hu. 2021b. [NAMER: A node-based multitasking framework for multi-hop knowledge base question answering](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies: Demonstrations*, pages 18–25, Online. Association for Computational Linguistics.
- Tiancheng Zhao and Kyusong Lee. 2020. [Talk to papers: Bringing neural question answering to academic search](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 30–36, Online. Association for Computational Linguistics.
- Bo Zheng, Haoyang Wen, Yaobo Liang, Nan Duan, Wanxiang Che, Daxin Jiang, Ming Zhou, and Ting Liu. 2020. [Document modeling with graph attention networks for multi-grained machine reading comprehension](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 6708–6718, Online. Association for Computational Linguistics.