

# Bridging the Gap Between Indexing and Retrieval for Differentiable Search Index with Query Generation

Shengyao Zhuang<sup>12\*</sup>, Houxing Ren<sup>1</sup>, Linjun Shou<sup>1</sup>, Jian Pei<sup>3</sup>, Ming Gong<sup>1</sup>,  
Guido Zuccon<sup>2</sup>, and Daxin Jiang<sup>1 †</sup>

<sup>1</sup> Microsoft STCA, <sup>2</sup> The University of Queensland

<sup>3</sup> School of Computing Science, Simon Fraser University

<sup>1</sup> {v-szhuang, v-houxingren, lisho, migon, djiang}@microsoft.com

<sup>2</sup> g.zuccon@uq.edu.au, <sup>3</sup> jpei@cs.sfu.ca

## Abstract

The Differentiable Search Index (DSI) is a new, emerging paradigm for information retrieval. Unlike traditional retrieval architectures where index and retrieval are two different and separate components, DSI uses a single transformer model to perform both indexing and retrieval. In this paper, we identify and tackle an important issue of current DSI models: the data distribution mismatch that occurs between the DSI indexing and retrieval processes. Specifically, we argue that, at indexing, current DSI methods learn to build connections between long document texts and their identifiers, but then at retrieval, short query texts are provided to DSI models to perform the retrieval of the document identifiers. This problem is further exacerbated when using DSI for cross-lingual retrieval, where document text and query text are in different languages. To address this fundamental problem of current DSI models we propose a simple yet effective indexing framework for DSI called DSI-QG. In DSI-QG, documents are represented by a number of relevant queries generated by a query generation model at indexing time. This allows DSI models to connect a document identifier to a set of query texts when indexing, hence mitigating data distribution mismatches present between the indexing and the retrieval phases. Empirical results on popular mono-lingual and cross-lingual passage retrieval benchmark datasets show that DSI-QG significantly outperforms the original DSI model.

## 1 Introduction

Information retrieval (IR) systems aim to return a ranked list of relevant documents for a given user query. Most modern information retrieval systems are based on the index-then-retrieve pipeline where documents are first encoded and stored in

an inverted index (Zobel and Moffat, 2006; Formal et al., 2021; Gao et al., 2021; Lin and Ma, 2021; Zhuang and Zuccon, 2021b; Dai and Callan, 2020; Mallia et al., 2021) or a nearest neighbor search index (Chappell et al., 2015; Lin, 2022; Karpukhin et al., 2020; Xiong et al., 2020; Gao and Callan, 2022; Zhan et al., 2021; Lin et al., 2020; Khattab and Zaharia, 2020) and search results are then constructed based on a retrieval model that exploits the information in the index.

Recently, an alternative approach called Differentiable Search Index (DSI) (Tay et al., 2022) has been proposed. Instead of separating indexing and retrieval into two different components in an IR system, DSI aims to encode all information of the corpus and conduct retrieval with a single Transformer language model (Vaswani et al., 2017). To do so, in the indexing phase, DSI learns to build connections within its model parameters between document texts and their corresponding document identifiers (docids). Then, in the retrieval phase, the trained Transformer model takes as input a query text and directly outputs a potentially-relevant ranked docid with beam search. Compared to traditional IR pipelines, DSI learns an end-to-end search system in a unified manner, thus extremely simplifying the architecture of IR systems.

Despite the original DSI method being shown effective on the document retrieval task, in this paper we argue that there is a significant data distribution mismatch problem in the original DSI model. More specifically, in the indexing phase the DSI model is fed with long document texts as inputs, but in the retrieval phase the model only observes short query texts: thus the input data at index is considerably different from the input data at retrieval. It is well-known that pre-trained language models are not robust to data distribution drift between training (“indexing”) and inference (retrieval) (Li et al., 2020; Ma et al., 2020; Li et al., 2021; Wang et al., 2021; Zhuang and Zuccon, 2021a, 2022): thus the

Work done while at Microsoft STCA

† Corresponding author

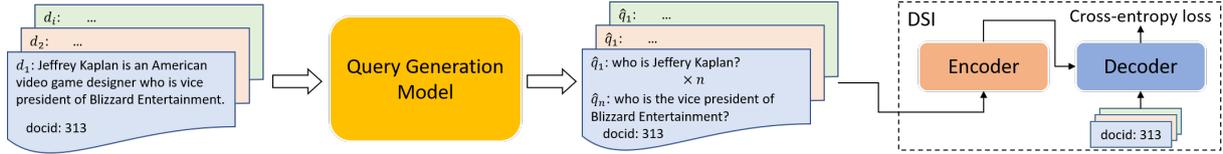


Figure 1: Overview of the proposed DSI-QG indexing framework.

original DSI model might be sub-optimal. Furthermore, we further demonstrate that the negative impact of the data distribution mismatch problem is even more considerable when adapting DSI to the cross-lingual retrieval setting, where documents and queries are from different languages.

Intuitively, DSI may be more effective for short document collections as shorter documents are similar to queries – at least in terms of text length. Thus, the data distribution mismatch problem may be lesser when documents are short in length. Indeed, in the original paper, although not explicitly recognising the data distribution mismatch problem, [Tay et al.](#) have shown that truncating long documents into shorter lengths displays higher effectiveness<sup>1</sup>. To further improve effectiveness, [Tay et al.](#) also tried adding labeled relevant queries into the indexing data so that the DSI model could learn to directly link a query to its relevant docid. However, for the majority of the documents in the collection where there is no labeled query provided, the model builds the docids connections with the original document texts only, as it is never exposed to the corresponding relevant queries: hence the data distribution mismatch problem still is present.

Based on our intuition of the data distribution mismatch problem that affects the DSI model, in this paper we propose DSI-QG, a simple yet effective indexing framework for DSI. The core idea of DSI-QG is that, instead of using the original long document texts for indexing, DSI-QG uses a set of queries that are relevant to the original document for indexing. Specifically, we employ a query generation model to generate a set of queries to represent each candidate document. By doing so, the same type of data is fed into the DSI in both the indexing and retrieval phases, hence avoiding the data distribution mismatch problem. Figure 1 illustrates our proposed DSI-QG indexing framework.

Our contributions can be summarised as follows:

- We identify a crucial problem that affects the original DSI model: the data distribution mismatch between indexing and retrieval.

- We show the poor effectiveness of DSI on the passage retrieval task caused by the data distribution mismatch problem, especially in the cross-lingual passage retrieval setting, which further emphasizes the gap between documents and queries.
- We propose the DSI-QG indexing framework that enables DSI to tackle the data distribution mismatch problem. Our framework uses query generation models (including a cross-lingual query generation model) to generate a set of relevant queries that are used to represent documents for indexing.
- We conduct extensive experiments on both mono-lingual and cross-lingual passage retrieval datasets and our results show that, with our proposed framework, the effectiveness of DSI is improved by over 240% and 790% on the mono-lingual and cross-lingual passage retrieval task respectively.

Code to reproduce the results presented in this paper can be found at <https://github.com/ArvinZhuang/DSI-QG>.

## 2 Preliminaries

In this section, we describe the details of the original DSI method. Then in the next section, we introduce our DSI-QG framework.

DSI performs index-then-retrieve with a single T5 transformer model ([Raffel et al., 2019](#)). During the indexing phase, the DSI model is fine-tuned to associate the text string of each document  $d_i$  in a collection  $D$  with its corresponding docid  $i$ . It utilizes a straightforward sequence-to-sequence (seq2seq) approach that takes the document texts as inputs and generates docids as outputs. The model is trained with the standard T5 training objective which uses the teacher forcing policy ([Williams and Zipser, 1989](#)) and the cross-entropy loss:

$$\mathcal{L}_{DSI}(\theta) = \sum_{d_i \in D} \log p(i|T5_{\theta}(d_i)), \quad (1)$$

the docid  $i$  could be represented by a single token (Atomic Docid) or a string of tokens (String Docid) ([Tay et al., 2022](#)). For the Atomic Docid,

<sup>1</sup>Section 4.4.5 in that paper ([Tay et al., 2022](#)).

each docid is a single token in the T5 vocabulary and it has been encoded as an embedding vector in the T5 embedding layer. Thus the task can be considered as an extreme multi-label classification problem (Liu et al., 2021) where the model learns a probability distribution over the docid embeddings. This setting poses a limit to DSI when used on a large-scale corpus, since the size of the T5 embedding layer cannot be too large. Hence, we do not consider this setting in our experiments. On the other hand, the String Docid strategy treats the docids as arbitrary strings so that they can be generated in a token-by-token manner with the original T5 vocabulary: thus there is no limitation for the corpus size. We note that the original DSI paper also proposed a Semantic String Docid which uses a hierarchical clustering algorithm to make similar documents have similar docids. Since clustering docids is not the aim of this paper and for simplicity, we only consider arbitrary String Docid, and leave extensions to the Semantic String Docid setting to future work.

At retrieval phase, given an input query  $q$ , a DSI model returns a docid by autoregressively generating the docid string with the fine-tuned T5 model. The probability of the generated docid  $i$  can be written as

$$p(i|q, \theta) = \prod_{m=1} p(i_m | T5_{\theta}(q, i_0, i_1, \dots, i_{m-1})), \quad (2)$$

where the  $i_m$  is the  $m$ -th token in the docid string. The ranked list of docids with high generation probabilities can be constructed via beam search.

It is important to note that a query usually is much shorter in length than a document. This means the length of the input data at indexing is very different from the length of input data at retrieval: thus the DSI model suffers from the data distribution mismatch problem occurring between training and inference data. To mitigate this problem, the DSI authors proposed the use of supervised DSI fine-tuning (Tay et al., 2022) which adds labeled relevant queries in the indexing data. Let  $Q_i$  be the set of labeled relevant queries to  $d_i$ . Then the training objective becomes:

$$\mathcal{L}_{DSI-S}(\theta) = \sum_{d_i \in D} \log p(i | T5_{\theta}(d_i)) + \sum_{q_j \in Q_i} \log p(i | T5_{\theta}(q_j)), \quad (3)$$

where  $q_j$  is a relevant query to  $d_i$  in  $Q_i$ . We note that having assessors labeling a relevant query for

all the documents in the collection requires a large annotation effort thus not all the documents can have a human-judged relevant query for supporting the indexing. In other words,  $Q_i$  could be an empty (or small) set. Hence the DSI model still suffers from the data distribution mismatch problem, even when the supervised DSI fine-tuning method is used.

### 3 DSI with Query Generation

As we discussed in the previous section, in the original DSI method there is a gap between the input data used at indexing and that used at retrieval. In order to bridge this gap and improve DSI’s effectiveness, we propose DSI-QG which uses a query generation model to generate a set of potentially-relevant queries to represent each candidate document for indexing. Specifically, we denote  $\hat{Q}_i$  as the set of queries generated by a query generation model  $QG$  given the document  $d_i$ :

$$\hat{Q}_i = QG(d_i). \quad (4)$$

All the generated queries  $\hat{q}$  in  $\hat{Q}_i$  share the same docid as  $d_i$ . We then replace the original documents that need to be indexed with their corresponding generated queries. Thus, during the indexing phase in DSI-QG, the modified DSI model is trained to associate the generated queries of each candidate document with its docid:

$$\mathcal{L}_{DSI-QG}(\theta) = \sum_{d_i \in D} \sum_{\hat{q}_j \in \hat{Q}_i} \log p(i | T5_{\theta}(\hat{q}_j)). \quad (5)$$

The retrieval phase of DSI-QG is the same as the original DSI model and takes a user query as input and uses beam search to construct a ranked docid list. Hence, in our DSI-QG framework, a DSI model only observes short queries as input data during both indexing and retrieval thus eliminating the data distribution mismatch problem that affects the original DSI model.

A key factor for the success of our proposed DSI-QG indexing framework is the QG model should generate high-quality and diverse relevant queries so that they can effectively represent a document. For this purpose, we train a T5 model with a similar seq2seq objective as Eq. (1) but the input is the document text and the output is the labeled relevant query  $q_j$ :

$$\mathcal{L}_{QG}(\theta) = \sum_{d_i \in D} \sum_{q_j \in Q_i} \log p(q_j | T5_{\theta}(d_i)). \quad (6)$$

After training a QG model, instead of using beam search, we use a random sampling strategy to generate a set of queries for each candidate document. This is because we find random sampling gives more creative and diverse queries than beam search, thus potentially covering more relevant information about the document. To avoid random sampling generating too much diversity thus resulting in irrelevant content and grammarly-incorrect queries, we adopt the top- $k$  sampling scheme (Fan et al., 2018) which only allows the  $k$  most likely next words to be sampled during the query generation and the probability mass of those  $k$  next words is redistributed. In our experiments, we set  $k = 10$ . Another factor is the number of generated queries  $n$  for each document: we discuss the impact of  $n$  in Section 5.2.

To generalize our DSI-QG framework to the cross-lingual IR setting, we also train a multi-lingual T5 model (Xue et al., 2021) to generate queries in different languages to represent a document. To achieve this, we use a prompt-based approach to control the generated query language. Specifically, we place the target language and the document text in the following template for both training and inference:

Generate [lang] question: [doc], (7)

where [lang] and [doc] is the placeholder for the target query language and the document text.

## 4 Experimental Settings

**Baselines.** We compare DSI-QG with the following baselines:

- BM25 (Robertson and Zaragoza, 2009): a classic sparse retrieval method based on the inverted index. We use the Pyserini (Lin et al., 2021) implementation of BM25 for this baseline.
- docTquery-t5 (Nogueira and Lin, 2019): a sparse retrieval method which also leverages query generation. It uses a T5 model to generate a set of queries and appends them to the original document. Then it uses an inverted index and BM25 to retrieve augmented documents. We also use the Pyserini implementation for this baseline.
- DPR (Karpukhin et al., 2020): a BERT-based dense passage retrieval method that is trained with a contrastive loss with hard negatives sampled from the top retrieved passages by BM25. DPR relays on nearest neighbor index search (Faiss implementation (Johnson et al.,

2019)) to retrieve the passages that have the closest embeddings to the query embedding. We train the DPR model with the Tevatron dense retriever training toolkit (Gao et al., 2022).

- DSI (Tay et al., 2022): The original DSI method that uses document texts as input for indexing. Since the original code has not currently been made available by the authors, we implement and train the the DSI model ourselves using the Huggingface transformers Python Library.

**Datasets and evaluation.** Following the original DSI paper, we conduct our experiments on subsets of publically available passage retrieval datasets, namely MS MARCO 100k (Nguyen et al., 2016) for the mono-lingual passage retrieval task and XORQA 100k (Asai et al., 2021) for the cross-lingual retrieval task. The full MS MARCO passage retrieval dataset has  $\approx 500k$  training query-passage pairs and 6980 dev query-passage pairs. We downsample the dataset by randomly sampling 93k passages in the training set and use all of the passages in the dev set to form our MS MARCO 100k subset. All the queries and passages in MS MARCO 100k are in English. For XORQA 100k, we use the gold paragraph data available in the original repository<sup>2</sup> which contains around 15k gold (annotated as relevant) passage-query pairs in the training set and 2k gold passage-query pairs in the dev set. Queries in both train and dev sets are in 7 typologically diverse languages<sup>3</sup> and passages are in English. Since the total number of passages in the XORQA training set and dev set is around 17k, we randomly sample 93k passages from a dump of the English Wikipedia passage corpus to form a 100k collection for testing our models.

Following the original DSI paper, for both datasets, we evaluate baselines and our models on the dev set with Hits@1 and Hits@10. This metric reports the proportion of the correct docid ranked in the top 1 and top 10 predictions.

**Implementation details.** There are two Transformer models in our DSI-QG framework, a query generation model and a DSI model. For the MS MARCO 100k dataset, we use an existing T5-based query generation model called docTquery (Nogueira and Lin, 2019) which is trained with the MS MARCO training set. For the DSI model, we use the standard pre-trained T5 model (Raffel et al., 2019) to initialize the

<sup>2</sup><https://github.com/AkariAsai/XORQA#gold-paragraph-data>

<sup>3</sup>They are Ar, Bn, Fi, Ja, Ko, Ru and Te.

Model	MS MARCO 100k		XORQA 100k	
	Hits@1	Hits@10	Hits@1	Hits@10
BM25	46.5	73.9	2.7	5.2
docTquery-t5	<b>68.5</b>	<b>92.7</b>	18.0	34.6
DPR	65.0	91.9	26.7	60.6
DSI-base	2.1	7.1	0.3	3.9
DSI-large	10.4	23.0	1.2	7.6
DSI-QG-base	59.2	81.1	25.3	57.0
DSI-QG-large	58.4	80.9	<b>35.9</b>	<b>67.8</b>

Table 1: Experimental results on MS MARCO 100k and XORQA 100k datasets. DocTquery and DSI-QG are using 10 generated queries for MS MARCO 100k and 70 generated queries for XORQA 100k (10 for each language).

model parameters. For XORQA 100k, we use the multi-lingual T5 model (Xue et al., 2021) to initialize both the query generation model and DSI model. For our trained query generation model on XORQA, we train the model on the training set with a batch size of 128 and a learning rate of  $1e^{-4}$  with Adam optimizer for 600 training steps, which is equivalent to about 6 epochs. The DSI models in our DSI-QG method are trained for a maximum of 1M steps with a batch size of 256 and a learning rate of  $5e^{-5}$  with 100k warmup-steps. Since the documents in DSI-QG are represented by generated short queries, we set the maximum length of the input data to 32 tokens for faster training and saving memory usage. For training the original DSI model, we use the training configuration suggested in the original paper (Tay et al., 2022). For the DPR model on MS MARCO, we use the training configuration from the original DPR work (Vaswani et al., 2017). And for DPR trained on XORQA, we follow the training configuration in the XORQA paper (Asai et al., 2021), which uses a multi-lingual BERT-base model as the backbone query and passage encoder. All Transformer models used in this paper are implemented with Huggingface transformers (Wolf et al., 2020) and training is conducted on 8 Tesla A100 GPUs.

## 5 Results

### 5.1 Mono-lingual and Cross-lingual effectiveness

In Table 1, we report the Hits scores of baselines and our DSI-QG methods. Recall that MS MARCO 100k is a mono-lingual retrieval dataset and XORQA 100k is a cross-lingual retrieval dataset. For docTquery and DSI-QG, we generate 10 queries for each document in MS MARCO

100k and 70 queries for XORQA 100k (10 for each language). We also initialize DSI and DSI-QG models with T5/mT5-base (200M/580M) and T5/mT5-large (800M/1.2B) to explore the impact of different model sizes.

Firstly, our results show that the original DSI model performs much worse on XORQA 100k than that of MS MARCO 100k. This is likely due to the data distribution mismatch problem being amplified by the language gap in the cross-lingual passage retrieval task. Even on the mono-lingual retrieval task, though, DSI performs much worse than other baselines. We note that our results contradict the results on the original DSI paper where DSI outperformed BM25 on the Natural Question dataset (Kwiatkowski et al., 2019). We think this may be because the document and queries in the NQ dataset are more similar to each other than in the MS MARCO dataset, thus the gap between indexing and retrieval input data is smaller.

Secondly, our DSI-QG outperforms the original DSI model by a large margin on both datasets. In particular, DSI-QG achieves competitive effectiveness against other baselines on MS MARCO 100k and the best effectiveness on XORQA 100k. These results suggest that the query generation employed in DSI-QG can successfully address DSI’s data distribution mismatch problem.

Finally, our results also show that model size has a large impact on the original DSI model. On both datasets we find that the effectiveness of DSI decreases dramatically with a smaller base model. In contrast, DSI-QG-base still works well on XORQA 100k and even slightly better on MS MARCO 100k. These results suggest that, with our proposed DSI-QG framework, a large pre-trained T5 model is not necessarily needed, thus DSI-QG enjoys a faster retrieval inference and a lower GPU memory requirement.

### 5.2 Impact of number of generated queries

In this section, we discuss how the number of generated queries  $n$  impacts the effectiveness of DSI-QG and the convergence of its training. Figure 2 reports the changes in Hits@10 on MS MARCO 100k as the number of generated queries increases. For this experiment, we set  $n = 1, 5, 10, 15, 20$ . When  $n = 1$ , DSI-QG can already match the Hits@10 of the original DSI model (reported in Table 1). Effectiveness dramatically increases when  $n \geq 5$  and Hits@10 keeps increasing with the increase of the

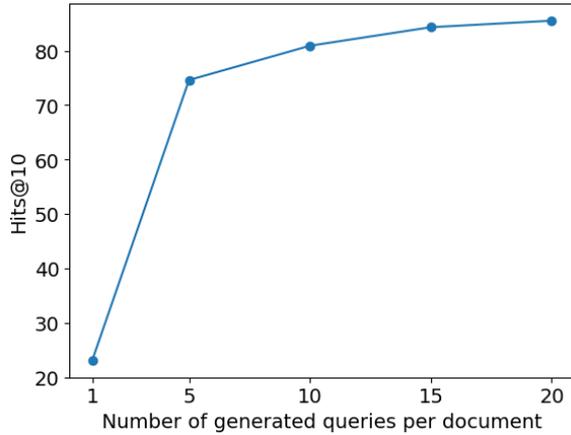


Figure 2: Hits@10 as a function of the number of generated queries ( $n$ ). For this plot, we use DSI-QG-large and MS MARCO 100k.

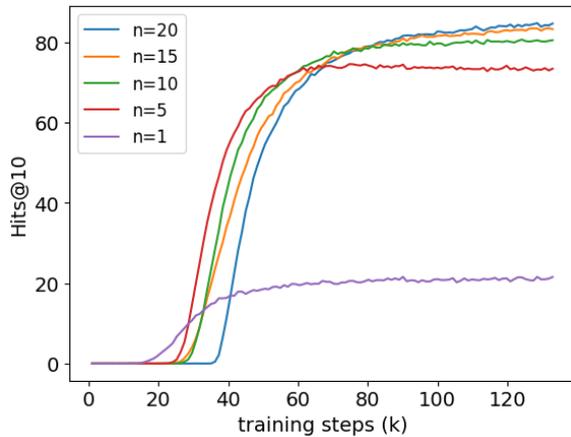


Figure 3: Learning curves of DSI-QG with different number of generated queries on MS MARCO 100k.

value of  $n$ . This result aligns with recent findings in sparse neural retrieval where query generation is adapted as a document expansion method (Lin and Ma, 2021; Mallia et al., 2021; Zhuang and Zuccon, 2021b): a larger number of generated queries can capture more information about the original document, thus providing a better representation of a document.

We also report the learning curves obtained in correspondence to each  $n$  value during training, see Figure 3. The results also confirm that larger  $n$  values converge at higher Hits@10 values; however, longer training periods are required for higher settings with larger  $n$  values to converge.

## 6 Conclusion

In this paper, we show that the current DSI model suffers from the problem of data distribution mis-

match that occurs between the indexing and the retrieval phases. This problem impacts negatively on the effectiveness of DSI on the mono-lingual passage retrieval task and makes DSI of impractical use on the cross-lingual passage retrieval task. To address this fundamental issue, we propose the DSI-QG indexing framework which adopts a query generation model to generate a set of relevant queries and thus represent each to-be-indexed document. Our experimental results on both mono-lingual and cross-lingual passage retrieval tasks show that our DSI-QG significantly outperforms the original DSI model.

## References

- Akari Asai, Jungo Kasai, Jonathan H Clark, Kenton Lee, Eunsol Choi, and Hannaneh Hajishirzi. 2021. Xor qa: Cross-lingual open-retrieval question answering. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 547–564.
- Timothy Chappell, Shlomo Geva, and Guido Zuccon. 2015. Approximate nearest-neighbour search with inverted signature slice lists. In *European conference on information retrieval*, pages 147–158. Springer.
- Zhuyun Dai and Jamie Callan. 2020. Context-aware term weighting for first stage passage retrieval. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 1533–1536.
- Angela Fan, Mike Lewis, and Yann Dauphin. 2018. Hierarchical neural story generation. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 889–898.
- Thibault Formal, Benjamin Piwowarski, and Stéphane Clinchant. 2021. Splade: Sparse lexical and expansion model for first stage ranking. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, page 2288–2292.
- Luyu Gao and Jamie Callan. 2022. Unsupervised corpus aware language model pre-training for dense passage retrieval. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2843–2853.
- Luyu Gao, Zhuyun Dai, and Jamie Callan. 2021. COIL: Revisit exact lexical match in information retrieval with contextualized inverted list. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational*

- Linguistics: Human Language Technologies*, pages 3030–3042.
- Luyu Gao, Xueguang Ma, Jimmy J. Lin, and Jamie Callan. 2022. Tevatron: An efficient and flexible toolkit for dense retrieval. *ArXiv*, abs/2203.05765.
- Jeff Johnson, Matthijs Douze, and Hervé Jégou. 2019. Billion-scale similarity search with GPUs. *IEEE Transactions on Big Data*, 7(3):535–547.
- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. Dense passage retrieval for open-domain question answering. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781.
- Omar Khattab and Matei Zaharia. 2020. Colbert: Efficient and effective passage search via contextualized late interaction over bert. In *Proceedings of the 43rd International ACM SIGIR conference on research and development in Information Retrieval*, pages 39–48.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. 2019. Natural questions: A benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:452–466.
- Linyang Li, Ruotian Ma, Qipeng Guo, Xiangyang Xue, and Xipeng Qiu. 2020. Bert-attack: Adversarial attack against bert using bert. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6193–6202.
- Zongyi Li, Jianhan Xu, Jiehang Zeng, Linyang Li, Xiaoqing Zheng, Qi Zhang, Kai-Wei Chang, and Cho-Jui Hsieh. 2021. Searching for an effective defender: Benchmarking defense against adversarial word substitution. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 3137–3147.
- Jimmy Lin. 2022. A proposed conceptual framework for a representational approach to information retrieval. In *ACM SIGIR Forum*, volume 55, pages 1–29. ACM New York, NY, USA.
- Jimmy Lin and Xueguang Ma. 2021. A few brief notes on deepimpact, coil, and a conceptual framework for information retrieval techniques. *arXiv preprint arXiv:2106.14807*.
- Jimmy Lin, Xueguang Ma, Sheng-Chieh Lin, Jheng-Hong Yang, Ronak Pradeep, and Rodrigo Nogueira. 2021. Pyserini: A Python toolkit for reproducible information retrieval research with sparse and dense representations. In *Proceedings of the 44th Annual International ACM SIGIR Conference on Research and Development in Information Retrieval (SIGIR 2021)*, pages 2356–2362.
- Sheng-Chieh Lin, Jheng-Hong Yang, and Jimmy Lin. 2020. Distilling dense representations for ranking using tightly-coupled teachers. *arXiv preprint arXiv:2010.11386*.
- Weiwei Liu, Haobo Wang, Xiaobo Shen, and Ivor Tsang. 2021. The emerging trends of multi-label learning. *IEEE transactions on pattern analysis and machine intelligence*.
- Wentao Ma, Yiming Cui, Chenglei Si, Ting Liu, Shijin Wang, and Guoping Hu. 2020. Charbert: Character-aware pre-trained language model. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 39–50.
- Antonio Mallia, Omar Khattab, Torsten Suel, and Nicola Tonello. 2021. Learning passage impacts for inverted indexes. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 1723–1727.
- Tri Nguyen, Mir Rosenberg, Xia Song, Jianfeng Gao, Saurabh Tiwary, Rangan Majumder, and Li Deng. 2016. Ms marco: A human generated machine reading comprehension dataset. In *CoCo@ NIPs*.
- Rodrigo Nogueira and Jimmy Lin. 2019. From doc2query to docTTTTTquery.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2019. Exploring the limits of transfer learning with a unified text-to-text transformer. *arXiv preprint arXiv:1910.10683*.
- Stephen E. Robertson and Hugo Zaragoza. 2009. The probabilistic relevance framework: BM25 and beyond. *Found. Trends Inf. Retr.*, 3(4):333–389.
- Yi Tay, Vinh Q. Tran, Mostafa Dehghani, Jianmo Ni, Dara Bahri, Harsh Mehta, Zhen Qin, Kai Hui, Zhe Zhao, Jai Prakash Gupta, Tal Schuster, William W. Cohen, and Donald Metzler. 2022. **Transformer memory as a differentiable search index**. *CoRR*, abs/2202.06991.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Proceedings of the 31st International Conference on Neural Information Processing Systems*, pages 6000–6010.
- Xiao Wang, Qin Liu, Tao Gui, Qi Zhang, et al. 2021. Textflint: Unified multilingual robustness evaluation toolkit for natural language processing. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing: System Demonstrations*, pages 347–355.
- Ronald J Williams and David Zipser. 1989. A learning algorithm for continually running fully recurrent neural networks. *Neural computation*, 1(2):270–280.

Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. 2020. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pages 38–45.

Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N Bennett, Junaid Ahmed, and Arnold Overwijk. 2020. Approximate nearest neighbor negative contrastive learning for dense text retrieval. In *International Conference on Learning Representations*.

Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya Barua, and Colin Raffel. 2021. mt5: A massively multilingual pre-trained text-to-text transformer. In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 483–498.

Jingtao Zhan, Jiaxin Mao, Yiqun Liu, Jiafeng Guo, Min Zhang, and Shaoping Ma. 2021. Optimizing dense retrieval model training with hard negatives. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 1503–1512.

Shengyao Zhuang and Guido Zuccon. 2021a. Dealing with typos for bert-based passage retrieval and ranking. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 2836–2842.

Shengyao Zhuang and Guido Zuccon. 2021b. Fast passage re-ranking with contextualized exact term matching and efficient passage expansion. *arXiv preprint arXiv:2108.08513*.

Shengyao Zhuang and Guido Zuccon. 2022. Characterbert and self-teaching for improving the robustness of dense retrievers on queries with typos. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*.

Justin Zobel and Alistair Moffat. 2006. Inverted files for text search engines. *ACM computing surveys (CSUR)*, 38(2):6–es.