

Questions Are All You Need to Train a Dense Passage Retriever

Devendra Singh Sachan^{1,2}, Mike Lewis³, Dani Yogatama⁴,
Luke Zettlemoyer^{3,5}, Joelle Pineau^{1,2,3}, Manzil Zaheer⁴

¹McGill University; ²Mila - Quebec AI Institute

³Meta AI; ⁴Google DeepMind

⁵University of Washington

sachande@mila.quebec, {dyogatama, manzilzaheer}@google.com
{mikelewis, lsz, jpineau}@fb.com

Abstract

We introduce ART, a new corpus-level autoencoding approach for training dense retrieval models that does not require any labeled training data. Dense retrieval is a central challenge for open-domain tasks, such as Open QA, where state-of-the-art methods typically require large supervised datasets with custom hard-negative mining and denoising of positive examples. ART, in contrast, only requires access to unpaired inputs and outputs (e.g. questions and potential answer documents). It uses a new document-retrieval autoencoding scheme, where (1) an input question is used to retrieve a set of evidence documents, and (2) the documents are then used to compute the probability of reconstructing the original question. Training for retrieval based on question reconstruction enables effective unsupervised learning of both document and question encoders, which can be later incorporated into complete Open QA systems without any further finetuning. Extensive experiments demonstrate that ART obtains state-of-the-art results on multiple QA retrieval benchmarks with only generic initialization from a pre-trained language model, removing the need for labeled data and task-specific losses.¹

1 Introduction

Dense document retrieval methods (Karpukhin et al., 2020; Xiong et al., 2021), initialized with encoders such as BERT (Devlin et al., 2019) and trained using supervised contrastive losses (Oord et al., 2018), have surpassed the performance achieved by previously popular keyword-based approaches like BM25 (Robertson and Zaragoza, 2009). Such retrievers are core components in models for open-domain tasks, such as Open QA, where state-of-the-art methods typically require large supervised datasets with custom hard-

negative mining and denoising of positive examples. In this paper, we introduce the first unsupervised method, based on a new corpus-level autoencoding approach, that can match or surpass strong supervised performance levels with no labeled training data or task-specific losses.

We propose ART: *Autoencoding-based Retriever Training* which only assumes access to sets of unpaired questions and documents. Given an input question, ART first retrieves a small set of possible evidence documents. It then *reconstructs the original question* by attending to these documents (see Figure 1 for an overview). The key idea in ART is to consider the retrieved documents as a noisy representation of the original question and question reconstruction probability as a way of denoising that provides *soft-labels* for how likely each document is to have been the correct result.

To bootstrap the training of a strong model, it is important to both have a strong initial retrieval model and to be able to compute reliable initial estimates of question reconstruction probability when conditioned on a (retrieved) document. Although document representations from BERT-style models are known to be reasonable retrieval baselines, it is less clear how to do zero-shot question generation. We use a generative pre-trained language model (PLM) and prompt it with the document as input to generate the question tokens using teacher-forcing. As finetuning of the question-generation PLM is not needed, only the retrieval model, ART can use large PLMs and obtain accurate soft-label estimates of which documents are likely to be the highest quality.

The retriever is trained to penalize the divergence of a document likelihood from its soft-label score. For example, if the question is "Where is the bowling hall of fame located?" as shown in Figure 1, then the training process will boost the retrieval like-

¹Our code and model checkpoints will be available at: <https://github.com/DevSinghSachan/art>

likelihood of the document "Bowling Hall of Fame is located in Arlington," as it is relevant and would lead to a higher question reconstruction likelihood, while the likelihood of the document "Hall of Fame is a song by ..." would be penalized as it is irrelevant. In this manner, the training process encourages correct retrieval results and vice-versa, leading to an iterative improvement in document retrieval.

Comprehensive experiments on five benchmark QA datasets demonstrate the usefulness of our proposed training approach. By simply using questions from the training set, ART outperforms models like DPR by an average of 5 points absolute in top-20 and 4 points absolute in top-100 accuracy. We also train using all the questions contained in the NaturalQuestions (NQ) dataset (Kwiatkowski et al., 2019) and find that even with a mix of answerable and unanswerable questions, ART achieves strong zero-shot generalization on out-of-distribution datasets. Our analysis further reveals that ART is highly sample efficient, outperforming BM25 and DPR with just 100 and 1000 questions, respectively, on the NQ-Open dataset, and that scaling up to larger retriever models consistently improves performance.

2 Method

2.1 Problem Definition

We focus on open-domain retrieval, where given a question q , the task is to select a small set of matching documents (i.e. 20 or 100) from a large collection of evidence documents $\mathcal{D} = \{\mathbf{d}_1, \dots, \mathbf{d}_m\}$. Our goal is to train a retriever in a *zero-shot manner*, i.e., without using question-passage pairs, such that it retrieves relevant documents to answer the question. Our proposed approach consists of two core modeling components (§2.2, §2.3) and a novel training method (§2.4).

2.2 Dual Encoder Retriever

For the retriever, we use the dual-encoder model (Bromley et al., 1994) which consists of two encoders, where

- one encoder computes the question embedding $f_q(\mathbf{q}; \Phi_q) : \mathcal{X} \mapsto \mathbb{R}^d$, and
- the other encoder computes the document embedding $f_d(\mathbf{d}; \Phi_d) : \mathcal{X} \mapsto \mathbb{R}^d$.

Here, $\mathcal{X} = \mathbb{V}^n$ denotes the universal set of text sequences, \mathbb{V} denotes the vocabulary consisting of discrete tokens, and \mathbb{R}^d denotes the (latent) embedding space. We assume that both the question and document embeddings lie in the same latent space. The *retrieval score* for a question-document pair (\mathbf{q}, \mathbf{d}) is then defined as the inner product between their respective embeddings,

$$\text{score}(\mathbf{q}, \mathbf{d}_i; \Phi) = f_q(\mathbf{q}; \Phi_q) \cdot f_d(\mathbf{d}_i; \Phi_d), \forall \mathbf{d}_i \in \mathcal{D} \quad (1)$$

where $\Phi = [\Phi_q, \Phi_d]$ denotes the retriever parameters. We select the top- K documents with maximum inner product scores and denote them as $\mathcal{Z} = \{z_1, \dots, z_K\}$.²

We use the transformer network (Vaswani et al., 2017) with BERT tokenization (Devlin et al., 2019) to model both the encoders. To obtain the question or document embedding, we do a forward pass through the transformer and select the last layer hidden state corresponding to the [CLS] token. As the input document representation, we use both the document title and text separated by [SEP] token.

2.3 Zero-Shot Cross-Attention Scorer

We obtain an estimate of the *relevance score* for a question-(retrieved) document pair (\mathbf{q}, \mathbf{z}) by using a pre-trained language model (PLM). In order to do this in a zero-shot manner, we use a large generative PLM to compute the likelihood score of a document conditioned on the question $p(\mathbf{z} | \mathbf{q})$.

The quantity $p(\mathbf{z} | \mathbf{q})$ can be better approximated by the autoregressive generation of question tokens conditioned on the document and teacher-forcing (Sachan et al., 2022). More formally, this can be written as

$$\log p(\mathbf{z} | \mathbf{q}; \Theta) = \log p(\mathbf{q} | \mathbf{z}; \Theta) + \log p(\mathbf{z}) + c \quad (2a)$$

$$\propto \frac{1}{|\mathbf{q}|} \sum_t \log p(q_t | \mathbf{q}_{<t}, \mathbf{z}; \Theta), \quad (2b)$$

where Θ denotes the parameters of the PLM, c is a constant independent of the document \mathbf{z} , and $|\mathbf{q}|$ denotes the number of question tokens. Here, Eq. 2a follows from a simple application of Bayes'

²As the selection operation requires performing inner-product with millions of document embeddings, this can be efficiently performed on accelerators such as GPUs.

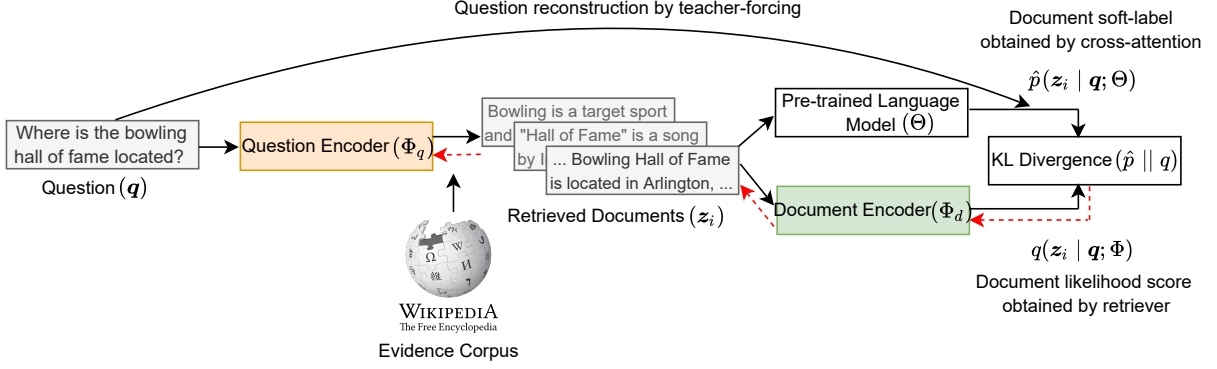


Figure 1: ART maximizes the retrieved document likelihood computed from the dense retriever by considering the language model question reconstruction score conditioned on the document as a *soft-label*. Colored blocks indicate trainable parameters. Red arrows show gradient flow during backpropagation.

rule to $p(z | q)$ and assuming that the document prior $p(z)$ in Eq. 2b is uniform for all $z \in \mathcal{Z}$.

We hypothesize that calculating the relevance score using Eq. 2b would be accurate because it requires performing deep cross-attention involving all the question and document tokens. In a large PLM, the cross-attention step is highly expressive, and in combination with teacher-forcing, requires the model to explain every token in the question resulting in a better estimation.

As the input document representation, we concatenate the document title and its text. In order to prompt the PLM for question generation, we follow (Sachan et al., 2022) and append a simple natural language instruction "Please write a question based on this passage." to the document text.

2.4 Training Algorithm

For training the model, our only assumption is that a collection of questions (\mathcal{T}) and evidence documents (\mathcal{D}) are provided as input. During training, the weights of the retriever are updated while the PLM is not finetuned, *i.e.*, it is used in inference mode. Our training algorithm consists of five core steps. The first four steps are performed at every training iteration while the last step is performed every few hundred iterations. Figure 1 presents an illustration of our approach.

Step 1: Top- K Document Retrieval For fast retrieval, we pre-compute the evidence document embedding using the initial retriever parameters ($\hat{\Phi}_d$). Given a question q , we compute its embedding using the current question encoder parameters (Φ_q) and then retrieve the top- K documents (\mathcal{Z}) according to Eq. 1. We then embed these top- K documents using the current document en-

coder parameters (Φ_d) and compute *fresh* retriever scores as,

$$\text{score}(q, z_i) = f_q(q; \Phi_q) \cdot f_d(z_i; \Phi_d), \forall z_i \in \mathcal{Z}.$$

Step 2: Retriever Likelihood Calculation

Computing the exact likelihood of the document conditioned on the question requires normalizing over all the evidence documents

$$p(z_i | q, \mathcal{D}; \Phi) = \frac{\exp(\text{score}(q, z_i)/\tau)}{\sum_{j=1}^m \exp(\text{score}(q, d_j)/\tau)},$$

where τ is a temperature hyperparameter. Computing this term is intractable, as this would require re-embedding all the evidence documents using Φ_d . Hence, we define a new distribution to approximate the likelihood of z_i as

$$q(z_i | q, \mathcal{Z}; \Phi) = \frac{\exp(\text{score}(q, z_i)/\tau)}{\sum_{j=1}^K \exp(\text{score}(q, z_j)/\tau)}, \quad (3)$$

which we also refer to as the *student distribution*. We assume that documents beyond the top- K contribute a very small probability mass, so we only sum over all the retrieved documents \mathcal{Z} in the denominator. While this approximation leads to a biased estimate of retrieved document likelihood, it works well in practice. Computing Eq. 3 is tractable as it requires embedding and backpropagating through a much smaller set of documents.

Step 3: PLM Relevance Score Estimation We compute the relevance score $\log p(z_i | q)$ of all the documents in \mathcal{Z} using a large PLM (Θ). This requires scoring the question tokens using teacher-forcing conditioned on a document as described

in §2.3. We then define a *teacher distribution* by applying softmax to the relevance scores

$$\hat{p}(z_i | \mathbf{q}, \mathcal{Z}) = \frac{\exp(\log p(z_i | \mathbf{q}; \Theta))}{\sum_{j=1}^K \exp(\log p(z_j | \mathbf{q}; \Theta))}.$$

Step 4: Loss Calculation and Optimization

We train the retriever (Φ) by minimizing the KL divergence loss between the teacher distribution (obtained by PLM) and the student distribution (computed by retriever).

$$\mathcal{L}(\Phi) = \frac{1}{|\mathcal{T}|} \sum_{q \in \mathcal{T}} \mathbb{KL}(\tilde{p}(z_i | \mathbf{q}, \mathcal{Z}) || q(z_i | \mathbf{q}, \mathcal{Z}; \Phi))$$

Intuitively, optimizing the KL divergence pushes the document likelihood scores of the retriever to match the document relevance scores from PLM by considering the relevance scores as soft-labels.

Step 5: Updating Evidence Embeddings During training, we update the parameters of both the question encoder (Φ_q) and document encoder (Φ_d). Due to this, the pre-computed evidence embeddings that was computed using initial retriever parameters ($\hat{\Phi}_d$) becomes stale, which may affect top- K document retrieval. To prevent staleness, we re-compute the evidence document embeddings using current document encoder parameters (Φ_d) after every 500 training steps.

2.5 ART as an Autoencoder

Since our encoder takes as input question \mathbf{q} and the PLM scores (or reconstructs) the same question when computing the relevance score, we can consider our training algorithm as an autoencoder with a retrieved document as the latent variable.

In the generative process, we start with an observed variable \mathcal{D} (the collection of evidence documents), which is the support set for our latent variable. Given an input \mathbf{q} , we generate an index i and retrieve the document z_i . This index generation and retrieval process is modeled by our dual encoder architecture. Given z_i , we decode it back into the question using our PLM.

Recall that our decoder (the PLM) is frozen and its parameters are not updated. However, the signal from the decoder output is used to train parameters of the dual encoder such that the log-likelihood of reconstructing the question \mathbf{q} is maximized. In practice, this improves the dual encoder to select the best document for a given question, since the only way to maximize the objective is by choosing the most relevant z_i given the input \mathbf{q} .

Dataset	# Train Questions	Dev	Test
Question-Answering Datasets			
WebQ	3,417	361	2,032
NQ-Open	79,168	8,757	3,610
SQuAD-Open	78,713	8,886	10,570
TriviaQA	78,785	8,837	11,313
Entity Questions	–	22,068	22,075
All Questions Datasets			
NQ-Full	307,373	–	–
MS MARCO	502,939	–	–

Table 1: Dataset statistics. During the training process, ART only uses the questions while evaluation is performed over the canonical development and test sets.

3 Experimental Setup

In this section, we describe the datasets, evaluation protocol, implementation details, and baseline methods for our passage retrieval experiments.³

3.1 Datasets and Evaluation

Evidence Passages The evidence corpus includes the preprocessed English Wikipedia dump from December 2018 (Karpukhin et al., 2020). Following convention, we split an article into non-overlapping segments containing 100 words each resulting in over 21 million passages. The same evidence is used for both training and evaluation.

Question-Answering Datasets Following previous work, we use the open-retrieval version of Natural Questions (NQ-Open; Kwiatkowski et al., 2019), TriviaQA (Joshi et al., 2017), SQuAD-1.0 (SQuAD-Open; Rajpurkar et al., 2016), WebQuestions (WebQ; Berant et al., 2013), and EntityQuestions (EQ; Sciavolino et al., 2021) datasets. Table 1 lists their training, development, and test set sizes.

All Questions Datasets For our transfer learning experiments, we use all the questions from Natural Questions (henceforth referred to as NQ-Full) and MS MARCO passage ranking (Bajaj et al., 2016) datasets. Table 1 lists the number of questions. The questions in NQ-Full are information-seeking, as they were asked by real users. Its size is four times that of NQ-Open. NQ-Full consists of questions having just long-form of answers such as paragraphs, all the questions in

³In this paper, we use the terms documents and passages interchangeably. In our experiments, we use short passages as the retrieval unit.

NQ-Open (which have both long-form and short-form answers), questions having yes/no answers, and questions that do not contain the answer or are unanswerable. For MS MARCO, we use its provided passage collection (around 8.8 million passages in total) as the evidence corpus.

Evaluation To evaluate retriever performance, we report the conventional top- K accuracy metric. It is the fraction of questions for which at least one passage among the top- K retrieved passages contains a span of words that matches human-annotated answer(s) to the question.

3.2 Implementation Details

Model Sizes We use BERT base configuration (Devlin et al., 2019) for the retriever, which consists of 12 layers, 12 attention heads, and 768 embedding dimensions, leading to around 220M trainable parameters. For the teacher PLM, we use T5-XL configuration (Raffel et al., 2020) consisting of 24 layers, 32 attention heads, and 2048 embedding dimensions, leading to 3B parameters.

Model Initialization We initialize the retriever with unsupervised masked salient spans (MSS) pre-training (Sachan et al., 2021a) as it provides an improved zero-shot retrieval over BERT pre-training. We initialize the teacher PLM with the instruction-tuned T0-3B language model (Sanh et al., 2022), which has been shown to be an effective zero-shot re-ranker for information retrieval tasks (Sachan et al., 2022).⁴

Compute Hardware We perform training on instances containing 8 or 16 A100 GPUs, each containing 40 GB RAM.

Passage Retrieval To perform fast top- K passage retrieval at every training step, we pre-compute the embeddings of all the evidence passages. Computing embeddings of 21M passages takes roughly 10 minutes on 16 GPUs. The total size of these embeddings is around 30 GB (768-dimensional vectors in FP16 format). For scalable retrieval, we shard these embeddings across all the GPUs and perform exact maximum inner product search using distributed matrix multiplication.

Training Details For all the datasets except WebQ, we perform training for 10 epochs using

Adam with a batch size of 64, 32 retrieved passages, dropout value of 0.1, peak learning rate of 2×10^{-5} with warmup and linear scheduling. Due to the smaller size of WebQ, we train for 20 epochs with a batch size of 16. We save the retriever checkpoint every 500 steps and perform model selection by evaluating it on the development set. We use mixed precision training to train the retriever and performed inference over T0-3B using bfloat16 format.

3.3 Baselines

We compare ART to both unsupervised and supervised models. Unsupervised models train a single retriever using unlabeled text corpus from the Internet while supervised models train a separate retriever for each dataset.

Unsupervised Models These include the popular BM25 algorithm (Robertson and Zaragoza, 2009) that is based on the sparse bag-of-words representation of text. Dense models typically use Wikipedia paragraphs to create (pseudo-) query and context pairs to perform contrastive training of the retriever. These differ in how the negative examples are obtained during contrastive training: they can be from the same batch (ICT; Lee et al., 2019; Sachan et al., 2021a), or contexts passages from previous batches (Contriever; Izacard et al., 2021), or by using other passages in the same article (Spider; Ram et al., 2021). Context passages can also be sampled from articles connected via hyperlinks (HLT; Zhou et al., 2022).

Supervised Models These consists of approaches that use questions and positive passages to perform contrastive training of the retriever. To obtain improved performance an additional set of hard-negative passages is often used (DPR; Karpukhin et al., 2020), iterative mining of negative contexts is done using model weights (ANCE; Xiong et al., 2021), or the retriever is first initialized with ICT or MSS pre-training followed by DPR-style finetuning (ICT-DPR / MSS-DPR; Sachan et al., 2021a). Supervision can also be infused from the annotated answers to a question by jointly training the PLM and the retriever (EMDR²; Sachan et al., 2021b).

⁴We did not consider T0+ or T0++ models because their training set overlapped with datasets used in this work.

Retriever	SQuAD-Open		TriviaQA		NQ-Open		WebQ		Average	
	Top-20	Top-100	Top-20	Top-100	Top-20	Top-100	Top-20	Top-100	Top-20	Top-100
<i>Unsupervised Approaches (trained using Wikipedia / Internet data)</i>										
BERT	5.2	13.5	7.2	17.8	9.4	20.3	3.7	12.8	6.4	16.1
ICT	45.1	65.2	57.5	73.6	50.6	66.8	43.4	65.7	49.2	67.8
MSS	51.3	68.4	67.2	79.1	60.0	75.6	49.2	68.4	56.9	72.9
BM25	71.1	81.8	76.4	83.2	62.9	78.3	62.4	75.5	68.2	79.7
Contriever	63.4	78.2	73.9	82.9	67.9	80.6	74.9	80.1	70.0	80.5
Spider	61.0	76.0	75.8	83.5	68.3	81.2	65.9	79.7	67.8	80.1
cpt-text S [†]	–	–	75.1	81.7	65.5	77.2	–	–	–	–
HLP	–	–	76.9	84.0	70.2	82.0	66.9	80.8	–	–
<i>Supervised Approaches (trained using question-passage aligned data)</i>										
DPR	63.2	77.2	79.4	85.0	78.4	85.4	73.2	81.4	73.6	82.3
DPR-Multi [‡]	51.6	67.6	78.8	84.7	79.4	86.0	75.0	82.9	71.2	80.3
ANCE	–	–	80.3	85.3	81.9	87.5	–	–	–	–
MSS-DPR	73.1	84.5	81.9	86.6	81.4	88.1	76.9	84.6	78.3	86.0
<i>Our Approach (trained using questions and Wikipedia text)</i>										
ART	75.3	85.0	82.9	87.1	81.6	89.0	75.7	84.3	78.9	86.4
ART-Multi	74.7	84.5	82.9	87.0	82.0	88.9	76.6	85.0	79.1	86.4

Table 2: Top-20 and top-100 retrieval accuracy on the test set of datasets. For more details regarding the unsupervised and supervised models, please see §3.3 in the text. [†] denotes that ‘cpt-text S’ model (Neelakantan et al., 2022) contains around 300M parameters. [‡] denotes that DPR-Multi was not trained on SQuAD-Open. ART substantially outperforms previous unsupervised models and matches or exceeds the performance of supervised models by just using questions during training.

4 Experiments and Results

4.1 Zero-Shot Passage Retrieval

For the passage retrieval task, we report results on SQuAD-Open, TriviaQA, NQ-Open, and WebQ and train ART under two settings. In the first setting, we train a separate retriever for each dataset using questions from their training set. In the second setting, to examine the robustness of ART training to different question types, we train a single retriever by combining the questions from all the four datasets, which we refer to as ART-Multi. As our training process does not require annotated passages for a question, we refer to this as *zero-shot passage retrieval*.

Table 2 presents the top-20 and top-100 retrieval accuracy in these settings alongside recent baselines that train a similar number of parameters. ART achieves substantially better performance than previous unsupervised approaches. It outperforms the recent Spider and Contriever models by an average of 9 points on top-20 and 6 points on top-100 accuracy. When comparing to supervised models, despite using just questions, ART outperforms strong baselines like DPR and ANCE and is at par or slightly better than pre-trained retrievers like MSS-DPR. In addition, ART-Multi obtains comparable performance to its single dataset ver-

sion, a considerable advantage in practical applications as a single retriever can be deployed rather than training a custom retriever for each use case.

Our results suggest that an *accurate and robust passage retrieval can be achieved by training with questions alone*. This presents a considerably more favorable setting than the current approaches which require obtaining positive and hard-negative passages for such questions.

4.2 Sample Efficiency

To measure the sample efficiency of ART, we train the model by randomly selecting a varying number of questions from NQ-Open training questions and compute the top- K accuracy on its development set. These results are presented in Figure 2 and we also include the results of BM25 and DPR for comparison. We see that performance increases with the increase in questions until about 10k questions, after which the gains become less pronounced.

When trained with just 100 questions, ART significantly outperforms BM25 and when trained with 1k questions, it matches DPR performance levels for top- $\{50, \dots, 100\}$ accuracy. *This demonstrates that ART in addition to using just questions is also much more data efficient than DPR*, as it requires almost ten times fewer ques-

Retriever	Training Dataset	SQuAD-Open		TriviaQA		WebQ		EQ	
		Top-20	Top-100	Top-20	Top-100	Top-20	Top-100	Top-20	Top-100
<i>Training on answerable questions</i>									
BM25	–	71.1	81.8	76.4	83.2	62.4	75.5	71.2	79.8
DPR [†]	NQ-Open	48.9	65.2	69.0	78.7	68.8	78.3	49.7	63.2
Spider [†]	NQ-Open	57.7	72.8	77.2	83.7	74.2	82.5	61.9	74.1
ART	NQ-Open	68.0	80.2	79.8	85.1	73.4	83.1	64.3	75.5
ART	MS MARCO	68.4	80.4	78.0	84.1	74.8	83.2	75.3	81.9
<i>Training on a mix of answerable and unanswerable questions</i>									
ART	NQ-Full	69.4	81.1	80.3	85.7	74.3	83.9	67.8	78.3
ART	MS MARCO + NQ-Full	69.6	81.1	80.7	85.7	75.3	84.5	69.2	79.1

Table 3: Top-20 and top-100 retrieval accuracy when evaluating zero-shot out-of-distribution (OOD) generalization of models on the test set of datasets. † denotes that these results are from (Ram et al., 2021). ART generalizes better than supervised models on OOD evaluation even when trained on all the questions of the Natural Questions dataset which contains a mix of answerable and unanswerable questions.

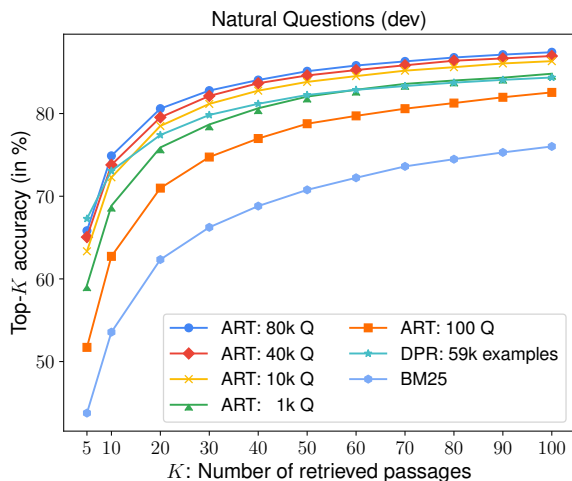


Figure 2: Top- K accuracy as the number of training questions (denoted as ‘Q’ in the legend) is varied. When trained with 100 questions, ART outperforms BM25 and when trained with 1k questions, it matches DPR’s performance for top- $K > 50$ passages, illustrating that ART is highly sample efficient.

tions to reach a similar performance.

4.3 Zero-Shot Out-of-Distribution Transfer

In the previous experiments, both the training and test sets contained questions that were sampled from the same underlying distribution, a setting that we refer to as *in-distribution training*. However, obtaining in-domain questions for training is not always feasible in practice. Instead, a model trained on an existing collection of questions must be evaluated on new datasets, a setting that we refer to as *out-of-distribution* (OOD) transfer.

We train ART using NQ-Open and NQ-Full questions and then evaluate its performance on

SQuAD-Open, TriviaQA, WebQ, and EQ datasets. While it is desirable to train on answerable questions such as the ones included in NQ-Open but this is not always possible, as real user questions are often imprecisely worded or ambiguous. Due to this, training on NQ-Full can be considered as a practical testbed for evaluating true OOD generalization as a majority of the questions (51%) were marked as unanswerable from Wikipedia by human annotators.⁵

Table 3 presents OOD generalization results on the four QA datasets including the results of DPR and Spider models trained on NQ-Open.⁶ ART trained on NQ-Open always performs significantly better than both DPR and Spider, showing that it is better at generalization than supervised models. When trained using NQ-Full, ART performance further improves by 3 and 0.5-1 points on EQ and other datasets, respectively, over NQ-Open. This highlights that in addition to questions annotated as having short answers, *questions annotated with long answers also provide meaningful supervisory signals and unanswerable questions do not necessarily degrade performance.*

We also train ART using MS MARCO questions and perform OOD evaluation. Due to the larger size of MS MARCO and a smaller num-

⁵The reasons for question unanswerability can be partly attributed to imprecise Wikipedia article retrieval during the annotation process, ambiguity in information-seeking questions, information required to answer not being localized to a single paragraph, etc (Kwiatkowski et al., 2019).

⁶We also include BM25 results for reference but do not directly compare with them because there is a high lexical overlap between question and passage tokens in the SQuAD-Open and EQ datasets which renders dense retrievers at a disadvantage over BM25, especially in the transfer setting.

	Retriever	NQ-Open		TriviaQA	
		Top-20	Top-100	Top-20	Top-100
Dev	ICT	44.2	61.0	58.8	74.4
	DPR	79.1	85.5	81.1	85.9
	ICT-DPR	81.4	87.4	82.8	86.9
	EMDR ²	<u>83.1</u>	<u>88.0</u>	<u>83.7</u>	<u>87.4</u>
	ART-base	80.6	87.4	83.6	87.4
	ART-large	81.0	87.8	83.7	87.5
Test	ICT	49.3	66.1	58.5	74.1
	DPR	81.0	87.2	81.4	86.0
	ICT-DPR	82.6	88.3	82.9	87.1
	EMDR ²	<u>85.3</u>	<u>89.7</u>	<u>83.4</u>	<u>87.3</u>
	ART-base	81.6	89.0	82.9	87.1
	ART-large	82.1	88.8	83.6	87.6

Table 4: Top-20 and top-100 accuracy when training large configuration retriever, which contains around 650M parameters. EMDR² (base configuration) (Sachan et al., 2021b) contains 440M parameters. Best supervised results are underlined while the best unsupervised results are highlighted in bold.

ber of evidence documents, we use a batch size of 512 and retrieve 8 passages for training. Quite surprisingly, it obtains much better performance than previous approaches including BM25 on EQ (more than 10 points gain on top-20 over training ART on NQ-Open). We suspect that this may be due to the similar nature of questions in MS MARCO and EQ. Further finetuning the pre-trained MS MARCO model on NQ-Full significantly improves performance on WebQ.

4.4 Scaling Model Size

We examine if scaling up the retriever parameters can offer further performance improvements. To this end, we train a retriever of BERT-large configuration (24 layers, 16 attention heads, 1024 embedding dimensions) containing around 650M parameters on NQ-Open and TriviaQA. Results are presented in Table 4 for both the development and test sets. We also include the results of other relevant baselines containing a similar number of trainable parameters.

By scaling up the retriever size, we see small but consistent improvements in retrieval accuracy across both the datasets. Especially on TriviaQA, ART matches or exceeds the performance of previous best models. On NQ-Open, it comes close to the performance of EMDR² (Sachan et al., 2021b), a supervised model trained using thousands of question-answer pairs.

We also attempted to use larger teacher PLMs such as T0-11B. However, our initial experiments

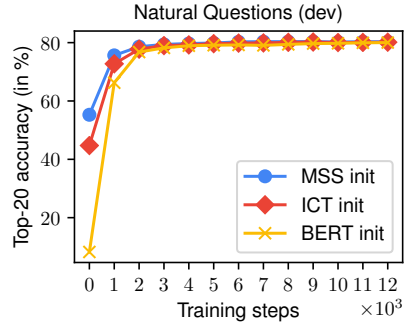


Figure 3: Effect of retriever initialization on ART training. The plot reveals that the training process is not sensitive to initial retriever parameters.

Retrieved Passages	Top-1	Top-5	Top-20	Top-100
32	36.7	65.8	80.6	87.4
2	+2.4	+0.4	-0.9	-0.6
4	+1.9	+0.9	-0.6	-0.6
8	+0.8	+0.8	-0.5	-0.1
16	+0.9	+0.9	-0.3	-0.1
64	-0.5	-0.7	-0.3	0
128	-2.3	-1.7	-0.8	-0.2

Table 5: Effect of using a different number of retrieved passages during ART training as evaluated on the NQ-Open development set. For each case, we list the absolute gain or loss in top- K accuracy when compared to the setting utilizing 32 retrieved passages.

did not lead to any further improvements over the T0-3B PLM. We conjecture that this might be either specific to these QA datasets or that we need to increase the capacity of the teacher PLM even more to observe improvements. We leave an in-depth analysis of using larger teacher PLMs as part of the future work.

4.5 Analysis

Sensitivity to Retriever Initialization To examine how the convergence of ART training is affected by the initial retriever parameters, we initialize the retriever with (1) BERT weights, (2) ICT weights (as trained in Sachan et al., 2021a), and (3) MSS weights, and train using NQ-Open questions. Figure 3 displays the top-20 performance on the NQ development set as the training progresses. It reveals that ART training is not sensitive to the initial retriever parameters as all three initialization schemes converge to similar results. However, the convergence properties might be different under low-resource settings, an exploration of which we leave for future work.

Retriever	Top-1	Top-5	Top-20	Top-100
NQ-Open (dev)				
DPR	50.1	69.6	79.1	85.5
EMDR ²	55.3	74.9	83.1	88.0
ART	37.6	66.8	81.0	87.8
TriviaQA (dev)				
DPR	59.6	74.4	81.1	85.9
EMDR ²	63.7	78.0	83.7	87.4
ART	58.3	77.5	83.7	87.5

Table 6: Analysis reveals that ART can even match the performance of end-to-end trained models like EMDR² when retrieving a larger number of passages. However, DPR and EMDR² still outperform ART when retrieving a small number of passages such as top- $K \in \{1, \dots, 5\}$ (highlighted in bold).

Effect of the Number of Retrieved Passages

Table 5 quantifies the effect of the number of retrieved passages used during training on performance. A smaller number of retrieved passages such as 2 or 4 leads to a somewhat better top- $\{1, 5\}$ accuracy, at the expense of a drop in top- $\{20, 100\}$ accuracy. Retrieving 32 passages offers a reasonable middle ground and beyond that, the top- K retrieval performance tends to drop.

A Closer Inspection of ART with Supervised Models

In order to have a better understanding of the tradeoff between supervised models and ART, we examine their top-1 and top-5 accuracy in addition to the commonly reported top-20 and top-100 scores. Table 6 presents these results for ART (large) along with supervised models of DPR (large) and EMDR². Supervised models achieve much better performance for top- $K \in \{1, \dots, 5\}$ passages, *i.e.*, these models are more precise. This is likely because DPR is trained with hard-negative passages and EMDR² finetunes PLM using answers resulting in an accurate relevance feedback to the retriever. When considering top- $K \in \{20, \dots, 100\}$ passages, ART comes close or matches the performance of EMDR². As top-performing models for knowledge-intensive tasks such as open-domain QA rely on a larger set of retrieved passages, such as top- $K=100$ (Sachan et al., 2022), this justifies the argument to adopt zero-shot ART over supervised retrievers.

Why Training using Passage Retrieval? To assess the importance of passages in \mathcal{Z} during the training process, we train the retriever under

P	N	U	IB	Top-1	Top-5	Top-20	Top-100
0	0	32	✗	6.0	16.6	30.8	46.7
1	0	31	✗	31.8	58.9	74.8	84.4
1	1	30	✗	33.7	61.0	76.0	85.5
1	1	0	✓	32.6	59.5	75.1	84.9
Top-32 passages				36.7	65.8	80.6	87.4

Table 7: Effect of passage types on ART training when evaluated on the NQ-Open development set. P denotes a positive passage, N denotes a hard-negative passage (mined using BM25), U denotes that the passages are randomly sampled from the evidence, and IB denotes in-batch training.

different settings by varying the passage types. Specifically, we train with a mix of positive, hard-negative, and uniformly sampled passages. We also perform in-batch training by defining \mathcal{Z} to be the union of positive and hard-negative passages for all the questions in a batch. Results in Table 7 illustrate that when \mathcal{Z} consists of uniformly sampled passages, it leads to poor performance. Including a (gold) positive passage in \mathcal{Z} leads to good performance improvements. Results further improve with the inclusion of a hard-negative passage in \mathcal{Z} . However, in-batch training leads to a slight drop in performance. As the gold passages are not always available, our method of selecting the top passages from evidence at every training step can be seen as an approximation to using the gold passages. With this, ART obtains even better results than the previous settings, an improvement by 4 points absolute in the top-20 accuracy.

5 Related Work

Our work is based on training a dense retriever using pre-trained language models (PLMs), which we have covered in previous sections. Here, we instead focus on other related approaches.

A popular method to train the dual-encoder retriever is to optimize contrastive loss using in-batch negatives (Gillick et al., 2019) and hard-negatives (Karpukhin et al., 2020; Xiong et al., 2021). Alternatives to using hard-negatives such as sampling from cached evidence embeddings have also shown to work well in practice (Lindgren et al., 2021). Multi-vector encoders for questions and documents are more accurate than dual-encoders, (Luan et al., 2021; Khattab and Zaharia, 2020; Humeau et al., 2020), although at the cost of an increased latency and storage requirements.

PLMs have been shown to improve docu-

ment rankings as they can perform cross-attention between the question and the retrieved documents (Lin et al., 2021). Supervised approaches to re-rank finetune PLMs using question-document pairs (Nogueira et al., 2020) while unsupervised approaches are based on zero-shot question generation (Sachan et al., 2022). The re-ranking process is slow due to the cross-attention step and is bottlenecked by the accuracy of first-stage retrievers. To address these limitations, cross-attention distillation approaches from the PLM to retriever have been proposed (Qu et al., 2021). Such distillation can be performed either in a single end-to-end training step (Guu et al., 2020; Sachan et al., 2021b) or in a multi-stage process (Khattab et al., 2021; Izacard and Grave, 2021).

An alternative approach to using PLMs is to generate data that can aid retrieval. The data can be either the title or an answer that provides more information about the question (Mao et al., 2021). Generating new questions to augment the training data has also been shown to improve performance (Ma et al., 2021; Bonifacio et al., 2022; Dai et al., 2022). In comparison, we do not generate new questions but train the retriever using existing questions and PLM feedback. Data augmentation is likely complementary, and can further improve accuracy.

6 Conclusions and Future Work

We introduced ART, a novel approach to train a dense passage retriever using only questions. ART does not require question-document pairs or hard-negative examples for training and yet achieves state-of-the-art results. The key to making ART work is to optimize the retriever to select relevant documents such that conditioning on them, the question generation likelihood computed using a large pre-trained language model iteratively improves. Despite requiring much less supervision, ART substantially outperforms DPR when evaluated on multiple QA datasets and also generalizes better on out-of-distribution questions.

ART presents several directions for future work. It would be interesting to apply this approach in low-resource retrieval including multilingual (Clark et al., 2020) and cross-lingual question answering (Asai et al., 2021). Our training framework can also be extended to train cross-modality retrievers such as for image or code search (Li et al., 2022; Neelakantan et al., 2022)

using textual queries. Finally, another direction worth exploring would be to train multi-vector retrievers with this approach.

Acknowledgements

The authors would like to thank our colleagues at Google DeepMind, Meta AI, and McGill University for providing us valuable feedback and useful suggestions about this work that helped us to improve the paper.

References

- Akari Asai, Jungo Kasai, Jonathan Clark, Kenton Lee, Eunsol Choi, and Hannaneh Hajishirzi. 2021. [XOR QA: Cross-lingual open-retrieval question answering](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 547–564, Online. Association for Computational Linguistics.
- Payal Bajaj, Daniel Campos, Nick Craswell, Li Deng, Jianfeng Gao, Xiaodong Liu, Rangan Majumder, Andrew McNamara, Bhaskar Mitra, Tri Nguyen, et al. 2016. [Ms marco: A human generated machine reading comprehension dataset](#). *arXiv preprint arXiv:1611.09268*.
- Jonathan Berant, Andrew Chou, Roy Frostig, and Percy Liang. 2013. [Semantic parsing on Freebase from question-answer pairs](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*.
- Luiz Bonifacio, Hugo Abonizio, Marzieh Fadaee, and Rodrigo Nogueira. 2022. [Inpars: Data augmentation for information retrieval using large language models](#). *arXiv preprint arXiv:2202.05144*.
- Jane Bromley, Isabelle Guyon, Yann LeCun, Eduard Säckinger, and Roopak Shah. 1994. [Signature verification using a "siamese" time delay neural network](#). In *Advances in Neural Information Processing Systems*.
- Jonathan H. Clark, Eunsol Choi, Michael Collins, Dan Garrette, Tom Kwiatkowski, Vitaly Nikolaev, and Jennimaria Palomaki. 2020. [TyDi QA: A benchmark for information-seeking question answering in typologically diverse languages](#). *Transactions of the Association for Computational Linguistics*, 8:454–470.
- Zhuyun Dai, Arun Tejasvi Chaganty, Vincent Zhao, Aida Amini, Qazi Mamunur Rashid, Mike Green, and Kelvin Guu. 2022. [Dialog inpainting: Turning documents into dialogs](#). *ArXiv*, abs/2205.09073.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*.
- Daniel Gillick, Sayali Kulkarni, Larry Lansing, Alessandro Presta, Jason Baldridge, Eugene Ie, and Diego Garcia-Olano. 2019. [Learning dense representations for entity retrieval](#). In *Proceedings of the 23rd Conference on Computational Natural Language Learning (CoNLL)*, pages 528–537, Hong Kong, China. Association for Computational Linguistics.
- Kelvin Guu, Kenton Lee, Zora Tung, Panupong Papat, and Mingwei Chang. 2020. [Retrieval augmented language model pre-training](#). In *Proceedings of the 37th International Conference on Machine Learning*.
- Samuel Humeau, Kurt Shuster, Marie-Anne Lachaux, and Jason Weston. 2020. [Poly-encoders: Architectures and pre-training strategies for fast and accurate multi-sentence scoring](#). In *International Conference on Learning Representations*.
- Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand Joulin, and Edouard Grave. 2021. [Towards unsupervised dense information retrieval with contrastive learning](#). *arXiv preprint arXiv:2112.09118*.
- Gautier Izacard and Edouard Grave. 2021. [Distilling knowledge from reader to retriever for question answering](#). In *International Conference on Learning Representations*.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. 2017. [TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*.
- Vladimir Karpukhin, Barlas Oğuz, Sewon Min, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*.
- Omar Khattab, Christopher Potts, and Matei Zaharia. 2021. [Relevance-guided supervision for openqa with colbert](#). *Transactions of the Association for Computational Linguistics*, 9:929–944.
- Omar Khattab and Matei Zaharia. 2020. [Colbert: Efficient and effective passage search via contextualized late interaction over bert](#). In *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval*.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Matthew Kelcey, Jacob Devlin, Kenton Lee, Kristina N. Toutanova, Llion Jones, Ming-Wei Chang, Andrew Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: a benchmark for question answering research](#). *Transactions of the Association of Computational Linguistics*.
- Kenton Lee, Ming-Wei Chang, and Kristina Toutanova. 2019. [Latent retrieval for weakly supervised open domain question answering](#). In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*.

- Yujia Li, David Choi, Junyoung Chung, Nate Kushman, Julian Schrittwieser, Rémi Leblond, Tom Eccles, James Keeling, Felix Gimeno, Agustin Dal Lago, et al. 2022. [Competition-level code generation with alphacode](#). *arXiv preprint arXiv:2203.07814*.
- Jimmy Lin, Rodrigo Nogueira, and Andrew Yates. 2021. [Pretrained transformers for text ranking: Bert and beyond](#). *Synthesis Lectures on Human Language Technologies*, 14(4):1–325.
- Erik Lindgren, Sashank J. Reddi, Ruiqi Guo, and Sanjiv Kumar. 2021. [Efficient training of retrieval models using negative cache](#). In *Advances in Neural Information Processing Systems*.
- Yi Luan, Jacob Eisenstein, Kristina Toutanova, and Michael Collins. 2021. [Sparse, Dense, and Attentional Representations for Text Retrieval](#). *Transactions of the Association for Computational Linguistics*, 9.
- Ji Ma, Ivan Korotkov, Yinfei Yang, Keith Hall, and Ryan McDonald. 2021. [Zero-shot neural passage retrieval via domain-targeted synthetic question generation](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume*, pages 1075–1088, Online. Association for Computational Linguistics.
- Yuning Mao, Pengcheng He, Xiaodong Liu, Yelong Shen, Jianfeng Gao, Jiawei Han, and Weizhu Chen. 2021. [Generation-augmented retrieval for open-domain question answering](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 4089–4100, Online. Association for Computational Linguistics.
- Arvind Neelakantan, Tao Xu, Raul Puri, Alec Radford, Jesse Michael Han, Jerry Tworek, Qiming Yuan, Nikolas Tezak, Jong Wook Kim, Chris Hallacy, et al. 2022. [Text and code embeddings by contrastive pre-training](#). *arXiv preprint arXiv:2201.10005*.
- Rodrigo Nogueira, Zhiying Jiang, Ronak Pradeep, and Jimmy Lin. 2020. [Document ranking with a pre-trained sequence-to-sequence model](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, Online. Association for Computational Linguistics.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. 2018. [Representation learning with contrastive predictive coding](#). *arXiv preprint arXiv:1807.03748*.
- Yingqi Qu, Yuchen Ding, Jing Liu, Kai Liu, Ruiyang Ren, Wayne Xin Zhao, Daxiang Dong, Hua Wu, and Haifeng Wang. 2021. [RocketQA: An optimized training approach to dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 5835–5847, Online. Association for Computational Linguistics.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. 2020. [Exploring the limits of transfer learning with a unified text-to-text transformer](#). *Journal of Machine Learning Research*, 21(140):1–67.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, Austin, Texas. Association for Computational Linguistics.
- Ori Ram, Gal Shachaf, Omer Levy, Jonathan Berant, and Amir Globerson. 2021. [Learning to retrieve passages without supervision](#). *arXiv preprint arXiv:2112.07708*.
- Stephen Robertson and Hugo Zaragoza. 2009. [The probabilistic relevance framework: Bm25 and beyond](#). *Foundations and Trends in Information Retrieval*.
- Devendra Singh Sachan, Mike Lewis, Mandar Joshi, Armen Aghajanyan, Wen-tau Yih, Joelle Pineau, and Luke Zettlemoyer. 2022. [Improving passage retrieval with zero-shot question generation](#). *arXiv preprint arXiv:2204.07496*.
- Devendra Singh Sachan, Mostofa Patwary, Mohammad Shoeybi, Neel Kant, Wei Ping, William L Hamilton, and Bryan Catanzaro. 2021a. [End-to-end training of neural retrievers for open-domain question answering](#). In *Joint Conference of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (ACL-IJCNLP)*.
- Devendra Singh Sachan, Siva Reddy, William L. Hamilton, Chris Dyer, and Dani Yogatama. 2021b. [End-to-end training of multi-document reader and retriever for open-domain question answering](#). In *Advances in Neural Information Processing Systems*.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Arun Raja, Manan Dey, M Saiful Bari, Canwen Xu, Urmish Thakker, Shanya Sharma Sharma, Eliza Szczechla, Taewoon Kim, Gunjan Chhablani, Nihal Nayak, Debajyoti Datta, Jonathan Chang, Mike Tian-Jian Jiang, Han Wang, Matteo Manica, Sheng Shen, Zheng Xin Yong, Harshit Pandey, Rachel Bawden, Thomas Wang, Trishala Neeraj, Jos Rozen, Abheesht Sharma, Andrea Santilli, Thibault Fevry, Jason Alan Fries, Ryan Teehan, Teven Le Scao, Stella Biderman, Leo Gao, Thomas Wolf, and Alexander M Rush. 2022. [Multitask prompted training enables zero-shot task generalization](#). In *International Conference on Learning Representations*.

Christopher Sciavolino, Zexuan Zhong, Jinhyuk Lee, and Danqi Chen. 2021. [Simple entity-centric questions challenge dense retrievers](#). In *Empirical Methods in Natural Language Processing (EMNLP)*.

Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *Advances in Neural Information Processing Systems*.

Lee Xiong, Chenyan Xiong, Ye Li, Kwok-Fung Tang, Jialin Liu, Paul N. Bennett, Junaid Ahmed, and Arnold Overwijk. 2021. [Approximate nearest neighbor negative contrastive learning for dense text retrieval](#). In *International Conference on Learning Representations*.

Jiawei Zhou, Xiaoguang Li, Lifeng Shang, Lan Luo, Ke Zhan, Enrui Hu, Xinyu Zhang, Hao Jiang, Zhao Cao, Fan Yu, et al. 2022. [Hyperlink-induced pre-training for passage retrieval in open-domain question answering](#). *arXiv preprint arXiv:2203.06942*.