

Constructing Cross-lingual Consumer Health Vocabulary with Word-Embedding from Comparable User Generated Content

Chia-Hsuan Chang^{*1,2}, Lei Wang^{†1}, and Christopher C. Yang^{‡1}

¹College of Computing and Informatics, Drexel University,
Philadelphia, 19104, USA

²Department of Information Management, National Sun Yat-sen
University, Kaohsiung 80424, Taiwan

June 24, 2022

Abstract

The online health community (OHC) is the primary channel for laypeople to share health information. To analyze the health consumer-generated content (HCGC) from the OHCs, identifying the colloquial medical expressions used by laypeople is a critical challenge. The open-access and collaborative consumer health vocabulary (OAC CHV) is the controlled vocabulary for addressing such a challenge. Nevertheless, OAC CHV is only available in English, limiting the applicability to other languages. This research aims to propose a cross-lingual automatic term recognition framework for extending the English OAC CHV into a cross-lingual one. Our framework requires an English HCGC corpus and a non-English (i.e., Chinese in this study) HCGC corpus as inputs. Two monolingual word vector spaces are determined using skip-gram algorithm so that each space encodes common word associations from laypeople within a language. Based on isometry assumption, the framework align two monolingual spaces into a bilingual word vector space, where we employ cosine similarity as a metric for identifying semantically similar words across languages. In the experiments, our framework demonstrates that it can effectively retrieve similar medical terms, including colloquial expressions, across languages and further facilitate compilation of cross-lingual CHV.

*corresponding author, email: sham82503@gmail.com

†email: lw474@drexel.edu

‡email: chris.yang@drexel.edu

1 Introduction

The increasing popularity of social media has facilitated the discussion between Internet users and encourages us to share information and experiences. Such development contributes to the emergence of online health communities (OHCs) and stimulates a new channel for exchanging healthcare knowledge, including personal experiences of diseases, reflections of medicines, and communications between physicians and patients (DeAndrea and Vendemia, 2016; Zhou et al., 2018). OHCs possess a wide variety of health consumer-generated content (HCGC). Analyzing HCGC becomes a potential way for answering a wide variety of research questions, such as the doctors-patients interaction (Zhang et al., 2020; Chen et al., 2020; Khurana et al., 2019) and health information search behavior (Wu et al., 2019). HCGC also serves as a valuable resource for extracting health knowledge base (Alemu and Huang, 2020) and identifying authoritative health answers (Deardorff et al., 2017), which could facilitate many applications such as Q&A system and dialog assistant.

Extracting medical entities is a key step in analyzing HCGC. However, entity recognition from the HCGC is challenging because the vocabulary used by health consumers is very different from the that used in the medical literature or electronic health records generated mainly by health professionals. The open-access and collaborative consumer health vocabulary (OAC CHV) was compiled for addressing this language gap. Compared with other professional-oriented vocabularies organized in the Metathesaurus of Unified Medical Language System (UMLS), OAC CHV intends to capture the medical expressions used by health consumers who are usually laypeople. For example, laypeople tend to use colloquial expressions like *watery stool* rather than professional jargon such as *diarrhea* for describing their bowel suffering.

1.1 Motivations

We have two motivations for driving this study. The first one is the underdevelopment in cross-lingual automatic term recognition (ATR) methods for CHV. In order to recognize the expression evolution and enrich the original OAC CHV (Zeng and Tse, 2006), several studies proposed various monolingual automatic term recognition (ATR) methods such as applying heuristic string patterns (Zeng et al., 2007, 2012; Vydiswaran et al., 2014), co-occurrence analysis (Jiang and Yang, 2013), machine learning models (Zeng et al., 2007; He et al., 2017), and word embedding techniques (Gu et al., 2019). Unfortunately, most studies expanded vocabulary merely for English and depended on language-specific features that cannot be generalized to other languages. Besides, to the best of our knowledge, most cross-lingual ATR methods rely on costly cross-lingual resources, such as parallel corpus (Lu et al., 2008) and manually crafted bilingual medical terminology (Chen and Kageura, 2020), which are inaccessible to most languages.

The second motivation is the difficulties in analyzing HCGC and developing consumer-oriented healthcare applications of other non-English languages

due to the lack of cross-lingual CHV. Although English dominates the health information on the Internet, only 379 million people, which represent 4.9% of the world population, are English native speakers. Considering the initiative proposed by World Health Organization that “Bridging the Language Divide in Health¹”, there is still a large population of laypeople using their native languages to share and search for health information. When we cannot identify the medical entities and concepts across languages, language becomes a barrier for searching relevant and assessing the high quality of health information on the Internet (Teixeira Lopes et al., 2017).

1.2 Research Objectives

To address the above research gaps, this study aims at proposing a cross-lingual ATR framework that helps medical professionals extend the English CHV into other languages. The framework starts with collecting HCGC corpora of two different languages. With the corpora, the framework adopts word2vec techniques (Mikolov et al., 2013) on each monolingual corpus to learn the word associations used by laypeople. To identify similar medical concepts across languages, we align monolingual word spaces into a cross-lingual word space (Smith et al., 2017; Lample et al., 2018) using a set of medical entity translations, which are accessible resources in most cases. Our experiments demonstrate that our cross-lingual ATR framework can effectively retrieve similar medical terms, including colloquial expressions, across languages.

The rest of the paper is structured as follows: Section 2 reviews related works in monolingual ATR methods, cross-lingual ATR methods, and cross-lingual word embedding construction. Section 3 illustrates our proposed cross-lingual ATR framework, and Section 4 describes the experimental settings, metrics, and experimental results. We then discuss the key findings, implications, limitations, and future directions in Section 5. Finally, we draw conclusions in Section 6.

2 Literature Review

We review previous ATR techniques on expanding the medical vocabulary and categorize them into two types of ATRs: Monolingual ATR and Cross-lingual ATR. We also review the techniques on cross-lingual space alignment since we rely on a cross-lingual word space for comparing concepts across languages. In the following, we discuss the limitations and the inspirations from these studies.

2.1 Monolingual ATR

Zeng et al. (2007) relied on the query logs from MedlinePlus and proposed an ATR method, which consisted of three important components. The first component was used to identify string candidates that cannot be mapped to UMLS. The second component employed the collaborative efforts from experts

¹<http://dx.doi.org/10.2471/BLT.15.020615>

for removing noisy candidates. The last component estimated the score (also called termhood) of each remaining candidate for including into the OAC CHV (Zeng and Tse, 2006). For calculating the score, the authors adopted C-value (Frantzi et al., 2000), whose calculation was based on the nested string pattern. They proposed a termhood model, a logistic regression model, which included both lexical and semantic features as independent variables. Rather than considering the query logs, Doing-Harris and Zeng-Treitler (2011) collected HCGC from PatientLikeMe.com and adopted both C-value and termhood model to establish a computer-assisted update system for OAC CHV.

Vydiswaran et al. (2014) proposed an ATR method using string rule mapping. They collected health-related Wikipedia pages as reference corpus and extracted synonym candidates using predefined linking rules (e.g., also called, also known as, and also referred to as). Each candidate was then determined as a valid expansion for OAC CHV when it occurred more-frequently in the consumer-oriented corpus than a professional-oriented corpus. To leverage the word co-occurrence information, Jiang and Yang (2013) proposed an ATR method modified from the *tf-idf* technique. Specifically, they first crawled discussion threads from MedHelp. Given the corpus, the possible N-grams were extracted as term candidates. With the predefined terms in the OAC CHV as query seeds, the authors calculated each candidate’s co-occurrence score to each seed. Likewise, Chen et al. (2018) relied on a probabilistic topic model for mining the associations of health problems in HCGC. The resultant word associations were used to extend Medical Subject Headings (MeSH) thesaurus, a professional-oriented medical terminology.

Instead of merely using ad-hoc lexical patterns, He et al. (2017) proposed a clustering method for ATR that combining lexical, syntactic, and contextual patterns. They first collected Q&A related to diabetes and cancers from *Yahoo Know!*. For enabling the K-means clustering, every term from OAC CHV was seen as seeds, and other terms were seen as candidates. Every term was then encoded into a predefined feature vector, including term frequency, document frequency, C-value, editing distances to UMLS seeds, syntactic/lexical patterns, and contextual information. After term vectorization, they applied K-means clustering on seed terms and then expanded a candidate using the similarity between the seed groups.

Motivated by the development of the word embedding technique, Gu et al. (2019) collected two Chinese health-related Q&A corpora and adopted word embedding techniques for determining the word vector space from corpora. They finetuned the space using a small set of professional–consumer term pairs for the task of extracting Chinese CHV.

Most previous monolingual ATR methods required string patterns and lexical features that were only applicable for English, which causes difficulty in generalizing to other languages. Even though both co-occurrence calculation and word embedding determination are language-agnostic techniques, there was an unclear gap in applying them across languages.

2.2 Cross-lingual ATR

Marko et al. (2006) relied on an interchange format for combining four monolingual medical lexicons. Their approach highly depended on morpho-syntactic features for linking potential translation and synonyms across languages. Even though the morphological features are applicable for those languages having cognates, considering the subword features are hardly useful for languages from different language families (e.g., English and Chinese). Lu et al. (2008) utilized both Web anchor texts and search result pages as bilingual references. Given such Web resources, they then exploited the translation probability and statistics between words of different languages for compiling high-quality English–Chinese medical term pairs. Alfano et al. (2018) integrated English CHV and translated Italian CHV into a bilingual CHV. To update the CHV, they built a collaborative management system that employs two steps for expanding new consumer terms. In the first step, the system allows non-authenticated users to propose new consumer terms. Experts would review those term suggestions in the second step. However, such a manual process is not scalable. Regarding the terminology structure, Chen and Kageura (2020) proposed a two-layer graph convolutional network to exploit the shared structure between multilingual MeSH, resulting in an effective prediction model for unseen terms. Unfortunately, MeSH is only available in a few languages and compiled for professional-oriented use.

Most of the above cross-lingual ATR methods did not consider the word usages and word contextual information from the HCGC, limiting the efficacy of inducing consumer-oriented expressions. To better learn the word patterns from the HCGC, we adopt the word embedding technique (Mikolov et al., 2013) to extract the hidden contextual information. Besides, since the above cross-lingual ATR methods rely on costly cross-lingual resources, we leverage the space alignment technique (Smith et al., 2017; Lample et al., 2018) for aligning the word contextual information across languages in a resource-efficient manner.

2.3 Cross-lingual Word Embedding Construction

Several studies (Smith et al., 2017; Lample et al., 2018; Ruder et al., 2019) recently showed that aligning two monolingual word vector spaces facilitates bilingual lexicon induction because the alignment procedure helps identify the word associations across languages.

Smith et al. (2017) assume isometry between word spaces of two different languages; hence, with a few translation pairs as anchors, they propose to learn a linear transformation to align two spaces with the least mean-square error. They also determine the transformation with orthogonal constraint for keeping the density of source word vector space invariant, resulting in more accurate translation bilingually. Motivated to align spaces in an unsupervised manner, Lample et al. (2018) propose an approach to transform spaces using an adversarial learner, which is strongly based on the assumption of isometry; however, such isometric assumption could be weak when languages are etymologically

distant. As a result, [Patra et al. \(2019\)](#) show the necessity of incorporating supervision across languages.

All the above studies attempted to align word spaces that are determined from the large-scale general texts (e.g., Wikipedia). In this study, we apply space alignment techniques on word spaces that are determined from health-specific corpora – HCGC. Hence, besides evaluating the performances, we also investigate the different scenarios in aligning the medical entities across languages.

3 The Cross-lingual ATR Framework

Based on the definition of distributional semantics, words tend to have a similar meaning when they often occur in the same contexts. Word embedding is a technique for vectorizing each word into a vector representation by considering the contexts of that word ([Mikolov et al., 2013](#)). Word vector space comprises all vectorized words, and its characteristic is that words with similar contexts shall be close to each other in the space due to their similar vector representations. This capability of grouping contextually similar words helps to extend potential health expressions from HCGC ([Gu et al., 2019](#)). In addition, because word vector spaces of different languages are topologically similar ([Smith et al., 2017](#); [Lample et al., 2018](#)), we can compare the contextual similarity between words across languages after aligning the spaces, which inspired our cross-lingual ATR.

[Fig. 1](#) illustrates our cross-lingual ATR framework for expanding CHV across languages. Our framework consists of four main modules. With collected health Q&A corpora, the first *pre-processing module* employs existing NLP toolkits to clean the raw texts and transforms them into processed contents. Subsequently, the *word semantic space learning module* determines the word vector space of each language from collected corpora using a word embedding technique. To compare words in a language-agnostic way, the *space alignment module* pairs up the spaces across languages utilizing a set of bilingual medical translation pairs as anchors in the spaces. Given the bilingual word space, the last *term candidate expansion module* requires a set of seed words, e.g., OAC CHV ([Zeng and Tse, 2006](#)), to expand their synonyms for eliciting the bilingual CHV. In the following subsections, we present the collected data and detail each module of our cross-lingual ATR framework.

3.1 Data Collection

We collected the healthcare Q&A corpus from OHCs. With the facilitation of the Web and the Internet, OHCs are the platforms for laypeople exchanging their health-related information, where people tend to use colloquial expressions rather than professional jargons. Hence, we can exploit the usages of health vocabularies from such HCGC on the OHCs.

MedHelp is a popular English OHC consisting of various communities for consumers to discuss different kinds of diseases. We extracted 520,659 discussion

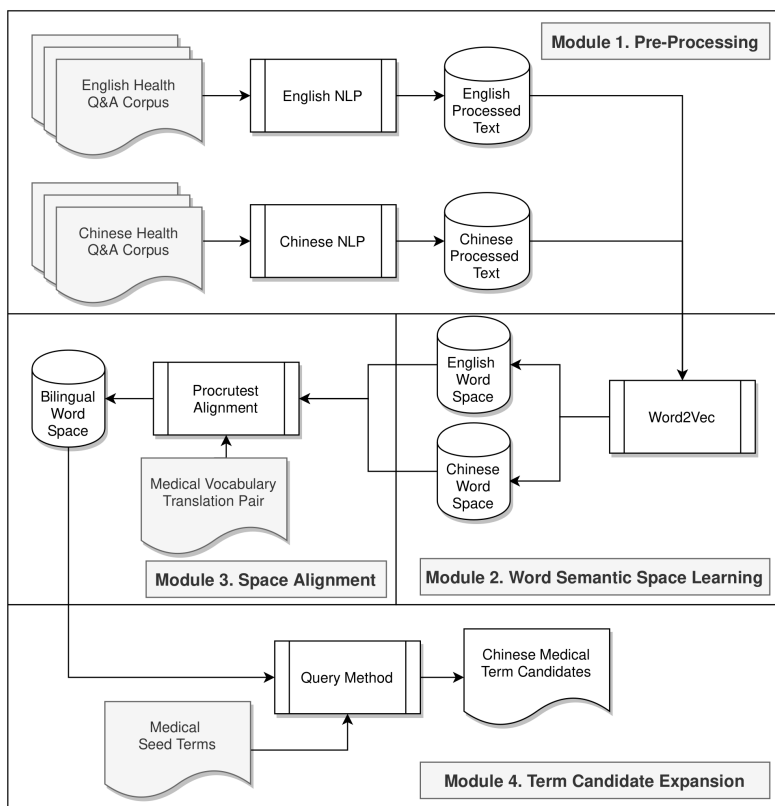


Figure 1: Our framework for bilingual medical term expansion

threads from 106 different communities in MedHelp. To gather Chinese contents, we crawled three Chinese healthcare Q&A websites, including eDoctor², MED-NET³, and Kingnet⁴, to retrieve 259,709 inquiries and their responses, where most questions are answered by doctors and solved by one response. Table 1 presents descriptive statistics of two corpora, in which the English corpus significantly has more textual contents than the Chinese one. Note that the content length is measured by the number of characters of each question.

3.2 Pre-processing

After crawling the corpora, we first processed our textual data using existing NLP toolkits. For English, we applied sciSpacy (Neumann et al., 2019), a package for biomedical text processing, for word tokenization and medical concepts extraction by consulting Metathesaurus of UMLS (Bodenreider, 2004). Regard-

²<http://taiwanedoctor.mohw.gov.tw/>

³<https://expert.med-net.com/index#/index>

⁴<https://www.kingnet.com.tw/knNew/inquiry/outpatient.html>

Table 1: Descriptive statistics of our collected corpora. Avg. content length is the average characters of each question.

	#Docs	#Sentences	Avg. Content Length	Avg. #Comments
English Corpus	520,659	15.82M	754.11	2.68
Chinese Corpus	259,709	0.70M	177.70	1.01

ing pre-processing Chinese texts, we employed jieba⁵ for word tokenization. Due to the lack of reliable medical name entity recognition tool in the Chinese language, we collected 7,824 Chinese medical entities from the healthcare category of BaiduBaikē⁶, and 11,604 Chinese medical entities from Wikipedia⁷. The two were combined as our custom dictionary serves as fundamental entity extraction. To prevent breaking 2-grams with high co-occurrences into two separate grams, we utilized the phrases identification method (Mikolov et al., 2013) to connect them. We filtered out the noises, including stop words, special symbols, and punctuations for both languages.

3.3 Determining Monolingual Word Vector Space

In the second module, we leverage the word embedding technique to determine word vector space of each language. The word vector space helps us compare semantic similarities between words. One of the powerful word embedding algorithms is Skip-gram (Mikolov et al., 2013), which is known for preserving the word semantics, and capable of encoding each word into a continuous vector representation. By utilizing Skip-gram, we determined two word vector spaces $V^{en} \in \mathbb{R}^{|W^{en}| \times d}$ and $V^{zh} \in \mathbb{R}^{|W^{zh}| \times d}$ for English and Chinese healthcare Q&A corpus, respectively. Note that W^{en} (W^{zh}) is the set of vocabularies appearing in the English (Chinese) corpus, and d is the size of hidden dimensions representing each word. Moreover, we normalize every word vector by applying l_2 -norm as Eq. 1, where V_i^l is a vector of word i in language l . With the normalization, we obtain two unit d -dimensional spheres where each for one language.

$$V_i^l = \frac{V_{i,j}^l}{\|V_i^l\|_2}, l \in \{en, zh\}, \forall i \in |W^l|, \forall j \in d \quad (1)$$

3.4 Aligning the Spaces of Different Languages

With the contextual information of words determined from the word semantic space learning module, the word spaces are determined independently and resulted in the unaligned word dimensions between languages. We align consumer health vocabularies of different languages in the space alignment mod-

⁵<https://github.com/fxsjy/jieba>

⁶<https://baike.baidu.com/wikitag/taglist?tagId=76625>

⁷Since every page in Wikipedia is organized in a hierarchical structure, we provide the detail retrieval process in the next section.

ule. To facilitate the alignment procedure, we assume the space structures are topologically similar, also called isometric in previous studies, across languages (Smith et al., 2017; Lample et al., 2018). This assumption allows us to use a linear transformation matrix $L \in \mathbb{R}^{d \times d}$ for aligning one source word space into one target word space. In our setting, with the observation that English word space tends to have better transformation performance when being target word space (Smith et al., 2017; Lample et al., 2018), we treat the Chinese word space V^{zh} as source word space and apply L on it to align with the target word space – English word space V^{en} .

The determination of L requires a set of translation pairs $P \subseteq W^{en} \times W^{zh}$ as anchor points between the two word spaces. To identify quality P for our two health-oriented word spaces, we leverage Wikipedia as our knowledge source. Because of collective intelligence and multilingualism, Wikipedia possesses numerous health entities that are compiled into several languages. Besides, the title of each page is usually the name of an entity. Hence, we followed the data collection strategy proposed in Vydiswaran et al. (2014) to collect a bilingual title list of health-related pages from Wikipedia. In detail, we adopted the MediaWiki Action API to traverse the category hierarchy organized in Wikipedia and drill down subcategories for *health* category with the depth of five layers. We then record the English title of each relevant page and its Chinese title as one translation pair by querying the *langlink* property in MediaWiki Action API. Figure 2 presents an example that we use “Diarrhea” as a query to find its corresponding Chinese title “腹瀉” (Diarrhea).

```
{
  "batchcomplete": "",
  "query": {
    "pages": {
      "53951": {
        "pageid": 53951,
        "ns": 0,
        "title": "Diarrhea",
        "langlinks": [
          {
            "lang": "zh",
            "*": "腹瀉"
          }
        ]
      }
    }
  }
}
```

Figure 2: The result of using Diarrhea as a query. One can get the same result by visiting

<https://en.wikipedia.org/w/api.php?action=query&titles=Diarrhea&prop=langlinks&lllang=zh&for>

After compiling P , to optimize L , each title pair were represented as a vector pair by consulting V^{en} and V^{zh} , which resulted into two subspaces: $V_{\dagger}^{en} \in \mathbb{R}^{|P| \times d}$ and $V_{\dagger}^{zh} \in \mathbb{R}^{|P| \times d}$. The objective of L aims at minimizing the following equation:

$$\arg \min_L \|V_{\dagger}^{zh} L - V_{\dagger}^{en}\|_F \text{ s.t. } L^T L = I, \quad (2)$$

where the orthogonal constraint of L keeps the density between words in V_{\dagger}^{zh} invariant after transforming. Solving L is hereby an orthogonal Procrustes problem which has a analytical solution (Lample et al., 2018) using singular value decomposition (SVD):

$$L = UV, \text{ with } U\Sigma V^T = SVD((V_{\dagger}^{zh})^T V_{\dagger}^{en}). \quad (3)$$

For a better illustration of the alignment procedure, we provide an example in Fig. 3, where the red items with the same number in Fig. 3a and 3b represent each anchor pair in the P . The goal of L is to transform V^{zh} to align each anchor pair using the V^{en} as a standard reference. When L is determined, the bilingual word space is derived as Eq. 4.

$$V^{bi} = (V^{zh} \cdot L) \cup V^{en}, \quad (4)$$

where $V^{bi} \in \mathbb{R}^{|W^{bi}| \times d}$ and $W^{bi} = W^{en} + W^{zh}$. We provide the whole process for the alignment module in the Algorithm 1.

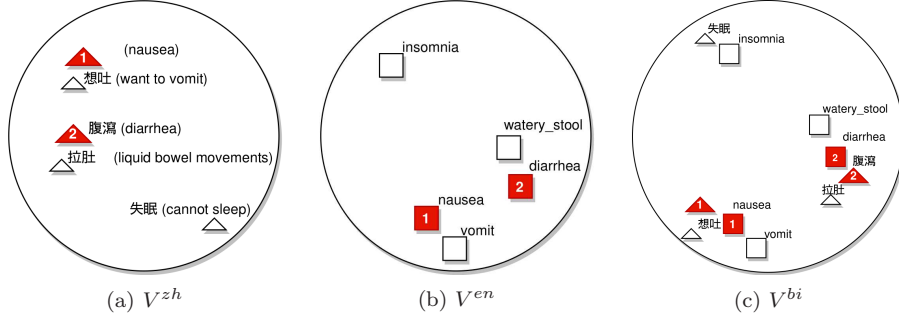


Figure 3: The illustration of the spaces alignment

Algorithm 1: The algorithm for space alignment

Input: English word space V^{en} , Chinese word space V^{zh} , a set of translation pairs P

- 1 refer to P to create two word subspaces $V_{\dagger}^{en}, V_{\dagger}^{zh}$
- 2 determine the linear transformation matrix L using Eq. 3
- 3 determine V^{bi} by Eq. 4

Output: a bilingual word space V^{bi}

The alignment module not only aligned anchor word pairs in P (red items in Fig. 3) but also indirectly aligned non-anchor words (i.e., those words are not in P) across languages. Fig. 3c explains three possible cases of the alignment between non-anchor words across languages.

1. **Case 1: Non-anchor words that are close to the anchors.** Even though only anchors involve in determining L , we could expect to find more synonyms after transformation due to the similar representations encoded in neighbors of anchors. For example, given diarrhea and nausea as queries, we not only can find their corresponding anchors 腹瀉 (diarrhea) and 噁心 (nausea), but also 拉肚子 (liquid bowel movements) as well as 想吐 (want to vomit), respectively.
2. **Case 2: Non-anchor words that are distributed similarly across languages.** As we transform the whole source space into the target space, the words with similar meanings will match up by L due to the assumption of topological similarity between spaces. For example, even we do not provide *insomnia* or its neighborhoods as anchors, we still could find its Chinese synonym 失眠 (cannot sleep). This is because the similar word concepts are distributed closely across languages after aligning.
3. **Case 3: Non-anchor words that bias at a particular language space.** As shown in Table 1, the size of corpus is significantly different between languages. Besides, some diseases, drugs, or other medical entities may differ between languages, which causes some areas to be monolingual in the resultant bilingual word space. In this situation, given an English word, its Chinese neighbors have significantly greater distances than ones in the previous two cases.

3.5 Word Expansion by Querying the Spaces

Given the bilingual word space, the words should be language-agnostic; hence, we can compute semantic closeness between any two words using the cosine similarity as shown in Eq. 5

$$\cos(i, j) = \frac{V_i^{bi} \cdot V_j^{bi}}{|V_i^{bi}| |V_j^{bi}|}, \quad (5)$$

where $i, j \in W^{bi}$ and V_i^{bi} is the word vector of word i . Since each word vector has normalized in step 2, each word vector has unit length, which helps to simplify the $\cos(i, j)$ into $V_i^{bi} \cdot V_j^{bi}$.

We then required a group of seed words Q of a language as query points in the bilingual word space for searching their synonym candidates across languages. In the present study, seed words could be either English or Chinese, so we have two query directions: (1) EN \rightarrow ZH, and (2) ZH \rightarrow EN. For each seed word $q \in Q$, we then utilize Eq. 5 as the metric to find the nearest words

as candidates. To ensure the expansion quality, we only kept the candidate r whose similarity with the query beyond a threshold (δ):

$$\cos(q, r) \geq \delta \quad (6)$$

Dynamic Threshold. Instead of using only one δ to filter out noisy synonym candidates, we also consider using different thresholds for different queries. This is because we observe that it is not easy to find an appropriate δ for all queries. Take Table 2 as an example, we could set 0.64 as δ to filter out the noisy candidates of “高血壓” (hypertension), but this δ is too strict for “雞眼” (wart). On the other hand, if we loose the δ for “雞眼” (wart), the δ is adversely too vague for “高血壓” (hypertension). This phenomenon can be explained by the three cases resulted from the space alignment module: some queries are distributed equally across languages because they belong to case 1 or case 2, while some queries are biased at a language that makes them far away from their synonyms of the other language.

Table 2: The results of two queries: “高血壓” (hypertension) and “雞眼” (wart)

(a)				(b)			
Query	Rank	Candidate	Cosine Similarity	Query	Rank	Candidate	Cosine Similarity
高血壓	1	hypertension	0.81	雞眼	1	wart	0.58
	2	htn	0.74		2	plantar_wart	0.55
	3	high_bp	0.73		3	callus	0.54
	4	hbp	0.72		4	splinter	0.54
	5	high_blood_pressure	0.72		5	ganglion_cyst	0.53
	6	hypertention	0.65		6	skin_tag	0.52
	7	hypertensive	0.64		7	ingrown_toenail	0.52
	8	high_cholesterol	0.62		8	bunion	0.51
	9	hyperlipidemia	0.61		9	athlete_foot	0.51
	10	blood_pressure_problem	0.61		10	hard_skin	0.50

Our dynamic threshold mechanism is based on modularity. Modularity is a metric to evaluate a query bias at a specific language in the bilingual word vector space. The lower modularity of a query means more words of the other language surrounding that query. The higher modularity of a query instead means that the query has more words of the same language as neighbors. To measure the modularity quantitatively, we refer to the previous work (Fujinuma et al., 2019) and design our calculation for approximating modularity score in the Algorithm 2. Given a query q , *Line 1* and *Line 2* collect top- K English and Chinese nearest neighbors as two set of words G^{en} and G^{zh} , respectively. *Line 3* and *Line 4* are then used to calculated an average score of cosine similarity $\eta^{en}(\eta^{zh})$ with respect to $G^{en}(G^{zh})$. As *Line 5*, the modularity is the difference between η^{en} and η^{zh} . Therefore, the lower modularity of a query indicates its nearest neighbors of the other language are closer. In other words, when a query with smaller modularity, the more possibilities the query is either in case 1 or case 2.

Otherwise, when a query with higher modularity, it will possibly be a case 3.

Algorithm 2: The algorithm for calculating modularity

- Input:** bilingual word space V^{bi} , a query q , number of neighbors K
- 1 $G^{en} = \text{top-}K$ similar English words of q
 - 2 $G^{zh} = \text{top-}K$ similar Chinese words of q
 - 3 $\eta^{en} = \mathbb{E}_{r \sim G^{en}}[\cos(q, r)]$
 - 4 $\eta^{zh} = \mathbb{E}_{r \sim G^{zh}}[\cos(q, r)]$
 - 5 $m = |\eta^{en} - \eta^{zh}|$
- Output:** m
-

To dynamically set different δ for queries, we first apply Algorithm 2 on each seed word q . After sorting the seed words ascendingly with respect to their modularity scores, we split Q into N subsets of equal size based on quantiles $\{Q_i\}_{i=1}^N$, in which Q_1 contains the queries with the lowest modularity. As a result, we search the best δ of each subset with regard to a determined metric (e.g., F-score).

4 Evaluation

4.1 Setups

Parameter Settings. We determined the word vector space of each language by feeding all texts from English and Chinese healthcare Q&A corpus. We employed the word2vec module from *gensim*⁸, which implements the Skip-gram algorithm (Mikolov et al., 2013). All parameters of the Skip-gram were set at default values. Table 3 presents the number of vocabularies of our determined word spaces. We then used 719 bilingual title pairs from Wikipedia for enabling the process of space alignment. Note that we totally collected 11,604 pairs, yet we dropped a pair if either English or Chinese title in a pair does not exist in our corpora. In our further evaluations, we demonstrated the effective performances even with a small proportion of words as anchors. It is worth mentioning that previous studies (Lample et al., 2018) also demonstrated the helpful alignment with fewer anchors than ours.

Table 3: Size of vocabularies and anchor pairs

	#Vocabularies	#Anchor Pairs (P)
English	54,061	719
Chinese	17,882	

Test Set Preparation. We evaluated our proposed methodology by testing the query performance of frequently used medical entities selected from our collected healthcare Q&A corpora. Only five divisions (community groups in

⁸<https://radimrehurek.com/gensim/models/word2vec.html>

MedHelp), including General-Health, Women-Health, Dermatology, Ear-Nose-Throat, and Neurology, involved in the further evaluations because these divisions were most popular topics in our corpora. To generate English test queries, we first calculated the frequency of each term which was selected from the OAC CHV (Zeng and Tse, 2006) and only retained terms that belonged to two semantic types: *Sign or Symptom* [T184] and *Disease or Syndrome* [T047]⁹. After filtering out the general terms (terms appearing in all divisions), we picked top-10 frequent words as queries from each division, resulting in 50 English queries.

On the other hand, we sorted every word by its frequency within each division in the Chinese Q&A corpus to select Chinese queries. We manually filtered out the words that do not represent a sign, symptom, disease, and syndrome. After that, we picked the top-10 frequent words of each division as queries from the remaining words. As a result, we had 50 Chinese queries. Subsequently, we manually scrutinized the top 100 nearest neighbors of each Chinese and English query to make the ground truth. The labeling strategy was as follows: If a neighbor word has the same semantic meaning to the query, it will be labeled as a relevant item, otherwise a non-relevant item.

Performance Metrics. We used precision, recall, and F_1 to report the query performance, and those metrics are defined as follows:

$$\text{precision} = \frac{|\text{relevant items} \cup \text{retrieved items}|}{|\text{retrieved items}|} \quad (7)$$

$$\text{recall} = \frac{|\text{relevant items} \cup \text{retrieved items}|}{|\text{relevant items}|} \quad (8)$$

$$F_1 = 2 \times \frac{\text{precision} \times \text{recall}}{\text{precision} + \text{recall}} \quad (9)$$

4.2 Results

Fig. 4a and Fig. 4b showed the influence of a similarity threshold δ to the precision, recall, and F_1 . In the figures, EN \rightarrow ZH means that we used English queries to find Chinese synonym candidates, and ZH \rightarrow EN was the reverse query direction. Both query directions had consistent trends of three metrics with respect to the x-axis, δ . With the higher δ , our methodology generated the more-precise synonym candidates across languages, and the precision approached the peak when $\delta = 0.75$. On the other hand, the recall was at the peak as δ stayed low; however, the price was that loose criteria included too many noisy candidates, resulting in the undesirably low precision. For the task of determining bilingual medical vocabulary, both precision and recall have the same importance. Therefore, we could set 0.6 as δ for both query directions for reaching the best F_1 . Comparing with the previous studies on expanding vocabularies within the same languages (Jiang and Yang, 2013; He et al., 2017), our F_1 performance was competent even in the more challenging context—expanding vocabularies

⁹Both T184 and T047 were the semantic types defined in the Semantic Network of UMLS.

across languages. The ZH \rightarrow EN had a better performance than EN \rightarrow ZH. We attributed this phenomenon to the unbalanced size between corpora of different languages. The size of English vocabulary was three times than that of Chinese one, so a Chinese query was more likely to find its English synonyms.

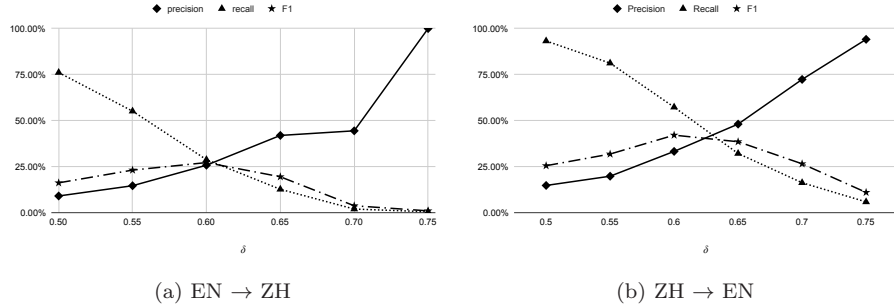


Figure 4: Performance of precision, recall, and F_1 under different δ

In views of the number of retrieved and correct candidates, we presented the histograms in Fig. 5a and Fig. 5b, where blue bar and red bar were the number of retrieved candidates and the number of correct candidates under the δ , respectively. When we set δ at 0.6 (where F_1 performs the best), the correct ratio of EN \rightarrow ZH and ZH \rightarrow EN were 25.76%(59/229) and 33.26%(314/944), respectively. That is, we could find 1 correct Chinese candidates among every 4 Chinese candidates and 1 correct English candidates among every 3 English candidates. This retrieval performance demonstrated that our methodology was effective for vocabulary expansion and helped to avoid scanning ten thousands of possible candidates of each query.

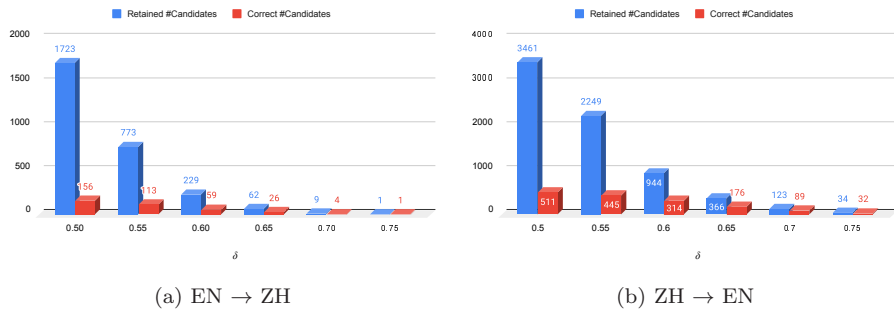


Figure 5: Number of retrieved candidates and correct candidates under different δ

To show the necessity of applying the dynamic setting of δ , we ascendingly sorted the whole query set by the modularity score. We then grouped it into

four quarters, namely Q_1, Q_2, Q_3 and Q_4 , based on the quartile. Fig. 6a and Fig. 6b showed the F_1 curve of each quarter, in which the queries in each quarter reach the highest F_1 at different value of δ . The curves of Q_4 are central on smaller δ than ones of other quarters. Instead, the curves of Q_1 tend to require higher δ to reach a peak of F_1 . These patterns imply the phenomenon provided in Table 2 that we cannot use a single threshold for every query. Also, the modularity score is the one potential factor to set the appropriate threshold. As a result, after grouping queries concerning modularity score, the dynamic threshold mechanism helped to adopt the threshold which reached the highest F_1 for each quarter (e.g., in $EN \rightarrow ZH$ we set 0.5 as δ for Q_4 and 0.6 for Q_1) to achieve better retrieval performance.

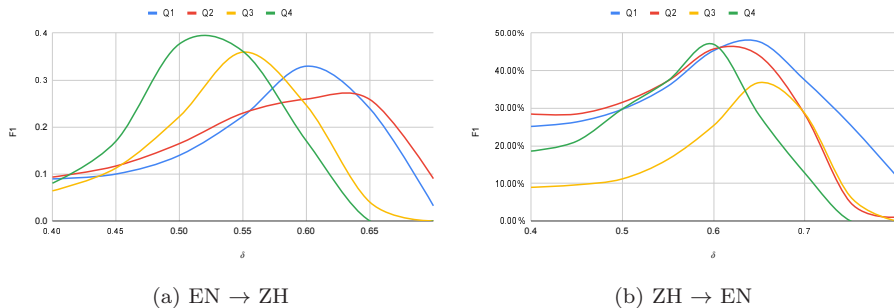


Figure 6: F_1 performance for different subsets of queries

To benchmark the performance of the dynamic threshold mechanism, we compared it with the other two alternative query methods: k -NN and single threshold. For k -NN, we searched its best performance of k in a range from 5 to 50 with 5 as step size, and for single threshold, we searched its best performance of δ in a range from 0.5 to 0.75 with 0.05 as a step size. Table 4 presented the performance of each method. After applying the dynamic threshold mechanism, the total candidates retrieved in $ZH \rightarrow EN$ direction shrank, yet the proportion of correct candidate increased, leading to the better F_1 . In $EN \rightarrow ZH$, its F_1 also rose, and it helped identify more correct candidates without significant compromise of correct ratios.

Table 4: Query performance between different methods

Query Direction	Query Method	Num. of Total Candidates	Num. of Correct Candidates	Correct Ratio	F_1
$ZH \rightarrow EN$	k -NN	750	248	33.07%	38.21%
	Single Threshold	944	314	33.26%	42.09%
	Dynamic Threshold	716	287	40.84%	44.31%
$EN \rightarrow ZH$	k -NN	250	72	28.80%	31.65%
	Single Threshold	229	59	25.76%	27.19%
	Dynamic Threshold	427	108	25.29%	33.13%

We also provided the retrieved samples in Table 5. When we took 拉肚子(diarrhea) as the query, our approach helped identify not only correct

Table 5: Retrieved samples of 拉肚子(diarrhea) and diarrhea

Query	Rank	Candidates	Query	Rank	Candidates
拉肚子(diarrhea)	1	diarhea	diarrhea	1	腹瀉(diarrhea)
	2	diareah		2	水瀉(watery stools)
	3	diarreha		3	拉肚子(diarrhea)
	4	diarrhea		4	拉水(watery stools)
	5	diarreeh		5	瀉(diarrhea)
	6	diaherra		6	下痢(diarrhea)
	7	stomach_ache		7	肚痛(abdominal pain)
	8	diahrrrea		8	腹泄(diarrhea)
	9	diahrea		9	消化不良(indigestion)
	10	stomach_cramp		10	瀉肚子(diarrhea)

synonym–diarrhea but also some common wrong-spelling alternatives used by laypeople such as *diarhea*, *diareah*, *diarreha*, *diarreeh*, *diaherra*, *diahrrrea*, and *diahrea*. Even though *stomach_ache* and *stomach_cramp* do not match the exact meaning of the query, but both terms have similar contents. Those misspelled and similar contextual words may contribute to subsequent consumer-oriented health applications such as information retrieval or query expansion. On the other hand, when we set *diarrhea* as the query, several Chinese synonyms (i.e., 腹瀉(diarrhea), 水瀉(watery stools), 拉肚子(diarrhea), 拉水(watery stools), 瀉(diarrhea), 下痢(diarrhea), 腹泄(diarrhea), 瀉肚子(diarrhea)) were successfully identified, including two words with similar contexts: 肚痛(abdominal pain) and 消化不良(indigestion). From the above two query examples, we found that laypeople used different expressions to describe a symptom, and our method can help identify those expressions.

5 Discussion

5.1 Contributions

The contributions of this study are two-fold. First, we proposed a cross-lingual framework that requires accessible bilingual resources and only uses language-agnostic techniques to identify similar medical concepts across languages. Compared to previous monolingual ATR methods (Zeng et al., 2007; Doing-Harris and Zeng-Treitler, 2011; Vydiswaran et al., 2014) that relied on English-specific features, such as string patterns, lexical patterns, and syntactic patterns, our framework used word contextual information (i.e., word associations derived from word vector space), which makes our framework not only work in English. Besides, to the best of our knowledge, although some works propose using word embedding for enriching vocabulary within a specific language (He et al., 2017; Gu et al., 2019), we are the first to align the word contextual information across languages to facilitate cross-lingual consumer health vocabulary construction. Compared to previous cross-lingual ATR methods (Marko et al., 2006; Lu et al., 2008; Alfano et al., 2018; Chen and Kageura, 2020), our framework does not require considerable bilingual resources, such as parallel corpus and manually-crafted bilingual medical vocabulary, which are hard to come by in most languages.

We only require a set of bilingual medical translation entries, which can be easily accessed from Wikipedia as shown in Section 3.4.p Therefore, we believe our study can facilitate and contribute to future cross-lingual consumer health vocabulary construction.

Second, we aligned monolingual word spaces determined from domain-specific corpora – HCGC, which makes us different from previous works (Smith et al., 2017; Lample et al., 2018; Patra et al., 2019) on cross-lingual word space construction that align word embedding determined from large-scale general corpora (i.e., Wikipedia). In our collected HCGC from two different languages, we observed that some medical entities, such as drugs and diseases, are only or more often discussed in a particular language, leading to the language-specific concept areas in the resultant bilingual word space. Moreover, queries in these language-specific concept areas tend to cluster words of the same language, resulting in suboptimal cross-lingual retrieval performance. To address this issue, we proposed a dynamic threshold to consider the language-biased level (i.e., modularity) of a query for searching term candidates across languages. Our findings and improved results by the dynamic threshold could contribute to cross-lingual word space construction for proposing a better alignment mechanism.

5.2 Practical Implications

For the medical practitioners who hope to construct non-English CHV, our cross-lingual ATR helps to compile the vocabulary. There are three strengths of our approach. First, the induced non-English CHV connects to the existing English CHV thanks to the bilingual word space. Such connections help the induced non-English medical terms conform to the existing medical classification, such as concept unique identifiers (CUI) in UMLS. Therefore, it is possible to construct a language-agnostic CHV for benefiting more multilingual applications (e.g., analyzing code-switching medical texts). Second, since the cross-lingual ATR learns word association patterns from the collected HCGC, it helps capture the commonly used medical expressions from laypeople, facilitating subsequent consumer-oriented applications such as medical chatbot. Lastly, the resources used by our cross-lingual ATR are accessible in most languages. We only require two HCGC corpora in two languages. Even though we need a set of bilingual translation pairs of medical entities for aligning spaces, we have demonstrated that a few hundreds of them are effective, and we proposed a way to collect those bilingual resources from Wikipedia.

5.3 Limitations

There are two limitations to our proposed method. The first one is the requirement of a large amount of textual data for determining the word embedding space since acquiring large HCGC is inapplicable in some resource-scarce languages. The second one is that the unbalanced size of corpora between languages could harm synonym retrieval performance. For example, in our evaluation, the

size of the Chinese corpus is significantly less than one of the English corpus, so we find the query direction EN \rightarrow ZH has worse performance than that of ZH \rightarrow EN because of the limited potential synonym candidates in Chinese. Therefore, the data volume of languages of interest is the key factor in enabling our proposed method.

5.4 Future Directions

Our proposed method can be generalized to align word vector spaces of two more languages to compare consumer-oriented expressions across multiple languages. We can explore different vocabulary usage patterns in different countries and generate a language-agnostic CHV for facilitating cross-lingual medical information retrieval. Moreover, incorporating more languages also helps to increase query quality. Like the study from [Steinberger et al. \(2012\)](#), they achieved a better-translated lexicon using trilingual resources than using bilingual resources.

Using the appropriate terms in the query is critical to the task of consumer health search ([Teixeira Lopes et al., 2017](#)). Since every non-English native consumer may have different English literacy, recommending common-used medical expressions as a query is potentially helpful to most consumers for having results with better readability ([Teixeira Lopes and Ribeiro, 2019](#)). Hence, another possible direction is to develop a query suggestion tool using cross-lingual ATR.

In this study, we used word embedding techniques (i.e., Skipgram) to form word vector spaces from the corpus statistics. Hence, such a data-driven approach lacks guidance from the pre-defined medical terminology. Medical professionals have constructed several medical terminologies such as MedDRA in a hierarchical structure, defined by the relationships between medical entities. Thanks to the development of deep learning techniques, several works proposed methods to encode a hierarchical graph (also a network) into a continuous embedding space ([Perozzi et al., 2014](#); [Chen and Kageura, 2020](#)). Those methods provide a feasible way to represent the hierarchical medical terminologies in a vector space. Although propagating the hierarchical relationships across languages is still need to be investigated, the mechanism that incorporates both corpus-based embedding and terminology-based embedding is worth investigating. Once that English human-crafted knowledge can be propagated across different languages, it will benefit most other languages.

6 Conclusion

Considering expanding English OAC CHV into the other language automatically, we proposed a cross-lingual ATR method, which first captures word semantics from HCGC within each language using word embedding technique. Then words of different languages will be aligned into a bilingual word space by referring to a few pairs of seed words. The resultant bilingual word space effectively retrieves similar health-related expressions such as misspelling words

and colloquial terms across languages, which prevents inspectors from screening thousands of candidates to select appropriate synonyms.

References

- Alemu, E. N. and Huang, J. (2020). HealthAid: Extracting domain targeted high precision procedural knowledge from on-line communities. Information Processing & Management, 57(6):102299.
- Alfano, M., Lenzitti, B., Lo Bosco, G., and Taibi, D. (2018). Development and practical use of a medical Vocabulary-Thesaurus-Dictionary for patient empowerment. In Proceedings of the 19th International Conference on Computer Systems and Technologies, CompSysTech 2018, Ruse, Bulgaria, September 13-14, 2018, pages 88–93.
- Bodenreider, O. (2004). The Unified Medical Language System (UMLS): integrating biomedical terminology. Nucleic acids research, 32(Database issue):D267–D270.
- Chen, C., Huang, E., and Yan, H. (2018). Detecting the association of health problems in consumer-level medical text. Journal of Information Science, 44(1):3–14.
- Chen, L.-H. and Kageura, K. (2020). Multilingualization of Medical Terminology: Semantic and Structural Embedding Approaches. In Proceedings of The 12th Language Resources and Evaluation Conference, LREC 2020, Marseille, France, May 11-16, 2020, pages 4157–4166.
- Chen, S., Guo, X., Wu, T., and Ju, X. (2020). Exploring the online Doctor-Patient interaction on patient satisfaction based on text mining and empirical analysis. Information Processing & Management, 57(5):102253.
- DeAndrea, D. C. and Vendemia, M. A. (2016). How Affiliation Disclosure and Control Over User-Generated Comments Affects Consumer Health Knowledge and Behavior: A Randomized Controlled Experiment of Pharmaceutical Direct-to-Consumer Advertising on Social Media. Journal of Medical Internet Research, 18(7):e189.
- Deardorff, A., Masterton, K., Roberts, K., Kilicoglu, H., and Demner-Fushman, D. (2017). A protocol-driven approach to automatically finding authoritative answers to consumer health questions in online resources. Journal of the Association for Information Science and Technology, 68(7):1724–1736.
- Doing-Harris, K. M. and Zeng-Treitler, Q. (2011). Computer-Assisted Update of a Consumer Health Vocabulary Through Mining of Social Network Data. Journal of Medical Internet Research, 13(2):e37.

- Frantzi, K., Ananiadou, S., and Mima, H. (2000). Automatic recognition of multi-word terms: the C-value/NC-value method. International Journal on Digital Libraries, 3(2):115–130.
- Fujinuma, Y., Boyd-Graber, J., and Paul, M. J. (2019). A Resource-Free Evaluation Metric for Cross-Lingual Word Embeddings Based on Graph Modularity. In Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers, pages 4952–4962.
- Gu, G., Zhang, X., Zhu, X., Jian, Z., Chen, K., Wen, D., Gao, L., Zhang, S., Wang, F., Ma, H., and Lei, J. (2019). Development of a Consumer Health Vocabulary by Mining Health Forum Texts Based on Word Embedding: Semi-automatic Approach. JMIR Medical Informatics, 7(2):e12704.
- He, Z., Chen, Z., Oh, S., Hou, J., and Bian, J. (2017). Enriching consumer health vocabulary through mining a social Q&A site: A similarity-based approach. Journal of Biomedical Informatics, 69(C):75–85.
- Jiang, L. and Yang, C. C. (2013). Using co-occurrence analysis to expand consumer health vocabularies from social media data. In IEEE International Conference on Healthcare Informatics, ICHI 2013, 9-11 September, 2013, Philadelphia, PA, USA, pages 74–81.
- Khurana, S., Qiu, L., and Kumar, S. (2019). When a doctor knows, it shows: An empirical analysis of doctors’ responses in a Q&A forum of an online healthcare portal. Information Systems Research, 30(3):872–891.
- Lample, G., Conneau, A., Ranzato, M., Denoyer, L., and Jégou, H. (2018). Word translation without parallel data. In 6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings.
- Lu, W.-H., Lin, R. S., Chan, Y.-C., and Chen, K.-H. (2008). Using Web resources to construct multilingual medical thesaurus for cross-language medical information retrieval. Decision Support Systems, 45(3):585–595.
- Marko, K., Baud, R., Zweigenbaum, P., Borin, L., Merkel, M., and Schulz, S. (2006). Towards a multilingual medical lexicon. In AMIA 2006, American Medical Informatics Association Annual Symposium, Washington, DC, USA, November 11-15, 2006, pages 534–538.
- Mikolov, T., Sutskever, I., Chen, K., Corrado, G., and Dean, J. (2013). Distributed Representations of Words and Phrases and Their Compositionality. In Advances in Neural Information Processing Systems 26: 27th Annual Conference on Neural Information Processing Systems 2013. Proceedings of a meeting held December 5-8, 2013, Lake Tahoe, Nevada, United States, pages 3111–3119.

- Neumann, M., King, D., Beltagy, I., and Ammar, W. (2019). ScispaCy: Fast and Robust Models for Biomedical Natural Language Processing. In Proceedings of the 18th BioNLP Workshop and Shared Task, BioNLP@ACL 2019, Florence, Italy, August 1, 2019, pages 319–327.
- Patra, B., Moniz, J. R. A., Garg, S., Gormley, M. R., and Neubig, G. (2019). Bilingual lexicon induction with semi-supervision in non-isometric embedding spaces. In Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers, pages 184–193.
- Perozzi, B., Al-Rfou, R., and Skiena, S. (2014). DeepWalk: Online Learning of Social Representations. In The 20th ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '14, New York, NY, USA - August 24 - 27, 2014, pages 701–710.
- Ruder, S., Vulić, I., and Søgaard, A. (2019). A survey of cross-lingual word embedding models. Journal of Artificial Intelligence Research, 65:569–631.
- Smith, S. L., Turban, D. H. P., Hamblin, S., and Hammerla, N. Y. (2017). Offline bilingual word vectors, orthogonal transformations and the inverted softmax. In 5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings.
- Steinberger, J., Ebrahim, M., Ehrmann, M., Hurriyetoglu, A., Kabadjov, M., Lenkova, P., Steinberger, R., Tanev, H., Vázquez, S., and Zavarella, V. (2012). Creating sentiment dictionaries via triangulation. Decision Support Systems, 53(4):689–694.
- Teixeira Lopes, C., Paiva, D., and Ribeiro, C. (2017). Effects of language and terminology of query suggestions on medical accuracy considering different user characteristics. Journal of the Association for Information Science and Technology, 68(9):2063–2075.
- Teixeira Lopes, C. and Ribeiro, C. (2019). Interplay of Documents’ Readability, Comprehension and Consumer Health Search Performance Across Query Terminology. In Proceedings of the 2019 Conference on Human Information Interaction and Retrieval, CHIIR 2019, Glasgow, Scotland, UK, March 10-14, 2019, pages 193–201.
- Vydiswaran, V. G. V., Mei, Q., Hanauer, D. A., and Zheng, K. (2014). Mining consumer health vocabulary from community-generated text. In AMIA 2014, American Medical Informatics Association Annual Symposium, Washington, DC, USA, November 15-19, 2014, pages 1150–1159.
- Wu, D., Xu, H., and Fan, S. (2019). How do consumers acquire health information? a pattern analysis on online health consultation. Proceedings of the Association for Information Science and Technology, 56(1):813–815.

- Zeng, Q. T., Redd, D., Rindflesch, T., and Nebeker, J. (2012). Synonym, Topic Model and Predicate-Based Query Expansion for Retrieving Clinical Documents. In AMIA 2012, American Medical Informatics Association Annual Symposium, Chicago, Illinois, USA, November 3-7, 2012, pages 1050–1059.
- Zeng, Q. T. and Tse, T. (2006). Exploring and Developing Consumer Health Vocabularies. Journal of the American Medical Informatics Association, 13(1):24–29.
- Zeng, Q. T., Tse, T., Divita, G., Keselman, A., Crowell, J., Browne, A. C., Goryachev, S., and Ngo, L. (2007). Term Identification Methods for Consumer Health Vocabulary Development. Journal of Medical Internet Research, 9(1):e4.
- Zhang, X., Guo, F., Xu, T., and Li, Y. (2020). What motivates physicians to share free health information on online health platforms? Information Processing & Management, 57(2):102166.
- Zhou, L., Zhang, D., Yang, C. C., and Wang, Y. (2018). Harnessing social media for health information management. Electronic Commerce Research and Applications, 27:139–151.