

# SC-QUES: A Sentence Completion Question Dataset for English as a Second Language Learners

Qiongqiong Liu  
TAL Education Group  
Beijing, China  
liuqiongqiong1@tal.com

Shuyan Huang  
TAL Education Group  
Beijing, China  
huangshuyan@tal.com

Zitao Liu\*  
TAL Education Group  
Beijing, China  
liuzitao@tal.com

Weiqi Luo  
Guangdong Institute of Smart Education  
Jinan University  
GuangZhou, China  
lwq@jnu.edu.cn

## ABSTRACT

Sentence completion (SC) questions present a sentence with one or more blanks that need to be filled in, three to five possible words or phrases as options. SC questions are widely used for students learning English as a Second Language (ESL). In this paper, we present a large-scale SC dataset, SC-QUES, which is made up of 292,517 ESL SC questions from real-world standardized English examinations. Furthermore, we build a comprehensive benchmark of automatically solving the SC questions by training the large-scale pre-trained language models on the proposed SC-QUES dataset. We conduct detailed analysis of the baseline models performance, limitations and trade-offs. The data and our code are available for research purposes from: <https://github.com/ai4ed/SC-Ques>.

### ACM Reference Format:

Qiongqiong Liu, Shuyan Huang, Zitao Liu, and Weiqi Luo. 2018. SC-QUES: A Sentence Completion Question Dataset for English as a Second Language Learners. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (Conference acronym 'XX)*. ACM, New York, NY, USA, 6 pages. <https://doi.org/XXXXXXXX.XXXXXXX>

## 1 INTRODUCTION

Standardized examination is one of the crucial elements in world-wide education systems of teaching English as a Second Language (ESL) [3, 52]. They have proved a necessary source of evaluation data for investigating and diagnosing the situations that ESL learners grasp the essential language knowledge [9, 13, 26]. The standardized ESL examinations are usually organized in various formats of well-designed language processing tasks to evaluate specific capabilities.

\*The corresponding author: Zitao Liu.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](https://permissions.acm.org).

Conference acronym 'XX, June 03–05, 2018, Woodstock, NY

© 2018 Association for Computing Machinery.  
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00  
<https://doi.org/XXXXXXXX.XXXXXXX>

Previous researchers have spent lots of efforts in designing such language proficiency evaluation tasks which can be summarized into three categories: narrow, intermediate, and general [4, 19, 47, 52]. These tasks are designed to assess different ESL language understanding capabilities from word, sentence, paragraph/document levels. For examples, among the narrow tasks, the identification of synonyms and antonyms has been widely used in the Test of English as a Foreign Language (TOEFL), Graduate Record Exams (GRE) and many other ESL standardized exams [28, 40–43]. General tasks involve more logical and comprehensive abilities such as logic puzzles in the Law School Administration Test (LSAT) [8, 21, 22], reading comprehension questions from GRE [29, 34], etc. The intermediate tasks stand between the word-level narrow tasks and the paragraph-level general tasks and focus on the sentence level language understanding. Among all the intermediate tasks, sentence completion (SC) questions are well-studied as one of the classic representatives [20, 38, 46, 48]. SC questions present a sentence with one or more blanks that need to be filled in. Three to five possible words (or short phrases) are given as options for each blank and only one of the options yields to a reasonable sentence. An example of SC question is shown in Table 1.

**Table 1: An illustrative example of SC questions.**

- That T-shirt with Yao Ming’s picture on it \_\_\_\_ belong to John. He likes him a lot.
  - No, it \_\_\_\_ be his. He hates black color.
- (A) can; can’t (B) may; needn’t (C) must; mustn’t (D) must; can’t

An intelligent computational approach to SC in ESL is able to provide instant feedback to students and help students learn and practice ESL questions anytime anywhere. Besides, they provide feasible solutions to evaluate distractors in SC questions and help teachers revise and improve the overall qualities of SC questions. Hence, constructing a SC dataset is essential to building an intelligent SC approach.

Although there are a few publicly available SC datasets such as MSR SC dataset<sup>1</sup> [37, 47, 51], their sample sizes are very limited and only contain a few thousand SC questions. Such small datasets are not able to align with the power of the state-of-the-art (SOTA) pre-trained language models (LMs). Furthermore, the number of missing blanks and the length of candidate tokens are fixed in

<sup>1</sup><https://www.microsoft.com/en-us/research/project/msr-sentence-completion-challenge/>

existing open-sourced SC datasets [51]. However, in the real-world English learning scenario, SC questions are usually presented in diverse forms with irregular numbers of blanks and various lengths of to-be-filled tokens.

To tackle the above limitations in existing SC datasets, we introduce SC-QUES, a large-scale SC question dataset for ESL learners. The proposed SC-QUES dataset contains 292,517 questions with one or more missing blanks. To the best of our knowledge, SC-QUES is one of the largest SC question dataset for ESL learners. Meanwhile, we fine-tune the existing SOTA pre-trained LMs on the SC-QUES dataset and present a systematic benchmark of automatically solving the ESL SC questions in students' real-life scenarios. We conduct comprehensive experimental evaluations to understand the performance impacts of different lengths of SC questions contexts and different numbers of words in candidate options. We conduct the precision-recall trade-off analysis and discuss the practical issues when deploying the SC question AI solver in real-world educational contexts.

## 2 THE SC-QUES DATASET

### 2.1 Data Collection

SC questions in SC-QUES are real English assignment questions used for K-12 students and they are developed by teaching content professionals at TAL Education Group<sup>2</sup>. Each SC question in SC-QUES is represented as the single select multiple choice question format that consists of three parts: (1) question stem that denotes the main text content of the target ESL question with one or more blanks; (2) candidate options that are represented as a predetermined set of responses of at least three or more options; and (3) answer that indicates the correct one to be filled in the blanks.

Even though all the SC questions are manually developed by teaching professionals, there exists some data duplication, missing data problems or data corruption issues. Therefore, we conduct a series of steps to filter out or clean up the duplication and ill-formed SC questions. Specifically, we remove the duplicate question with the same options. And we filter out SC questions that if the question stem, candidate options, or answer is missing. Furthermore, we only remain SC questions whose number of candidate options is equal to 3 or 4.

### 2.2 SC Question Categorization

Due to the arbitrary number of blanks and tokens in the ESL SC tasks, questions in SC-QUES are categorized into the following categories according to the blank numbers and tokens numbers and the examples of each category are illustrated in Table 2.

- **C1: One-blank and one-token.** Questions have one to-be-filled blank and the longest candidate option has one token.
- **C2: One-blank and many-token.** Questions have one to-be-filled blank and the longest candidate option has multiple tokens.
- **C3: Many-blank and one-token.** Questions have more than one to-be-filled blanks and the longest candidate option has one token.


- **C4: Many-blank and many-token.** Questions have more than one to-be-filled blanks and the longest candidate option has multiple tokens.

**Table 2: Illustrative examples of SC questions from different categories.**

C1	Jack is five years old now. He can dress ____.
	(A) herself (B) himself (C) yourself
C2	Sam and Mike aren't at school. ____ are they?
	(A) How (B) Who (C) Where
C3	- I'm very tall. Where can I sit?
	- ____ the classroom.
	(A) In the front of (B) At the back of (C) In the middle of
	- I find that I have been unlucky these days.
C4	- ____ Everything will become better soon.
	(A) Keep silent! (B) Why not cry? (C) Cheer up! (D) How about you?
	- Whose are those jeans?
	- This pair of jeans ____ mine and that two pairs ____ my brother's.
C3	(A) are; are (B) are; is (C) is; are
	- That T-shirt with Yao Ming's picture on it ____ belong to John.
	He likes him a lot.
	- No, it ____ be his. He hates black color.
C4	(A) can; can't (B) may; needn't (C) must; mustn't (D) must; can't
	We have ____ homework to do every day so we can't play ____
	computer games.
	(A) too many; too many (B) too much; too many
C4	(C) too many; too much (D) too much; too much
	____ of their bad habits, the boys changed from being dependent on their
	parents to ____ for others.
	(A) Having rid; sacrificing (B) To rid; sacrifice
C4	(C) Rid; sacrificing (D) Having been rid; sacrifice

### 2.3 Data Statistics

After data cleaning and preprocessing, in total, we end up with 292,517 SC questions in SC-QUES. Specifically, we have 111,990 134,732, 28,201, and 17,594 SC questions in categories C1, C2, C3 and C4 respectively. 84.3% of SC questions have one blank missing. The length distribution of the question stems in SC-QUES is shown in Figure 1. As we can see that most of the questions contain 5 to 15 words and sentences of 9 words have the largest portion. There are only 5.9% questions that have more than 20 words. This indicates SC questions usually have very limited contexts and imply subtle linguistic knowledge such as grammar, syntax, and semantics, the performance of automatically solving the ESL SC questions may vary a lot.

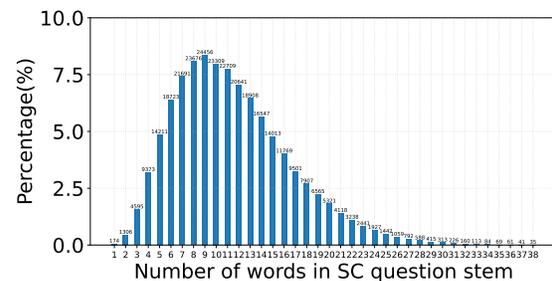

**Figure 1: Length distribution of SC questions in SC-QUES.**

## 3 BENCHMARK

### 3.1 Problem Formulation


Let  $q$  be the SC question stem with one or more blanks. Let  $o_1, \dots, o_m$  be the candidate options associated with  $q$ . Solving the SC question is to find the option that leads to the highest correct probability

<sup>2</sup>TAL Education Group (NYSE:TAL) is an educational technology company dedicated to supporting public and private education across the world.

after completing the to-be-filled sentence with the selected option, i.e.,  $\arg \max_{i=1, \dots, m} \Pr(o_i|q)$ .

### 3.2 Benchmark Workflow

In this work, we view the above problem as a predictive task and we aim to train a classifier to find the correct answer from the option pool of confusing candidates. Specifically, we first fill candidate options into the corresponding blanks to get complete sentences. Then we treat sentences that contain the correct options as positive examples and the rest as negative examples. After that, we utilize a neural LM model to extract the semantically meaningful information within each sentence in SC questions and make final SC question predictions via a multilayer perceptron (MLP). The overall end-to-end benchmark workflow is shown in Figure 2.



**Figure 2: The overall benchmark workflow. The sentence in red color denotes the correct option and is denoted as the positive example in the training process.**

**The Neural Language Model.** Large-scale pre-trained LMs such as BERT [10], BART [23] and XLNet [49], benefit from self-supervised learning on a large amount of corpus, and has shown its competent generalization to various downstream natural language understanding tasks. In this work, we conduct systematic benchmark evaluation by measuring the prediction accuracy with existing prevalent large-scale pre-trained LMs listed as follows. Please note that we choose to use their large model versions for experiments. Since we expect each SC question to be solved correctly, we choose to use accuracy as our evaluation metric.

- BERT [10]. A pre-trained natural language understanding model with transformer encoder blocks. We fine-tune BERT on our SC dataset as a sentence classification task. We adapt a special start token ([CLS]) as the first token of every text sequence and the final hidden state corresponding to this token is used as the aggregated SC sentence representation.
- RoBERTa [25]. RoBERTa improves BERT by replacing static masking with dynamic masking, pre-training more epochs with larger batch size, and removing the next sentence prediction task. We follow the same fine-tuning protocol as described in the BERT method.
- XLNet [49]. XLNet is an auto regressive based pre-training method with transformer decoder blocks. Similar to BERT, we fine-tune the XLNet and utilize the last hidden state as the SC representation.
- BART [23]. BART adapts standard Transformer [44] as its backbone model and utilizes a denoising autoencoder for pretraining sequence-to-sequence models. It is pre-trained to recover different types of text corruptions to their original versions, such as sentence permutation and text infilling.

**The MLP Prediction.** Once we obtain the final hidden state from above neural LM module as the aggregated SC sentence representation. We introduce two additional fully-connected layers to perform the binary classification task, i.e.,  $x = \text{softmax}(W_1 \tanh(W_0 t_n +$


$b_0) + b_1)$ ), where  $W_0 \in \mathbb{R}^{d \times 1024}$ ,  $b_0 \in \mathbb{R}^{1024}$ ,  $W_1 \in \mathbb{R}^{1024 \times 2}$  and  $b_1 \in \mathbb{R}^2$ . The first entry of  $x$  gives the probability of wrong option while the second entry gives right option probability. The objective is to minimize the cross entropy of the right or wrong option labels.

### 3.3 Experimental Setup & Details

We randomly split the entire dataset into training set and testing set with 244,070 and 48,447 SC questions respectively in an approximate ratio of 5 : 1. For BERT, RoBERTa and XLNet, each model has 24 hidden layers, 1024 hidden size and 16 attention heads. For the BART model, it has 12 layers and 16 attention heads in each of the encoder and decoder, and the hidden size is 1024. We employ the AdamW [18] as the optimizer with an initial learning rate of  $1e-5$  for all models. We fine-tune our model on 4 Tesla V100 GPU devices. Due to the limited memory of GPU devices, the batch size of BERT is set to 32, and the other models set the batch size as 16. The max length of the sentences is set to 128.

### 3.4 Results

**Overall Performance.** As we can see from Figure 3, BART outperforms other models in terms of prediction errors on the entire testing set. When comparing prediction performance of all the methods on C1 to C2, C3 and C4, we can see that the increase of either the number of blanks or the length of options doesn't hurt the accuracy of ESL SC question solvers. The pre-trained large-scaled LMs are very robust and insensitive to SC questions in different categories. We run the pairwise t-test for each possible pair from these methods and all of them are statistically significantly different at 0.01 level.

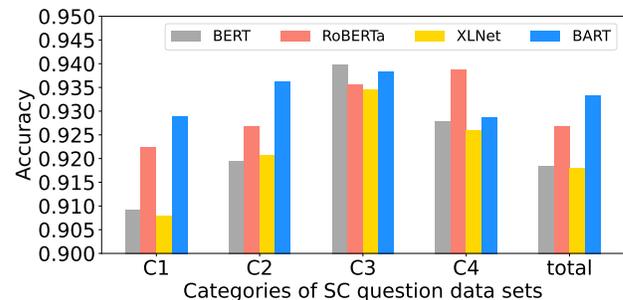

**Figure 3: Results on different categories of SC question data sets in terms of accuracy.**

**Impacts of Different Lengths of SC Questions Contexts.** We study the impacts of different lengths of questions and the results are shown in Figure 4. From the model performance curve, we can see that when the length of the questions is larger than 10, the model performances of XLNet and BART drop sharply. This indicates that after exceeding a certain length, questions become more difficult with the increase of the context length. The reason may be that the model is difficult to capture the contextual information in such a long distance. What is interesting is that if the length of the question is less than 3, the models also show slightly poor performance, which indicates that it is hard for the model to distinguish different options once there is not enough context information.

**Impacts of Different Numbers of Words In Candidate Options.** We also study the performance impacts in terms of the length

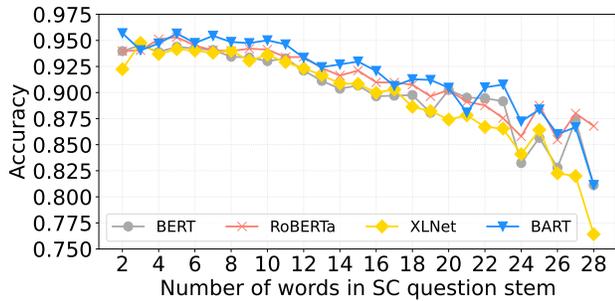


Figure 4: Results on different lengths of the questions.

of candidate options. We focus on the questions which have only one blank and two blanks. As shown in Table 3, we can see that the trend is similar to the different length of the questions, if the length of the candidate options is too short or too long, the performance would be a little worse.

Table 3: Results on different lengths of the longest option in the questions which have *one blank* and *two blanks*.

Methods	one blank				two blanks			
	1	2	3	>=4	2	3	4	>=5
BERT	0.9092	0.9344	0.9153	0.8845	<b>0.9393</b>	0.9355	0.9357	0.9002
RoBERTa	0.9224	0.9379	0.9202	0.906	0.9354	<b>0.9473</b>	<b>0.9398</b>	<b>0.9267</b>
XLNet	0.9079	0.9344	0.9131	0.8942	0.9345	0.9277	0.9357	0.9048
<b>BART</b>	<b>0.9290</b>	<b>0.9457</b>	<b>0.9331</b>	<b>0.9151</b>	0.9382	0.9308	0.9382	0.9142

**Precision-Recall Trade-off Analysis.** When deploying the model in practice, a wrong answer may give bad guidance to students. In order to reduce such problems, we may refuse to solve some difficult questions and improve the precision of more solvable questions. The models in our benchmark will output the correct probability for each option, for each question, we use a softmax function with temperature 0.1 for the probabilities of all options, the final highest probability can also be viewed as the problem-solvable confidence score. After that, we set a threshold to the correct probability of the model’s selected option and accept the above-the-threshold questions as our solvable questions. The recall score is computed as (the number of solvable questions)/(the number of all test questions), and the precision score is calculated as (the number of both solvable and correct-answered questions)/(the number of solvable questions). The precision and recall curves of all the pre-trained LMs in different thresholds are shown in Figure 5. We can see that with the threshold growing, the precision is higher and the recall becomes smaller. When the threshold is 0.95, the precision of most of the models are higher than 97.0% and the recall scores keep greater than 80.0%.

## 4 RELATED WORK

### 4.1 Sentence Completion Datasets

SC datasets always include in-completed sentences which require selecting the most appropriate answer from several options. Recently, there are several publicly available SC datasets. MSR is a SC challenge data consisting of 1,040 sentences with four impostor sentences for each original sentence [51]. CODAH involves multiple choice SC questions, each SC question contains four options which are consistent with commonsense [5]. Park and Park collected 1823 cloze-style questions with multiple-choice questions

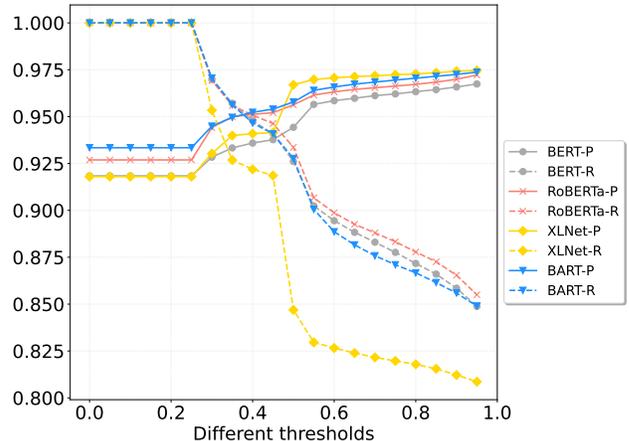


Figure 5: The precision-recall curve.

from the Test of Proficiency in Korean (TOPIK) [31]. Nozza et al. provided a manually labeled hurtful SC dataset in six languages [30]. Compared with the above works, our proposed SC-*QUES* is a relatively large-scale SC dataset with more than 290 thousands ESL SC questions.

### 4.2 Sentence Completion Solvers

Various approaches have been proposed to automatically solve the ESL SC questions. Earlier literature prefer complete the sentence by filling the blank with each candidate option in turn, and to evaluate its likelihood under an LM [6, 7, 52]. Motivated by the successful applications in language modeling via deep neural networks [14, 27, 35], recent studies tackle the SC challenges based on the recurrent neural networks (RNN) [39, 48]. For examples, Yang and Deng proposed a global context dependent RNN LM to obtain the global semantics of the target in the SC tasks [48]. Since large-scale pre-trained LMs become remarkably powerful models for language understanding and attain unprecedented levels of performance gains on multiple language tasks [10, 16, 32, 33], there are some approaches utilize pre-trained LMs to solve the SC questions [11, 36, 50]. Donahue et al. trained the language model by using the concatenation of artificially-masked texts and the texts which are masked as input [11]. Besides above research works of solving SC questions via language modeling, researchers also make attempts from different machine learning perspectives [1, 2, 12, 15, 24, 47]. Liu et al. developed an gradient search based iterative inference algorithm that can be broadly applied to any neural sequence generative model for the fill-in-the-blank tasks [24]. Researchers also studied automatically solve questions in domains other than ESL, such as history [45], science [17], etc.

## 5 CONCLUSION

In this paper, we construct a large-scale SC question dataset, SC-*QUES*, for ESL Learners. The SC-*QUES* consists of 292,517 SC questions with four categories of questions that contain almost all SC classifications in the English examinations of the real world. Furthermore, we present a benchmark on the proposed SC-*QUES* for automatically solving the ESL SC questions. The experimental results indicate the effectiveness of our dataset and the proposed benchmark.

## REFERENCES

- [1] Jean Argouarc'h. 2018. Dependency, skip-grams, association tensors and machine learning for sentence completion. In *Proc. 14th Conf. Natural Lang. Process. (KONVENS)*. 100–109.
- [2] S. Banerjee, Pinaki Bhaskar, Partha Pakray, Sivaji Bandyopadhyay, and Alexander Gelbukh. 2013. Multiple Choice Question (MCQ) Answering System for Entrance Examination. In *CLEF*.
- [3] Lisa Beinborn, Torsten Zesch, and Iryna Gurevych. 2015. Candidate evaluation strategies for improved difficulty prediction of language tests. In *Proceedings of the Tenth Workshop on Innovative Use of NLP for Building Educational Applications*. Association for Computational Linguistics, Denver, Colorado, 1–11. <https://doi.org/10.3115/v1/W15-0601>
- [4] Lisa Marina Beinborn. 2016. *Predicting and manipulating the difficulty of text-completion exercises for language learning*. Ph.D. Dissertation. Technische Universität Darmstadt.
- [5] Michael Chen, Mike D'Arcy, Alisa Liu, Jared Fernandez, and Doug Downey. 2019. CODAH: An adversarially-authored question answering dataset for common sense. In *Proceedings of the 3rd Workshop on Evaluating Vector Space Representations for NLP*. 63–69.
- [6] Stanley Chen. 2009. Performance Prediction for Exponential Language Models. In *Proceedings of Human Language Technologies: The 2009 Annual Conference of the North American Chapter of the Association for Computational Linguistics*. Association for Computational Linguistics, Boulder, Colorado, 450–458. <https://www.aclweb.org/anthology/N09-1051>
- [7] Stanley Chen. 2009. Shrinking Exponential Language Models. In *Proceedings of Human Language Technologies: The 2009 Annual Conference of the North American Chapter of the Association for Computational Linguistics*. Association for Computational Linguistics, Boulder, Colorado, 468–476. <https://www.aclweb.org/anthology/N09-1053>
- [8] Federico Chesani, Paola Mello, and Michela Milano. 2017. Solving mathematical puzzles: A challenging competition for ai. *AI Magazine* 38, 3 (2017), 83–96.
- [9] Gareth Davey, Chuan De Lian, and Louise Higgins. 2007. The university entrance examination system in China. *Journal of further and Higher Education* 31, 4 (2007), 385–396.
- [10] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: Pre-training of Deep Bidirectional Transformers for Language Understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*. Association for Computational Linguistics, Minneapolis, Minnesota, 4171–4186. <https://doi.org/10.18653/v1/N19-1423>
- [11] Chris Donahue, Mina Lee, and Percy Liang. 2020. Enabling Language Models to Fill in the Blanks. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Online, 2492–2501. <https://doi.org/10.18653/v1/2020.acl-main.225>
- [12] William Fedus, Ian J. Goodfellow, and Andrew M. Dai. 2018. MaskGAN: Better Text Generation via Filling in the \_\_\_\_\_. In *6th International Conference on Learning Representations, ICLR 2018, Vancouver, BC, Canada, April 30 - May 3, 2018, Conference Track Proceedings*. OpenReview.net. <https://openreview.net/forum?id=ByOExmWAb>
- [13] Wolfgang Franke. 1960. *The reform and abolition of the traditional Chinese examination system*. Vol. 10. Harvard Univ Asia Center.
- [14] Alex Graves, Abdel-rahman Mohamed, and Geoffrey Hinton. 2013. Speech recognition with deep recurrent neural networks. In *2013 IEEE international conference on acoustics, speech and signal processing*. IEEE, 6645–6649.
- [15] Joseph Gubbins and Andreas Vlachos. 2013. Dependency Language Models for Sentence Completion. In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, Seattle, Washington, USA, 1405–1410. <https://www.aclweb.org/anthology/D13-1143>
- [16] Jeremy Howard and Sebastian Ruder. 2018. Universal Language Model Fine-tuning for Text Classification. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Melbourne, Australia, 328–339. <https://doi.org/10.18653/v1/P18-1031>
- [17] Tushar Khot, Ashish Sabharwal, and Peter Clark. 2018. SciTail: A Textual Entailment Dataset from Science Question Answering. In *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence, (AAAI-18), the 30th innovative Applications of Artificial Intelligence (IAAI-18), and the 8th AAAI Symposium on Educational Advances in Artificial Intelligence (EAAI-18)*. New Orleans, Louisiana, USA, February 2-7, 2018, Sheila A. McIlraith and Kilian Q. Weinberger (Eds.). AAAI Press, 5189–5197. <https://www.aaai.org/ocs/index.php/AAAI/AAAI18/paper/view/17368>
- [18] Diederik P. Kingma and Jimmy Ba. 2015. Adam: A Method for Stochastic Optimization. In *3rd International Conference on Learning Representations, ICLR 2015, San Diego, CA, USA, May 7-9, 2015, Conference Track Proceedings*. Yoshua Bengio and Yann LeCun (Eds.). <http://arxiv.org/abs/1412.6980>
- [19] Thomas K Landauer and Susan T Dumais. 1997. A solution to Plato's problem: The latent semantic analysis theory of acquisition, induction, and representation of knowledge. *Psychological review* 104, 2 (1997), 211.
- [20] Kysusong Lee and Gary Geunbae Lee. 2014. Sentence completion task using web-scale data. In *2014 International Conference on Big Data and Smart Computing (BIGCOMP)*. IEEE, 173–176.
- [21] Iddo Lev. 2006. Logic puzzles: A new test-suite for compositional semantics and reasoning.
- [22] Iddo Lev, Bill MacCartney, Christopher Manning, and Roger Levy. 2004. Solving logic puzzles: From robust processing to precise semantics. In *Proceedings of the 2nd Workshop on Text Meaning and Interpretation*. Association for Computational Linguistics, Barcelona, Spain, 9–16. <https://www.aclweb.org/anthology/W04-0902>
- [23] Mike Lewis, Yinhan Liu, Naman Goyal, Marjan Ghazvininejad, Abdelrahman Mohamed, Omer Levy, Veselin Stoyanov, and Luke Zettlemoyer. 2020. BART: Denoising Sequence-to-Sequence Pre-training for Natural Language Generation, Translation, and Comprehension. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Online, 7871–7880. <https://doi.org/10.18653/v1/2020.acl-main.703>
- [24] Dayiheng Liu, Jie Fu, Pengfei Liu, and Jiancheng Lv. 2019. TIGS: An Inference Algorithm for Text Infilling with Gradient Search. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*. Association for Computational Linguistics, Florence, Italy, 4146–4156. <https://doi.org/10.18653/v1/P19-1406>
- [25] Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. RoBERTa: A robustly optimized BERT pretraining approach. *arXiv preprint arXiv:1907.11692* (2019).
- [26] George F Madaus. 1991. The effects of important tests on students: Implications for a national examination system. *The Phi Delta Kappan* 73, 3 (1991), 226–231.
- [27] Tomáš Mikolov, Stefan Kombrink, Lukáš Burget, Jan Černocký, and Sanjeev Khudanpur. 2011. Extensions of recurrent neural network language model. In *2011 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 5528–5531.
- [28] Saif Mohammad, Bonnie Dorr, and Graeme Hirst. 2008. Computing Word-Pair Antonymy. In *Proceedings of the 2008 Conference on Empirical Methods in Natural Language Processing*. Association for Computational Linguistics, Honolulu, Hawaii, 982–991. <https://www.aclweb.org/anthology/D08-1103>
- [29] Hwee Tou Ng, Leong Hwee Teo, and Jennifer Lai Pheng Kwan. 2000. A Machine Learning Approach to Answering Questions for Reading Comprehension Tests. In *2000 Joint SIGDAT Conference on Empirical Methods in Natural Language Processing and Very Large Corpora*. Association for Computational Linguistics, Hong Kong, China, 124–132. <https://doi.org/10.3115/1117794.1117810>
- [30] Debora Nozza, Federico Bianchi, and Dirk Hovy. 2021. HONEST: Measuring hurtful sentence completion in language models. In *The 2021 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics.
- [31] Heewoong Park and Jonghun Park. 2020. Assessment of word-level neural language models for sentence completion. *Applied Sciences* 10, 4 (2020), 1340.
- [32] Matthew Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. 2018. Deep Contextualized Word Representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*. Association for Computational Linguistics, New Orleans, Louisiana, 2227–2237. <https://doi.org/10.18653/v1/N18-1202>
- [33] Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. 2019. Language models are unsupervised multitask learners. *OpenAI blog* 1, 8 (2019), 9.
- [34] Ellen Riloff and Michael Thelen. 2000. A Rule-based Question Answering System for Reading Comprehension Tests. In *ANLP-NAACL 2000 Workshop: Reading Comprehension Tests as Evaluation for Computer-Based Language Understanding Systems*. <https://www.aclweb.org/anthology/W00-0603>
- [35] Mike Schuster and Kuldeep K Paliwal. 1997. Bidirectional recurrent neural networks. *IEEE transactions on Signal Processing* 45, 11 (1997), 2673–2681.
- [36] Tianxiao Shen, Victor Quach, Regina Barzilay, and Tommi Jaakkola. 2020. Blank Language Models. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, Online, 5186–5198. <https://doi.org/10.18653/v1/2020.emnlp-main.420>
- [37] Eugene Tang. 2015. Assessing the Effectiveness of Corpus-based Methods in Solving SAT Sentence Completion Questions. (2015).
- [38] Eugene Tang. 2016. Assessing the Effectiveness of Corpus-Based Methods in Solving SAT Sentence Completion Questions. *JCP* 11, 4 (2016), 266–279.
- [39] Ke Tran, Arianna Bisazza, and Christof Monz. 2016. Recurrent Memory Networks for Language Modeling. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*. Association for Computational Linguistics, San Diego, California, 321–331. <https://doi.org/10.18653/v1/N16-1036>
- [40] Peter Turney. 2008. A Uniform Approach to Analogies, Synonyms, Antonyms, and Associations. In *Proceedings of the 22nd International Conference on Computational*

- Linguistics (Coling 2008)*. Coling 2008 Organizing Committee, Manchester, UK, 905–912. <https://www.aclweb.org/anthology/C08-1114>
- [41] Peter D Turney. 2001. Mining the web for synonyms: PMI-IR versus LSA on TOEFL. In *European conference on machine learning*. Springer, 491–502.
- [42] Peter D Turney and Michael L Littman. 2005. Corpus-based learning of analogies and semantic relations. *Machine Learning* 60, 1-3 (2005), 251–278.
- [43] Peter D Turney, Michael L Littman, Jeffrey Bigham, and Victor Shnayder. 2003. Combining Independent Modules to Solve Multiple-choice Synonym and Analogy Problems. In *Proceedings of the International Conference on Recent Advances in Natural Language Processing, 2003*. 482–489.
- [44] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is All you Need. In *Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA*, Isabelle Guyon, Ulrike von Luxburg, Samy Bengio, Hanna M. Wallach, Rob Fergus, S. V. N. Vishwanathan, and Roman Garnett (Eds.), 5998–6008. <https://proceedings.neurips.cc/paper/2017/hash/3f5ee243547dee91fbd053c1c4a845aa-Abstract.html>
- [45] Di Wang, Leonid Boytsov, Jun Araki, Alkesh Patel, Jeff Gee, Zhengzhong Liu, Eric Nyberg, and Teruko Mitamura. 2014. CMU Multiple-choice Question Answering System at NTCIR-11 QA-Lab.. In *NTCIR*.
- [46] Xiaochi Wei, Heyan Huang, Liqiang Nie, Hanwang Zhang, Xian-Ling Mao, and Tat-Seng Chua. 2016. I know what you want to express: sentence element inference by incorporating external knowledge base. *IEEE Transactions on Knowledge and Data Engineering* 29, 2 (2016), 344–358.
- [47] Aubrie Woods. 2016. Exploiting Linguistic Features for Sentence Completion. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*. Association for Computational Linguistics, Berlin, Germany, 438–442. <https://doi.org/10.18653/v1/P16-2071>
- [48] Tao Yang and Hongli Deng. 2019. Intelligent sentence completion based on global context dependent recurrent neural network LM. In *Proceedings of the International Conference on Artificial Intelligence, Information Processing and Cloud Computing*. 1–5.
- [49] Zhilin Yang, Zihang Dai, Yiming Yang, Jaime G. Carbonell, Ruslan Salakhutdinov, and Quoc V. Le. 2019. XLNet: Generalized Autoregressive Pretraining for Language Understanding. In *Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada*, Hanna M. Wallach, Hugo Larochelle, Alina Beygelzimer, Florence d'Alché-Buc, Emily B. Fox, and Roman Garnett (Eds.), 5754–5764. <https://proceedings.neurips.cc/paper/2019/hash/dc6a7e655d7e5840e66733e9ee67cc69-Abstract.html>
- [50] Wanrong Zhu, Zhiting Hu, and Eric Xing. 2019. Text infilling. *arXiv preprint arXiv:1901.00158* (2019).
- [51] Geoffrey Zweig and Christopher JC Burges. 2011. *The microsoft research sentence completion challenge*. Technical Report. Citeseer.
- [52] Geoffrey Zweig, John C. Platt, Christopher Meeke, Christopher J.C. Burges, Ainur Yessenalina, and Qiang Liu. 2012. Computational Approaches to Sentence Completion. In *Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*. Association for Computational Linguistics, Jeju Island, Korea, 601–610. <https://www.aclweb.org/anthology/P12-1063>