

Distillation to Enhance the Portability of Risk Models Across Institutions with Large Patient Claims Databases

Steve Nyemba¹, Chao Yan¹, Ziqi Zhang², Amol Rajmane³, Pablo Meyer⁴,
Prithwish Chakraborty⁴, Bradley Malin^{1,2}

¹ Vanderbilt University Medical Center, Nashville, TN, USA

² Vanderbilt University, Nashville, TN, USA

³ IBM Watson Health, MA, USA

⁴ Center for Computational Health, IBM Research, NY, USA

ABSTRACT

Artificial intelligence, and particularly machine learning (ML), is increasingly developed and deployed to support healthcare in a variety of settings. However, clinical decision support (CDS) technologies based on ML need to be portable if they are to be adopted on a broad scale. In this respect, models developed at one institution should be reusable at another. Yet there are numerous examples of portability failure, particularly due to naive application of ML models. Portability failure can lead to suboptimal care and medical errors, which ultimately could prevent the adoption of ML-based CDS in practice. One specific healthcare challenge that could benefit from enhanced portability is the prediction of 30-day readmission risk. Research to date has shown that deep learning models can be effective at modeling such risk. In this work, we investigate the practicality of model portability through a cross-site evaluation of readmission prediction models. To do so, we apply a recurrent neural network, augmented with self-attention and blended with expert features, to build readmission prediction models for two independent large scale claims datasets. We further present a novel transfer learning technique that adapts the well-known method of born-again network (BAN) training. Our experiments show that direct application of ML models trained at one institution and tested at another institution perform worse than models trained and tested at the same institution. We further show that the transfer learning approach based on the BAN produces models that are better than those trained on just a single institution's data. Notably, this improvement is consistent across both sites and occurs after a single retraining, which illustrates the potential for a cheap and general model transfer mechanism of readmission risk prediction.

CCS CONCEPTS

• **Computing methodologies** → **Artificial intelligence**; *Learning paradigms*; • **Applied computing** → **Health informatics**.

KEYWORDS

ai for health, model portability, transfer learning

ACM Reference Format:

Steve Nyemba¹, Chao Yan¹, Ziqi Zhang², Amol Rajmane³, Pablo Meyer⁴, Prithwish Chakraborty⁴, Bradley Malin^{1,2}. . Distillation to Enhance the Portability of Risk Models Across Institutions with Large Patient Claims Databases. In . ACM, New York, NY, USA, 5 pages.

1 INTRODUCTION

The quantity of patient data continues to grow at an unprecedented pace. This is supported, in part, by the continued adoption of electronic health record (EHR) systems and use of greater detail in insurance claims. The large scale nature of such resources provide an opportunity to develop artificial intelligence, and machine learning (ML) in particular, to solve problems in a variety of settings.

From a patient health perspective, ML applications have shown promise for the analysis of radiology images [12], modeling comorbidity of chronic disorders [3, 9, 11], and forecasting of risk in developing particular diseases [14]. From a healthcare administration perspective, there is an expectation that ML can help detect and prevent costly healthcare events, such as the prediction of all-cause 30-day readmission after discharge from a hospital stay. This problem holds real world importance with both societal (preventing readmissions reduce the quality of life for patients [7]) and economic implications [4]. National payment agencies, such as the U.S. Centers for Medicare and Medicaid Services (CMS), regularly monitor the rate of such an event across healthcare facilities and penalize for unplanned readmissions. There has been a non-trivial amount of research into summary indicators of readmission [7]. For instance, Chakraborty et al. [2] showed that effective ML models for forecasting 30-day readmission risk can be learned by jointly representing the complex, sparse, and potentially noisy sequential patient records along with the summary indicators.

Demonstration of a model on a dataset from a single healthcare organization is a critical first step in model development. However, it is important that models developed using data from one site be tested at, and adapted to, other sites. Yet there are various challenges that can lead to an ineffective transfer of ML models. First, there are often inconsistencies in how data is organized and recorded across healthcare organizations. Second, ML models may be overfit to disease patterns observed at a specific site. While this can arise from insufficient model evaluation, patient populations at disparate healthcare organizations may be significantly different. These problems were clearly illustrated by a failure in portability of Epic's sepsis prediction tool [6]. Community efforts, such as the OHDSI network [8], have worked to solve the first problem by promoting common data model formats across institutes; however, the second aspect is often understudied and is thus the focus of this paper.

In this work, we investigate the practicality of model portability through a cross-site evaluation of readmission prediction models. To do so, we apply a recurrent neural network, augmented with self-attention and blended with expert features, to build readmission

prediction models for two independent large scale claims datasets. Interestingly, it is often desirable from a data-privacy and data-usage restrictions to allow transfer of built models between datasets without actually sharing the underlying training data/gradients. Thus, our focus is on such ‘black-box’ transfer of models (in contrast to federated learning) where we transfer only the final trained model from one dataset and apply it directly on a held-out test data from the second dataset. Our experiments show that such ‘remote’ models perform worse than ‘local’ models that are trained on the training data from the second dataset. Thus, we introduce a novel transfer learning technique by adapting the Born-again network (BAN) training paradigm [5]. BAN is a cheap training routine where the network is trained sequentially over generations, such that soft-decisions on training examples from the model of the previous generation are utilized to achieve more effective models. This approach has been found to be effective across a number of domains and applications [10]. However, to the best of our knowledge, this is the first to adapt this strategy to transfer models across health institutes. There specific contributions of this paper are:

- We introduce a novel, computationally inexpensive, and effective model transfer strategy based on the BAN training paradigm. It can consider a remote ML model as a black box (in contrast to federated learning/data sharing scenarios where regulated healthcare datasets may need to be explicitly/implicitly combined) while still leading to an effective transfer across institutions.
- We report on a 30-day readmission prediction across two data marts with varied data coverage patterns. We show that the new strategy can lead to more effective models - achieving over 10% improvement in the area under the precision-recall curve regardless of the transfer direction (i.e., site A to site B and vice versa) over directly applying remote models and about 2% improvement over local models.
- We show the robustness of this process by analyzing the performance lift of the BAN-transferred remote model compared to the corresponding local model for various bootstrap fold and find consistent improvement over the local models.

The remainder of the paper is organized as follows. Next, we describe the experimental setup, including a brief description of the data sets used in this study and the prediction problem. Then, we provide a brief overview of the BAN-driven transfer learning strategy. Finally, we report our results and provide a discussion on future opportunities.

2 EXPERIMENTAL SETUP

We conducted the analysis on two separate datasets, specifically the IBM MarketScan Commercial database (IBM MarketScan [1]) and Vanderbilt University Medical Center (VUMC) data mart, over the same calendar period (2017-2019). IBM MarketScan is intended to be nationally representative, albeit with different geographical sampling, and covering more than 220 million patient lives over the US. By contrast, the VUMC data mart covers substantially fewer patient lives - but it provides more detail on a specific geographic area. Both datasets cover various data sources such as diagnoses, drugs, and laboratory reports from administrative claims. The MarketScan dataset covers more than 220 million patient lives across

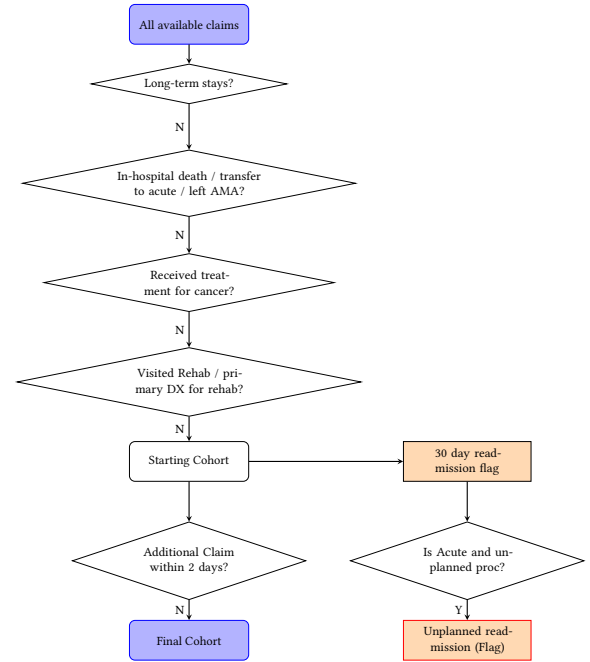


Figure 1: The cohort construction process to study all-cause 30-day readmission.

the entire United States of America. Diagnoses, procedures, and drugs are encoded using the International Classification of Diseases (ICD), Current Procedural Terminology (CPT), and National Drug Code (NDC) terminologies, respectively [1]. The second dataset is from the VUMC, where the data mainly comes from Electronic Data Interchange (EDI) x12 387 reports. The VUMC data is composed of patients from all fifty states, with a heavy skew towards the middle Tennessee region. The EDI data is transactional by nature and is, at times, redundant or contradictory as a result of interactions between providers and various payers. Thus, we relied upon data from Vanderbilt’s EHR, structured as Observational Medical Outcomes Partnership (OMOP), to consolidate claim records into a single event per patient. The EDI reports enable the VUMC data be semantically consistent with the IBM MarketScan data.

We constructed all-cause 30-day readmission prediction models following the same cohort definition and considerations as described by Chakraborty *et al.* [2]. More specifically, Figure 1 depicts the constructed cohort where we applied several exclusion criteria such as cancer patients, patients who left the hospital against medical advice, and patients who were in rehab. These criteria were aimed at analyzing a standard set of patients for whom we may expect a similar readmission pattern. Using this definition, starting from about 220 million patient lives, we were able to extract 1,112,958 patients with more than 10 million records from IBM MarketScan dataset. Similarly, from a starting point of about 5 million patient records, we were able to extract 1,472,891 records distributed across 53,810 patients from the VUMC dataset. For each of the selected patients, we next defined their ‘index events’ (see [2]) as the discharge date of a single hospital care or the last date of a set of contiguous hospital care. We also can label each such ‘index

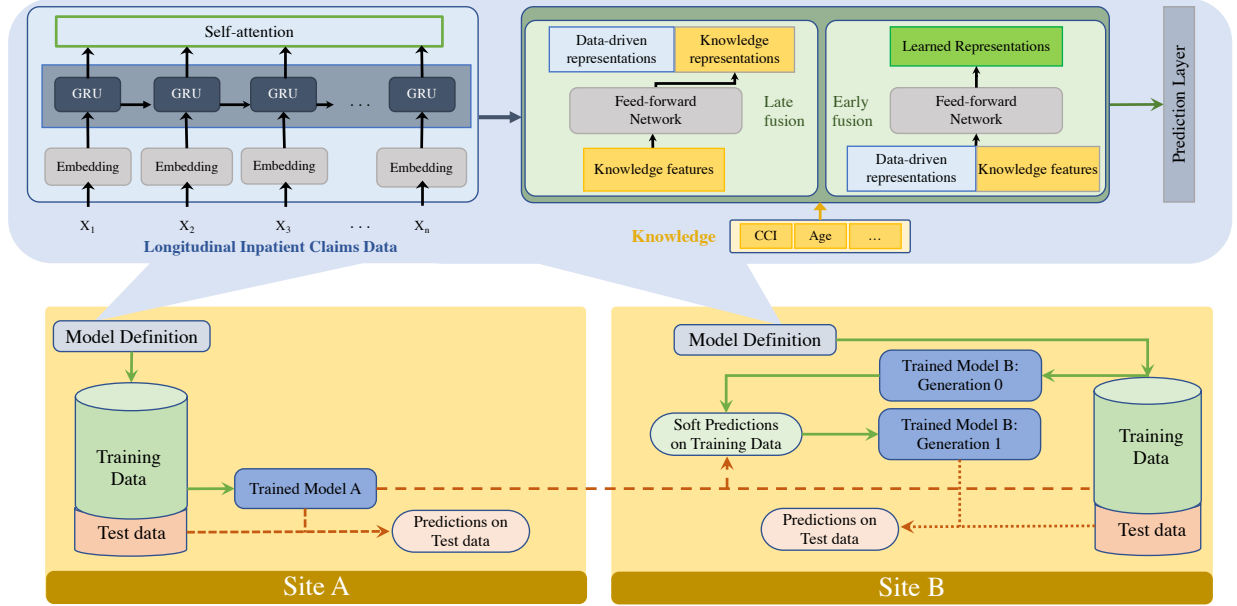


Figure 2: BAN Transfer: Depiction of transfer learning using Born-again-network training. Models share the same definition. Model trained at Site A is used to generate soft-predictions on training data for site B. A model trained on site B is then fine-tuned on these soft-predictions to generate the final transferred model for site B. This process implicitly transfers the knowledge from site A in the form of soft decision boundary. Green lines denotes training whereas dotted red-line indicate application of model

events' with the ground truth label for 30-day readmission. The final dataset is imbalanced with respect to target variables with less than 10% positive labels for each 'index event'. We extracted a broad set of features for each patients including demographic, medical, and hand-crafter features such as CCI index [2]. Finally, we split the data using a 70 : 10 : 5 : 15 split for training, validation, calibration, and test respectively using a stratified sampling approach. For each dataset, we trained local models with the same architectures as in [2] using lightsaber, an open source model training framework [13] to ensure reproducibility and auditability. The best trained models were selected by running hyperparameter search over the validation set and further calibrated using the calibration set. The test set was used as the holdout and, in the next section, all performance scores are reported based on this set for each dataset.

3 METHODS

Here, we provide an overview of the architecture for model transfer, the process for which is illustrated in Figure 2. Let us represent the data for two datasets as $\mathcal{D}_1 : \{X_1, Y_1\}$ and $\mathcal{D}_2 : \{X_2, Y_2\}$, where $X_i = \{x_{1i}, x_{2i}, \dots, x_{N_i i}\}$ denote the set of features for N_i index-events for the dataset \mathcal{D}_i and $Y_i = \{y_{1i}, y_{2i}, \dots, y_{N_i i}\}$ is a set of boolean values represent the corresponding ground truth for 30-day readmission. Furthermore, let us denote the local models trained on their respective dataset as \mathcal{M}_1 and \mathcal{M}_2 . These are referred to as the local models when used in context for the respective datasets. In contrast, we refer to these as the remote models when using it for the alternate dataset e.g. \mathcal{M}_1 used to predict readmission on \mathcal{D}_2 .

Without loss of generality, we now describe the transfer process by considering models are trained on \mathcal{D}_1 and applied on \mathcal{D}_2 . With respect to \mathcal{D}_2 , its local model \mathcal{M}_2 is trained by minimizing the cross-entropy loss on the corresponding training instances as:

$$L(\mathcal{D}_2) = L(\hat{y}_2, y_2) \quad (1)$$

where L is the cross-entropy loss, y_2 is the target value in the training instances from dataset \mathcal{D}_2 , and \hat{y}_2 is the soft-decision score ($\in [0, 1]$) output by \mathcal{M}_2 for training instances $\{x_{j2}; j \in \text{train-set}(\mathcal{D}_2)\}$.

In the proposed BAN-transfer procedure, this local model is further fine-tuned using outputs $\hat{y}_{1 \rightarrow 2}$ predicted on data mart \mathcal{D}_2 using remote model \mathcal{M}_1 (trained on \mathcal{D}_1). The final model, hereafter referred to as the BAN-transferred model, is then trained by fine-tuning \mathcal{M}_2 and minimizing the cross-entropy loss as below:

$$L(\mathcal{D}_2, \mathcal{M}_1) = L(\hat{y}_2, \hat{y}_{1 \rightarrow 2}) \quad (2)$$

4 RESULTS

The performance of the models on each site is reported in Table 1 with respect to both area under the receiver operator characteristic curve (AUROC) and precision-recall curve (AUPRC). We report the performance for the best models as selected by hyperparameter selection over the validation set on the held out test set. Performance is reported for the local models (when applied on the same dataset as the one it was trained on), remote models (when applying it on the alternate dataset), as well as the BAN-transferred models. With respect to each dataset, we consider the corresponding local model as the baseline and report the change in performance as a

Table 1: Performance evaluation of the locally learned and transfer learned models per site.

Model	IBM		VUMC	
	AUROC	AUPRC	AUROC	AUPRC
IBM	0.585 (baseline)	0.290 (baseline)	0.600 (-1.15%)	0.259 (-13.67%)
VUMC	0.610 (4.3%)	0.260 (-10.34%)	0.607 (baseline)	0.300 (baseline)
BAN transferred VUMC	0.611 (4.4%)	0.295 (1.72%)	-	-
BAN transferred IBM	-	-	0.614 (1.15%)	0.308 (2.6 %)

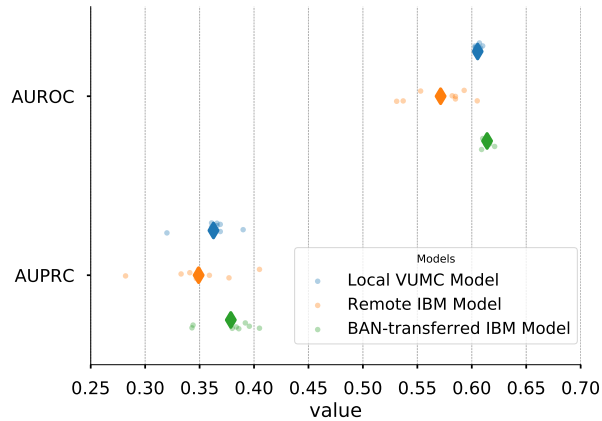
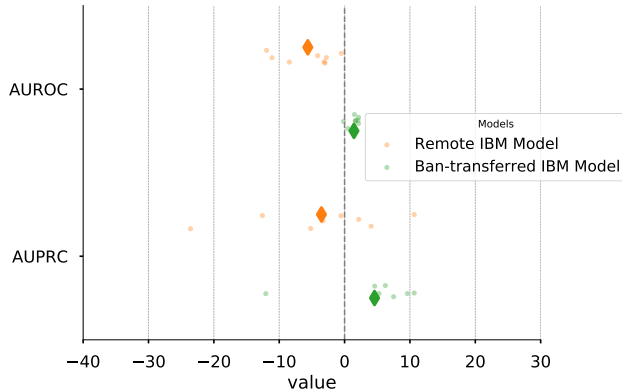
**(a) Performance****(b) Lift over baseline**

Figure 3: Performance (AUROC and AUPRC) evaluation on VUMC dataset. Comparisons shown for (a) locally built model (baseline) against remote model and transferred remote model and (b) achieved lift in performance over baseline. Dots and diamonds represent the values for each fold and mean over all folds, respectively.

percentage lift over the baseline. It can be seen that the directly transferred remote models generally has worse performance than the local models. Notably, the degradation in model performance is more pronounced for the AUPRC than the AUROC. Specifically,

it can be seen that model performance is over 10% worse for the directly transferred remote models with respect to AUPRC.

By contrast, the BAN-transferred models lead to slightly better AUROC performance than their respective baselines. However, more importantly, it can be seen that the AUPRC has now a slightly better performance than the baselines. This suggests that the BAN-transferred model accounts for the imbalanced data better than the local models.

To further investigate this improvement, we created 8 random bootstraps of the training, validation, calibration, and test folds on the VUMC dataset ; trained local VUMC models; and applied both the local VUMC and the remote IBM model on the VUMC dataset. Figure 3a depicts the performance across these 8 runs. It can be seen that, while the best runs for the remote model can achieve performance on par with the local models, on average the local models perform considerably better with respect to both AUROC and AUPRC. Interestingly, the BAN-transferred remote model leads to an improvement on average for both metrics over the local model.

Our experimental setup of 8 distinct bootstrap folds also enables us to compare the lift achieved by BAN-transferred model over the corresponding local model (that was fine-tuned to realize the BAN-transferred model) for each run. Figure 3b shows the performance lift and compares it against the remote model as a reference. It can be seen that the BAN-transfer process consistently increases the performance of local models (average greater than 0%) and this lift was found to be statistically significant for AUROC (0.05 significance level for paired t-test with two side alternate hypothesis). Furthermore, 87.5% of the bootstrap runs led to a lift for AUPRC. These show the consistency of the transfer procedure in improving a locally built model.

5 DISCUSSION AND CONCLUSIONS

This paper presents a new method of transferring models across sites using a computationally cheap process by only considering the models as black-box. The empirical findings suggest that a BAN-based transfer process shows promise in transferring ML models across healthcare organizations. This approach is notable in that allows the locally learned models to be treated as a black-box. In future work, we plan to investigate various experimental settings to ground the improvements in BAN-transfer and define the boundaries when such transfer is successful.

6 ACKNOWLEDGMENTS

This work was funded in part by IBM Watson Health and NIH grant ULTR002243.

REFERENCES

- [1] Anne M Butler, Katelin B Nickel, Robert A Overman, and M Alan Brookhart. 2021. IBM MarketScan research databases. In *Databases for Pharmacoepidemiological Research*. Springer, 243–251.
- [2] Prithwish Chakraborty, James Codella, Piyush Madan, Ying Li, Hu Huang, Yoonyoung Park, Chao Yan, Ziqi Zhang, Cheng Gao, Steve Nyemba, Xu Min, Sanjib Basak, Mohamed Ghalwash, Zach Shahn, Parthasarathy Suryanarayanan, Italo Buleje, Shannon Harrer, Sarah Miller, Amol Rajmane, Colin Walsh, Jonathan Wanderer, Gigi Yuen Reed, Kenney Ng, Daby Sow, and Bradley Malin. 2021. Blending Knowledge in Deep Recurrent Networks for Adverse Event Prediction at Hospital Discharge. In *Proceedings of the AMIA Informatics Summit*. 132–141.
- [3] Sanjoy Dey, Aritra Bose, Prithwish Chakraborty, Mohamed Ghalwash, Aldo Guzman Saenz, Philipp Ultro, NG Kenney, Jianying Hu, Laxmi Parida, and Daby Sow. 2021. Impact of Clinical and Genomic Factors on SARS-CoV2 Disease Severity. In *Proceedings of the AMIA Annual Symposium*. 378–387.
- [4] Gregg C Fonarow, Marvin A Konstam, and Clyde W Yancy. 2017. The hospital readmission reduction program is associated with fewer readmissions, more deaths: time to reconsider. *Journal of the American College of Cardiology* 70, 15 (2017), 1931–1934.
- [5] Tommaso Furlanello, Zachary Lipton, Michael Tschannen, Laurent Itti, and Anima Anandkumar. 2018. Born again neural networks. In *Proceedings of the International Conference on Machine Learning*. 1607–1616.
- [6] Anand Habib, Anthony Lin, and Richard Grant. 2021. The Epic Sepsis Model Falls Short—The Importance of External Validation. *JAMA* 181, 8 (2021), 1040–1041.
- [7] Leora Horwitz, Chohreh Partovian, Zhenqiu Lin, Jacqueline Grady, Jeph Herrin, Mitchell Conover, Julia Montague, Chloe Dillaway, Kathleen Bartczak, Lisa Suter, Joseph Ross, Susannah Bernheim, Harlan Krumholz, and Elizabeth Drye. 2014. Development and use of an administrative claims measure for profiling hospital-wide performance on 30-Day unplanned readmission. *Annals of Internal Medicine* 161, 10 Suppl (2014), S66–75.
- [8] George Hripcsak, Jon D Duke, Nigam H Shah, Christian G Reich, Vojtech Huser, Martijn J Schuemie, Marc A Suchard, Rae Woong Park, Ian Chi Kei Wong, Peter R Rijnbeek, et al. 2015. Observational Health Data Sciences and Informatics (OHDSI): opportunities for observational researchers. *Studies in Health Technology and Informatics* 216 (2015), 574–578.
- [9] Christopher Clement John, Vijayakumar Ponnusamy, Sriharipriya Krishnan Chandrasekaran, and R Nandakumar. 2021. A survey on mathematical, machine learning and deep learning models for COVID-19 transmission and diagnosis. *IEEE Reviews in Biomedical Engineering* (2021), 325–340.
- [10] Rohan Kodialam, Rebecca Boiarsky, Justin Lim, Aditya Sai, Neil Dixit, and David Sontag. 2021. Deep contextual clinical prediction with reverse distillation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, Vol. 35. 249–258.
- [11] Bum Chul Kwon, Vibha Anand, Peter Achenbach, Jessica L Dunne, William Hagopian, Jianying Hu, Eileen Koski, Åke Lernmark, Markus Lundgren, Kenney Ng, et al. 2022. Progression of type 1 diabetes from latency to symptomatic disease is predicted by distinct autoimmune trajectories. *Nature communications* 13, 1 (2022), 1–9.
- [12] Erich Sorantin, Michael G Grasser, Ariane Hemmelmayr, Sebastian Tschauer, Franko Hrzic, Veronika Weiss, Jana Lacekova, and Andreas Holzinger. 2021. The augmented radiologist: Artificial intelligence in the practice of radiology. *Pediatric Radiology* (2021), 1–13.
- [13] Parthasarathy Suryanarayanan, Prithwish Chakraborty, Piyush Madan, Kibichii Bore, William Ogallo, Rachita Chandra, Mohamed Ghalwash, Italo Buleje, Sekou Remy, Shilpa Mahatma, et al. 2021. Disease progression modeling workbench 360. *arXiv preprint arXiv:2106.13265* (2021).
- [14] Ziqi Zhang, Chao Yan, Xinmeng Zhang, Steve Nyemba, and Bradley Malin. 2022. Forecasting the future clinical event of a patient through contrastive learning. *Journal of the American Medical Informatics Association* (2022), in press.