

European Physical Society Grand Challenges Physics for Society in the Horizon 2050

EPS Forum Physics and Society

July 8, 2022

Contents

1	Milestones of research activity in quantum computing	1
----------	---	----------

Contributors

Zeki Can Seskir

Karlsruhe Institute of Technology - ITAS
Karlstraße 11, 76133 Karlsruhe, Germany

Jacob Biamonte

Skolkovo Institute of Science and Technology
Bolshoy Boulevard 30, bld. 1, Moscow 121205, Russian Federation

Chapter 1

Milestones of research activity in quantum computing

Chapter Abstract

We argue that quantum computing underwent an inflection point circa 2017. Long promised funding materialised which prompted public and private investments around the world. Techniques from machine learning suddenly influenced central aspects of the field. On one hand, machine learning was used to emulate quantum systems. On the other hand, quantum algorithms became viewed as a new type of machine learning model (creating the new model of *variational* quantum computation). Here we sketch some milestones which have lead to this inflection point. We argue that the next inflection point would occur around when practical problems will be first solved by quantum computers. We anticipate that by 2050 this would have become common place, were the world would still be adjusting to the possibilities brought by quantum computers.

Keywords: *quantum computing, quantum algorithms, citation analysis, technology forecasting.*

General Overview

What is quantum computing?

Today's computers which we know and love—albeit smartphones or the mainframes behind the internet—are all built from billions of transistors. (A transistor is an electrically controlled switch ultimately the power behind any electronics.) While transistors utilize quantum mechanical effects (such as tunneling: in which an electron can both penetrate and bounce off an energy barrier concurrently), the composite operation of today's computers is purely deterministic or *classical*. By classical, we mean *classical mechanics* which is exactly the physics (a.k.a. mechanics) we'd anticipate day to day in our lives. Quantum computers are not intended to always replace classical computers. Instead, they expected to be a different tool to complement certain types of calculations. We will elaborate shortly.

The term *quantum mechanics* dates to 1925 in work [1] by Born and Jordan (in German, *quanten mechanik*—without the space of course) and comprises the physics governing

atomic systems. Quantum mechanics contains principles and rules that appear to contradict the classical mechanics we are so intuitively familiar with. Such counter intuitive phenomena provide new possibilities to store and manipulate (quantum) information. This is exactly what a quantum computer should do. The information must be stored and processed in the matter. You can think of a quantum computer as providing new mechanisms to store, process, and generally manipulate data. Indeed, the ultimate limitation of computational power is given by quantum physics

How did quantum computing begin?

Quantum computing dates back at least to 1979, when the young physicist Paul Benioff [2] at Argonne National Laboratory, USA proposed a quantum mechanical model of computation. Richard Feynman [3] and independently Yuri Manin [4] suggested that a quantum computer had the potential to simulate physical processes that a classical computer could not. Such ideas were further formulated and developed in the work of Oxford's David Deutsch [5]—Deutsch formulated a quantum Turing machine and applied a sort of *anthropic principle* to the plausible computations allowed by the laws of physics. Namely, what we now call the Church–Turing–Deutsch principle asserts that a universal (quantum) computing device can simulate any physical process. (This hypothesis does not give an algorithm but just an assertion that such an algorithm exists). Yet even the most elementary quantum systems appear impossible to fully emulate using classical computers. Whereas quantum computers would readily emulate other quantum systems [3, 6].

Early insights into the computational power of quantum computers were based on the assertion that it is impossible to develop an efficient classical algorithm able to accurately emulate quantum systems [3, 6]. While not formally proven, ample empirical evidence supports this claim. Yet there are many computational problems where the required computational resources are better understood than simulating physics. These problems arise in the form of e.g. the theory of numbers, groups, or properties of graphs. For decades a small number of researchers worked to understand if one might expect an exponential quantum speedup for problems long studied in computer science. The early algorithms, such as Deutsch-Jozsa [7] and Simon's, [8] solved elegantly contrived problems making *prima facie* practical merit difficult to envision.

A more practical breakthrough waited until 1994 when Peter Shor proposed an efficient quantum algorithm for factoring integers: this would open the door to decrypt RSA-secured communications [9]. Shor's algorithm, if executed on a quantum computer, would require exponentially less time than the best known classical factoring algorithms. Other seminal early findings include Grover's 1996 quantum algorithm [10] which can search through N items in a database in \sqrt{N} steps. It turns out that Grover's algorithm is provably optimal: it is not possible for a quantum computer to search N unstructured elements any faster than \sqrt{N} steps [11], which could be significant in practice. Can these and other quantum algorithms (see Table 1.1) be realized experimentally [12]?

Problem Class	Quantum Complexity
Factorization	Polynomial [9]
Discrete Log	Polynomial [9]
Complete Search	$\mathcal{O}(\sqrt{N})$ [10]
Sparse Linear Systems	Polynomial [13]
Quantum Simulation	Polynomial [6]

Table 1.1: **(Expected Quantum Complexity)** Theory predicts that quantum computers have the potential to rapidly execute several important algorithmic tasks. Originally developed for the gate model, variational counterparts to Grover’s search [14], optimisation (QAOA [15]), linear [16] (and non-linear [17]) systems, and quantum simulation (VQE—first proposed in [18] and first demonstrated in [19]) have been developed. Factorization and Discrete Log can readily be mapped to Ising optimisation problems, yet the scaling remains unclear. Polynomial time variational quantum factoring might instead be accomplished by means of the circuit to variational algorithm mapping [20]

Where is quantum computing heading?

As of today, billions of dollars of public and private investment are being spent to build quantum computers [21]. In October of 2019, Google, in partnership with NASA, performed a quantum sampling task that appears infeasible on any classical computer [22]. Late in 2020 Chinese scientists [23] reported results of like-significance. At the core of these developments is the quantum mechanical bit: the *qubit* as first coined by Benjamin Schumacher [24] who asserts the term arose out of a 1996 conversation with William Wootters (for qubit, see Table 1.2). Simply, a qubit is a two-state (a.k.a. binary) quantum system.

The Quantum Bit or Qubit.
A traditional computer operates using bits, 0 and 1. Each classical register or classical memory must be in a single classical state which is represented by a string of bits (such as 0011 or 0100000111 for example). Quantum computers allow quantum registers and memories to be in multiple states concurrently. For this reason, quantum computers are often described as enabling parallel processing.

Table 1.2: A brief comparison of traditional bits and quantum bits (qubits).

There are a variety of physical approaches to creating qubits. For example, a single photon of light can represent two quantum states given by vertical- and horizontal polarization. Common qubit realisations include superconducting electronics [22], trapped-ions [25], and various optical realisations [26]. Qubits are the building blocks of fully programmable (e.g. universal) quantum computers: the universal quantum Turing machine’s abstraction from physics makes it harder to realize and consequently, this model has fallen from interest [2].

Qubits should both be isolated from their surroundings yet also be made to interact.

Quantum algorithms are described by *quantum circuits*—such circuits depict actions on and interactions between qubits by quantum gates and encompass today’s defacto universal model of quantum computation. In practice, design imperfections and random noise can not be avoided, meaning that the ideal qubit can never exist. Such noise processes serve to restrict quantum circuit depth. Over the last several decades researchers have developed a powerful theory of quantum error correction, proving that qubits need not be perfect to realise high-depth quantum circuits [27]. Indeed, quantum error correction proves that a small amount of noise can be tolerated: called the error tolerance threshold [28]. Hence, according to the laws of physics, nothing fundamentally prevents humans from building a quantum processor capable of executing high-depth quantum circuits.

A universal quantum computer is assumed to be error tolerant through error correction [29, 30]. Throughout the history of quantum computation, several universal models of quantum computation have been developed and shown to be computationally equivalent to the defacto quantum circuit model [27]. This includes adiabatic quantum computation [31, 32] both discrete and continuous quantum walks [33, 34], measurement based quantum computation [35] as well as one of the authors installment proving universality of the variational model [20].

Assuming this idealized (universal) setting, several miraculous quantum algorithms have been developed which would offer an advantage over the best-known classical algorithms. Lower bounding the computational resources required in quantum (and classical) algorithms has however proven extremely difficult: how might we rule out the existence of a better algorithm when the computational power of the class of possible algorithms is not fully understood.

For example, regarding recent quantum adversarial advantage demonstrations: [22, 23] who is to say that a classical algorithm won’t one day be discovered which can replicate the reported sampling task(s)? This does not imply that such assumptions are not without formal footing. Elegant methods exist to compare the power of a classical computer to the power of a quantum computer [36]. It does however make the timeline for a practically meaningful quantum computation difficult to predict. So with all of the dramatic progress, what might we expect from NISQ era quantum processors (NISQ: Noisy Intermediate Scale Quantum Computing [37])?

Design constraints

Design constraints limit manufacturing qubits. Working with current design constraints means that we must find ways to utilize imperfect qubits. The question is if we can still build meaningful systems with imperfect devices.

Despite outperforming classical computers at an *adversarial advantage* [22, 23], such a demonstration was tailored to favor quantum processors and has unclear practical application. Even with Moore’s law failing [38], traditional computing resources are ever-improving and increasingly accessible. Moreover, the von Neumann architecture has a first-mover advantage: the entire tool chain, the compilers, algorithms etc. in use today are tailored towards this architecture. To instead utilize quantum systems as a computational paradigm represents a dramatic change in how problems must be decomposed, encoded, and compiled. And in how we think about computing. Perhaps gleaning lessons from sampling [22, 23], we must

learn to look towards problems that are more amenable to quantum processors, with desirable criteria, such as:

- (i) Problems which bootstrap physical properties of a quantum processor to reduce implementation overhead(s).
- (ii) Systems and/or models of computation which offer some inherent tolerance to noise and/or systematic faults.
- (iii) Problems which utilize the ability of quantum systems to efficiently represent quantum states of matter—called the *memory scaling argument* (see Table 1.3).

The memory scaling argument asserts that quantum states exist which can not be stored using even the largest classical memories.
Early arguments for quantum computing advantage considered an ideal state of interacting qubits, requiring about $2^{n+1} \cdot 16$ bytes of information to store assuming 32 bit precision. This reaches 80 terabytes (<i>TB</i>) at just less than 43 qubits and 2.2 petabytes (<i>PB</i>) at just under 47 e.g - the world's largest memory of the supercomputer Trinity. Hence applications with ≥ 47 qubits might already outperform classical computers at certain tasks. While this argument didn't account for noise and approximations/compression schemes to reduce required memory, similar arguments are considered valid lines of reasoning today.

Table 1.3: The memory argument asserts that even the worlds largest computer can not store into its memory all but the simplest quantum states.

These constraints have led us to what is now called the variational model of quantum computation. In the absence of error correction, NISQ era quantum computation is focused on quantum circuits that are short enough and with gate fidelity high enough that these short quantum circuits can be executed without quantum error correction, as in the recent quantum supremacy experiments [22, 23]. Herein lies the heart of the variational model: by adjusting parameters in an otherwise fixed quantum circuit, low-depth noisy quantum circuits are pushed to their ultimate use case.

NISQ circuits typically bootstrap experimentally desirable regularities inline with criteria (i): the gate sequence itself is fixed, while the gate angles can be varied. A classical computer will adjust parameters of a circuit. Measurements will be used to calculate a cost function and the process will be iterate (see Table 1.4 for some examples).

The prospects of the variational model are limited by the computational overhead of outer-loop optimisation. This requires significant classical computing resources. Variational model proposes some alternatives to this (for a further comparison of these models, please see Table 1.5

Problem Hamiltonian	Finding Ground Energy (Classical / Quantum)	Calculating State Energy (Classical / Quantum)
1-LOCAL HAMILTONIAN	Polynomial	Polynomial
2-LOCAL ISING	*Exp	Polynomial
Electronic Structure	*Exp	*Exp / Polynomial
ZZXX Model	*Exp	*Exp / *Polynomial

Table 1.4: **(Hamiltonian Complexity Micro Zoo)** Anticipated computational resources to determine ground state energy and calculate energy relative to a state. ‘Restricted Ising’ denotes problems known to be in P. The upper star (*) denotes expected and not formally proven conjectures. Electronic Structure problem instances have constant maximum size so are assumed to be in BQP whereas the ZZXX model admits a QMA-complete ground state energy decision problem

Variational	Traditional
<ul style="list-style-type: none"> • Agnostic to systematic errors • Tightly connects hardware with software to overcome hardware constraints • Optimizes short depth circuits for optimal use • Emulates Hamiltonians by local measurements • Outer loop optimization can require significant classical computing resources • Coherence time and error rates limit circuit depth 	<ul style="list-style-type: none"> • Intuitive and familiar, textbook quantum algorithms adhere to the circuit model • Theoretical analysis, including complexity, has largely been proven possible • Impossible to execute all but the shortest circuits (smallest examples) with current hardware • Ignores hardware constraints and susceptible to both systematic and random errors

Table 1.5: Comparison of standard gate model quantum computation versus variational quantum computation. Variational quantum computation trains short quantum circuits to reach their maximum use case yet requires significant classical coprocessing to train these quantum circuits.

How did quantum computing develop prior to 2017?

A turning point in the development of quantum computation appears around 2017. At this point, several long-promised large funding programs began such as the European Quantum

Flagship and the American National Quantum Initiative Act (this happened around the world and was in the Billions of USD). Most national investments appear to keep a country competitive in technological development. There are many initiatives around the world adding up to more than 20 billion USD committed public funding. In addition, many private companies also invested dramatically around this time.

Meanwhile, quantum computation was merged with machine learning in two different ways (see the review [39]). Firstly, quantum circuits can be trained variationally. In other words, quantum circuits can be viewed as machine learning models. Secondly, machine learning can be applied to a host of problems faced in building and emulating quantum systems. These two facts encouraged the tech industry participation in quantum computing research and development. (In fact, a new model of computation was developed and proven to be universal in [20] by one of the authors.)

While those working in the field might readily agree that things have rapidly developed since around 2017, putting data behind this claim is the focus of this section. Hence, we will quantitatively describe the levels of activity before 2017, especially focusing on the field of quantum algorithms.

We have utilized two data sources for this section, one for academic publications and one for patent publications; Web of Science owned by Clarivate Analytics PLC, and the Cipher platform owned by Aistemos Ltd. However, our readers can use the same queries¹ to reproduce our results. To generate our queries we have used the previous ones created by previous publications in the literature [40, 41], and personal expertise.

To build our study, we first consider Figure 1.1. We see in the upper left-hand pane, the growth of quantum algorithms articles. We do see what appears to be an increase between 2015 and 2020. By total, we mean the entire sum up until that point. By new, we mean the number of articles in a given year. For the left top page of Figure 1.1, we again see a jump between 2015 and 2020.

Additionally, we ran the publication data set through a software tool for constructing and visualizing bibliometric networks (VOSViewer [42]) to run author keyword clustering, which resulted in the following Figure 1.2. In this figure, each node represents an author keyword, size of the node is correlated with how many times the keyword appears in the data set, connections between nodes represent co-occurrences of those keywords, and the color scale represents the average year of the keyword in the literature.

Here, one can notice the following point. Keywords such as *quantum algorithms*, *quantum computation*, *quantum computer* are mainly the keywords utilized by older literature, which in recent years are replaced with more field specific terms like *quantum chemistry*, *variational quantum eigensolver* and *quantum image processing*. This indicates an evolution of the literature into partially distinct lines of research, which are more developed topics

¹For quantum software and algorithms: (("quantum machine learning") OR ("qml" AND "quantum") OR ("quantum approximate optimization") OR ("vqe" AND "quantum") OR ("variational quantum eigen*") OR ("quantum algorithm*") OR ("quantum software") OR ("quantum Machine Learning") OR ("Classical-quantum Hybrid Algorithm*") OR ("quantum PCA") OR ("quantum SVM") OR ("variational Circuit*" AND "quantum") OR ("quantum Anneal*" AND "algorithm*") OR ("quantum Enhanced Kernel Method*") OR ("quantum Deep Learning") OR ("quantum Matrix Inversion") OR ("quantum embed*") OR ("quantum neural") OR ("quantum perceptron") OR ("quantum tensor network*"))

For artificial intelligence: (("machine learning") OR ("artificial intelligence") OR ("neural network*"))

Date: June 11th 2021

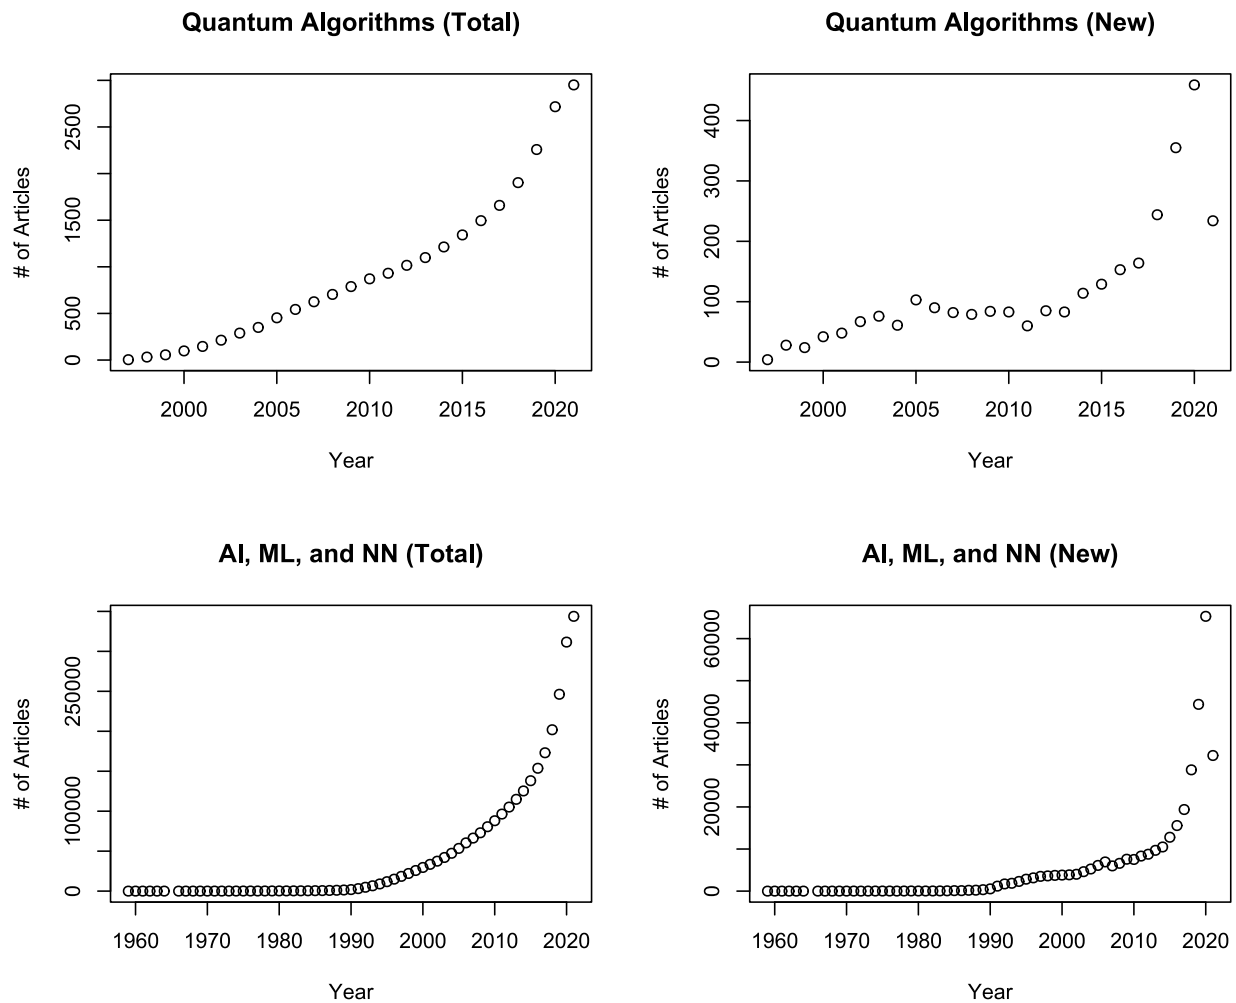


Figure 1.1: The numbers of new and total published articles in Quantum Algorithms and A.I. fields.

in terms of maturity, compared to earlier keywords utilized in the literature.

We also ran a similar analysis for the collaboration between countries (Figure 1.3). The country level data is associated with the affiliations of authors, and this map only represents the academic literature created by cross-country collaboration. This visual reveals that, although countries like England, Germany, China, and the US are located in the center of the collaboration network, a considerable number of new countries joined this network in recent years (hence, represented by dark purple in the figure).

In terms of numbers, the patent literature reveals similar results to academic publications. We see a rise in the early 2000s in the top left pane in Figure 1.4. We again see a jump before 2020. That sharp jump is the turning point we are discussing. The new and total number reflect this. We see similar jumps in the AI fields at a much larger scale (bottom two figures). Comparing the trends in Figure 1.4 with the Figure 1.1, it is clear to see that scientific interest in both fields have been more steady compared to commercial interest until

around 2016-2017, and then both starts in a strongly upward trend.

Finally, to see how this activity has been translating in the entrepreneurial realm, we gathered a list of companies ² in quantum technologies (QT), and identified the startups related to quantum computing (QC) in them, to compare them in Figure 1.5. It should be noted that other fields under QT (such as quantum sensing and quantum communication/cryptography) have also been gaining popularity in the recent years. From the figure, we can see that startups in QC is a relatively new phenomenon compared to companies in QT, but both have been rapidly increasing in number during the last five years.

²This list was collected by us manually and contains 439 companies as of June 2021. We used open access resources like Crunchbase, LinkedIn, The Quantum Insider, and Quantum Computing Report.

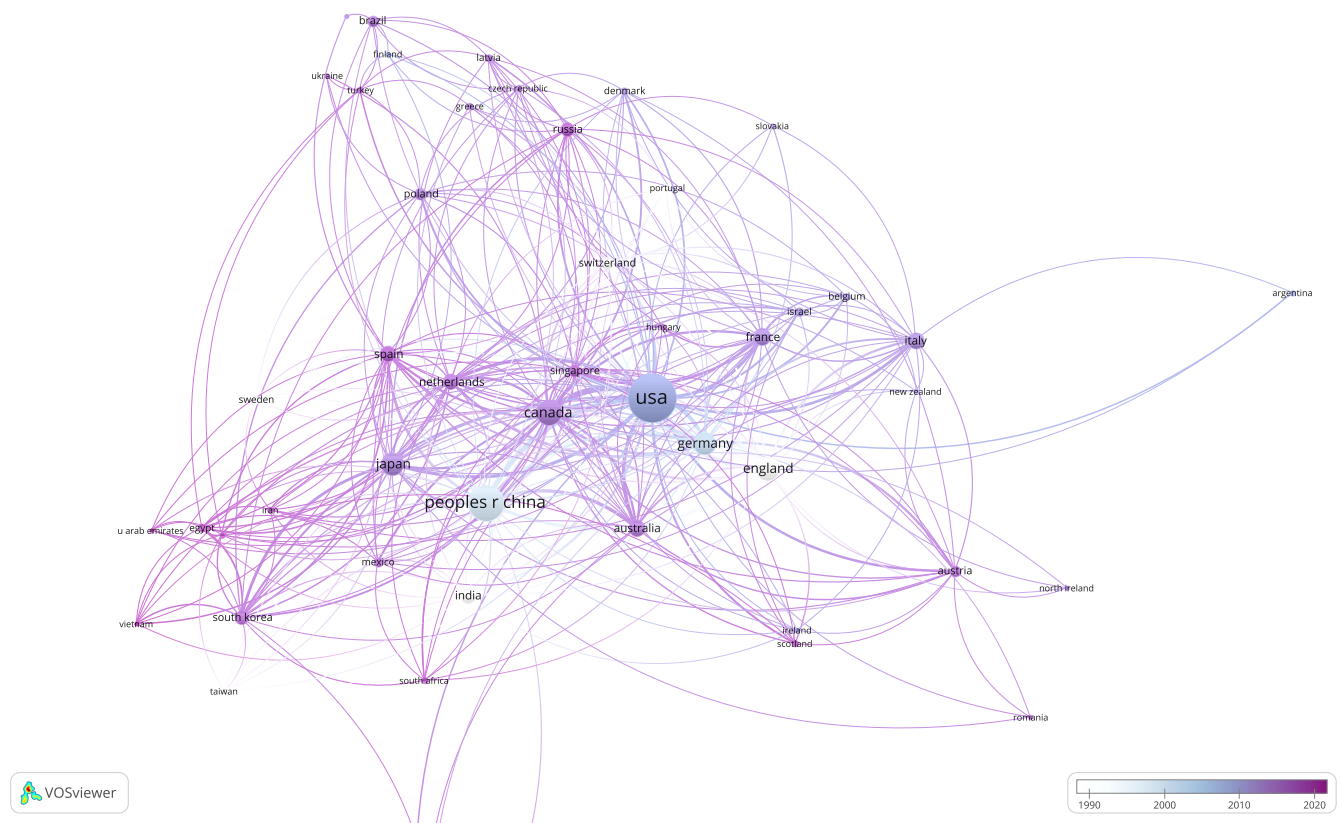


Figure 1.3: Overlay visualization of countries of origin of academic articles in time.

in Figures 1.4 and 1.1. One clear difference is of the scales, as there are orders of magnitude between the fields, and the second difference is that from early 1990 there has been a steady increase in the total number of patents obtained in the field of A.I. compared to the almost zero activity in the field of quantum algorithms except a brief and short lived interest in mid-2000s. One clear similarity is the sudden spike in late 2010s, especially after 2016-2017, which is also evident in Figure 1.5. The reason for this can be attributed to long promised funding materialising which in return prompted public and private investments around the world. Origins of some of the public funding schemes can be attributed to fear of missing out for countries with existing scientific investments in the field (Figure 1.3). Some can be explained by public demonstrations of IBM's and Google's superconducting quantum processors, signaling to the public (and investors) that quantum computing is becoming into the realm of calculable risk from Knightian uncertainty [43]. Regardless of the specifics, it is clear that both the number of new academic articles and new patents per year, and the number of startups in QC have increased significantly starting from 2016-2017.

This inflection point was not gone unnoticed in the ELSA (Ethical, Legal and Social Aspects) field as well, and one of the first special issues on QT titled *The Societal Impact of the Emerging Quantum Technologies* was published in the Ethics and Information Technology journal ³. Topics like access to quantum technologies [44], the impact of quantum computing on the future of scientific computing [45], responsible research and innovation in

³ISSN 1388-1957 (print) 1572-8439 (web)

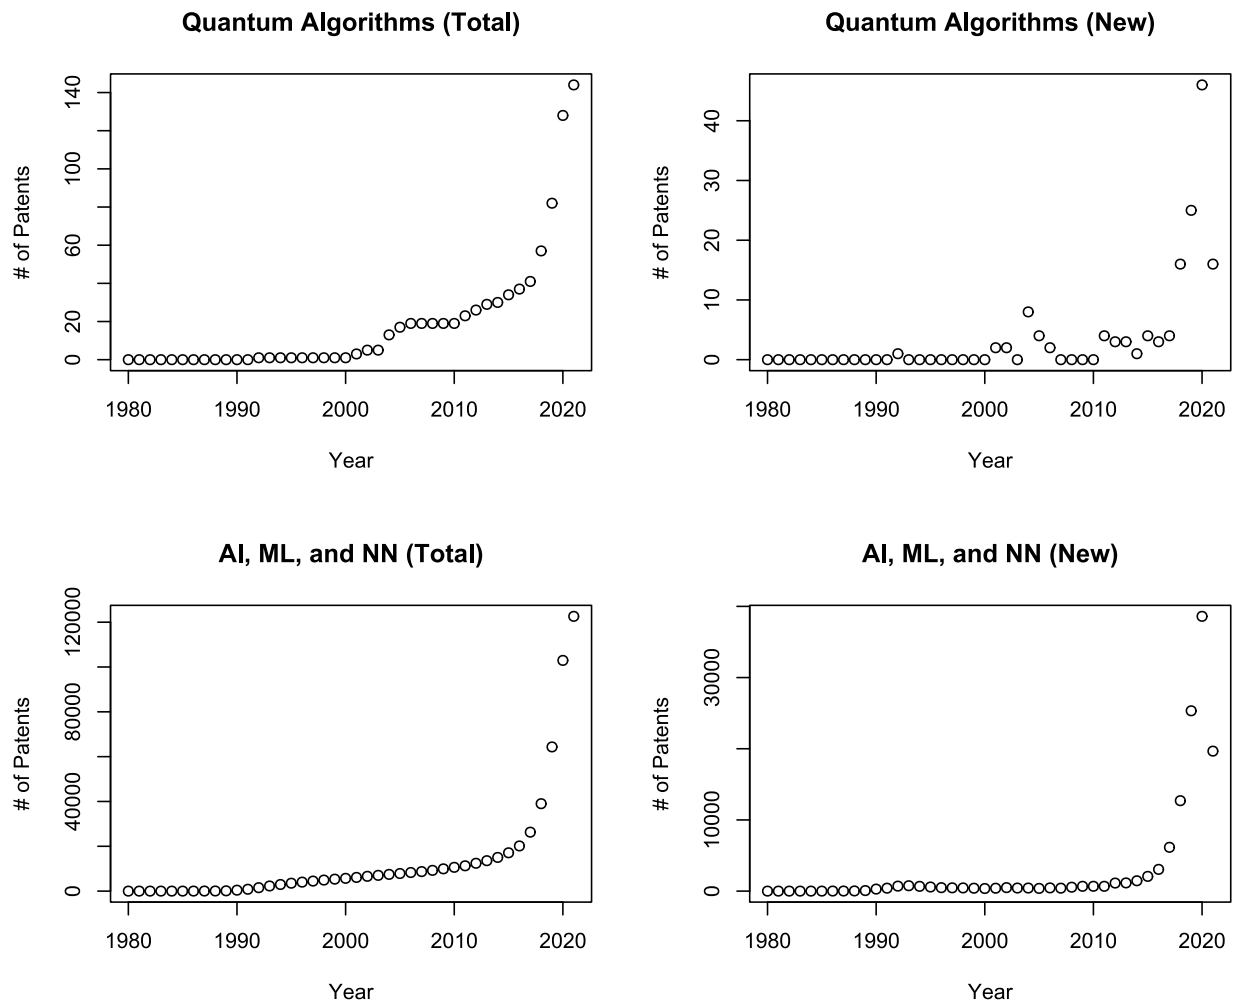


Figure 1.4: The numbers of new and total patents in Quantum Algorithms and A.I. fields.

quantum technologies [46], and the potential impact of quantum computers on society [47] were discussed in the special issue. Following 2017, there has been a growing interest in the societal impact of quantum technologies (and quantum computing in particular). As of 2021, many researchers and commercial actors in the field have been calling the community to action regarding quantum ethics, which is a clear indication that there is a strong belief in the community that this technology will play a huge role in our future, and should be developed ethically to avoid any undesired consequences while taking this quantum leap.

What is the next ‘turning point’ in the development of quantum computing?

For us at least it’s hard to predict technology. We can assume everything works and imagine best-case scenarios. We can assume nothing works and imagine a sort of quantum winter. In

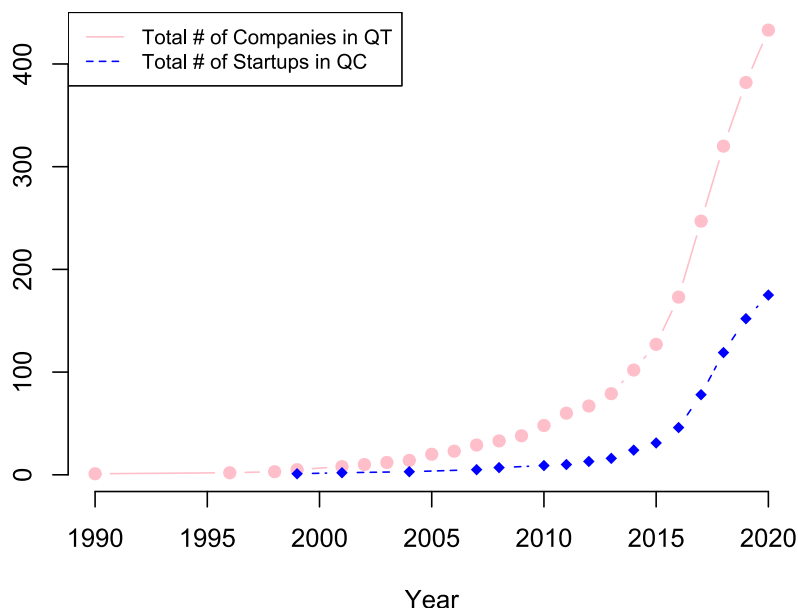


Figure 1.5: Total number of companies operating in quantum technologies and startups in quantum computing in years.

reality, it's likely the case that the changes ahead are impossible to envision today.

Quantum computing violates no known laws of physics. It, therefore, is thought of as perhaps the world's most challenging engineering problem. So when will we engineer such devices? Currently, we have seen dramatic progress. Progress so dramatic that it would be impossible for those working in the field to have imagined even 5 years ago. Perhaps this means that even five years from today will be difficult to predict. We still believe in five years from now that quantum computers will be in the early stages of development and still lack error correction and other essential features to realize all their potentials.

Saying that we do think that a quantum future is inevitable. This is the natural progression of technology. This is probably the ultimate limit of computers, perhaps until we can harness new powers in the cosmos. Humankind's trajectory is set on a quantum course. Companies such as Google, IBM, and the like are in this for research and long-term prospects.

When will we see another inflection point? It's hard to tell. The saying goes that knowledge begets knowledge. And so development always seems to go increasingly faster. But the next jump might have to wait until practical problems of commercial value are regularly solved. This should take place perhaps even around 2050. Yet by then, we do imagine that this technology would have already changed the world in ways we can't hope but predict now

Acknowledgements. JB acknowledges support from the project, Leading Research Center on Quantum Computing (Agreement No. 014/20).

Bibliography

- [1] M. Born and P. Jordan. Zur quantenmechanik. *Zeitschrift für Physik*, 34(1):858–888, December 1925.
- [2] Paul Benioff. The computer as a physical system: A microscopic quantum mechanical hamiltonian model of computers as represented by turing machines. *Journal of Statistical Physics*, 22(5):563–591, May 1980.
- [3] Richard P. Feynman. Quantum mechanical computers. *Optics News*, 11(2):11–20, February 1985.
- [4] Yuri Manin. *Vychislimoe i nevychislimoe [Computable and uncomputable]*. Soviet Radio, 1980. original in Russian.
- [5] David Deutsch. Quantum theory, the Church–Turing principle and the universal quantum computer. *Proceedings of the Royal Society of London Series A, Mathematical and Physical Sciences*, 400(1818):97–117, 1985.
- [6] S. Lloyd. Universal quantum simulators. *Science*, 273(5278):1073–1078, August 1996.
- [7] David Deutsch and Richard Jozsa. Rapid solution of problems by quantum computation. *Proceedings of the Royal Society of London. Series A: Mathematical and Physical Sciences*, 439(1907):553–558, 1992.
- [8] Daniel R. Simon. On the power of quantum computation. *SIAM Journal on Computing*, 26(5):1474–1483, October 1997.
- [9] Peter W. Shor. Polynomial-time algorithms for prime factorization and discrete logarithms on a quantum computer. *SIAM J. Comput.*, 26(5):1484–1509, oct 1997.
- [10] Lov K Grover. A fast quantum mechanical algorithm for database search. In *Proceedings of the twenty-eighth annual ACM symposium on Theory of computing*, pages 212–219, 1996.
- [11] Charles H. Bennett, Ethan Bernstein, Gilles Brassard, and Umesh Vazirani. Strengths and weaknesses of quantum computing. *SIAM Journal on Computing*, 26(5):1510–1523, October 1997.
- [12] Scott Aaronson. Read the fine print. *Nature Physics*, 11(4):291–293, April 2015.

- [13] Aram W. Harrow, Avinatan Hassidim, and Seth Lloyd. Quantum algorithm for linear systems of equations. *Phys. Rev. Lett.*, 103:150502, Oct 2009.
- [14] Mauro E. S. Morales, Timur Tlyachev, and Jacob Biamonte. Variational learning of grover’s quantum search algorithm. *Phys. Rev. A*, 98:062333, Dec 2018.
- [15] Edward Farhi, Jeffrey Goldstone, and Sam Gutmann. A quantum approximate optimization algorithm, 2014.
- [16] Carlos Bravo-Prieto, Ryan LaRose, M. Cerezo, Yigit Subasi, Lukasz Cincio, and Patrick J. Coles. Variational quantum linear solver, 2020.
- [17] Michael Lubasch, Jaewoo Joo, Pierre Moinier, Martin Kiffner, and Dieter Jaksch. Variational quantum algorithms for nonlinear problems. *Phys. Rev. A*, 101:010301, Jan 2020.
- [18] M.-H. Yung, J. Casanova, A. Mezzacapo, J. McClean, L. Lamata, A. Aspuru-Guzik, and E. Solano. From transistor to trapped-ion computers for quantum chemistry. *Scientific Reports*, 4(1), January 2014.
- [19] Alberto Peruzzo, Jarrod McClean, Peter Shadbolt, Man-Hong Yung, Xiao-Qi Zhou, Peter J Love, Alán Aspuru-Guzik, and Jeremy L O’Brien. A variational eigenvalue solver on a photonic quantum processor. *Nature Communications*, 5:4213, 2014.
- [20] Jacob Biamonte. Universal variational quantum computation. *Physical Review A*, 103(3), mar 2021.
- [21] Jacob D. Biamonte, Pavel Dorozhkin, and Igor Zacharov. Keep quantum computing global and open. *Nature*, 573(7773):190–191, September 2019.
- [22] Frank Arute, Kunal Arya, Ryan Babbush, Dave Bacon, Joseph C. Bardin, Rami Barends, Rupak Biswas, Sergio Boixo, Fernando G. S. L. Brandao, David A. Buell, Brian Burkett, Yu Chen, Zijun Chen, Ben Chiaro, Roberto Collins, William Courtney, Andrew Dunsworth, Edward Farhi, Brooks Foxen, Austin Fowler, Craig Gidney, Marissa Giustina, Rob Graff, Keith Guerin, Steve Habegger, Matthew P. Harrigan, Michael J. Hartmann, Alan Ho, Markus Hoffmann, Trent Huang, Travis S. Humble, Sergei V. Isakov, Evan Jeffrey, Zhang Jiang, Dvir Kafri, Kostyantyn Kechedzhi, Julian Kelly, Paul V. Klimov, Sergey Knysh, Alexander Korotkov, Fedor Kostritsa, David Landhuis, Mike Lindmark, Erik Lucero, Dmitry Lyakh, Salvatore Mandrà, Jarrod R. McClean, Matthew McEwen, Anthony Megrant, Xiao Mi, Kristel Michielsen, Masoud Mohseni, Josh Mutus, Ofer Naaman, Matthew Neeley, Charles Neill, Murphy Yuezhen Niu, Eric Ostby, Andre Petukhov, John C. Platt, Chris Quintana, Eleanor G. Rieffel, Pedram Roushan, Nicholas C. Rubin, Daniel Sank, Kevin J. Satzinger, Vadim Smelyanskiy, Kevin J. Sung, Matthew D. Trevithick, Amit Vainsencher, Benjamin Villalonga, Theodore White, Z. Jamie Yao, Ping Yeh, Adam Zalcman, Hartmut Neven, and John M. Martinis. Quantum supremacy using a programmable superconducting processor. *Nature*, 574(7779):505–510, October 2019.

- [23] Han-Sen Zhong, Hui Wang, Yu-Hao Deng, Ming-Cheng Chen, Li-Chao Peng, Yi-Han Luo, Jian Qin, Dian Wu, Xing Ding, Yi Hu, Peng Hu, Xiao-Yan Yang, Wei-Jun Zhang, Hao Li, Yuxuan Li, Xiao Jiang, Lin Gan, Guangwen Yang, Lixing You, Zhen Wang, Li Li, Nai-Le Liu, Chao-Yang Lu, and Jian-Wei Pan. Quantum computational advantage using photons. *Science*, 370(6523):1460–1463, 2020.
- [24] Benjamin Schumacher. Quantum coding. *Phys. Rev. A*, 51:2738–2747, Apr 1995.
- [25] Colin D. Bruzewicz, John Chiaverini, Robert McConnell, and Jeremy M. Sage. Trapped-ion quantum computing: Progress and challenges. *Applied Physics Reviews*, 6(2):021314, Jun 2019.
- [26] Pieter Kok, W. J. Munro, Kae Nemoto, T. C. Ralph, Jonathan P. Dowling, and G. J. Milburn. Linear optical quantum computing with photonic qubits. *Rev. Mod. Phys.*, 79:135–174, Jan 2007.
- [27] Michael A. Nielsen and Isaac L. Chuang. *Quantum Computation and Quantum Information*. Cambridge University Press, 2009.
- [28] P.W. Shor. Fault-tolerant quantum computation. In *Proceedings of 37th Conference on Foundations of Computer Science*. IEEE Comput. Soc. Press, 1996.
- [29] Peter W. Shor. Scheme for reducing decoherence in quantum computer memory. *Phys. Rev. A*, 52:R2493–R2496, Oct 1995.
- [30] Iulia Georgescu. 25 years of quantum error correction. *Nature Reviews Physics*, 2(10):519–519, September 2020.
- [31] Edward Farhi, Jeffrey Goldstone, Sam Gutmann, Joshua Lapan, Andrew Lundgren, and Daniel Preda. A quantum adiabatic evolution algorithm applied to random instances of an np-complete problem. *Science*, 292(5516):472–475, 2001.
- [32] Dorit Aharonov, Wim van Dam, Julia Kempe, Zeph Landau, Seth Lloyd, and Oded Regev. Adiabatic quantum computation is equivalent to standard quantum computation. *SIAM Review*, 50(4):755–787, 2008.
- [33] Andrew M. Childs. Universal computation by quantum walk. *Phys. Rev. Lett.*, 102:180501, May 2009.
- [34] Neil B. Lovett, Sally Cooper, Matthew Everitt, Matthew Trevers, and Viv Kendon. Universal quantum computation using the discrete-time quantum walk. *Physical Review A*, 81(4), Apr 2010.
- [35] Maarten Van den Nest, Akimasa Miyake, Wolfgang Dür, and Hans J. Briegel. Universal resources for measurement-based quantum computation. *Phys. Rev. Lett.*, 97:150504, Oct 2006.
- [36] Aram W. Harrow and Ashley Montanaro. Quantum computational supremacy. *Nature*, 549(7671):203–209, Sep 2017.

- [37] John Preskill. Quantum computing in the nisq era and beyond. *Quantum*, 2:79, Aug 2018.
- [38] M. Mitchell Waldrop. The chips are down for moore’s law. *Nature*, 530(7589):144–147, February 2016.
- [39] Jacob Biamonte, Peter Wittek, Nicola Pancotti, Patrick Rebentrost, Nathan Wiebe, and Seth Lloyd. Quantum machine learning. *Nature*, 549(7671):195–202, sep 2017.
- [40] Mandaar Pande and Preeti Mulay. Bibliometric survey of quantum machine learning. *Science & Technology Libraries*, 39(4):369–382, 2020.
- [41] Zeki C. Seskir and Arsev U. Aydinoglu. The landscape of academic literature in quantum technologies. *International Journal of Quantum Information*, 19(02):2150012, 2021.
- [42] Nees Jan van Eck and Ludo Waltman. Software survey: Vosviewer, a computer program for bibliometric mapping. *Scientometrics*, 84(2):523–538, 2009.
- [43] G. P. Watkins and Frank H. Knight. Knight’s risk, uncertainty and profit. *The Quarterly Journal of Economics*, 36(4):682, 1922.
- [44] David P. DiVincenzo. Scientists and citizens: getting to quantum technologies. *Ethics and Information Technology*, 19(4):247–251, Dec 2017.
- [45] Matthias Möller and Cornelis Vuik. On the impact of quantum computing technology on future developments in high-performance scientific computing. *Ethics and Information Technology*, 19(4):253–269, Dec 2017.
- [46] Christopher Coenen and Armin Grunwald. Responsible research and innovation (rri) in quantum technology. *Ethics and Information Technology*, 19(4):277–294, Dec 2017.
- [47] Ronald de Wolf. The potential impact of quantum computers on society. *Ethics and Information Technology*, 19(4):271–276, Dec 2017.