# Constructing Large-Scale Real-World Benchmark Datasets for AIOps

Zeyan Li<sup>1</sup>, Nengwen Zhao<sup>1</sup>, Shenglin Zhang<sup>2</sup>, Yongqian Sun<sup>2</sup> Pengfei Chen<sup>3</sup>, Xidao Wen<sup>1</sup>, Minghua Ma<sup>4</sup>, Dan Pei<sup>1</sup> <sup>1</sup>Tsinghua University, <sup>2</sup>Nankai University, <sup>3</sup>Sun Yat-sen University, <sup>4</sup>Microsoft Reasearch

## ABSTRACT

Recently, AIOps (Artificial Intelligence for IT Operations) has been well studied in academia and industry to enable automated and effective software service management. Plenty of efforts have been dedicated to AIOps, including anomaly detection, root cause localization, incident management, etc. However, most existing works are evaluated on private datasets, so their generality and real performance cannot be guaranteed. The lack of public large-scale real-world datasets has prevented researchers and engineers from enhancing the development of AIOps. To tackle this dilemma, in this work, we introduce three public real-world large-scale datasets about AIOps, mainly aiming at KPI anomaly detection, root cause localization on multi-dimensional data, and failure discovery and diagnosis. More importantly, we held three competitions in 2018/2019/2020 based on these datasets, attracting thousands of teams to participate. In the future, we will continue to publish more datasets and hold competitions to promote the development of AIOps further.

## **1** INTRODUCTION

In recent years, traditional manual operations and maintenance have gradually become time-consuming and error-prone due to the increasing complexity of modern IT service architectures. To tackle this dilemma, Artificial Intelligence for IT Operations (AIOps) has been proposed to relieve some manual intervention required. Gartner [35] defines AIOps as the application of machine learning (ML) and data mining to IT operations. AIOps combine big data and ML functionality to enhance and partially replace traditional manual efforts, including performance monitoring, anomaly detection, event correlation and analysis, incident management, etc.

In the literature, tremendous efforts have been devoted to the research of AIOps, including anomaly detection [7, 29, 34, 43], root cause localization [5, 6, 18, 19, 24, 25, 28, 33, 37, 40, 41, 47], failure prediction [11, 27, 39, 44, 46, 49], incident management [9, 10, 12, 31], resource management [14, 15] and so on. However, due to the lack of public large-scale real-world datasets, it is difficult to compare these approaches fairly. Although these works achieve promising performance on their respective private datasets, these approaches could perform unstably in the real world. It is also difficult to transfer an approach to real generic application due to the various nature of different target systems for AIOps. Thus, AIOps is at the crossing point between Artificial Intelligence research and operation engineers, which usually requires the cooperation of academic researchers and industry to obtain real data and scenarios and carry out research on this basis. However, it is challenging for every researcher to find industrial partners since the monitoring data used for AIOps are highly confidential. Therefore, the lack of public large-scale real-world datasets is one significant limitation of AIOps research and application.

Although there exist several public datasets, these datasets suffer from several limitations. First, the majority of existing datasets covers only one AIOps scenario, e.g., Yahoo Benchmark [21] for KPI anomaly detection and [51] for faulty microservice localization. However, AIOps involves diverse scenarios, for example, KPI anomaly detection, log anomaly detection, capacity planning, root cause localization, etc. It is unsatisfactory to evaluate comprehensive AIOps approaches separately on such scenario-specific datasets. Second, the scale of the dataset is limited. For example, Yahoo Benchmark for KPI anomaly detection only includes hundreds of data points. In general, real-world service systems tend to support numerous users and perform complex architecture. Thus, the dataset should be large and diverse to be close to the real world. Third, some datasets are synthetic, not from the real world. Such datasets cannot reflect the real system behavior, which could incur risk for real applications. As a result, rich, large-scale, and real-world datasets to assist the research of AIOps are highly desired.

To promote the development of AIOps, we have published three large-scale and real-world datasets, which are based on production systems of our industrial partner (e.g., Sougo, eBay, Tencent, Suning, and China Mobile Zhejiang). These datasets are for KPI anomaly detection, root cause localization for multi-dimension data, and failure discovery and diagnosis, which is a comprehensive scenario, respectively. There have been many research works [8, 13, 19, 23, 24, 38, 45, 50] using our datasets. Furthermore, based on these datasets, we have held an AIOps algorithm competition in 2018/2019/2020, attracting 125/141/141 teams and hundreds of participants<sup>1</sup>. The solutions of top teams are also shared publicly [4]. We believe such datasets would benefit the AIOps research and practice, as ImageNet [16] did to the fields of computer vision and deep learning. We would continue constructing and publishing new datasets and holding AIOps algorithm competitions once a year.

The main contributions of our work are summarized as follows.

- Up to now, we have published three large-scale real-world datasets [1–3], including KPI anomaly detection, root cause localization for multi-dimensional data, and failure discovery and diagnosis. These datasets have been used by many research works.
- We hold the yearly AIOps algorithm challenge, which involves thousands of researchers and engineers and significantly promotes this community's development.

#### 2 OUR WORK

Following existing work [36], we categorize the research of AIOps into two macro-areas, failure management and resource management. Failure management aims to reduce the negative impact incurred by failures so as to ensure service availability and user

<sup>&</sup>lt;sup>1</sup>https://competition.aiops-challenge.com/home/competition

ESEC/FSE 2022, 14 - 18 November, 2022, Singapore




Figure 1: Pipeline and key measurements in failure management

experience. Resource management aims to allocate and save various resourcees (e.g., power, VMs) in IT service management. We currently mainly focus on failure management, and resource management could be our future work.

As presented in Fig. 1, the goals of failure discovery, failure diagnosis, and failure mitigation are to reduce the mean time to detect (MTTD), to reduce the mean time to recover (MTTR), and to increase the mean time between failures (MTBF), respectively. In our work, to tackle the bottleneck of AIOps research, motivated by ImageNet [16], we aim to construct large-scale real-world benchmark datasets for AIOps. We first focus on failure management and have published three related datasets, including KPI anomaly detection (Section 3), root-cause localization for multi-dimensional data (Section 4), and failure discovery and diagnosis (Section 5). We will introduce each dataset and related background in detail in the following three sections.

# **3 KPI ANOMALY DETECTION**

In this section, we first introduce the background of KPI anomaly detection. Then we present the details of our published dataset to enhance the research of KPI anomaly detection.

## 3.1 Background

To closely monitor service running status and identify system failures, engineers tend to continuously collect many key performance indicators (KPIs) and identify anomalies from KPIs. Accurate KPI anomaly detection can trigger prompt troubleshooting, help to avoid economic loss, and maintain user experience [29, 38, 43, 48].

In recent years, tremendous efforts have been dedicated to KPI anomaly detection. Existing works could be classified into three categories, i.e., supervised methods (e.g., Opprentice [29] and EDAGS [21]), unsupervised methods (e.g., Donut [43]), and semi-supervised methods (e.g., ADS [7]). However, there exist several significant challenges, restricting the research of KPI anomaly detection [38].

- Various KPI patterns. Based on our experience and observation, KPI patterns could be classified into three categories: seasonal (e.g., transaction volume), stable (e.g., success rate), and unstable (e.g., CPU utilization). Therefore, a successful approach should be generalized enough for different patterns.
- Diverse KPI anomaly patterns. The definition of KPI anomalies is the behavior violating normal patterns, like spikes, dips, and jitters. Besides, different scenarios and components have different levels of tolerance to anomalies. Thus, the designed approaches should have the ability to detect diverse anomaly patterns.
- Lack of sufficient labeled data. On the one hand, the number of KPIs is huge in large-scale systems. On the other hand, labeling anomalies requires experienced engineers with domain

Z. Li, N. Zhao, S. Zhang, Y. Sun, P. Chen, X. Wen, M. Ma, D. Pei

Table 1: Overview of KPI anomaly detection dataset A

		anomary av	
KPI ID	#Points	Anomaly ratio	Time span (#days)
02e99bd4f6cfb33f	241189	4.37%	183
046ec29ddf80d62e	17568	0.45%	60
07927a9a18fa19ae	21920	0.58%	86
09513ae3e75778a3	239975	0.09%	183
18fbb1d5a5dc099d	240299	3.27%	183
1c35dbf57f55f5e4	240969	3.97%	183
40e25005ff8992bd	209155	0.31%	146
54e8a140f6237526	16497	0.02%	61
71595dd7171f4540	295337	0.37%	207
769894baefea4e9e	17568	0.05%	60
76f4550c43334374	17568	0.49%	60
7c189dd36f048a6c	295379	0.14%	207
88cf3a776ba00e7c	130872	2.37%	90
8a20c229e9860d0c	17568	0.02%	60
8bef9af9a922e0b3	258907	0.20%	182
8c892e5525f3e491	294019	1.04%	207
9bd90500bfd11edb	238798	0.05%	183
9ee5879409dccef9	130899	2.24%	90
a40b1df87e3f1c87	275850	0.13%	194
a5bf5d65261d859a	237426	0.01%	183
affb01ca2b4f0b45	295361	0.19%	207
b3b2e6d1a791d63a	16495	0.07%	61
c58bfcbacb2822d1	241453	0.05%	183
cff6d3c01e6a6bfa	295258	0.36%	207
da403e4e3f87c9e0	241148	3.17%	183
e0770391decc44ce	294048	1.04%	207

knowledge [50]. Thus, it is challenging and time-consuming to obtain sufficient labeled data to construct a supervised model and evaluate performance.

Although there exist rich KPI anomaly detection works, these approaches are mainly evaluated on their private datasets. Besides, there are no large-scale real-world KPI anomaly detection datasets currently for model training and evaluation. Thus, despite the promising performance of their papers, the performance of real deployment in the industry is far from satisfying. Although there exist several public datasets about KPI anomaly detection like Yahoo Benchmark [21] and Numenta Anomaly Benchmark [22], they only contain KPIs with limited data points and synthetic anomalies. In comparison, the number and type of KPIs are large and diverse. Consequently, a large-scale and diverse KPI anomaly dataset is highly desired in the community of KPI anomaly detection.


#### 3.2 Dataset

To tackle the above challenges, we constructed a large-scale realworld KPI anomaly detection dataset (named *A*) with sufficient labels, covering various KPI patterns and anomaly patterns. This dataset is collected from five large Internet companies (Sougo, eBay, Baidu, Tencent, and Ali). Specifically, dataset *A* includes 27 KPIs in total. For each KPI, experienced engineers in these companies manually labeled anomalies carefully. Table 1 shows some statistical information about this dataset, including the total number of data points, anomaly ratio and time span. We could observe that the time span of each KPI is from two months to seven months, which is large-scale compared with existing datasets like Yahoo [21]. Figure 2 presents five KPIs within a time span of one week. Obviously, the KPI patterns in this dataset are indeed various.

Based on this dataset, we held the first AIOps algorithm challenge in  $2018^2$ , attracting 125 teams and over 300 participants from both academia and industry. Besides, motivated by the novel evaluation

<sup>&</sup>lt;sup>2</sup>https://competition.aiops-challenge.com/home/competition/1484452272200032281

Constructing Large-Scale Real-World Benchmark Datasets for AIOps

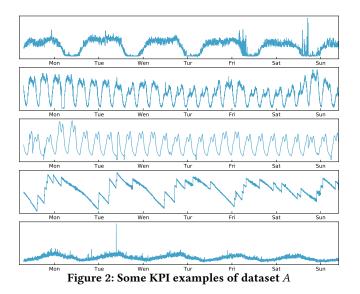

strategy of KPI anomaly detection proposed in [43], we import alarm delay restriction and design a novel evaluation method used in the competition<sup>3</sup>. This dataset and evaluation method have been widely used in many research works [13, 38, 50]. The best F1-score achieved in this competition is 0.8216. The solutions proposed by the top teams are shared in public [4].

# 4 ROOT CAUSE LOCALIZATION FOR MULTI-DIMENSIONAL DATA

In this section, we first introduce the background of root cause localization for multi-dimensional data. Then we introduce our published large-scale dataset for this problem.

## 4.1 Background

To closely monitor the events occurring in a system, various types of structured logs are generated, carrying critical information for failure diagnosis. The structured logs record events with many fields describing the events. For example, an online shopping platform could generate structured logs recording orders. As shown in Table 2, the field Timestamp describes when the order occurs, Dollar Amount describes the dollar amount of the order, Province describes the location of the corresponding customer, and ISP describes the network that the customer used. Engineers would like to collect the overall value of some fields, such as the total dollar amount, to monitor the status of the whole system. We call such fields measures [6, 24]. Other fields characterize the events and we call them attributes [6, 18, 24, 28]. By grouping original structured logs by some attributes and aggregating values of some fields, multidimensional data [24] are generated. For example, to generate the multi-dimensional data in Table 3, we group structured logs like those in Table 2 by Timestamp, Province, and ISP, and aggregate values of Dollar Amount. Note that in Table 3, we only present a snapshot of the whole multi-dimensional data, i.e., the multidimensional data at a specific timestamp. Multi-dimensional data is a more compact representation of the original structured logs, and thus, we focus on multi-dimensional data for failure diagnosis.

It indicates a failure occurring in the system when the overall value of a measure becomes abnormal (e.g., the total dollar amount decreases compared with the expected normal value). However, in practice, a failure usually only causes the measure values under specific attribute combinations [18] abnormal [24]. An attribute combination refers to a slice of the whole multi-dimensional data by selecting records with specified values of some attributes, and it has been formally defined in existing literature [18]. For example, in Table 3, only the measure values under {Province=Beijing} are significantly abnormal. Such attribute combinations show the scope of the failure, and thus, are substantial clues for failure diagnosis. In Table 3, for example, by localizing {Province=Beijing}, engineers get to know that the failure is related to the network or servers for users in Beijing, which directs further diagnosis. Therefore, we call such attribute combinations as root causes of multi-dimensional data.

Table 2	: Examp	le structured	logs
---------	---------	---------------	------

Order ID	Timestamp	Dollar Amount	Province	ISP
T001	2021.11.11 10:00:01	\$16	Beijing	China Mobile
T002	2021.11.11 10:00:05	\$21	Beijing	China Unicom

#### Table 3: Example multi-dimensional data

Province	ISP	Dollar Amount	Expected Dollar Amount
Beijing	China Mobile	5	10
Beijing	China Unicom	10	20
Shanghai	China Unicom	30	31
Guangdong	China Mobile	10	9.8
Zhejiang	China Unicom	2	2
Guangdong	China Unicom	200	210
Shanxi	China Unicom	20	22
Jiangsu	China Unicom	200	203
Tianjin	China Mobile	41	43
	Total	518	550.8

# 4.2 Dataset

Most existing works [5, 6, 18, 19, 25, 28, 37, 40, 41, 47] on root cause localization for multi-dimensional data use their private datasets for evaluation. Therefore, to enhance the research of root cause localization for multi-dimensional data, we construct and publish a dataset [2], named *B*, based on the real-world large online shopping platform of Suning. Ltd.

In dataset *B*, there are five attributes, which are named as i, e, c, p and 1 for confidential reasons. The measure of *B* is the average number of order per minute. In total, the dataset *B* contains 400 synthetic failures with ground-truth root cause labels, spanning eight weeks. We use synthetic failures rather than real-world failures because it is hard to collect hundreds of production failures with ground-truth root causes. The synthesis process of failures contains six steps.

- (1) We first select a time point for anomaly injection where the overall measure values are smooth.
- (2) We randomly choose  $m \in \{1, 2, 3, 4\}$  different attributes out of the five attributes.
- (3) Then we randomly choose n ∈ {1, 2, 3, 4} different attribute combinations corresponding to the *m* selected attributes. These *n* selected attribute combinations are the ground-truth root cause where we are going to inject anomalies.

<sup>&</sup>lt;sup>3</sup>https://github.com/iopsai/iops/tree/master/evaluation

ESEC/FSE 2022, 14 - 18 November, 2022, Singapore

Z. Li, N. Zhao, S. Zhang, Y. Sun, P. Chen, X. Wen, M. Ma, D. Pei

- (4) For each selected attribute combination, we modify the measure values of it, i.e., the measure values of those rows at the select time point satisfying the attribute combination. The modified values are calculated by *generalized ripple effect* (GRE) [24] with a random magnitude.
- (5) We add extra noises, which are generated by Gaussian distribution, on both modified rows and other rows to simulate the cases where GRE does not work perfectly and there are forecast residuals, respectively.
- (6) We check the synthetic failure with the following conditions. When anyone of them are triggered, we go back to step 2 to regenerate a failure at the time point.
  - There is other attribute combinations sharing almost the same rows with the selected ground-truth attribute combinations.
  - The injected noises is so large that the overall measure value of unmodified records (in step 3) is also abnormal.

Overall, among the 400 synthetic faults, 144/131/89/36 faults contains 1/2/3/4 root-cause attribute combinations, and 96/136/108/60 faults involve 1/2/3/4 attributes.

Based on the dataset *B*, we held the second AIOps challenge in  $2019^4$ . There are 141 teams and 547 participants from both academia (39%) and industries (61%) in this competition. The best performance achieved by them in this competition is 0.9593 with respect to F1-score. The solutions proposed by the top teams are published in [4].

There are several existing research works [19, 24] utilizing the data provided by AIOps Challenge 2019. Note that the datasets  $\mathcal{B}_0 \sim \mathcal{B}_4$  used and published by Squeeze [24] are based on exactly the same original data as the dataset *B* described above and generated by almost the same synthesis process.

# 5 FAILURE DISCOVERY AND DIAGNOSIS

In Section 3 and Section 4, we introduce our datasets on KPI anomaly detection and root cause localization for multi-dimensional data. These datasets are useful to benchmark failure discovery and failure diagnosis algorithms respectively. However, on the one hand, engineers require automatic failure discovery and diagnosis in an end-to-end manner. On the other hand, root cause localization for multi-dimensional data provides only clues to the exact root causes, and it still requires further diagnosis to obtain fine-grained root causes given such clues. Thus, we construct a dataset for benchmarking both failure discovery and fined-grained failure diagnosis approaches. In this section, we first introduce the background of the problem. Then we introduce the details of our dataset.

## 5.1 Background

A distributed system is composed of many cooperating components, such as load balancers, web servers, application servers, and databases. For example, in Fig. 3, we present the architecture of a production distributed system (named S) at a major Internet service provider, China Mobile Zhejiang. In Fig. 3, each vertex is a component. These components are of five classes, including OSB (Oracle Service Bus), service, DB, Docker, and OS. To monitor the status of the components, engineers collect various KPIs of these




Figure 3: The components and their relationships, including call dependencies (solid) and deployment dependencies (dashed), in the distributed system S.

components, such as queries per minute, success rate, and average response time.

By KPI anomaly detection on these KPIs, we can discover failures in the distributed systems and figure out which components are abnormal. However, due to the complex dependencies, a failure occurring at a root-cause component can propagate to other components and cause their KPIs abnormal as well [23]. Therefore, to diagnose the failure, it is necessary to distinguish the root-cause components from other abnormal components. Furthermore, to localize the fine-grained root causes of a failure, it is required to identify root-cause metrics of the root-cause components further. For each component, there are plenty of metrics (e.g., CPU utilization and network throughput) collected. When we identified the root cause metrics, for example, CPU usage, it is clear that the failure is caused by CPU exhaustion on the component. In summary, we aim to discover failures by KPI anomaly detection and then identify the root-cause components and the root-cause metrics.

As introduced in Section 3, KPI anomaly detection has been extensively studied. The existing approaches of identifying rootcause components [17, 20, 23, 26, 32, 45, 51] can be classified into two categories, i.e., trace-based [17, 23, 26, 45, 51] and dependency graph-based [20, 32]. There are also some works [30, 42] further identifying root-cause metrics. MicroDiag [42] models the dependencies among metrics by causality discovery and ranks metrics by PageRank. FluxRank [30] ranks metrics by learning-to-rank.

## 5.2 Dataset

Most existing works on failure diagnosis use private datasets for evaluation. Some existing works [23, 51] published their datasets, but these datasets contain only traces and thus do not support fine-grained failure diagnosis. Furthermore, though there are also some public datasets (e.g., Azure<sup>5</sup> and Alibaba<sup>6</sup>) including fine-grained metrics, there are no ground-truth failure time points and root causes. Therefore, to provide a comprehensive benchmark for failure discovery and fine-grained diagnosis, we construct and publish a dataset [3], named *C*. Dataset *C* has already been used by existing research works [8, 23, 45].

The dataset C is based on *sysA*, whose architecture is shown in Fig. 3. There are three types of monitoring data in the dataset C, i.e., traces, KPIs, and metrics. User requests are sent to one of the OSB components and then invoke other components, including Service and DB. The whole execution process of a user request is called a trace. We record each trace by its spans on each component, including the attributes of each span and the causal relationships among spans. A span is a unit of work done in a component of a

<sup>&</sup>lt;sup>4</sup>https://competition.aiops-challenge.com/home/competition/1484446614851493956

<sup>&</sup>lt;sup>5</sup>https://github.com/Azure/AzurePublicDataset

<sup>&</sup>lt;sup>6</sup>https://github.com/alibaba/clusterdata

Constructing Large-Scale Real-World Benchmark Datasets for AIOps

			10	ible 4. A example (	lace in the datase	ic		
callType	startTime	elapsedTime	success	traceId	id	pid	cmdbId	serviceName
OSB	1590249600016	274.0	True	6a171e24568385015da7	6a171919979385015da7	None	os_021	osb_001
CSF	1590249600025	257.0	True	6a171e24568385015da7	6a1714eba31485915da7	6a171919979385015da7	os_021	csf_001
RemoteProcess	1590249600026	254.0	True	6a171e24568385015da7	6a17182dad5063a15da7	6a1714eba31485915da7	docker_003	csf_001
CSF	1590249600035	33.0	True	6a171e24568385015da7	6a171a703a9063325da7	6a17182dad5063a15da7	docker_003	csf_002
RemoteProcess	1590249600037	30.0	True	6a171e24568385015da7	6a1719334a3114525da7	6a171a703a9063325da7	docker_005	csf_002
LOCAL	1590249600054	7.0	True	6a171e24568385015da7	6a171648b90214635da7	6a1719334a3114525da7	docker_005,	local_method_011
JDBC	1590249600054	3.0	True	6a171e24568385015da7	6a171721a43214635da7	6a171648b90214635da7	docker_005	db_003

 Table 4: A example trace in the dataset C

#### Table 5: The metrics collected in the dataset C

Category	Metrics list
Docker	container_{thread_total,fgct,thread_idle,thread_used_pct,session_used,thread_running,fgc,cpu_used,mem_used, fail_percent}
Linux	Agent_ping,Buffers_used,CPU_{idle_pct,user_time,system_time,iowait_time,util_pct},Cache_used,Disk_{rd_ios,io_util,await,avgqu_sz,svctm,wr_ kbs,rd_kbs,wr_ios},FS_{used_space,used_pct,total_space,max_util,max_avail},ICMP_ping,Incoming_network_traffic,Memory_{used_ pct,used,available,free,available_pct,total},Num_{of_processes,of_running_processes},Outgoing_network_traffic,Page_{po,pi},Processor_{load_ 5_min,load_15_min},Received_{packets,errors_packets,queue},Recv_total,Send_total,Sent_{errors_packets,queue,packets},Shared_ memory,Swap_used_pct,System_{wait_queue_length,block_queue_length},Zombie_Process,ss_total
Oracle	ACS,AIOS,AWS,Asm_Free_Tb,CPU_{free_pct,Used_Pct},Call_Per_Sec,DFParaWrite_Per_Sec,DbFile_Used_Pct,DbTime,Exec_Per_Sec,Hang,LFParaWrite_ Per_Sec,LFSync_Per_Sec,Logic_Read_Per_Sec,Login_Per_Sec,MEM_{real_util,Used,Total,Used_Pct},New_{Tbs_Free_Gb,Tbs_Used_Pct},On_Off_ State,PGA_{Used_Pct,used_total},Physical_Read_Per_Sec,Proc_{User_Used_Pct},Used_Pct},Redo_Per_Sec,Row_Lock,SEQ_Used_Pct,SctRead_Per_ Sec,SeqRead_Per_Sec,Sess_{Used_Undo,Used_Temp,Connect,Active},Session_pct,TPS_Per_Sec,Tbs_{Used_Pct,Free_Gb},TempTbs_Pct,Total_Tbs_ Size,UndoTbs_Pct,Used_Tbs_Size,User_Commit,tnsping_result_time
Redis	Redis_key_count,blocked_clients,connected_clients,evicted_keys,expired_keys,instantaneous_{output_kbps,input_kbps,ops_per_sec},keyspace_ {hits,misses},maxmemory,mem_fragmentation_ratio,redis_{ping,load},rejected_connections,total_{connections_received,commands_processed},used_ {memory_peak,cpu_sys,memory_rss,cpu_user,memory}

distributed system<sup>7</sup>. The attributes of the spans on each component can be aggregated into KPIs to reflect the overall status of each component. In Table 4, we preset an example trace, where each row is a span. Each span has a unique ID (the field id), the ID of its parent span (the span that invokes this span) (pid), and the unique ID of the whole trace (traceId). With these three fields we can identify the spans of a trace and the causal relationships among the spans. The other fields characterize a span. For example, the span of the first row occurs at 1590249600016 (startTime. Unix timestamp in milliseconds), costs 274 milliseconds, and has a successful response. Its call type is OSB and occurs at the component os 021. The KPIs (e.g., success rate, average response time) of the component are available by grouping the spans by cmdbId and aggregating some fields (e.g., success, elapsedTime). Note that the overall KPIs (i.e., the KPIs on the OSB components) are directly given in the published dataset. Besides the traces, we also collect the fine-grained metrics of each component. There are four categories of metrics, which are summarized in Table 5.

In the dataset *C*, we provide 169 injected failures with groundtruth time points and root causes, spanning one month. We use injected failures rather than real-world failures because it is hard to collect so many real-world failures with ground-truth root causes. On *sysA*, we injected 7 types of failures in total, which are summarized in Table 6.

Tab	e 6:	: Fai	lure	ini	iecti	ion	in	the	datase	et i	С
Lab		• I uI	luic		, ccu	UII		unc	uataby	~	C

Component	Injection type	Description			
Database	close	Close the listening port of the target instances			
Database	session limit	Decrease the session limit of the target instance			
Container	CPU stress *	Stress the CPU of the target container			
Container	network delay \$	Delay packets randomly on the target container			
Container	network loss \$	Drop packets randomly on the target container			
Physical node	network delay \$	Delay packets randomly on the target node			
Physical node	network loss \$	Drop packets randomly on the target node			
Injection tool: stress-ng (*) and tc (\$)					

<sup>7</sup>We follow OpenTracing specification: https://opentracing.io/docs/overview/spans/

Based on the dataset *C*, we held the third AIOps Challenge in  $2020^8$ . It attracted 141 teams and 517 participants from both academia and industries. In this competition, the participants are asked to detect and diagnose these failures in an online manner. For each failure, each team is allowed to submit at most two potential root-cause metrics. For network failures on containers, including both loss and delay, as we did not collect network metrics on containers, the participants are asked to localize the root-cause containers only. If the result submitted by a team of a failure achieves a precision score greater than or equal to 0.5, then the result is considered valid. For each failure, the valid results from different teams are ranked by time to diagnose/F-0.5 score, then each of them gets max(10 - i + 1, 0) points (*i* is the rank). The best score achieved by the participants is 755, given 129 failures in total.

# 6 CONCLUSION

AIOps has attracted a great deal of attention from academics and industry. A significant limitation of the research of AIOps is the lack of public real-world and large-scale datasets. To tackle this problem, we have published three datasets, including KPI anomaly detection, root-cause localization for multi-dimensional data, failure discovery, and diagnosis. More importantly, we held an algorithm competition once a year based on the public datasets, attracting hundreds of teams to take part. Our work is helpful for practitioners and researchers to apply AIOps to enhance service reliability. In the future, we will continuously publish more datasets involving various AIOps scenarios and hold the competition. Welcome to pay attention to and actively participate in the competition.

<sup>&</sup>lt;sup>8</sup> https://competition.aiops-challenge.com/home/competition/1484441527290765368

ESEC/FSE 2022, 14 - 18 November, 2022, Singapore

Z. Li, N. Zhao, S. Zhang, Y. Sun, P. Chen, X. Wen, M. Ma, D. Pei

### REFERENCES

- 2018. NetManAIOps/KPI-Anomaly-Detection: 2018AIOps: The 1st Match for AIOps. https://github.com/netmanaiops/kpi-anomaly-detection
- [2] 2019. NetManAIOps/MultiDimension-Localization: 2019AIOps: The 2nd Match for AIOps. https://github.com/NetManAIOps/MultiDimension-Localization
- [3] 2020. AIOps-Challenge-2020-Data. NetManAIOps. https://github.com/ NetManAIOps/AIOps-Challenge-2020-Data
- [4] 2022. AIOps Workshop. https://workshop.aiops.org.
- [5] Faraz Ahmed, Jeffrey Erman, Zihui Ge, Alex X. Liu, Jia Wang, and He Yan. 2017. Detecting and Localizing End-to-End Performance Degradation for Cellular Data Services Based on TCP Loss Ratio and Round Trip Time. *IEEE/ACM Transactions* on Networking 25, 6 (Dec. 2017), 3709–3722.
- [6] Ranjita Bhagwan, Rahul Kumar, Ramachandran Ramjee, George Varghese, Surjyakanta Mohapatra, Hemanth Manoharan, and Piyush Shah. 2014. Adtributor: Revenue Debugging in Advertising Systems. In NSDI 2014.
- [7] Jiahao Bu, Ying Liu, Shenglin Zhang, Weibin Meng, Qitong Liu, Xiaotian Zhu, and Dan Pei. [n.d.]. Rapid deployment of anomaly detection models for large number of emerging kpi streams. In *IPCCC 2018*.
- [8] Yang Cai, Biao Han, Jie Li, Na Zhao, and Jinshu Su. 2021. ModelCoder: A Fault Model Based Automatic Root Cause Localization Framework for Microservice Systems. In IWQoS 2021.
- [9] Junjie Chen, Xiaoting He, Qingwei Lin, Yong Xu, Hongyu Zhang, Dan Hao, Feng Gao, Zhangwei Xu, Yingnong Dang, and Dongmei Zhang. 2019. An empirical investigation of incident triage for online service systems. In *ICSE-SEIP 2019*.
- [10] Junjie Chen, Xiaoting He, Qingwei Lin, Hongyu Zhang, Dan Hao, Feng Gao, Zhangwei Xu, Yingnong Dang, and Dongmei Zhang. 2019. Continuous incident triage for large-scale online service systems. In ASE 2019.
- [11] Yujun Chen, Xian Yang, Qingwei Lin, Hongyu Zhang, Feng Gao, Zhangwei Xu, Yingnong Dang, Dongmei Zhang, Hang Dong, Yong Xu, et al. 2019. Outage Prediction and Diagnosis for Cloud Service Systems. In WWW 2019.
- [12] Zhuangbin Chen, Yu Kang, Liqun Li, Xu Zhang, Hongyu Zhang, Hui Xu, Yangfan Zhou, Li Yang, Jeffrey Sun, Zhangwei Xu, et al. 2020. Towards intelligent incident management: why we need it and how we make it. In FSE 2020.
- [13] Zhuangbin Chen, Jinyang Liu, Yuxin Su, Hongyu Zhang, Xiao Ling, Yongqiang Yang, and Michael R. Lyu. 2022. Adaptive Performance Anomaly Detection for Online Service Systems via Pattern Sketching. In *ICSE 2022*. arXiv:2201.02944
- [14] Eli Cortez, Anand Bonde, Alexandre Muzio, Mark Russinovich, Marcus Fontoura, and Ricardo Bianchini. 2017. Resource central: Understanding and predicting workloads for improved resource management in large cloud platforms. In SOSP 2017.
- [15] Christina Delimitrou and Christos Kozyrakis. 2014. Quasar: Resource-efficient and qos-aware cluster management. *ACM SIGPLAN Notices* 49, 4 (2014), 127–144.
- [16] Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. [n.d.]. Imagenet: A large-scale hierarchical image database. In CVPR 2009.
- [17] Yu Gan, Mingyu Liang, Sundar Dev, David Lo, and Christina Delimitrou. 2021. Sage: Practical and Scalable ML-Driven Performance Debugging in Microservices. In ASPLOS 2021.
- [18] Jiazhen Gu, Chuan Luo, Si Qin, Bo Qiao, Qingwei Lin, Hongyu Zhang, Ze Li, Yingnong Dang, Shaowei Cai, Wei Wu, Yangfan Zhou, Murali Chintalapati, and Dongmei Zhang. 2020. Efficient Incident Identification from Multi-Dimensional Issue Reports via Meta-Heuristic Search. In FSE 2020.
- [19] Pengkun Jing, Yanni Han, Jiyan Sun, Tao Lin, and Yanjie Hu. 2021. AutoRoot: A Novel Fault Localization Schema of Multi-Dimensional Root Causes. In WCNC 2021.
- [20] Myunghwan Kim, Roshan Roshan, and Sam Shah. 2013. Root Cause Detection in a Service-Oriented Architecture. ACM SIGMETRICS Performance Evaluation Review (June 2013). https://doi.org/10.1145/2494232.2465753
- [21] Nikolay Laptev, Saeed Amizadeh, and Ian Flint. 2015. Generic and scalable framework for automated time-series anomaly detection. In KDD 2015.
- [22] Alexander Lavin and Subutai Ahmad. 2015. Evaluating real-time anomaly detection algorithms-the Numenta anomaly benchmark. In 2015 IEEE 14th International Conference on Machine Learning and Applications (ICMLA).
- [23] Zeyan Li, Junjie Chen, Rui Jiao, Nengwen Zhao, Zhijun Wang, Shuwei Zhang, Yanjun Wu, Long Jiang, Leiqin Yan, Zikai Wang, Zhekang Chen, Wenchi Zhang, Xiaohui Nie, Kaixin Sui, and Dan Pei. 2021. Practical Root Cause Localization for Microservice Systems via Trace Analysis. In *IWQoS 2021*.
- [24] Zeyan Li, Chengyang Luo, Yiwei Zhao, Yongqian Sun, Kaixin Sui, Xiping Wang, Dapeng Liu, Xing Jin, Qi Wang, and Dan Pei. 2019. Generic and Robust Localization of Multi-Dimensional Root Causes. In ISSRE 2019.
- [25] Fred Lin, Keyur Muzumdar, Nikolay Pavlovich Laptev, Mihai-Valentin Curelea, Seunghak Lee, and Sriram Sankar. 2020. Fast Dimensional Analysis for Root Cause Investigation in a Large-Scale Service Environment. Proceedings of the ACM on Measurement and Analysis of Computing Systems (June 2020).
- [26] Jinjin Lin, Pengfei Chen, and Zibin Zheng. 2018. Microscope: Pinpoint Performance Issues with Causal Graphs in Micro-Service Environments. In ICSOC 2018, Claus Pahl, Maja Vukovic, Jianwei Yin, and Qi Yu (Eds.).

- [27] Qingwei Lin, Ken Hsieh, Yingnong Dang, Hongyu Zhang, Kaixin Sui, Yong Xu, Jian-Guang Lou, Chenggang Li, Youjiang Wu, Randolph Yao, et al. 2018. Predicting Node failure in cloud service systems. In FSE 2018.
- [28] Qingwei Lin, Jian-Guang Lou, Hongyu Zhang, and Dongmei Zhang. 2016. iDice: Problem Identification for Emerging Issues. In ICSE 2016.
- [29] Dapeng Liu, Youjian Zhao, Haowen Xu, Yongqian Sun, Dan Pei, Jiao Luo, Xiaowei Jing, and Mei Feng. 2015. Opprentice: Towards practical and automatic anomaly detection through machine learning. In *IMC 2015.*
- [30] Ping Liu, Yu Chen, Xiaohui Nie, Jing Zhu, Shenglin Zhang, Kaixin Sui, Ming Zhang, and Dan Pei. 2019. FluxRank: A Widely-Deployable Framework to Automatically Localizing Root Cause Machines for Software Service Failure Mitigation. In ISSRE 2019.
- [31] Jian-Guang Lou, Qingwei Lin, Rui Ding, Qiang Fu, Dongmei Zhang, and Tao Xie. 2017. Experience report on applying software analytics in incident management of online service. Automated Software Engineering 24, 4 (2017), 905–941.
- [32] Meng Ma, Jingmin Xu, Yuan Wang, Pengfei Chen, Zonghua Zhang, and Ping Wang. 2020. AutoMAP: Diagnose Your Microservice-Based Web Applications Automatically. In WWW 2020.
- [33] Minghua Ma, Zheng Yin, Shenglin Zhang, Sheng Wang, Christopher Zheng, Xinhao Jiang, Hanwen Hu, Cheng Luo, Yilin Li, Nengjun Qiu, et al. 2020. Diagnosing root causes of intermittent slow queries in cloud databases. *Proceedings of the* VLDB Endowment 13, 8 (2020).
- [34] Minghua Ma, Shenglin Zhang, Junjie Chen, Jim Xu, Haozhe Li, Yongliang Lin, Xiaohui Nie, Bo Zhou, Yong Wang, and Dan Pei. 2021. {Jump-Starting} Multivariate Time Series Anomaly Detection for Online Service Systems. In ATC 2021.
- [35] Susan Moore. 2019. Gartner: How to Get Started With AIOps. https://www.gartner.com/smarterwithgartner/how-to-get-started-with-aiops
- [36] Paolo Notaro, Jorge Cardoso, and Michael Gerndt. 2021. A Survey of AIOps Methods for Failure Management. ACM Transactions on Intelligent Systems and Technology (TIST) 12, 6 (2021), 1–45.
- [37] M. A. Qureshi, L. Qiu, A. Mahimkar, J. He, and G. Baig. 2020. Multi-Dimensional Impact Detection and Diagnosis in Cellular Networks. In 2020 16th International Conference on Mobility, Sensing and Networking (MSN).
- [38] Hansheng Ren, Bixiong Xu, Yujing Wang, Chao Yi, Congrui Huang, Xiaoyu Kou, Tony Xing, Mao Yang, Jie Tong, and Qi Zhang. 2019. Time-series anomaly detection service at microsoft. In KDD 2019.
- [39] Mohammed Shatnawi and Mohamed Hefeeda. 2015. Real-time failure prediction in online services. In INFOCOM 2015.
- [40] Yongqian Sun, Youjian Zhao, Ya Su, Dapeng Liu, Xiaohui Nie, Yuan Meng, Shiwen Cheng, Dan Pei, Shenglin Zhang, Xianping Qu, and Xuanyou Guo. 2018. HotSpot: Anomaly Localization for Additive KPIs With Multi-Dimensional Attributes. *IEEE* Access 6 (2018), 10909–10923.
- [41] H. Wang, G. Rong, Y. Xu, and Y. You. 2020. ImpAPTr: A Tool For Identifying The Clues To Online Service Anomalies. In ASE 2020.
- [42] Li Wu, Johan Tordsson, Jasmin Bogatinovski, Erik Elmroth, and Odej Kao. 2021. MicroDiag: Fine-Grained Performance Diagnosis for Microservice Systems. In *ICSE21 Workshop on Cloud Intelligence*. 7.
- [43] Haowen Xu, Wenxiao Chen, Nengwen Zhao, Zeyan Li, Jiahao Bu, Zhihan Li, Ying Liu, Youjian Zhao, Dan Pei, Yang Feng, Jie Chen, Zhaogang Wang, and Honglin Qiao. 2018. Unsupervised Anomaly Detection via Variational Auto-Encoder for Seasonal KPIs in Web Applications. In WWW 2018.
- [44] Yong Xu, Kaixin Sui, Randolph Yao, Hongyu Zhang, Qingwei Lin, Yingnong Dang, Peng Li, Keceng Jiang, Wenchi Zhang, Jian-Guang Lou, et al. 2018. Improving service availability of cloud systems by predicting disk error. In ATC 2018.
- [45] Guangba Yu, Pengfei Chen, Hongyang Chen, Zijie Guan, Zicheng Huang, Linxiao Jing, Tianjun Weng, Xinmeng Sun, and Xiaoyun Li. 2021. MicroRank: End-to-End Latency Issue Localization with Extended Spectrum Analysis in Microservice Environments. In WWW 2021.
- [46] Ke Zhang, Jianwu Xu, Martin Renqiang Min, Guofei Jiang, Konstantinos Pelechrinis, and Hui Zhang. 2016. Automated IT system failure prediction: A deep learning approach. In *Big Data 2022*.
- [47] Xu Zhang, Chao Du, Yifan Li, Yong Xu, Hongyu Zhang, Si Qin, Ze Li, Qingwei Lin, Yingnong Dang, Andrew Zhou, Saravanakumar Rajmohan, and Dongmei Zhang. 2021. HALO: Hierarchy-Aware Fault Localization for Cloud Systems. In *KDD 2021.*
- [48] Xu Zhang, Junghyun Kim, Qingwei Lin, Keunhak Lim, Shobhit O Kanaujia, Yong Xu, Kyle Jamieson, Aws Albarghouthi, Si Qin, Michael J Freedman, et al. 2019. Cross-dataset time series anomaly detection for cloud systems. In ATC 2019.
- [49] Nengwen Zhao, Junjie Chen, Zhou Wang, Xiao Peng, Gang Wang, Yong Wu, Fang Zhou, Zhen Feng, Xiaohui Nie, Wenchi Zhang, et al. 2020. Real-time incident prediction for online service systems. In FSE 2020.
- [50] Nengwen Zhao, Jing Zhu, Rong Liu, Dapeng Liu, Ming Zhang, and Dan Pei. 2019. Label-Less: A Semi-Automatic Labelling Tool for KPI Anomalies. In INFOCOM 2019.
- [51] Xiang Zhou, Xin Peng, Tao Xie, Jun Sun, Chao Ji, Dewei Liu, Qilin Xiang, and Chuan He. 2019. Latent Error Prediction and Fault Localization for Microservice Applications by Learning from System Trace Logs. In FSE 2019.