# Automatic Sequences in Negative Bases and Proofs of Some Conjectures of Shevelev

Jeffrey Shallit,\* Sonja Linghui Shan, and Kai Hsiang Yang School of Computer Science University of Waterloo Waterloo, ON N2L 3G1 Canada shallit@uwaterloo.ca slshan@uwaterloo.ca kh2yang@uwaterloo.ca

August 15, 2022

#### Abstract

We discuss the use of negative bases in automatic sequences. Recently the theoremprover Walnut has been extended to allow the use of base (-k) to express variables, thus permitting quantification over  $\mathbb{Z}$  instead of  $\mathbb{N}$ . This enables us to prove results about two-sided (bi-infinite) automatic sequences. We first explain the theory behind negative bases in Walnut. Next, we use this new version of Walnut to give a very simple proof of a strengthened version of a theorem of Shevelev. We use our ideas to resolve two open problems of Shevelev from 2017. We also reprove a 2000 result of Shur involving bi-infinite binary words.

### 1 Introduction

Walnut, originally designed by Hamoon Mousavi [11], is a theorem-prover that can prove or disprove first-order logical statements about automatic sequences. Roughly speaking, automatic sequences  $(a_n)_{n\geq 0}$  are those over a finite alphabet that can be computed by a DFAO (deterministic finite automaton with output) that, on input *n* represented in some fashion, has output  $a_n$ . The most famous example of such a sequence is the Thue-Morse sequence  $\mathbf{t} = 01101001\cdots$ .

<sup>\*</sup>Research funded by a grant from NSERC, 2018-04118.

As an example of the kind of statement that Walnut can prove, consider the pattern called an *overlap*: this is a word of the form axaxa, where a is a single letter and x is a possibly empty word, like the French word **entente**. The following first-order formula asserts that **t** has no overlaps:

 $\neg \exists i, n \ (n \ge 1) \land \forall k \ (k \le n) \implies \mathbf{t}[i+k] = \mathbf{t}[i+k+n].$ (1)

When we enter this formula into Walnut in a suitably-translated form, i.e.,

eval no\_overlap "~Ei,n (n>=1) & Ak (k<=n) => T[i+k]=T[i+k+n]":

then Walnut returns TRUE, thus rigorously proving the absence of overlaps in t. Here E is Walnut's way of writing the existential quantifier, A is the universal quantifier, => is logical implication, & is logical AND, and ~ is logical NOT.

The decision procedure used by Walnut compiles a first-order logical statement like Eq. (1) about an automatic sequence into a series of transformations on finite automata and DFAO's (deterministic finite automata with outputs on the states). Numbers are represented as words over a finite alphabet, in some numeration system such as base k. In order for the decision procedure to work, there must be finite automata checking the addition relation x + y = z and the comparison relations x < y.

Up to now, the domain of variables in Walnut (such as the variables i, k, n appearing in Eq. (1)), has been restricted to  $\mathbb{N} = \{0, 1, 2, \ldots\}$ , the natural numbers. In this paper we describe a recent extension to Walnut that allows us to extend the domain of variables, in a simple and natural way, to  $\mathbb{Z}$ , the set of all integers. Among other things, this enables us to mechanically prove results about certain two-sided (bi-infinite) words (or sequences; we use these terms interchangeably). These words can be viewed as maps from  $\mathbb{Z}$ , the integers, to a finite alphabet.

We use our extension of Walnut to improve a 2017 result of Shevelev, and resolve two of his (up to now unproved) open problems. We also reprove a 2000 result of Shur.

For more information about Walnut and its capabilities, see [15].

The outline of the paper is as follows. In Section 2 we recall the basic properties of representation in base -k. In Section 3 we discuss automatic sequences in base -k. In Section 4 we give the basic theoretical constructions that allow Walnut to work with base -k, and implementation details are given in Section 5. The syntax and semantics of the new Walnut commands are discussed in Section 6; as an application we reprove a 2000 result of Shur. In Section 7 we give a new proof of a result of Shevelev and we also strengthen it. In Section 8 we solve two of Shevelev's open problems from [18] using our new techniques. In Section 9 we consider the so-called negaFibonacci representation and use it to reprove a result of Levé and Richomme on the quasiperiods of the infinite Fibonacci word [9]. Finally, in Section 10 we prove (and strengthen) one more result of Shevelev.

# **2** Representation in base (-k)

Let  $k \ge 2$  be an integer. In the late 19th century, Grünwald [5] introduced the idea of representing integers in base (-k). The history, use, and application of negative bases is

described in detail in  $[6, \S4.1]$  and  $[1, \S3.7]$ .

In analogy with ordinary base-k representation, representation in base (-k) involves writing

$$n = \sum_{0 \le i \le r} a_i (-k)^i,$$

where  $n \in \mathbb{Z}$  and  $a_i \in \Sigma_k$ , where  $\Sigma_k := \{0, 1, \ldots, k-1\}$ . Up to the inclusion of leading zeros, every integer has a unique such base-(-k) representation, called the *canonical expansion*, as a word  $a_r a_{r-1} \cdots a_0$ , with  $a_r \neq 0$ , over the alphabet  $\Sigma_k$ . We denote it as  $(n)_{-k}$ . Similarly, if  $x \in \Sigma_k^*$  is a word, we let  $[x]_{-k}$  be the integer represented by x interpreted in base (-k).

Table 1 gives some examples of representation in base (-2)—also called *negabinary* where representations are given with the most significant digit first. Here  $\epsilon$  denotes the empty word.

n	$(n)_{-2}$
-7	1001
-6	1110
-5	1111
-4	1100
-3	1101
-2	10
-1	11
0	$\epsilon$
1	1
2	110
3	111
4	100
5	101
6	11010
7	11011

Table 1: Representation in base (-2)

The advantage to this particular representation of  $\mathbb{Z}$  is that we do not need artificial conventions such as a sign bit to represent integers. It also avoids the ambiguity associated with representations of 0, where -0 and +0 would have the same meaning.

# **3** Automata in base (-k)

The well-studied theory of automatic sequences extends seamlessly to negative bases. We say a bi-infinite sequence  $(a_n)_{n\in\mathbb{Z}}$  is (-k)-automatic if there exists a DFAO  $(Q, \Sigma_k, \Delta, \delta, q_0, \tau)$  where

- Q is a finite nonempty set of states;
- $\Sigma_k = \{0, 1, \dots, k-1\};$
- $\Delta$  is a finite output alphabet;
- $\delta: Q \times \Sigma \to Q$  is the transition function;
- $q_0 \in Q$  is the start state;
- and  $\tau: Q \to \Delta$  is the output mapping,

such that  $a(n) = \tau(\delta(q_0, x))$  for all integers n and words  $x \in \Sigma^*$  such that  $[x]_{-k} = n$  (even those with leading zeroes).

Let us look at an example. The one-sided Thue-Morse sequence

 $\mathbf{t} = 0110100110010110 \cdots$ 

can be extended in two separate ways to a two-sided generalization: either

 $\mathbf{t}' = \mathbf{t}^R \cdot \mathbf{t} = \cdots 100110010110.011010011001 \cdots,$ 

or

$$\mathbf{t}'' = \overline{\mathbf{t}}^R \cdot \mathbf{t} = \cdots 011001101001.011010011001 \cdots,$$

where an R as an exponent changes a one-sided right-infinite word into a one-sided leftinfinite word, the overline denotes binary complement, and the period indicates that the 0 index begins immediately to the right.

Base-(-2) automata for these two two-sided sequences are given in Figure 1. Note that these automata are topologically identical; only the output functions associated with the states differ. We explain how to compute them in Section 6.5.

# 4 Components for working with base (-k)

The decision procedure used by Walnut compiles a first-order logical statement about an automatic sequence into a series of transformations on finite automata and DFAO's (deterministic finite automata with outputs on the states). Numbers are represented as words over a finite alphabet, in some numeration system such as base k. In order for the decision procedure to work, there must be finite automata checking the addition relation x + y = z and the comparison relations x < y. In this section we describe the components needed for working with base (-k).

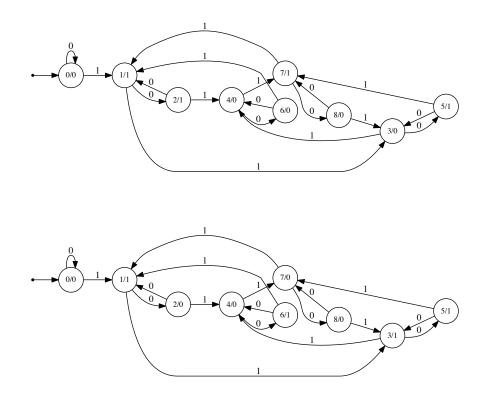


Figure 1: Base-(-2) automata generating the bi-infinite words  $\mathbf{t}'$  (top) and  $\mathbf{t}''$  (bottom).

# **4.1** Adder for base (-k)

In this section we describe the construction of automata checking the relation x + y = z in base (-k). Here  $x, y, z \in \Sigma_k^*$  are all represented in base (-k), and the automaton reads the representations of x, y, z in parallel, starting with the most significant digit.

Define a DFA  $M_k = (Q, \Sigma_k \times \Sigma_k \times \Sigma_k, \delta, q_0, F)$  where

- 1.  $Q = \{q_0, q_1, q_2, q_3\};$
- 2.  $F = \{q_0\};$  and

3. for all  $[a, b, c] \in \Sigma_k \times \Sigma_k \times \Sigma_k$ , we have

$$\delta(q_0, [a, b, c]) = \begin{cases} q_0, & \text{if } a + b - c = 0; \\ q_1, & \text{if } a + b - c = -1; \\ q_2, & \text{if } a + b - c = 1; \end{cases}$$
  
$$\delta(q_1, [0, 0, k - 1]) = q_2;$$
  
$$\delta(q_2, [a, b, c]) = \begin{cases} q_0, & \text{if } a + b - c - k = 0; \\ q_1, & \text{if } a + b - c - k = -1; \\ q_2, & \text{if } a + b - c - k = 1, \end{cases}$$

with undefined transitions all leading to  $q_3$ .

The DFA  $M_2$  is given in Figure 2 with transitions to  $q_3$  hidden. For  $x, y, z \in \Sigma_k^*$  of length




Figure 2:  $M_2$ 

*n*, we interpret [x, y, z] as  $[x_1, y_1, z_1][x_2, y_2, z_2] \cdots [x_n, y_n, z_n]$ . To see that  $M_k$  recognizes the language  $\{[x, y, z] : [x]_{-k} + [y]_{-k} = [z]_{-k}\}$ , we have the following result.

**Theorem 1.** Let  $x, y, z \in \Sigma_k^*$  be words of length n. Let  $q = \delta(q_0, [x, y, z])$ .

- If  $q = q_0$  then  $[x]_{-k} + [y]_{-k} [z]_{-k} = 0$ .
- If  $q = q_1$  then  $[x]_{-k} + [y]_{-k} [z]_{-k} = -1$ .
- If  $q = q_2$  then  $[x]_{-k} + [y]_{-k} [z]_{-k} = 1$ .
- If  $q = q_3$  then  $|[x]_{-k} + [y]_{-k} [z]_{-k}| > 1$ .

*Proof.* We proceed by induction on n.

- Suppose n = 0. Then,  $q = \delta(q_0, \varepsilon) = q_0$ . Trivially,  $[x]_{-k} + [y]_{-k} [z]_{-k} = 0$ .
- Suppose n > 0. Let x = x'a, y = y'b, z = z'c for  $x', y', z' \in \Sigma_k^*$  and  $a, b, c \in \Sigma_k$ . Suppose the claim holds for [x', y', z']. Let  $q' = \delta(q_0, [x', y', z'])$ . Then,  $q = \delta(q', [a, b, c])$ .

- Case 
$$q' = q_0$$
. By the inductive hypothesis,  $[x']_{-k} + [y']_{-k} - [z']_{-k} = 0$ . Then,

$$[x]_{-k} + [y]_{-k} - [z]_{-k} = [x'0]_{-k} + [y'0]_{-k} - [z'0]_{-k} + a + b - c = a + b - c$$

If  $q = q_0, q_1, q_2$  or  $q_3$ , we have a + b - c = 0, -1, 1 or |a + b - c| > 1 respectively.

- Case  $q' = q_1$ . By the inductive hypothesis,  $[x']_{-k} + [y']_{-k} - [z']_{-k} = -1$ . Then,  $[x]_{-k} + [y]_{-k} - [z]_{-k} = [x'0]_{-k} + [y'0]_{-k} - [z'0]_{-k} + a + b - c = k + a + b - c$ 

If  $q = q_2$ , a = b = 0 and c = k - 1. So k + a + b - c = 1. If  $q = q_3$ ,  $a \neq 0$ ,  $b \neq 0$  or  $c \neq k - 1$ . Suppose  $|k + a + b - c| \leq 1$ . Then,  $a + b - c \leq -k + 1$ . It follows that a = b = 0 and c = k - 1, a contradiction. Hence, |k + a + b - c| > 1.

- Case  $q' = q_2$ . By the inductive hypothesis,  $[x']_{-k} + [y']_{-k} - [z']_{-k} = 1$ . Then,

$$[x]_{-k} + [y]_{-k} - [z]_{-k} = [x'0]_{-k} + [y'0]_{-k} - [z'0]_{-k} + a + b - c = a + b - c - k$$

If  $q = q_0, q_1, q_2$  or  $q_3$ , we have a + b - c - k = 0, -1, 1 or |a + b - c - k| > 1 respectively.

- Case  $q' = q_3$ . Since  $q' = q_3$ ,  $q = q_3$ . By the inductive hypothesis,  $|[x']_{-k} + [y']_{-k} - [z']_{-k}| > 1$ . It follows that  $|[x']_{-k} + [y']_{-k} - [z']_{-k}| \ge 2$  and then,  $|[x'0]_{-k} + [y'0]_{-k} - [z'0]_{-k}| \ge 2k$ . Since  $|a + b - c| \le 2k - 2$ ,

$$\left| [x]_{-k} + [y]_{-k} - [z]_{-k} \right| = \left| [x'0]_{-k} + [y'0]_{-k} - [z'0]_{-k} + a + b - c \right| > 1$$

In all cases, the claim holds for [x, y, z].

This completes our proof by induction.

By Theorem 1, we have  $M_k$  accepts [x, y, z] if and only if  $[x]_{-k} + [y]_{-k} = [z]_{-k}$ .

### **4.2** Comparison automaton for base (-k)

In this section we describe the construction of an automaton for checking if x < y. Define DFA  $N_k = (Q, \Sigma_k \times \Sigma_k, \delta, q_0, F)$  where

- 1.  $Q = \{q_0, q_1, q_2\},\$
- 2.  $F = \{q_2\}$ , and
- 3. for all  $[a, b] \in \Sigma_k \times \Sigma_k$ , we have

$$\delta(q_0, [a, b]) = \begin{cases} q_0, & \text{if } a - b = 0; \\ q_1, & \text{if } a - b > 0; \\ q_2, & \text{if } a - b < 0; \end{cases}$$
$$\delta(q_1, [a, b]) = q_2$$
$$\delta(q_2, [a, b]) = q_1.$$

The DFA  $N_2$  is given in Figure 3. For  $x, y \in \Sigma_k^*$  of length n, we similarly interpret [x, y] as  $[x_1, y_1][x_2, y_2] \cdots [x_n, y_n]$ . To see that  $N_k$  recognizes the language  $\{[x, y] : [x]_{-k} < [y]_{-k}\}$ , we have the following result.




Figure 3:  $N_2$ 

**Theorem 2.** Let  $x, y \in \Sigma_k^*$  be words of length n. Let  $q = \delta(q_0, [x, y])$ .

- If  $q = q_0$  then  $[x]_{-k} [y]_{-k} = 0$ .
- If  $q = q_1$  then  $[x]_{-k} [y]_{-k} > 0$ .
- If  $q = q_2$  then  $[x]_{-k} [y]_{-k} < 0$ .

*Proof.* We proceed by induction on n.

- Suppose n = 0. Then,  $q = \delta(q_0, \varepsilon) = q_0$ . Trivially,  $[x]_{-k} [y]_{-k} = 0$ .
- Suppose n > 0. Let x = x'a, y = y'b for  $x', y' \in \Sigma_k^*$  and  $a, b \in \Sigma_k$ . Suppose the result holds for [x', y']. Let  $q' = \delta(q_0, [x', y'])$ . Then,  $q = \delta(q', [a, b])$ .
  - Case  $q' = q_0$ . By the inductive hypothesis,  $[x']_{-k} [y']_{-k} = 0$ . Then,

$$[x]_{-k} - [y]_{-k} = [x'0]_{-k} - [y'0]_{-k} + a - b = a - b$$

If  $q = q_0, q_1$  or  $q_2$ , we have a - b = 0, a - b > 0 or a - b < 0 respectively.

- Case  $q' = q_1$ . Since  $q' = q_1$ ,  $q = q_2$ . By the inductive hypothesis,  $[x']_{-k} - [y']_{-k} > 0$ . It follows that  $[x']_{-k} - [y']_{-k} \ge 1$  and then,  $[x'0]_{-k} - [y'0]_{-k} \le -k$ . Then,

$$[x]_{-k} - [y]_{-k} = [x'0]_{-k} - [y'0]_{-k} + a - b \le a - b - k$$

Since a - b < k, a - b - k < 0. So  $[x]_{-k} - [y]_{-k} \le a - b - k < 0$ .

- Case  $q' = q_2$ . Since  $q' = q_2$ ,  $q = q_1$ . By the inductive hypothesis,  $[x']_{-k} - [y']_{-k} < 0$ . It follows that  $[x']_{-k} - [y']_{-k} ≤ -1$  and then,  $[x'0]_{-k} - [y'0]_{-k} ≥ k$ . Then,

$$[x]_{-k} - [y]_{-k} = [x'0]_{-k} - [y'0]_{-k} + a - b \ge k + a - b$$

Since a - b > -k, k + a - b > 0. So  $[x]_{-k} - [y]_{-k} \ge k + a - b > 0$ .


In all cases, the result holds for [x, y, z].

This completes our induction proof.

By Theorem 2, we have  $N_k$  accepts [x, y] if and only if  $[x]_{-k} < [y]_{-k}$ .

### **4.3** Conversion from base (-k) to base k

In this section we describe an automaton that can be used to convert from base (-k) to base k and vice versa. The theory behind this can be found in [1, §5.3].

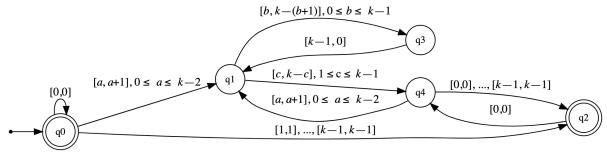

Input in msd: [base k, base -k]

Figure 4:  $P_k$ 

We define a DFA  $P_k = (Q, \Sigma_k \times \Sigma_k, \delta, q_0, F)$  as shown in Figure 4 where

- $Q = \{q_0, q_1, q_2, q_3, q_4\},\$
- $F = \{q_0, q_2\}$ , and
- We define the following transitions

$$\begin{split} \delta(q_0, [0, 0]) &= q_0, \\ \delta(q_0, [a, a+1]) &= q_1, 0 \le a \le k-2, \\ \delta(q_0, [m, m]) &= q_2, 1 \le m \le k-1, \\ \delta(q_1, [b, k-(b+1)]) &= q_3, 0 \le b \le k-1, \\ \delta(q_1, [c, k-c]) &= q_4, 1 \le c \le k-1, \\ \delta(q_2, [0, 0]) &= q_4, \\ \delta(q_3, [k-1, 0]) &= q_1, \\ \delta(q_4, [a, a+1]) &= q_1, 0 \le a \le k-2, \\ \delta(q_4, [n, n]) &= q_2, 0 \le n \le k-1. \end{split}$$

**Theorem 3.** Let  $x, y \in \Sigma_k^*$  be words of length n. Let  $q = \delta(q_0, [x, y])$ .

- If  $q = q_0$  then  $[x]_k = [y]_{-k} = 0$ .
- If  $q = q_1$  then x, y > 0 and  $[x]_k [y]_{-k} = -1$ .
- If  $q = q_2$  then x, y > 0 and  $[x]_k [y]_{-k} = 0$ .
- If  $q = q_3$  then x > 0, y < 0, and  $[x]_k + [y]_{-k} = -1$ .

• If  $q = q_4$  then x > 0, y < 0, and  $[x]_k + [y]_{-k} = 0$ .

*Proof.* We proceed by induction on n.

Let n = 0, then  $\delta(q_0, \epsilon) = q_0$  and we have  $[x]_k = [y]_{-k} = 0$ .

Let n > 0. Let x = x'a and y = y'b, where  $x', y' \in \Sigma_k^*$  and  $a, b \in \Sigma_k$ . Let  $q' = \delta(q_0, [x', y'])$ and  $q = \delta(q_0, [x, y]) = \delta(q', [a, b])$ . Consider the following cases:

- If  $q = q_1$ , then, by the construction of  $P_k$ , n is odd and x, y > 0. We consider the following cases for q':
  - If  $q' = q_0$  or  $q_4$  then  $[x']_k + [y']_{-k} = 0$  by the induction hypothesis and  $[a]_k [b]_{-k} = -1$  by the construction of  $P_k$ . Then

$$[x]_{k} - [y]_{-k} = k \cdot ([x']_{k} + [y']_{-k}) + [a]_{k} - [b]_{-k}$$
$$= [a]_{k} - [b]_{-k}$$
$$= -1.$$

- If  $q' = q_3$  then  $[x']_k + [y']_{-k} = -1$  by the induction hypothesis and  $[a]_k - [b]_{-k} = k - 1$  by the construction of  $P_k$ . Then

$$[x]_{k} - [y]_{-k} = k \cdot ([x']_{k} + [y']_{-k}) + [a]_{k} - [b]_{-k}$$
$$= -k + k - 1$$
$$= -1.$$

• If  $q = q_2$ , then, by the construction of  $P_k$ , n is odd and x, y > 0. For both  $q' = q_0$ and  $q' = q_4$ ,  $[x']_k + [y']_{-k} = 0$  by the induction hypothesis and  $[a]_k - [b]_{-k} = 0$  by the construction of  $P_k$ . Then

$$[x]_k - [y]_{-k} = k \cdot ([x']_k + [y']_{-k}) + [a]_k - [b]_{-k}$$
  
= 0.

• If  $q = q_3$ , then, by the construction of  $P_k$ , n is even and x > 0 whereas y < 0. Since  $q' = q_1$ ,  $[x']_k - [y']_{-k} = -1$  by the induction hypothesis and  $[a]_k + [b]_{-k} = k - 1$  by the construction of  $P_k$ . Then

$$[x]_{k} + [y]_{-k} = k \cdot ([x']_{k} - [y']_{-k}) + [a]_{k} + [b]_{-k}$$
$$= -k + k - 1$$
$$= -1.$$

• If  $q = q_4$ , then, by the construction of  $P_k$ , n is even and x > 0 whereas y < 0. We consider the following cases for q':

- If  $q' = q_1$  then  $[x']_k - [y']_{-k} = -1$  by the induction hypothesis and  $[a]_k + [b]_{-k} = k$  by the construction of  $P_k$ . Then

$$[x]_{k} + [y]_{-k} = k \cdot ([x']_{k} - [y']_{-k}) + [a]_{k} + [b]_{-k}$$
$$= -k + k$$
$$= 0.$$

- If  $q' = q_2$  then  $[x']_k - [y']_{-k} = 0$  by the induction hypothesis and  $[a]_k + [b]_{-k} = 0$  by the construction of  $P_k$ . Then

$$[x]_k + [y]_{-k} = k \cdot ([x']_k - [y']_{-k}) + [a]_k + [b]_{-k}$$
  
= 0.

# 5 Extending Walnut to base (-k)

In this section, we describe how to extend Walnut to base (-k). Suppose  $x, y, z \in \mathbb{Z}$  are written in base (-k). Recall from Section 4.1, we may check the relations x + y = z and x < y using the base-(-k) automata. These observations allow extending Walnut to base (-k). Specifically, the comparison automaton  $N_k$  allows checking relations involving the relational operators,  $=, \neq, <, >, \leq$ , and  $\geq$ , available in Walnut. Moreover, the handling of logical operators, quantification, and indexing into automata does not need to be changed to work with specifically with base (-k). It remains to discuss how Walnut can be extended to handle arithmetic operators in base (-k).

Walnut for base (-k) is available at

https://github.com/jono1202/Walnut .

### **5.1** Constants and negation in base (-k)

In base (-k), every representation matching 0\*1 represents the integer 1. So the relation x = 1 may be checked by the automaton corresponding to 0\*1. Using this fact, the relation x = m can be checked using Walnut when m > 1. Similarly, the relation x = 0 may be checked by the automaton corresponding to 0\*. Alternatively, when m < 0, the relation x = m can be rewritten as

$$\exists y, z \in \mathbb{Z} \ x + y = z \land y = (-m) \land z = 0.$$

This allows checking the relation x = m for all  $m \in \mathbb{Z}$ . More generally, if  $p(x_1, \ldots, x_m)$  is an arithmetic expression involving variables  $x_1, \ldots, x_m$ , the relation  $x = -p(x_1, \ldots, x_m)$  can be rewritten as

 $\exists y, z \in \mathbb{Z} \ x + y = z \land y = p(x_1, \dots, x_m) \land z = 0.$ 

In this way, we have the ability to negate any arithmetic expression.

### 5.2 Arithmetic expressions in base (-k)

In this section, we show how addition, subtraction, multiplication by a constant, and division by a nonzero constant can be done in base (-k). The ability to check relations x = m for all  $m \in \mathbb{Z}$ , allows checking addition or subtraction, possibly involving integer constants. For example, m - x = y can be rewritten as

$$\exists z \ x + y = z \land z = m$$

When  $m \ge 0$ , the relation x = my can be handled in the same way as in non-negative bases. When m < 0, my can be rewritten as the negation of the arithmetic expression (-m)y. Specifically, we rewrite x = my as x = -((-m)y). This allows checking the relation x = myfor all  $m \in \mathbb{Z}$ . Finally, we need to be able to check the relation  $x = \lfloor y/m \rfloor$  for nonzero integers m. When m < 0, we rewrite  $x = \lfloor y/m \rfloor$  as

$$\exists r \in \mathbb{Z} \ y = xm + r \land m < r \le 0$$

Similarly, when m > 0, we rewrite x = |y/m| as

$$\exists r \in \mathbb{Z} \ y = xm + r \land 0 \le r < m$$

This allows checking the relation  $x = \lfloor y/m \rfloor$  for nonzero integer constants m.

### 6 New Walnut commands

In this section, we describe the new split, reverse-split, and join commands in Walnut which will be useful for working in base (-k).

Walnut with the split, reverse-split, and join commands is available at https://github.com/jono1202/Walnut .

### **6.1** Syntax of base (-k) comands

Analogously to base k, the phrase  $2msd_neg_k$  preceding a formula specifies the formula should be evaluated in base (-k), with most significant digit first. Alternatively, the phrase  $2lsd_neg_k$  preceding a formula specifies the formula should be evaluated in base (-k), with least significant digit first. The unary negation operation is written using \_ (an underscore), and can be written preceding any arithmetic expression, variable, or constant.

One thing to keep in mind when using base (-k) is that when using these, the universal and existential quantifiers now apply to all of  $\mathbb{Z}$ , not just  $\mathbb{N}$ .

#### 6.2 The split command

The observation from Section 4.3 implies that, given a (-k)-automatic sequence  $(a_n)_{n\in\mathbb{Z}}$ , the corresponding transformed sequence  $(a_n)_{n\in\mathbb{N}}$  is k-automatic. Moreover, the base-k DFAO for  $(a_n)_{n\in\mathbb{N}}$  can be computed using existing Walnut functionality.

For sake of example, suppose  $(a_n)_{n\in\mathbb{Z}}$  is over the output alphabet  $\{0,1\}$ , A is the base-(-k) DFAO for  $(a_n)_{n\in\mathbb{Z}}$ , and C is the conversion automaton from base-k to base-(-k). Using existing Walnut commands, we may produce the base-k DFAO for  $(a_n)_{n\in\mathbb{Z}}$  as follows.

```
eval a "En A[n] = @1 & C(m,n)";
combine AS a;
```

The new split command is used to more easily compute the same automaton, like so.

split AS A[+];

The split command can also produce the automaton for  $(a_{-n})_{n\in\mathbb{Z}}$  and be used on DFAO with any amount of inputs. For example, given a base-(-k) DFAO, B, with two inputs, we may use split to transform B like so.

split BS B[+] [-];

BS outputs on (x, y) in base k the same output as B does on (x, -y) in base (-k).

#### 6.3 The reverse-split command

The observation from Section 4.3 also implies that, given a k-automatic sequence  $(a_n)_{n \in \mathbb{N}}$ , the corresponding transformed sequence  $(a_n)_{n \in \mathbb{Z}}$ , where  $a_n := 0$  if n < 0, is (-k)-automatic. The base-(-k) DFAO for  $(a_n)_{n \in \mathbb{Z}}$  can be computed using the new reverse-split command.

rsplit AR[+] A;

Also similar to the split command, the reverse-split command can produce the automaton for  $(a_{-n})_{n\in\mathbb{Z}}$  and be used on DFAO with any number of inputs. For example, given a base-k DFAO, B, with two inputs, we may use reverse-split as follows:

rsplit BR[+] [-] B;

When  $x, -y \in \mathbb{N}$ , BR outputs on (x, y) in base (-k) the same output as B does on (x, -y) in base k. Otherwise BR outputs zero.

#### 6.4 The join command

Given a list of input DFAO, the join command produces the DFAO which outputs the first nonzero value of the input DFAO. For example, given two base-k DFAOs, A and B, both with two inputs, the join command can be used like so.

```
join ABJ A[x] [y] B[x] [y];
```

ABJ outputs on (x, y) the first nonzero output of A or B at (x, y). If both A and B output zero on (x, y), ABJ will output zero on (x, y).

#### 6.5 Examples

As an illustration of these new Walnut commands, we show how to obtain the automata in Figure 1 that extend the one-sided Thue-Morse word  $\mathbf{t}$  to to two bi-infinite sequences  $\mathbf{t}'$  and  $\mathbf{t}''$ .

```
def tmn "T[n-1]=@1":
combine T2 tmn:
rsplit T21 [+] T:
rsplit T22 [-] T2:
join TM21 T21[x] T22[x]:
def tmn2 "T[n-1]=@0":
combine T3 tmn2:
rsplit T23 [-] T3:
join TM22 T21[x] T23[x]:
```

Here we create the first automaton, TM21.txt, by joining two automata, one for Thue-Morse on the non-negative integers, and one for Thue-Morse on the negative integers. The second automaton, TM22.txt, is constructed similarly, except we use  $\bar{t}$  for the negative integers.

To see that these two infinite words  $\mathbf{t}'$  and  $\mathbf{t}''$  are true generalizations of  $\mathbf{t}$  to the bi-infinite case, we can prove the following theorem.

**Theorem 4.** A finite word x is a factor of t iff it is a factor of t', iff it is a factor of t''.

*Proof.* We can prove this with Walnut as follows:

```
def tm21faceq "?msd_neg_2 At (t>=0 & t<n) => TM21[i+t]=TM21[j+t]":
def tm22faceq "?msd_neg_2 At (t>=0 & t<n) => TM22[i+t]=TM22[j+t]":
eval tmtest1 "?msd_neg_2 Ai,n Ej (j>=0) & $tm21faceq(i,j,n)":
eval tmtest2 "?msd_neg_2 Ai,n Ej (j>=0) & $tm22faceq(i,j,n)":
```

and Walnut returns TRUE for both.

We now use the automaton for  $\mathbf{t}'$  to reprove a result of Shur [19], namely

**Theorem 5.** There exists a bi-infinite binary word that avoids  $(\frac{7}{3} + \epsilon)$ -powers, and has unequal frequencies of letters.

Let us recall the relevant definitions. We say a finite word x = x[1..n] of length n has period p if x[i] = x[i+p] for  $1 \le i \le n-p$ . Let  $p > q \ge 1$  be integers. We say that a word x is a (p/q)-power if x is of length p and has period q. Let  $\alpha > 1$  be a real number. We say an infinite word  $\mathbf{x}$  is  $\alpha$ -power-free if  $\mathbf{x}$  has no finite factor that is a (p/q)-power, for  $p/q \ge \alpha$ , and we say it is  $\alpha^+$ -power-free if  $\mathbf{x}$  has no finite factor that is a (p/q)-power, for  $p/q \ge \alpha$ . For example, an overlap-free word is  $2^+$ -power-free.

*Proof.* The idea is to use the morphism given in [16, Theorem 33]; it was called g there, but we call it  $\xi$  here:

 $\begin{aligned} \xi(0) &= 011001001101001011010011001\\ \xi(1) &= 011001001101001011001001\\ \xi(2) &= 0110010011010011001010010110001 \end{aligned}$ 

First we create a bi-infinite ternary word **vtm2** from the Thue-Morse word; this is a generalization of the so-called *variant Thue-Morse* word **vtm**. Then we apply  $\xi$  to it. However, it is easy to see that the image of each letter has 14 0's and 13 1's, so the resulting word has unequal letter frequencies. We then assert that the resulting word has a  $(\frac{7}{3} + \epsilon)$ -power with Walnut, as follows:

```
morphism xi "0 -> 01100100110100101101001
1 -> 01100100110100101100101
2 -> 01100100110100101001":
# Shur's 27-uniform morphism
def vtm0 "?msd_neg_2 TM21[n]+1=TM21[n-1]":
  def vtm1 "?msd_neg_2 TM21[n]=TM21[n-1]+1":
    combine VTM2 vtm0=0 vtm1=1 vtm2=2:
image SHUR xi VTM2:
# apply xi to VTM2
eval testshur "?msd_neg_2 Ei,n (n>=1) & At (t>=i & 3*t<=3*i+4*n) =>
    SHUR[t]=SHUR[t+n]":
And Walnut returns FALSE, so the word is indeed (<sup>7</sup>/<sub>3</sub> + ε)-free.
```

This was a big calculation in Walnut, using 5468 seconds of CPU time and 400G of RAM.

### 7 Shevelev's first sequence

Now that we have extended Walnut to handle inputs with domain  $\mathbb{Z}$  instead of  $\mathbb{N}$ , we are ready to solve Shevelev's problems on bi-infinite sequences.

Vladimir Shevelev [18] considered the following natural analogue of the Thue-Morse sequence for base -2: let g(n) denote the number of 1's in the base-(-2) representation of n, taken modulo 2. Table 2 gives the first few values of g.

n															
g(n)	0	1	0	0	1	1	0	0	1	0	1	1	0	1	0

Table 2: Some values of q

The (-2)-automaton for this sequence is given in Figure 5. For  $n \ge 0$ , this is sequence <u>A269027</u> in the On-Line Encyclopedia of Integer Sequences (OEIS) [20].




Figure 5: Automaton for Shevelev's g in base -2.

Shevelev proved that the bi-infinite sequence  $\mathbf{g} = (g(n))_{n \in \mathbb{Z}}$  contains no cubes, that is, three consecutive identical blocks of digits. His proof was quite complicated.

We can prove Shevelev's result and strengthen it as follows:

**Theorem 6.** The sequence **g** contains no overlaps.

*Proof.* We use the new version of Walnut that can use negative bases. We run the following command, which checks the assertion that there are overlaps. Walnut returns FALSE, so there are no overlaps.

eval shevelev "?msd\_neg\_2 Ei,n (n>=1) & At (t>=0 & t<=n) => G[i+t]=G[i+t+n]":  $\Box$ 

# 8 Shevelev's two open problems

In this section we show how, using Walnut, to prove Shevelev's two open problems, labeled (C) and (D) in his paper [18]. They concern two sequences v and w.

#### 8.1 The v(n) sequence

Shevelev also studied the following sequence: define v(n) to be the largest integer k such that g(i) = t(n+i) for  $0 \le i < k$ , where t(n) is the Thue-Morse sequence. This sequence is 2-synchronized in the sense of [14]; this means there is an automaton accepting precisely the base-2 representations of n and v(n) in parallel, where we pad the shorter one with leading zeros.

We can construct this automaton with Walnut as follows: first, we extract the values of g on  $\mathbb{N}$  using the new split command. It produces a new 2-automaton SH for g(n). Of course SH can only compute g(n) for non-negative values of n. We do it with the following command:

#### split SH G [+]:

This produces the automaton in Figure 6.

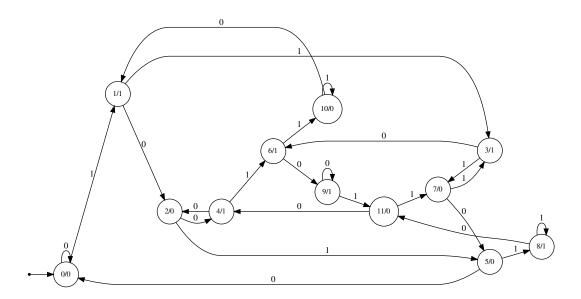


Figure 6: 2-automaton for g(n).

Shevelev studied the "record-setting" values of v(n); these are the values v(n) for which v(n) > v(i) for all i < n. Shevelev defined the sequence of record-setting values as  $(a(n))_{n\geq 1}$  and the position in which they occur in v(n) as  $(l(n))_{n\geq 1}$ . Thus v(l(n)) = a(n) for  $n \geq 1$ . The first few record-setting values are given in Table 3. Sequence  $(a(n))_{n\geq 1}$  is <u>A268866</u> in the OEIS.

The pairs (a(n), l(n)) are 2-synchronized. We can demonstrate this by creating an automaton accepting the pairs  $(a(n), l(n))_2$  in parallel.

n	a(n)	l(n)
0	2	0
1	3	3
2	22	10
3	38	58
4	342	170
5	598	938

Table 3: Record-setters for v(n).

```
def agree "Ai (i<k) => SH[i]=T[n+i]":
def vseq "$agree(k,n) & ~$agree(k+1,n)":
def recordv "$vseq(k,n) & Aj,r (r<n & $vseq(j,r)) => (j<k)":</pre>
```

The resulting automaton recordv.txt is displayed in Figure 7.

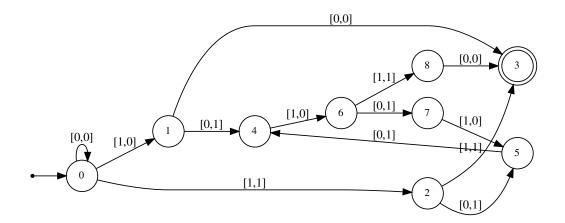


Figure 7: 2-automaton recordv.txt.

We can now examine the acceptance paths in this automaton. They are of four types:

```
\begin{split} & [1,0][0,0] \\ & [1,1][1,1] \\ & [1,0][0,1]([1,0][0,1][1,0][0,1])^i [1,0][1,1][0,0] \\ & [1,1][0,1][0,1][1,0]([0,1][1,0][0,1][1,0])^i [1,1][0,0] \end{split}
```

for  $i \geq 0$ , representing the numbers

$$(2,0) (3,3) (2^{4i+6}+2)/3, (2^{4i+5}-2)/3) ((4+7\cdot 2^{4i+5})/6, (11\cdot 2^{4i+5}-4)/6).$$

Set i = (n-2)/2 for  $n \ge 2$  even, and i = (n-3)/2 for  $n \ge 3$  odd. Then from above we have

$$\begin{split} \ell(0) &= 0\\ \ell(1) &= 3\\ \ell(n) &= (2^{2n+1}-2)/3 \text{ for } n \geq 2 \text{ even, and}\\ \ell(n) &= (11 \cdot 2^{2n-1}-4)/6 \text{ for } n \geq 3 \text{ odd.} \end{split}$$

Similarly,

a(0) = 2 a(1) = 3  $a(n) = (2^{2n+2} + 2)/3$  for  $n \ge 2$  even, and  $a(n) = (7 \cdot 2^{2n-1} + 4)/6$  for n > 3 odd.

These statements are equivalent to the statement of open problem (C) in Shevelev's paper, which is now proved.

#### 8.2 The w(n) sequence

Shevelev also studied a "dual problem". Define w(n) to be the largest integer k such that  $g(i) \neq t(n+i)$  for  $0 \leq i < k$ , where again t(n) is the Thue-Morse sequence. He then studied the "record-setting" values of w(n); these are the values w(n) such that w(n) > w(i) for all i < n. Enumerate the sequence of record-setting values as  $(b(n))_{n\geq 1}$  and the position where they occur in v(n) as  $(m(n))_{n\geq 1}$ . The first few record-setting values are given in Table 4. Sequence  $(b(n))_{n\geq 1}$  is sequence A269341 in the OEIS. We can find formulas for these numbers just as we did in Section 8.1.

```
def disagree "Ai (i<k) => SH[i]!=T[n+i]":
def wseq "$disagree(k,n) & ~$disagree(k+1,n)":
def recordw "$wseq(k,n) & Aj,r (r<n & $wseq(j,r)) => (j<k)":</pre>
```

The resulting automaton recordw.txt is displayed in Figure 8.

n	b(n)	m(n)
0	0	0
1	1	1
2	6	2
3	10	14
4	86	42
5	150	234

Table 4: Record-setters for w(n).

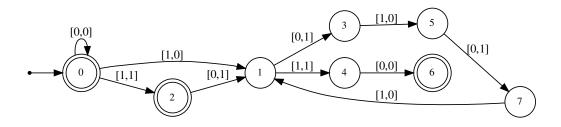


Figure 8: 2-automaton recordw.txt.

We can now examine the acceptance paths in this automaton. They are of four types:

$$\begin{split} & [0,0] \\ & [1,1] \\ & [1,0]([0,1][1,0][0,1][1,0])^i [1,1][0,0] \\ & [1,1][0,1]([0,1][1,0][0,1][1,0])^i [1,1][0,0] \end{split}$$

for  $i \ge 0$ , representing (in binary) the pairs

$$(0,0) (1,1) (2^{4i+4}+2)/3, (2^{4i+3}-2)/3) ((7 \cdot 2^{4i+3}+4)/6, (11 \cdot 2^{4i+3}-4)/3)$$

Set i = (n-2)/2 for  $n \ge 2$  even, and i = (n-3)/2 for  $n \ge 3$  odd. Then from above we have

$$\begin{split} m(0) &= 0 \\ m(1) &= 1 \\ m(n) &= (2^{2n-1}-2)/3 \text{ for } n \geq 2 \text{ even, and} \\ m(n) &= (11 \cdot 2^{2n-3}-4)/6 \text{ for } n \geq 3 \text{ odd.} \end{split}$$

Similarly,

$$b(0) = 0$$
  
 $b(1) = 3$   
 $b(n) = (2^{2n} + 2)/3 \text{ for } n \ge 2 \text{ even, and}$   
 $b(n) = (7 \cdot 2^{2n-3} + 4)/6 \text{ for } n \ge 3 \text{ odd.}$ 

These two formulas are equivalent to Shevelev's open problem (D), which is now proved.

### 9 NegaFibonacci representation

Previous sections have discussed representation in base-(-k). In this section we discuss a more exotic numeration system, called negaFibonacci representation.

In the ordinary Fibonacci numeration system (also called the Zeckendorf numeration system), a natural number n is expressed as a sum

$$n = \sum_{2 \le i \le t} e_i F_{i}$$

where  $F_0 = 0$ ,  $F_1 = 1$ ,  $F_n = F_{n-1} + F_{n-2}$  are the Fibonacci numbers and  $e_i \in \{0, 1\}$ . Such a representation is unique (up to leading zeros) provided  $e_i e_{i+1} \neq 1$  for  $2 \leq i < t$ . The binary word  $e_t e_{t-1} \cdots e_2$  is called the *canonical Fibonacci representation* for n and is denoted  $(n)_F$ . See, for example, [8, 21]. Walnut can do calculations with numbers represented in this numeration system; see [12] for some examples.

As an example, consider the infinite (one-sided) Fibonacci word

$$\mathbf{f} = f_0 f_1 f_2 \cdots = 0100101001001 \cdots,$$

which is the fixed point of the morphism  $0 \to 01$ ,  $1 \to 0$  [2]. It is known that for  $i \ge 0$ ,  $f_i$  is equal to the least significant digit of the Fibonacci representation of i, and hence **f** is Fibonacci-automatic.

As is well-known, **f** is also a Sturmian characteristic word; more specifically, if we define

$$\mathbf{s}_{\theta} = s_{\theta}(1)s_{\theta}(2)s_{\theta}(3)\cdots$$

where  $0 < \theta < 1$  is a real irrational number and

$$\mathbf{s}_{\theta}(n) = \lfloor (n+1)\theta \rfloor - \lfloor n\theta \rfloor$$

then

$$f_i = s_\gamma(i+1) \tag{2}$$

for  $\gamma = (3 - \sqrt{5})/2$  and  $i \ge 0$ .

We now consider an extension of the one-sided word  $\mathbf{f}$  to a two-sided (bi-infinite) word. There are essentially two different ways to do this; see [13, 4, 7]. One natural extension of **f** to a two-sided or bi-infinite word is to use the equality (2) for all integers *i*, not just for  $i \ge 0$ . Setting  $g_i = s_{\gamma}(i+1)$  for all  $i \in \mathbb{Z}$  gives us the following infinite word:

Notice that, from the definition, the words  $\mathbf{f}$  and  $\mathbf{g}$  coincide on non-negative indices.

On the other hand, the Fibonacci numeration system can be extended to a representation for all integers, not just non-negative integers. This extension, sometimes called the nega-Fibonacci system, expresses n as a sum

$$n = \sum_{1 \le i \le t} e_i (-1)^{i+1} F_i.$$

Bunder [3] proved that this is a unique representation for all integers (up to leading zeros), provided  $e_i e_{i+1} \neq 1$ . In this case the binary word  $e_t e_{t-1} \cdots e_1$  is called the *canonical nega-Fibonacci representation* for n and is denoted  $(n)_{-F}$ . Table 5 gives some examples of this representation.

n	$(n)_{-F}$
-8	100000
-7	100001
-6	100100
-5	100101
-4	1010
-3	1000
-2	1001
-1	10
0	$\epsilon$
1	1
2	100
3	101
4	10010
5	10000
6	10001
7	10100
8	10101

Table 5: Examples of negaFibonacci representation.

An alternative extension of  $\mathbf{f}$  to a two-sided word could then be defined as the least significant bit of the negaFibonacci representation of n: namely,

Here the relationship between  $\mathbf{f}$  and  $\mathbf{h}$  is slightly less apparent.

Our goal is to show the relationship between the infinite words f, g, and h. Namely,

#### Theorem 7. We have

(a)  $g_i = g_{-3-i}$  for  $i \notin \{-2, -1\}$ ;

(b) 
$$h_i = h_{1-i}$$
 for  $i \notin \{0, 1\}$ ;

(c) 
$$g_{i-1} = h_{i+1}$$
 for  $i \notin \{-1, 0\}$ .

*Proof.* We start with the Fibonacci-synchronized automaton phin given in [14] for  $(n, \lfloor \alpha n \rfloor)$ ,  $n \ge 0$ , where  $\alpha = (1 + \sqrt{5})/2$ .

From it we construct a Fibonacci-synchronized automaton gn for  $(n, \lfloor \gamma n \rfloor)$  for  $n \ge 0$ . For  $n \ge 1$  we have

$$\lfloor \gamma n \rfloor = \lfloor (2 - \alpha)n \rfloor = \lfloor 2n - \alpha n \rfloor = 2n + \lfloor -\alpha n \rfloor = 2n - 1 - \lfloor \alpha n \rfloor,$$

where we have used the fact that |x| + |-x| = -1 if x is not an integer.

We also construct a Fibonacci-synchronized automaton gmn for  $(n, -\lfloor -\gamma n \rfloor)$  for  $n \ge 0$ .

Next, we convert these two Fibonacci automata into two negaFibonacci automata, one for the non-negative values of n and one for the negative values.

We then join the two negaFibonacci automata into one called GG for  $(n, \lfloor n\gamma \rfloor)$  that covers the entire range of n: positive, negative, and zero.

From this we get another negaFibonacci automaton computing  $\lfloor (n+1)\gamma \rfloor - \lfloor n\gamma \rfloor$  for all  $n \in \mathbb{Z}$ .

We create a negaFibonacci DFAO G2 for g and H2 for h, and then verify the identities (a)-(c). Here is the Walnut code:

```
reg shift {0,1} {0,1} "([0,0] | [0,1] [1,1]*[1,0])*":
def phin "?msd_fib (s=0 & n=0) | Ex $shift(n-1,x) & s=x+1":
# Fibonacci synchronized automaton for (n, floor(n*alpha))
```

```
def gn "?msd_fib (n>=1 & Ex $phin(n,x) & s+x+1=2*n) | (n=0&s=0)":
# Fibonacci synchronized automaton for (n, floor(n*gamma))
```

```
combine GN gn:
def gmn "?msd_fib (n=0&s=0) | (n>=1) & $gn(n,s-1)":
combine GMN gmn:
rsplit GN2 [+] [+] GN:
rsplit GMN2 [-] [-] GMN:
join GG GN2[x][y] GMN2[x][y]:
# GG[x][y] is negaFibonacci synchronized DFAO for (n, floor(n*gamma))
```

```
def st "?msd_neg_fib Ex,y GG[n][x]=@1 & GG[n+1][y]=@1 & y=x+1":
# st[n] returns true if sturmian word at position n
# in negaFibonacci representation is equal to 1
def fb "?msd_neg_fib $st(n+1)":
# n'th position of the Fibonacci word, generalized to negaFibonacci
combine G2 fb:
eval parta "?msd_neg_fib Ai (G2[i]=G2[_(i+3)]) <=> (i!=_1 & i!=_2)":
reg ends1 msd_neg_fib "0*(0|10)*1":
combine H2 ends1:
eval partb "?msd_neg_fib Ai (H2[i]=H2[1-i]) <=> (i!=0 & i!=1)":
eval partc "?msd_neg_fib Ai (G2[i-1]=H2[i+1]) <=> (i!=0 & i!=_1)":
```

Walnut returns TRUE when it evaluates parta, partb, partc. This completes the proof.  $\Box$ 

Here is another way to see that  $\mathbf{g}$  and  $\mathbf{h}$  are generalizations of  $\mathbf{f}$ :

**Theorem 8.** A word is a factor of  $\mathbf{f}$  if and only if it is a factor of  $\mathbf{g}$  if and only iff it is a factor of  $\mathbf{h}$ .

*Proof.* Recalling that  $\mathbf{f}[0..\infty) = \mathbf{g}[0..\infty)$ , we can use Walnut to verify these claims:

```
def gfactoreq "?msd_neg_fib At (t>=0 & t<n) => G2[i+t]=G2[j+t]":
def ghfactoreq "?msd_neg_fib At (t>=0 & t<n) => H2[i+t]=G2[j+t]":
eval test1 "?msd_neg_fib Ai,n Ej (j>=0) & $gfactoreq(i,j,n)":
eval test2 "?msd_neg_fib Ai,n Ej (j>=0) & $ghfactoreq(i,j,n)":
```

and Walnut returns TRUE for both.

We now turn to an application of these ideas. We say that a finite word w is a (weak) quasiperiod of an infinite word  $\mathbf{x}$  of w covers  $\mathbf{x}$  by translates, where we allow w to partially "fall off" the left edge of  $\mathbf{x}$ . Levé and Richomme [9] determined the (weak) quasiperiods of the (one-sided) Fibonacci word  $\mathbf{f}$ . We can find a simpler but equivalent characterization of the (weak) quasiperiods using the bi-infinite Fibonacci word  $\mathbf{g}$  as follows:

**Theorem 9.** Suppose  $n \ge 1$  and  $F_{j-1} \le n < F_j$  for some natural number j. The length-n word x is a quasiperiod of the bi-infinite Fibonacci word  $\mathbf{g}$  if and only if there exists an index  $i, 0 \le i \le F_j - n - 2$ , such that  $x = \mathbf{g}[i..i + n - 1]$ .

*Proof.* We first check whether a number in negaFibonacci representation is Fibonacci number and assert that a number is the smallest Fibonacci number that is larger than n as follows.

$$\begin{aligned} \mathrm{isFib}(x) &:= \exists i \ x = F_i \\ \mathrm{minFib}(n,s) &:= \mathrm{isFib}(s) \land s > n \land \forall k \ (\mathrm{isFib}(k) \land k > n) \implies k \geq s \end{aligned}$$

The statements translate into Walnut as follows. To generate the regular expression for isFib, we utilize the fact that the terms of the negaFibonacci system alternate in signs and  $F_n = F_{n-1} + F_{n-3} + \cdots + F_1$  if n is odd.

We then use the following to assert quasiperiodicity in the bi-infinite Fibonacci word.

$$\begin{aligned} & \operatorname{gFactorEq}(i,j,n) := \forall t \ (t \geq 0 \land t < n) \implies \mathbf{g}[i+t] = \mathbf{g}[j+t] \\ & \operatorname{quasiBiFib}(k,n) := \forall i \ \exists j \ (i < j+n) \land (j \leq i) \land \operatorname{gFactorEq}(k,j,n) \end{aligned}$$

We express the full theorem as follows.

 $\forall k, n \ n \ge 1 \implies$  (quasiBiFib(k, n)  $\iff \exists i, s \ \min \text{Fib}(n, s) \land i \ge 0 \land i \le s - n - 2 \land \text{gFactorEq}(k, i, n) )$ 

Translating into Walnut, we have the following.

```
def gfactoreq "?msd_neg_fib At (t>=0 & t<n) => G2[i+t]=G2[j+t]":
def quasibifib "?msd_neg_fib Ai Ej i<j+n & j<=i & $gfactoreq(k,j,n)":
eval thm7bifib "?msd_neg_fib Ak,n (n>=1) => ($quasibifib(k,n)
        <=> (Ei,s $minfib(n,s) & i>=0 & i<=s-n-2 & $gfactoreq(k,i,n)))":
# 30 ms
# returns TRUE
```

This completes the proof.

### **10** Final remarks

Walnut can also be used to prove (or reprove) other results in Shevelev's paper [18]. However, these additional problems do not deal with negative bases, so they are not the focus of this paper. We simply mention briefly that his Open Problem A, also mentioned in [17], has recently been completely solved in [10].

Furthermore, his Theorem 6, dealing with the critical exponent of the sequence counting (modulo 2) the number of runs of 1's in the (ordinary) binary representation of n, can be easily proved and even improved as follows:

**Theorem 10.** Define r(n) to be the parity of the number of runs of 1's in the binary representation of n. Then the infinite word  $\mathbf{r} = (r(n))_{n\geq 0}$  has no  $(4 + \epsilon)$ -powers, and this bound is optimal.

*Proof.* It is easy to see that  $\mathbf{r}[1..4] = 1111$ , so clearly  $\mathbf{r}$  has 4th powers. To show  $\mathbf{r}$  has no  $(4 + \epsilon)$ -powers, we use Walnut:

```
reg runs msd_2 "0*11*(00*11*00*11*)*0*":
# number of runs of 1's in binary expansion of n is odd
combine RU runs:
# turn it into a DFAO
eval has4e "Ei,n (n>=1) & At (t<=3*n) => RU[i+t]=RU[i+t+n]":
# assert it has (4+epsilon)-powers
# Walnut returns FALSE
```

The sequence  $\mathbf{r}$  is sequence <u>A268411</u> in the OEIS.

# Acknowledgments

We are very grateful to Arseny Shur for his suggestion that we try to prove Theorem 5 with Walnut. Some of the calculations with Walnut were done on the CrySP RIPPLE Facility at the University of Waterloo. Thanks to Ian Goldberg for allowing us to run computations on this machine.

### References

- [1] J.-P. Allouche and J. Shallit. *Automatic Sequences: Theory, Applications, Generalizations.* Cambridge University Press, 2003.
- [2] J. Berstel. Mots de Fibonacci. Séminaire d'Informatique Théorique, LITP 6-7 (1980– 81), 57–78.
- [3] M. W. Bunder. Zeckendorf representations using negative Fibonacci numbers. *Fibonacci Quart.* **30** (1992), 111–115.
- [4] J. Du and X. Su. On the existence of solutions for Frenkel-Kontorova models on quasicrystals. Arxiv preprint 2012.15594 [math.DS]. Available at https://arxiv.org/abs/ 2012.15594, 2020.
- [5] V. Grünwald. Intorno all'aritmetica dei sistemi numerici a base negativa con particolare riguardo al sistema numerico a base negativo-decimale per lo studio delle sue analogie coll'aritmetica (decimale). Giornale di Matematiche di Battaglini 23 (1885), 203–221. Errata, p. 367.
- [6] D. E. Knuth. *The Art of Computer Programming*, Vol. 3: Seminumerical Algorithms. Addison-Wesley, 3rd edition, 1998.

- [7] S. Labbé and J. Lepšová. A numeration system for Fibonacci-like Wang shifts. In T. Lecroq and S. Puzynina, editors, WORDS 2021, Vol. 12847 of Lecture Notes in Computer Science, pp. 104–116. Springer-Verlag, 2021.
- [8] C. G. Lekkerkerker. Voorstelling van natuurlijke getallen door een som van getallen van Fibonacci. Simon Stevin 29 (1952), 190–195.
- [9] F. Levé and G. Richomme. Quasiperiodic infinite words: some answers. Bull. European Assoc. Theor. Comput. Sci., No. 84, (2004), 128–138.
- [10] J. Meleshko, P. Ochem, J. Shallit, and S. L. Shan. Pseudoperiodic words and a question of Shevelev. Arxiv preprint arXiv:2207.10171 [math.CO], available at https://arxiv. org/abs/2207.10171, 2022.
- [11] H. Mousavi. Automatic theorem proving in Walnut. Arxiv preprint arXiv:1603.06017
   [cs.FL], available at http://arxiv.org/abs/1603.06017, 2016.
- [12] H. Mousavi, L. Schaeffer, and J. Shallit. Decision algorithms for Fibonacci-automatic words, I: basic results. *RAIRO Inform. Théor. App.* **50** (2016), 39–66.
- [13] S. W. Rosema and R. Tijdeman. The Tribonacci substitution. *Electronic J. Combina-torics* 5(3) (2005), #A13 (electronic).
- [14] J. Shallit. Synchronized sequences. In T. Lecroq and S. Puzynina, editors, WORDS 2021, Vol. 12847 of Lecture Notes in Computer Science, pp. 1–19. Springer-Verlag, 2021.
- [15] J. Shallit. The Logical Approach to Automatic Sequences: Exploring Combinatorics on Words with Walnut. Cambridge University Press, 2022. In press.
- [16] J. Shallit and A. Shur. Subword complexity and power avoidance. Theoret. Comput. Sci. 792 (2019), 96–116.
- [17] V. Shevelev. Equations of the form t(x + a) = t(x) and t(x + a) = 1 t(x) for Thue-Morse sequence. Arxiv preprint arXiv:0907.0880 [math.NT], available at https://arxiv.org/abs/0907.0880, 2012.
- [18] V. Shevelev. Two analogs of the the Thue-Morse sequence. Arxiv preprint arXiv:1603.04434. Available at https://arxiv.org/abs/1603.04434, 2017.
- [19] A. M. Shur. The structure of the set of cube-free Z-words in a two-letter alphabet (Russian). Izv. Ross. Akad. Nauk Ser. Mat. 64 (2000), 201–224. English translation in Izv. Math. 64 (2000), 847–871.
- [20] N. J. A. Sloane et al. The on-line encyclopedia of integer sequences, 2022. Available at https://oeis.org.
- [21] E. Zeckendorf. Représentation des nombres naturels par une somme de nombres de Fibonacci ou de nombres de Lucas. Bull. Soc. Roy. Liège 41 (1972), 179–182.