

Fair Assortment Planning

Qinyi Chen

Operations Research Center, Massachusetts Institute of Technology, Cambridge, MA 02139, qinyic@mit.edu

Negin Golrezaei

Sloan School of Management, Massachusetts Institute of Technology, Cambridge, MA 02139, golrezae@mit.edu

Fransisca Susan

Operations Research Center, Massachusetts Institute of Technology, Cambridge, MA 02139, fsusan@mit.edu

Many online platforms, ranging from online retail stores to social media platforms, employ algorithms to optimize their offered assortment of items (e.g., products and contents). These algorithms often focus exclusively on achieving the platforms' objectives, highlighting items with the highest popularity or revenue. This approach, however, can compromise the equality of opportunities for the rest of the items, in turn leading to less content diversity and increased regulatory scrutiny for the platform. Motivated by that, we introduce and study a *fair* assortment planning problem, which requires any two items with similar quality/merits to be offered similar outcomes. We show that the problem can be formulated as a linear program (LP), called (FAIR), that optimizes over the distribution of all feasible assortments. To find a near-optimal solution to (FAIR), we propose a framework based on the Ellipsoid method, which requires a polynomial-time separation oracle to the dual of the LP. We show that finding an optimal separation oracle to the dual problem is an NP-complete problem, and hence we propose a series of approximate separation oracles, which then result in a $1/2$ -approx. algorithm and an FPTAS for the original Problem (FAIR). The approximate separation oracles are designed by (i) showing the separation oracle to the dual of the LP is equivalent to solving an infinite series of parameterized knapsack problems, and (ii) leveraging the structure of the parameterized knapsack problems. Finally, we conduct a case study using the MovieLens dataset, which demonstrates the efficacy of our algorithms and further sheds light on the price of fairness.

Key words: assortment planning, fairness, online platforms, approximation algorithm, customer exposure

1. Introduction

Algorithms are widely used by modern digital platforms to optimize decisions ranging from assortment planning, pricing, ranking and resource allocation. However, these algorithms, while enhancing efficiency, can inadvertently compromise fairness, marginalizing certain items or creators. In assortment planning, fairness concerns are prevalent across online retail stores, social media, job search sites, etc. These platforms often favor top-selling or well-established entities over lesser-known ones in their offered assortments, thus creating disparities among their items. For example, Amazon spotlights top-selling products on its front page, overshadowing equally deserving items on subsequent pages (Search Engine Journal 2018). Instagram favors posts with high engagement or advanced features, neglecting similar contents created by smaller businesses who lack resources to

use these features (The New York Times 2022). Such disparity, however, may lead to reduced platform loyalty, diminished content diversity, and regulatory scrutiny on fair competition principles (e.g., the Digital Markets Act (Official Journal of the European Union 2023)).

Consequently, it becomes imperative for platforms to prioritize not only efficiency but also *equality of opportunity* for all entities involved. Notably, some companies have just begun to address this issue. As an example, LinkedIn’s initial recommendation algorithms favored users with more connections/activities, overlooking newer or less active members with relevant skills. In response, LinkedIn has recently rolled out fairness toolkits to “provide equal opportunities to equally qualified member” (LinkedIn 2022). In light of this, creating a universal framework that promotes equality of opportunities in assortment planning can greatly advance fairness across digital platforms, paving the way for industry-wide equitable practices.

Fair assortment planning problem. To address the aforementioned issue, we consider an online platform that hosts n items, representing products, social media posts, job candidates in respective contexts. Each item i has a popularity weight w_i and generates revenue $r_i \in (0, \bar{r}]$ when chosen/purchased. The platform aims to offer an assortment with up to K items that maximizes its expected revenue. Users then choose items according to a multinomial choice model based on popularity weights w_i .

To ensure fairness, we introduce a parameterized notion based on pairwise parity of *normalized outcomes* across items. The normalized outcome is an item’s outcome divided by its quality score, which may depend on its weight, revenue, and other factors like relevance to search results or consumer ratings. The platform seeks to ensure equitable opportunities by making normalized outcomes comparable for all items.

Defining fairness in assortment planning requires reconciling conflicting objectives between the platform and its items. Traditional fairness notions, like alpha fairness (Mo and Walrand 2000, Lan et al. 2010), prioritize maximizing social welfare and may overlook the platform’s revenue goals. To strike a balance, we formulate our fair assortment planning problem as a constrained optimization problem, called Problem (FAIR), enabling revenue maximization while guaranteeing equitable treatment for items via fairness constraints. (See Section 4 for an extended discussion on the motivation behind our fairness notions.)

Fair Ellipsoid-based assortment planning algorithms. In Section 5, we introduce a framework for near-optimal algorithms addressing Problem (FAIR). This framework leverages the Ellipsoid method alongside a (near-)optimal polynomial-time separation oracle for the dual counterpart of the problem, denoted by Problem (FAIR-DUAL). Ideally, the Ellipsoid method requires an optimal separation oracle for Problem (FAIR-DUAL), which, given any point, either confirms its feasibility or provides a separating hyperplane from the feasibility region. Designing a polynomial-time optimal

separation oracle for Problem (FAIR-DUAL) is shown to be generally NP-complete (see Theorem 4). Nonetheless, we establish that with a β -approx. separation oracle for Problem (FAIR-DUAL), it is possible to construct a β -approx. solution to Problem (FAIR) using the Ellipsoid method, where $\beta \in (0, 1]$ (see Theorem 5).

Separation oracle via transformation to infinite knapsack problems. In Section 6, we proceed to develop near-optimal separation oracles for Problem (FAIR-DUAL), which requires us to maximize a *cost-adjusted revenue* over sets with at most K items, where costs are functions of dual variables associated with fairness constraints. As the main result of this section, we show:

THEOREM 1 (Informal: Transformation to Infinite Knapsack Problems). *Maximizing a cost-adjusted revenue is equivalent to maximizing infinite parameterized, cardinality-constrained knapsack problems.*

Here, each knapsack problem is parameterized by its capacity parameter $W \in [0, \infty)$, which also affects the utility of items, where utilities decrease as W increases. Having established Theorem 1, we then devise a series of polynomial-time, β -approx. algorithms for the infinite knapsack problems.

Note that our approximation algorithms for maximizing the cost-adjusted revenue in fact apply to any problem that can be formulated as a *cardinality-constrained assortment planning problem with arbitrary fixed costs*. This can be of independent interest to our readers; see Section 2 for details.

1/2-approx. separation oracle. While solving one knapsack problem approximately is doable in polynomial time, we cannot possibly solve an infinite number of them. In Section 7, we first present an 1/2-approx. algorithm that leverages the structure of the parameterized knapsack problems to overcome this challenge:

THEOREM 2 (Informal: 1/2-Approx. Algorithm). *Algorithm 1 returns a 1/2-approx. solution for maximizing the infinite knapsack problems in polynomial time. It, along with the fair Ellipsoid-based framework, gives an 1/2-approx. fair Ellipsoid-based algorithm for Problem (FAIR).*

As an important technical contribution, we note that for each of the aforementioned knapsack problems, an 1/2-approx. solution can be obtained using a concept called *profile*, which records the set of items that are fully added, fractionally added, and not added to the knapsack at the optimal basic solution to the LP relaxation of the knapsack problem. We observe that the profiles associated with these solutions undergo at most $\mathcal{O}(nK)$ changes as the knapsack parameter W varies. Inspired by this, our 1/2-approx. algorithm (Algorithm 1) adopts a key procedure called *adaptive partitioning*, which dynamically detects changes in the profile, updates it, and collects the corresponding 1/2-approx. solution in polynomial time.

FPTAS separation oracle. In Section 8, we further present a fully polynomial-time approximation scheme (FPTAS) for the infinite knapsack problems.

THEOREM 3 (Informal: FPTAS). *For any $\epsilon > 0$, Algorithm 2 returns an $(1 - \epsilon)$ -approx. solution for maximizing the infinite knapsack problems, in time polynomial in n, K and $1/\epsilon$. It, along with the fair Ellipsoid-based framework, gives an FPTAS fair Ellipsoid-based algorithm for Problem (FAIR).*

Inspired by the FPTAS for a single cardinality-constrained knapsack problem (Caprara et al. 2000), our FPTAS also adopts a dynamic-programming (DP) approach. To address the challenges of having infinite knapsack problems, we employ a dual-partition strategy on the interval $[0, \infty)$, leveraging both our 1/2-approx. algorithm and the structural characteristics of the parameterized knapsack problem. The two rounds of partitioning reduces the number of DP schemes to a polynomial number, effectively managing the complexities associated with infinite knapsack problems.

Numerical studies and insights. We numerically evaluate our near-optimal algorithms (1/2-approx. algorithm and FPTAS) in both a real-world movie recommendation case study based on the MovieLens dataset (Section 9) and various synthetic, real-world inspired instances (Section E). Overall, the 1/2-approx. algorithm is shown to be a viable practical solution comparable to the FPTAS given its superior performance in both the quality of solution and runtime. Our results also demonstrate how online platforms can effectively enforce fairness at minimal cost, especially in contexts like movie recommendations where item qualities are similar. If fairness considerations can lead to long-term sustainability, this could offset the small short-term costs of fairness experienced by the platform.

2. Related Work

Our research is relevant to or contributes to several lines of works:

Fairness in supervised learning. The rise of machine learning algorithms has spurred extensive research on algorithmic fairness in supervised learning, particularly in binary classification and risk assessment (Calders et al. 2009, Dwork et al. 2012, Hardt et al. 2016, Goel et al. 2018, Ustun et al. 2019). These works are typically categorized into individual fairness (Dwork et al. 2012, Kusner et al. 2017), group fairness (Calders et al. 2009, Hardt et al. 2016), and subgroup fairness (Kearns et al. 2018). Our work focuses on achieving individual fairness for every item on a platform. However, instead of addressing prediction problems using labeled data, we solve an assortment optimization problem while integrating fairness constraints.

Fairness in resource allocation. Our problem involves an online platform allocating exposure (an intangible resource) to items fairly while optimizing its objective. Works on fair resource allocation study two settings: (i) a static setting where allocation occurs in a single shot and the trade-off between fairness and efficiency is investigated (Bertsimas et al. 2011, 2012, Hooker and Williams 2012, Donahue and Kleinberg 2020); see, also, (Cohen et al. 2021a) and (Deng et al. 2022)

for studies on fairness in price discrimination and individual welfare in auctions, respectively; (ii) a dynamic setting where resources are allocated over time, including fairness in online resource allocation (Manshadi et al. 2021, Balseiro et al. 2021, Bateni et al. 2021), online matching (Ma et al. 2021), sequential allocation (Sinclair et al. 2021), scheduling (Mulvany and Randhawa 2021), bandit (Baek and Farias 2021), content spread (Schoeffer et al. 2022), and Markovian search (Aminian et al. 2023). Our work aligns more closely with the first stream, focusing on fairness and efficiency trade-offs. However, it stands out as the first to explore fairness in assortment planning.

Fairness in ranking. Our work also intersects with the literature on fairness in ranking, which focuses on optimizing permutations of items displayed to users (Patro et al. 2022). We can view our assortment planning problem as a specialized ranking problem, where items in the top K positions are chosen for the assortment. Several works, such as (Singh and Joachims 2018, Biega et al. 2018, Singh and Joachims 2019), emphasize the importance of ensuring equal opportunities for items and devise ranking methods that aim to achieve proportional exposure or visibility based on item relevance or quality. However, the aforementioned works lack theoretical guarantees. In contrast, our algorithms offer provable performance guarantees. We believe our fairness notion and mathematical framework can be easily extended to product ranking settings.

Fairness in assortment planning. Fairness has been a topic largely unexplored in the field of assortment planning. One work that might appear relevant is Chen et al. (2021), where the authors divide items into partitions with the caveat that each customer sees only one partition and address unfairness resulting from the partitioned display policy and price competitions among sellers. To impose item fairness, they adopt fairness constraints to ensure that the ratio of marketshare and attractiveness between any two partitions is above a threshold. Our research differs from this work in that we incorporate fairness directly into the more fundamental assortment planning framework, and directly tackle the issue of inequality of opportunities caused by assortment planning decisions. We also adopt a more individualistic approach, ensuring fairness between every item pair, unlike Chen et al. (2021) who approach fairness from a group fairness perspective, which could still lead to unfairness for items within the same partition.

To the best of our knowledge, our work is the first that integrates fairness considerations into assortment planning, a key area in operations management. Since the release of our initial manuscript, several follow-up studies on fairness in assortment planning have emerged. Among them, Lu et al. (2023) considers an alternative fairness constraint that ensures a minimum level of visibility for each item, and propose a polynomial-time algorithm for the unconstrained assortment planning problem. However, when the problem includes a cardinality constraint, it again becomes NP-complete, and our $1/2$ -approx. and FPTAS fair Ellipsoid-based algorithms can readily handle this alternative fairness constraint (see Section A). This demonstrates the versatility of our

framework and methods in addressing various fairness notions in addition to our pairwise fairness constraints. There is another follow-up study by Barré et al. (2023) that adopts a model different from the single-shot assortment planning we study, where they consider a stream of customers and impose a visibility constraint that requires each item to be shown to a minimum number of customers.

Cardinality-constrained assortment planning with fixed costs. In our Ellipsoid-based framework, we design separation oracles that find a set S with cardinality of at most K that maximizes the cost-adjusted revenue. The approximation schemes we design, including a $1/2$ -approx. algorithm and an FPTAS, can be directly applied to general cardinality-constrained assortment planning problems with arbitrary fixed costs, which advance beyond the technical results in other studies and hold independent interests for our readers.

While many previous studies tackle general assortment planning problems (Kok et al. 2008) and cardinality-constrained assortment planning problems (Rusmevichientong et al. 2010, Gallego and Topaloglu 2014), there are only a handful that consider item fixed costs: (1) Kunnumkal et al. (2010) provides a $1/2$ -approx. algorithm and PTAS for unconstrained assortment planning with positive fixed costs. In comparison, the presence of cardinality constraints present non-trivial challenges and necessitate innovations in our techniques. In addition, we offer stronger technical results with an FPTAS, which yields arbitrarily good performance in fully polynomial time. (2) Kunnumkal and Martínez-de Albéniz (2019) proposes tractable ways of obtaining upper bounds for both unconstrained and constrained assortment planning with positive fixed costs, rather than proposing algorithms for solving these problems. (3) Lastly, Lu et al. (2023) offers a $1/2$ -approx. algorithm and an FPTAS (based on the scheme in Désir et al. (2022)) that can solve cardinality-constrained assortment planning with *non-positive* fixed costs. Our schemes, however, accommodates arbitrary (both positive and non-positive) fixed costs. Here, the expansion to positive fixed costs presents a notably greater challenge, as it directly offsets item revenues. Overall, compared to these works, our approximation schemes fully address the challenges underlying the cardinality-constrained assortment planning with arbitrary fixed costs, offering valuable technical insights.

3. Model

3.1. User’s Choice Models

We consider a platform with n items, indexed by $i \in [n]$. Each item i has a *weight* $w_i \geq 0$ that measures how popular the item is to the platform’s users. Upon offering an assortment/set S of items, the users purchase/choose item $i \in S$ according to the MNL model (Train 1986), with probability $\frac{w_i}{1+w(S)}$, where $w(S) = \sum_{i \in S} w_i$. The users may also choose not to purchase any item with probability $\frac{1}{1+w(S)}$; that is, the no-purchase option (item 0) is always included in set S . If

item i is purchased by the users, it generates revenue $r_i \in (0, \bar{r}]$. The action of purchasing an item can be viewed as “taking the desired action” under different contexts (e.g., purchasing a product in an online retail store, clicking on a post on a social media platform, or watching a movie on a movie recommendation site). The main objective of the platform is to optimize over its offered assortment that can contain at most K items in order to maximize its expected revenue, which we denote as

$$\text{REV}(S) = \frac{\sum_{i \in S} r_i w_i}{1 + w(S)}.$$

3.2. Fairness Notions

The platform aims to create a fair marketplace for all items, ensuring equitable allocation of outcomes among items of similar quality. Let $p(S)$ represent the probability that the platform offers set S with $S \subseteq [n]$ and $|S| \leq K$. We let $O_i(S)$ denote the *outcome* received by item i upon offering a set S that includes i , and, with a slight abuse of notation, let $O_i = \sum_{i \in S} O_i(S)p(S)$ be the expected outcome received by item i given the platform’s assortment planning decision $\{p(S)\}_{S:|S| \leq K}$. In particular, we will let the outcome of item i under set S take the following generic form:

$$O_i(S) = a_i \cdot \frac{w_i}{1 + w(S)} + b_i \tag{1}$$

for some $a_i, b_i \geq 0$. Examples of outcomes include: (1) **visibility** ($a_i = 0, b_i = 1$), where $O_i = \sum_{S:i \in S} p(S)$ is the probability that item i gets shown to users; (2) **revenue** ($a_i = r_i, b_i = 0$), where $O_i = \sum_{S:i \in S} \frac{r_i w_i}{1 + w(S)} \cdot p(S)$ is the expected revenue generated by item i ; (3) **marketshare** ($a_i = 1, b_i = 0$), where $O_i = \sum_{S:i \in S} \frac{w_i}{1 + w(S)} \cdot p(S)$ is the expected marketshare of item i .

The preferred interpretation of the outcome received by item i varies by the context. For instance, content creators on streaming platforms may prioritize visibility, while sellers on online marketplaces may focus on revenues or profits. Under Eq. (1), any weighted combination of visibility, revenue, and marketshare can serve as the outcome metric for items, thus accommodating different contexts.

Additionally, the platform assesses the quality score of each item using a known function $q_i(w_i, r_i, \cdot)$, which may depend on factors such as popularity weight w_i , revenue r_i , and other metrics like an item’s relevance score or consumer ratings, as adopted in works such as (Biswas et al. 2021) and (Wu et al. 2021). (One example is $q_i(w_i, r_i, \cdot) = g_i(w_i)$, where $g_i(\cdot)$ ’s are increasing functions.) Online platforms can derive quality scores for items based on various measurable data. For example, platforms like Amazon analyze product reviews, ratings, purchase frequency, and return rates to gauge item quality. Social media platforms such as Instagram track engagement metrics such as likes, shares, comments, and sentiment to assess post quality. Job search sites such as LinkedIn evaluate job candidates based on past experiences, endorsements, recommendations, and

connections. Our framework can flexibly handle any quality function $q_i(w_i, r_i, \cdot)$ regardless of how it is measured. Throughout the rest of this paper, to ease the exposition, we would use q_i to denote the quality/merit of item i , suppressing its variable dependencies.

To ensure a fair ecosystem, the platform aims to ensure the parity of *pairwise normalized outcome* across different items, where the normalized outcome of an item i is its outcome divided by its quality score (i.e., O_i/q_i). This ratio allows for a standardized comparison of outcomes, independent of the varying quality scores of different items. We say that the platform is δ -fair if, for any pair of items (i, j) ¹, we have

$$\frac{O_i}{q_i} - \frac{O_j}{q_j} \leq \delta \iff q_j \cdot \sum_{S:i \in S} O_i(S)p(S) - q_i \cdot \sum_{S:j \in S} O_j(S)p(S) \leq \delta \cdot q_i q_j \quad i, j \in [n]. \quad (2)$$

Here, $\frac{O_i}{q_i}$ is a normalized outcome received by item i , scaled by its quality score. In an extreme case, setting $q_i = 1$ for all $i \in [n]$ would result in all items receiving nearly equal outcomes; however, this may result in the undesirable situation where the platform gets flooded with low-quality items. We are thus motivated to impose fairness with respect to normalized outcomes, aiming to preserve the platform’s perceived quality for customers while promoting merit-based fairness. (For further insights, see Figure 4 in the case study.)

Note that as parameter δ in Eq. (2) increases, the platform becomes less concerned about being fair toward the items. When $\delta = 0$ (i.e., when the platform is 0-fair), the above constraint can be written as $\frac{O_i}{q_i} = \frac{O_j}{q_j}$, indicating that the outcome received by item i is exactly proportional to its quality. For any $\delta \geq \frac{\max_{i \in [n]} O_i}{\min_{i \in [n]} q_i}$, the fairness constraint is simply satisfied at the optimal solution without the fairness constraint, achieved by always offering the single assortment with the largest expected revenue. Nonetheless, the optimal solution without fairness constraints, while maximizing platform revenue, can lead to very unfair outcomes when the quality of some items not included in the assortment matches or exceeds that of those included.

We note that pairwise notions of fairness (as we considered in Eq. (2)) are common in the literature and have been used in recommendation systems (Beutel et al. 2019), ranking and regression models (Narasimhan et al. 2020, Kuhlman et al. 2019, Singh et al. 2021), and predictive risk scores (Kallus and Zhou 2019). Our approach to achieving pairwise fairness with respect to normalized outcomes is closely related to the fairness notion employed in Biega et al. (2018), Singh and Joachims (2019), Schoeffler et al. (2022) for ranking problems, which, similar to our setting, aims to allocate visibility in proportion to item quality. However, our formulation of pairwise fairness in the assortment planning setting is a novel contribution not explored in prior works. (See Section 4 for an extended discussion on our fairness notions.)

¹ It is also possible to consider a different fairness parameter δ_{ij} for each pair of items (i, j) . To incorporate this, one simply needs to replace δ in Problems (FAIR) and (FAIR-DUAL) with δ_{ij} . All of our results would remain valid.

We also highlight that our proposed framework/method flexibly extends to encompass fairness concepts beyond pairwise fairness. For example, a recent follow-up work by Lu et al. (2023) adopts fairness constraints aimed at guaranteeing a minimum visibility for each item. In Section A, we show how our proposed framework/method can readily adapt to these additional fairness notions.

3.3. Platform’s Objective

Having defined the user’s choice model and the fairness notion, we define an instance of our fair assortment planning problem using $\Theta = (\mathbf{a}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q}) \in \mathbb{R}_+^{5n}$, where $\mathbf{a} = \{a_i\}_{i \in [n]}$ and $\mathbf{b} = \{b_i\}_{i \in [n]}$ determine outcomes of items (see Eq. (1)), $\mathbf{r} = \{r_i\}_{i \in [n]}$ represents item revenues, $\mathbf{w} = \{w_i\}_{i \in [n]}$ represents item weights, and $\mathbf{q} = \{q_i\}_{i \in [n]}$ represent item qualities. We now define two specific instances of our problem.

- **Revenue/Marketshare-Fair Instance.** We call an instance with the form $\Theta = (\mathbf{a}, \mathbf{0}, \mathbf{r}, \mathbf{w}, \mathbf{q})$ a *revenue/marketshare-fair* instance. Here, item i ’s outcome when it gets offered in set S is $O_i(S) = a_i \cdot \frac{w_i}{1+w(S)}$, which can either be its revenue if $a_i = r_i$ or its marketshare if $a_i = 1$.
- **Visibility-Fair Instance.** We call an instance with the form $\Theta = (\mathbf{0}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q})$ a *visibility-fair* instance. Here, the expected outcome received by item i is $O_i = b_i \cdot \sum_{S: i \in S} p(S)$, which is proportional to the probability that item i is shown to a user (i.e., the visibility of item i).

While our algorithms can be applied to Problem (FAIR) for any instance $\Theta \in \mathbb{R}_+^{5n}$, better results can be achieved for revenue/marketshare-fair instances. Specifically, we will prove that there exists a polynomial-time optimal algorithm for Problem (FAIR) for any revenue/marketshare-fair instance.

Given any instance $\Theta \in \mathbb{R}_+^{5n}$, the platform wishes to maximize its expected revenue by optimizing over its offered assortment with cardinality of at most K , subject to the fairness constraints in Eq. (2). This gives the platform’s optimization problem:

$$\begin{aligned} \text{FAIR} = & \max_{p(S) \geq 0: |S| \leq K} \sum_{S: |S| \leq K} p(S) \cdot \text{REV}(S) \\ \text{s.t.} & \quad q_j \cdot \sum_{S: i \in S} O_i(S)p(S) - q_i \cdot \sum_{S: j \in S} O_j(S)p(S) \leq \delta \cdot q_i q_j \quad i, j \in [n], i \neq j \\ & \quad \sum_{S: |S| \leq K} p(S) \leq 1, \end{aligned} \tag{FAIR}$$

where $\text{REV}(S) = \frac{\sum_{i \in S} r_i w_i}{1+w(S)}$ is the platform’s expected revenue upon offering assortment $S \subseteq [n]$. Here, we slightly abuse the notation and denote both the platform’s problem and the optimal expected revenue with the term FAIR. In Problem (FAIR), the objective is the platform’s expected revenue. The first set of constraints is the fairness constraints, and the second constraint enforces $\{p(S)\}_{S: |S| \leq K}$ to be a probability distribution. Our goal is to provide computationally-efficient algorithms with provable performance guarantees for Problem (FAIR) with any $\delta \geq 0$.²

² Observe that for any $\delta \geq 0$, this problem always admits the following feasible solution: $p(\{i\}) = \frac{q_i/O_i(\{i\})}{\sum_{j \in [n]} q_j/O_j(\{j\})}$ and $p(S) = 0$ for any S with $|S| > 1$ and $S = \emptyset$.

Remark. Note that in this work, we study the platform’s problem in a static/offline setting, which can be well-justified when the platform has a good estimate of the model primitives. Nonetheless, one can consider an online version of this problem where the platform aims to maximize its revenue subject to fairness constraints while trying to learn the model primitives. Such an online problem can usually be well-handled if one has access to an efficient algorithm for the offline setting (see, e.g., Niazadeh et al. (2021), Kakade et al. (2007)). See also Section 10 for potential future directions for studying the dynamic setting.

4. Discussions on Our Fairness Notion

Before presenting algorithms for Problem (FAIR), we discuss the motivations and justifications for our fairness notions in Section 3.2.

Conflict of interests between the platform and its items. In existing literature, fairness is often addressed through social welfare functions like alpha fairness (Mo and Walrand 2000, Lan et al. 2010), which combine fairness and welfare metrics. However, these approaches either overlook the platform’s revenue, which is crucial in assortment planning, or improperly merge it into the social welfare function, mistreating the platform as an equivalent to its items. Such a conflict of interests, where the platform’s revenue goals clash with the maximization of social welfare, leads to fairness being sidelined by many platforms. The concern that dominant online platforms may leverage their power to funnel users towards the most profitable services or products has drawn regulatory attention, notably with initiatives like the proposed Digital Markets Act (DMA) by the European Union (Official Journal of the European Union 2023).

To reconcile the conflict of interests, we prioritize revenue maximization as the primary goal in assortment planning while introducing pairwise fairness constraints. Similar fairness-through-constraints approaches are seen in Singh and Joachims (2018, 2019) for fair rankings, Cohen et al. (2021a,b) for fair pricing, Zafar et al. (2019) for fair classification, Kasy and Abebe (2021) for fair algorithmic decision-making, Høgsgaard et al. (2023) for fairness-welfare trade-offs, and Chen et al. (2023) for fair recommendations.

Generality of our fairness notion. As discussed in Section 3.2, our pairwise fairness concept (Eq. (2)) ensures equal treatment of items under a variety of outcome metrics (e.g., visibility, revenue, marketshare). This accomodates items’ needs in different contexts. For instance, sellers/products on e-commerce platforms may prioritize their revenue, while social media content creators may focus more on visibility and engagement (e.g., likes, comments, shares).

Additionally, from the platform’s perspective, it is not always clear which notion of fairness should be favored. In Figure 1, we compare a platform’s revenue when fairness is imposed with respect to items’ visibility or revenues in markets with different price sensitivity. The results show that neither

fairness notion consistently outperforms the other. The impact of fairness could depend on factors such as price sensitivity and purchasing power of the market, as well as the distribution of popularity weights/revenues of items. Our generic fairness notion also allows flexibility for platform-specific needs.

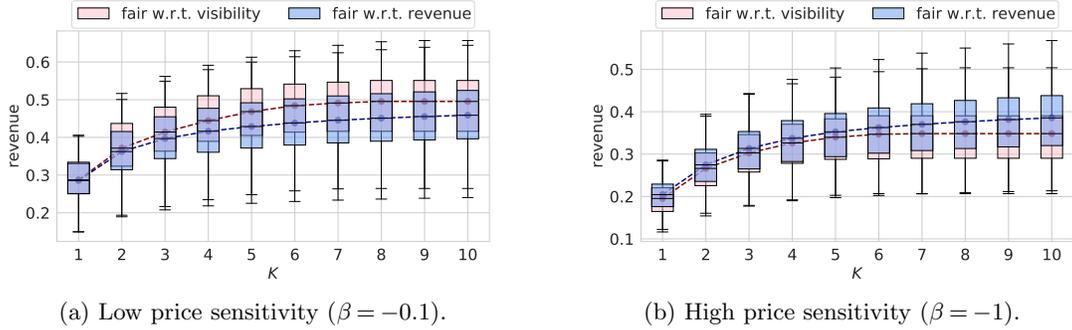


Figure 1 We solve Problem (FAIR) for $n = 10$ and $K \in [n]$. Each item i has $r_i \sim \text{i.i.d. UNIF}([0, 1])$, and $w_i = \exp(\beta \cdot r_i + \theta_i)$, where β is price sensitivity, $\theta_i \sim \text{i.i.d. UNIF}([0.4, 1])$ for $i \leq m$ and $\text{UNIF}([0.2, 0.4])$ for $i > m$, where $1 \leq m \leq \lceil n/4 \rceil$ are highly attractive items. We set $q_i = w_i$ for all i . For each (K, m, β) , we generate 50 instances and compute Problem (FAIR)’s objective when being 0-fair under different fairness notions. In markets with lower price sensitivity (Figure 1a), fairness based on item visibility leads to higher platform revenue, while in markets with higher price sensitivity, fairness based on item revenue is more profitable (Figure 1b).

5. (Near) Optimal Algorithms for Problem (FAIR)

In this section, we first present a property of Problem (FAIR) that motivates the design of our algorithms (Section 5.1). We then present a general framework that allows us to provide a wide-range of (near-)optimal algorithms for Problem (FAIR), which relies on the dual counterpart of Problem (FAIR) (Section 5.2) and the Ellipsoid method (Section 5.3).

5.1. A Property of Problem (FAIR)

The following proposition shows that for any $\delta \geq 0$, there exists an optimal solution to Problem (FAIR) that randomizes over at most $\mathcal{O}(n^2)$ sets, easing implementation of the optimal solution.

PROPOSITION 1 (Randomization over at most $\mathcal{O}(n^2)$ sets). *For any $\delta \geq 0$, there exists an optimal solution $p^*(\cdot)$ to Problem (FAIR) such that $|\{S : p^*(S) > 0\}| \leq n(n-1) + 1$.*

Motivated by Proposition 1 above, we aim to design (near-)optimal algorithms for Problem (FAIR) that also randomize over a polynomial number of sets, leading to an easy-to-implement solution.

5.2. Dual Counterpart of Problem (FAIR)

Our framework relies on the dual counterpart of Problem (FAIR), which can be written as

$$\begin{aligned} \text{FAIR-DUAL} = \min_{\rho \geq 0, \mathbf{z} \geq \mathbf{0}} \rho + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij} \\ \text{s.t. } \sum_{i \in S} O_i(S) \cdot \left(\sum_{j=1, j \neq i}^n (z_{ij} - z_{ji}) q_j \right) + \rho \geq \text{REV}(S), \quad \forall S: |S| \leq K. \end{aligned} \quad (\text{FAIR-DUAL})$$

Here, $\mathbf{z} = (z_{ij})_{i,j \in [n], i \neq j}$ are the dual variable of the first set of constraints and $\rho \geq 0$ is the dual variable of the second constraint in Problem (FAIR). Note that z_{ij} can be viewed as the *fairness cost* that item i has caused due to the presence of item j on the platform. We call each constraint in Problem (FAIR-DUAL) a *dual fairness constraint* on set S . Observe that the set of dual fairness constraints in Problem (FAIR-DUAL) can be written as the following single constraint:

$$\rho \geq \max_{S: |S| \leq K} \left\{ \text{REV}(S) - \sum_{i \in S} O_i(S) \cdot \left(\sum_{j=1, j \neq i}^n (z_{ij} - z_{ji}) q_j \right) \right\} := \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z}). \quad (3)$$

In the optimal solution of Problem (FAIR-DUAL), the inequality in Eq. (3) must be satisfied with equality. Here, we refer to $\text{REV-COST}(S, \mathbf{z})$ as the *cost-adjusted revenue*. Recall that $O_i(S) = \frac{a_i w_i}{1+w(S)} + b_i$; we can thus reformulate the cost-adjusted revenue as:

$$\text{REV-COST}(S, \mathbf{z}) = \text{REV}(S) - \sum_{i \in S} \left(\frac{a_i w_i}{1+w(S)} + b_i \right) \cdot c_i(\mathbf{z}) = \sum_{i \in S} \frac{(r_i - a_i c_i(\mathbf{z})) w_i}{1+w(S)} - \sum_{i \in S} b_i c_i(\mathbf{z}), \quad (4)$$

where for dual vector \mathbf{z} , for any $i \in [n]$, we define $c_i(\mathbf{z})$ as the *cost* of item i :

$$c_i(\mathbf{z}) = \sum_{j=1, j \neq i}^n (z_{ij} - z_{ji}) q_j, \quad (5)$$

which is a linear combination of the fairness costs z_{ij} and z_{ji} , $j \neq i$. Let us additionally define $\tau_i(\mathbf{z}) = r_i - a_i c_i(\mathbf{z})$ as the *post-fairness revenue* of item i and $\mathbf{c}_i(\mathbf{z}) = b_i c_i(\mathbf{z})$ as the *post-fairness cost* of item i . The cost-adjusted revenue in Eq. (4) can then be further simplified as:

$$\text{REV-COST}(S, \mathbf{z}) = \sum_{i \in S} \frac{\tau_i(\mathbf{z}) w_i}{1+w(S)} - \sum_{i \in S} \mathbf{c}_i(\mathbf{z}). \quad (6)$$

Determining the feasibility of any solution for Problem (FAIR-DUAL) boils down to solving the optimization problem in Eq. (3). However, the maximization of cost-adjusted revenue is in general NP-complete:

THEOREM 4 (Complexity of Determining Feasibility for Problem (FAIR-DUAL)).

Consider the following problem that represents the first set of constraints in Problem (FAIR-DUAL):

$$\text{SUB-DUAL}(\mathbf{z}, K) = \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z}), \quad (\text{SUB-DUAL}(\mathbf{z}, K))$$

where $\text{REV-COST}(S, \mathbf{z})$ is defined in Eq. (6).

-
1. For revenue/marketshare-fair instances where $\Theta = (\mathbf{a}, \mathbf{0}, \mathbf{r}, \mathbf{w}, \mathbf{q})$, there exists an polynomial-time optimal algorithm for Problem (SUB-DUAL(\mathbf{z}, K)).
 2. For visibility-fair and general instances where $\Theta = (\mathbf{a}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q})$, with $b_i \neq 0$ for some $i \in [n]$, Problem (SUB-DUAL(\mathbf{z}, K)) is NP-complete.

Theorem 4 implies the possibility of designing a polynomial-time optimal algorithm for Problem (FAIR) in revenue/marketshare-fair instances. However, for visibility-fair and general instances, verifying the feasibility of solutions in Problem (FAIR-DUAL) may be computationally intractable. We will show, in Section 5.3, that with a polynomial-time near-optimal algorithm for Problem (SUB-DUAL(\mathbf{z}, K)), the Ellipsoid method can solve Problem (FAIR) near-optimally in polynomial time.

5.3. Fair Ellipsoid-based Framework

We now present our framework for obtaining (near-)optimal solutions to Problem (FAIR), leveraging the Ellipsoid method and the dual problem (FAIR-DUAL). We show that to obtain a β -approx. solution to Problem (FAIR), for $\beta \in (0, 1]$, that randomizes over a polynomial number of assortments, it suffices to have a β -approx. solution to Problem (SUB-DUAL(\mathbf{z}, K)). Specifically, our algorithm for Problem (FAIR-DUAL) will be a (near-)optimal separation oracle for the Ellipsoid method, following principles in Padberg (2013).

Assume that we have access to a polynomial-time algorithm \mathcal{A} that gives a β -approx. solution for (SUB-DUAL(\mathbf{z}, K)), for any $\mathbf{z} \geq 0$ and $K \in [n]$, where $\beta \in (0, 1]$. Our fair Ellipsoid-based algorithm consists of the following two steps:

Step 1: Apply the Ellipsoid method to the dual problem (FAIR-DUAL) with a β -approx. separation oracle. We apply the Ellipsoid method to Problem (FAIR-DUAL), which has exponentially many constraints. At each iteration of the Ellipsoid method, to check the feasibility of the current solution (\mathbf{z}, ρ) , we use the following approximate separation oracle instead of an exact separation oracle. This oracle relies on a polynomial-time β -approx. algorithm \mathcal{A} for Problem (SUB-DUAL(\mathbf{z}, K)):

1. Use \mathcal{A} to find $S_{\mathcal{A}}$ with $|S_{\mathcal{A}}| \leq K$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}, K)$.
2. If $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) > \rho$, the set $S_{\mathcal{A}}$ violates the dual fairness constraint. If not, (\mathbf{z}, ρ) is feasible. See Section B for details of the Ellipsoid method for Problem (FAIR-DUAL).

Step 2: Solve Problem (FAIR) using only violated sets from the dual fairness constraint. Throughout the Ellipsoid method, we collect all sets violating the dual fairness constraint in \mathcal{V} . The size of \mathcal{V} is polynomial in n and $\log(q_{\max})$. Here, $q_{\max} \in \mathbb{Z}^+$ is the maximum *adjusted* measurement of quality, where, for any rational q_i , its adjusted version is obtained by multiplying it by the smallest common denominator of all the quality values. We then solve primal problem (FAIR) by setting

$p(S) = 0$ for $S \notin \mathcal{V}$, reducing non-zero variables to a polynomial size, and in turn, making the problem solvable in polynomial time.

The following theorem shows that this fair Ellipsoid-based algorithm (i) gives a β -approx. solution for Problem (FAIR) that randomizes over a polynomial number of assortments, and (ii) runs in polynomial time.

THEOREM 5 (β -Approx. Algorithm for Problem (FAIR)). *Suppose that for any $\mathbf{z} \geq \mathbf{0}$ and $K \in [n]$, we have a polynomial-time β -approx. algorithm \mathcal{A} for Problem (SUB-DUAL(\mathbf{z}, K)), for some $\beta \in (0, 1]$. That is, \mathcal{A} returns set $S_{\mathcal{A}}$ with $|S_{\mathcal{A}}| \leq K$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}, K)$. Then, there exists a polynomial-time algorithm that returns a β -approx. feasible solution $\hat{p}(S)$, $S \subseteq [n]$ to Problem (FAIR). That is, $\sum_{S: |S| \leq K} \hat{p}(S) \cdot \text{REV}(S) \geq \beta \cdot \text{FAIR}$ and the returned solution is δ -fair. In addition, the number of sets S such that $\hat{p}(S) > 0$ is polynomial in n and $\log(q_{\max})$.*

6. (Near) Optimal Algorithms for Problem (SUB-DUAL(\mathbf{z}, K))

We now focus on designing a polynomial-time β -approx. algorithm for Problem (SUB-DUAL(\mathbf{z}, K)), which would serve as a (near-)optimal separation oracle for Problem (FAIR-DUAL) as we apply the Ellipsoid-based algorithm in Section 5.3. Since the dual vector \mathbf{z} is fixed at each iteration of the Ellipsoid method, in the rest of this paper, we suppress the dependency of variables on \mathbf{z} and denote $\tau_i = \tau_i(\mathbf{z})$ and $\mathbf{c}_i = \mathbf{c}_i(\mathbf{z})$.

6.1. Optimal Algorithm for Revenue/Marketshare-Fair Instances

In revenue/marketshare-fair instances, we have $b_i = 0$, and hence $\mathbf{c}_i = 0$ for all $i \in [n]$. In this case, Problem (SUB-DUAL(\mathbf{z}, K)) simplifies to a cardinality-constrained assortment optimization problem, with τ_i being the revenue of item i , and can be solved optimally in polynomial time.

PROPOSITION 2. *Given any revenue/marketshare-fair instance with the form $\Theta = (\mathbf{a}, \mathbf{0}, \mathbf{r}, \mathbf{w}, \mathbf{q})$, the STATICMNL algorithm in Rusmevichientong et al. (2010) returns the optimal assortment $S^* = \arg \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z})$, and its running time is of order $\mathcal{O}(n^2)$.*

With STATICMNL algorithm, we have access to an exact separation oracle for Problem (FAIR-DUAL), solving Problem (FAIR) optimally in polynomial-time using the Ellipsoid-based algorithm in Section 5.3.

6.2. Near Optimal Algorithm for General Instances

In visibility-fair and general instances, however, solving Problem (SUB-DUAL(\mathbf{z}, K)) is NP-complete and requires us to design approximation algorithms. Given any instance $\Theta = (\mathbf{a}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q}) \in \mathbb{R}_+^{5n}$, solving Problem (SUB-DUAL(\mathbf{z}, K)) is equivalent to solving a *capacitated assortment optimization problem with fixed costs*, with post-fairness revenue τ_i being the revenue of item i and post-fairness cost \mathbf{c}_i (which can be positive or negative) being the fixed cost of item i .

However, even without the capacity constraints, assortment optimization with positive fixed costs has been shown to be a NP-complete problem, and existing works have proposed intricate methods for its approximation (Kunnumkal et al. 2010, Kunnumkal and Mart´inez-de Alb´eniz 2019).

To design polynomial-time approximation algorithms for Problem (SUB-DUAL(\mathbf{z}, K)), we start by first establishing an important equivalence that transforms Problem (SUB-DUAL(\mathbf{z}, K)) to an infinite series of parameterized knapsack problems, with both cardinality and capacity constraints. Consider the following knapsack problem with capacity $W \geq 0$ and cardinality upper bound K :

$$\text{KP}(W, K) = \max_S \sum_{i \in S} \left(\frac{\tau_i w_i}{1+W} - \mathbf{c}_i \right) \text{ s.t. } \sum_{i \in S} w_i \leq W \text{ and } |S| \leq K, \quad (\text{KP}(W, K))$$

where the *utility* of item $i \in [n]$ is $\frac{\tau_i w_i}{1+W} - \mathbf{c}_i$ and its weight is w_i . For a given W , we denote the *utility* of item i as $u_i(W) := \frac{\tau_i w_i}{1+W} - \mathbf{c}_i$. Observe that in Problem (KP(W, K)), the first constraint is the capacity constraint and the second constraint is the cardinality constraint. The following theorem characterizes the relationship between Problems (KP(W, K)), $W \geq 0$, and Problem (SUB-DUAL(\mathbf{z}, K)).

THEOREM 6 (Problem (SUB-DUAL(\mathbf{z}, K)) as an infinite series of knapsack problems).

For any $\mathbf{z} \geq \mathbf{0}$ and $K \in [n]$, we have $\text{SUB-DUAL}(\mathbf{z}, K) = \max_{W \geq 0} \text{KP}(W, K)$.

Consequently, to design a β -approx. algorithm for Problem (SUB-DUAL(\mathbf{z}, K)), it suffices to design a β -approx. algorithm for $\max_{W \geq 0} \text{KP}(W, K)$, which finds set S such that $\text{REV-COST}(S, \mathbf{z}) \geq \beta \cdot \max_{W \geq 0} \text{KP}(W, K)$. However, solving the problem $\max_{W \geq 0} \text{KP}(W, K)$ involves solving infinite cardinality-constrained knapsack problems, (KP(W, K)), for any $W \geq 0$. Further note that in Problem (KP(W, K)), as we increase W , the capacity of the knapsack enlarges, but the utility of the items $u_i(W) = \frac{\tau_i w_i}{1+W} - \mathbf{c}_i$ decreases. These

introduce additional challenges in solving $\max_{W \geq 0} \text{KP}(W, K)$, as shown in Figure 2.³ Observe that

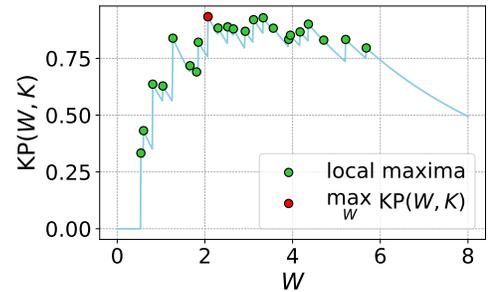


Figure 2: Evolution of $\text{KP}(W, K)$ with W .

³ For illustration in Figure 2, we consider a random instance where $n = 10, K = 5, w_i \sim \text{i.i.d. UNIF}([0.5, 1.5]), \tau_i \sim \text{i.i.d. UNIF}([1, 2]), \mathbf{c}_i \sim \text{i.i.d. UNIF}([0, 1])$, for all $i \in [n]$. We then solve Problem (KP(W, K)) for $W \in [0, 8]$.

the values of $\text{KP}(W, K)$ are not monotonic with respect to W , but rather can have many local maxima as W evolves. Hence, it can be difficult to tell which W maximizes $\text{KP}(W, K)$, or if our transformation has even simplified the problem.

Nevertheless, in the next two sections, using this transformation, we design approximate algorithms for Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$, including a $1/2$ -approx. algorithm (Section 7) and an FPTAS (Section 8).

7. $1/2$ -Approx. Algorithm for Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$

Leveraging the transformation to infinite knapsack problems $\max_{W \geq 0} \text{KP}(W, K)$, we first devise a $1/2$ -approx. algorithm for general instances of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. This, along with the fair Ellipsoid-based framework from Section 5.3, yields our *$1/2$ -approx. fair Ellipsoid-based algorithm*.

In Section 7.1, we discuss the LP relaxation of our knapsack problems and introduce the concept of *profile*, which is pivotal to our $1/2$ -approx. algorithm. In Section 7.2, we detail the steps of our $1/2$ -approx. algorithm for $\max_{W \geq 0} \text{KP}(W, K)$ and outline our main intuitions. Finally, in Section 7.3, we present the approximation ratio and runtime complexity of our algorithm.

7.1. Relaxed Knapsack Problems and the Notion of Profile

To design a $1/2$ -approx. algorithm for this infinite series of knapsack problems, we take advantage of the LP relaxation of the original knapsack problem $(\text{KP}(W, K))$, defined as

$$\text{KP-RELAX}(W, K) = \max_{\mathbf{x} \in [0, 1]^n} \sum_{i \in [n]} \left(\frac{v_i w_i}{1 + W} - c_i \right) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i \leq W \quad \text{and} \quad \sum_{i \in [n]} x_i \leq K. \quad (\text{KP-RELAX}(W, K))$$

Observe that if we enforce $x_i \in \{0, 1\}$, rather than $x_i \in [0, 1]$, we recover Problem $(\text{KP}(W, K))$. The variable x_i , $i \in [n]$, can be viewed as the fraction of item i that we fit in the knapsack. For integer solutions $\mathbf{x} \in \{0, 1\}^n$ to Problem $(\text{KP-RELAX}(W, K))$, we sometimes use the term “sets” where the set associated with $\mathbf{x} \in \{0, 1\}^n$ is $\{i \in [n] : x_i = 1\}$.

For any fixed $W \in [0, \infty)$, the relaxed problem $(\text{KP-RELAX}(W, K))$ always has an *optimal basic feasible solution*⁴, which can have at most two fractional variables. We denote an optimal basic solution to $(\text{KP-RELAX}(W, K))$ as $\mathbf{x}^*(W)$.⁵ Let $P_1(W) = \{i \in [n] : x_i^*(W) = 1\}$ be the set of items that are fully added to the knapsack $x^*(W)$. Similarly, let $P_f(W) = \{i \in [n] : 0 < x_i^*(W) < 1\}$ (respectively $P_0(W) = \{i \in [n] : x_i^*(W) = 0\}$) as the set of items that have a fractional value (respectively

⁴ See Section M for the definition of a basic (feasible) solution. In Problem $(\text{KP-RELAX}(W, K))$, the feasibility region is nonempty (as $\mathbf{x} = \mathbf{0}$ is feasible) and bounded (since $\mathbf{x} \in [0, 1]^n$). By Corollary 2.2 in Bertsimas and Tsitsiklis (1997), the problem has at least one basic feasible solution. Furthermore, because its optimal objective is also bounded, by Theorem 2.8 in Bertsimas and Tsitsiklis (1997), it admits at least one optimal basic feasible solution.

⁵ The optimal basic solution to Problem $(\text{KP-RELAX}(W, K))$, denoted as $x^*(W)$, may not be unique. While one could represent profile $\mathcal{P}(W)$ as $\mathcal{P}(x^*(W))$, we opt to avoid this notation for simplicity.

value of zero) in $\mathbf{x}^*(W)$. (Here, “f” in P_f stands for fractional.) We denote $P_f(W)$ by an ordered pair of items (i, j) . When $P_f(W)$ contains one (zero) item, we set $j = 0$ ($i, j = 0$) where 0 represents a dummy item; otherwise, we ensure $w_i \leq w_j$. We denote $\mathcal{P}(W) = \{P_1(W), P_f(W), P_0(W)\}$ as the *profile* associated with the optimal basic solution $x^*(W)$.

In the following lemma, borrowed from Caprara et al. (2000), we show that utilizing an optimal basic solution to the relaxed problem ($\text{KP-RELAX}(W, K)$) allows for the construction of an integer 1/2-approx. solution to both Problems ($\text{KP-RELAX}(W, K)$) and ($\text{KP}(W, K)$).

LEMMA 1 (1/2-Approx. Solutions to Problem ($\text{KP-RELAX}(W, K)$) (Caprara et al. 2000)).
 For a fixed $W \in [0, \infty)$, let $\mathbf{x}^*(W)$ be an optimal basic solution to Problem ($\text{KP-RELAX}(W, K)$) and let $\mathcal{P}(W) = \{P_1(W), P_f(W), P_0(W)\}$ be its profile, where $P_f(W) = (i, j)$. We have one of the following:

1. If $P_f(W) = (0, 0)$, $P_1(W)$ is an integer optimal solution to Problem ($\text{KP-RELAX}(W, K)$).
2. If $P_f(W) = (i, 0)$ for some $i \in [n]$, either $P_1(W)$ or $\{i\}$ is an integer 1/2-approx. solution to Problem ($\text{KP-RELAX}(W, K)$).
3. If $P_f(W) = (i, j)$ for some $i, j \in [n]$ such that $w_i \leq w_j$, either $P_1(W) \cup \{i\}$ or $\{j\}$ is an integer 1/2-approx. solution to Problem ($\text{KP-RELAX}(W, K)$).

The crucial insight from Lemma 1 is that to find a 1/2-approx. solution of Problem ($\text{KP}(W, K)$) or ($\text{KP-RELAX}(W, K)$), we only need the profile $\mathcal{P}(W)$, not the actual optimal basic solution $\mathbf{x}^*(W)$. While $\mathbf{x}^*(W)$ may vary for different knapsack problems $\text{KP}(W, K)$, we show in the proof of Theorem 7 that their associated profile $\mathcal{P}(W)$ undergoes a polynomial number of changes. This allows us to consider a polynomial number of sub-intervals of $[0, \infty)$ where the profile $\mathcal{P}(W)$ remains unchanged, hence constructing a 1/2-approx. solution to $\max_{W \geq 0} \text{KP}(W, K)$ in polynomial time.

7.2. Description of the 1/2-Approx. Algorithm

We now describe the main procedures of our 1/2-approx. algorithm for $\max_{W \geq 0} \text{KP}(W, K)$, presented in Algorithm 1. As alluded above, a main challenge here is that the key components of our knapsack problem (e.g., utilities and capacity constraint) keep evolving as W changes. Our first step in tackling this issue is to partition the interval $[0, \infty)$ into a series of sub-intervals, such that each sub-interval $I \subset [0, \infty)$ is *well-behaving*, which is defined as follows:

DEFINITION 1 (WELL-BEHAVING INTERVAL). Given a collection of n items, indexed by $i \in [n]$, we say that an interval $I \subset [0, \infty)$ is *well-behaving* if the following conditions are satisfied on I :

- (i) The signs of the utilities of items are the same for any $W \in I$.
- (ii) The ordering of the utilities of items is the same for $W \in I$.

- (iii) The ordering of the utility-to-weight ratios of items is the same for any $W \in I$. Here, the utility-to-weight ratio of item $i \in [n]$ is $\frac{u_i(W)}{w_i} = \frac{\frac{\tau_i w_i}{1+W} - c_i}{w_i} = \frac{\tau_i}{1+W} - \frac{c_i}{w_i}$.
- (iv) For any given item $i \in [n]$ and two distinct items $j \neq i, k \neq i, k \neq j$, the ordering between $\frac{u_j(W) - u_i(W)}{w_j - w_i}$ and $\frac{u_k(W) - u_i(W)}{w_k - w_i}$ is the same for any $W \in I$.

We formally show in Lemma 2 that there are at most $\mathcal{O}(n^3)$ sub-intervals to be considered.

LEMMA 2. *There exists a partition of $[0, \infty)$ with at most $\mathcal{O}(n^3)$ sub-intervals such that each sub-interval $I \subset [0, \infty)$ in this partition is well-behaving, per Definition 1.*

Next, we focus on each well-behaving interval $I = [W_{\min}, W_{\max}) \subset [0, \infty)$. In Algorithm 1, we propose an 1/2-approx. algorithm for $\max_{W \in I} \text{KP}(W, K)$. In particular, it returns an integer 1/2-approx. solution S_I for $\max_{W \in I} \text{KP-RELAX}(W, K)$. Throughout Algorithm 1, we also maintain a collection \mathcal{C}_I , which contains an 1/2-approx. solution to Problem (KP(W, K)) for any $W \in I$.

Algorithm 1 $\mathcal{A}_{1/2}(\mathbf{w}, \tau, \mathbf{c}, K, I)$: 1/2-approx. algorithm for $\max_{W \in I} \text{KP}(W, K)$

Input: weights $\mathbf{w} = \{w_i\}_{i \in [n]}$, post-fairness revenues $\tau = \{\tau_i\}_{i \in [n]}$, post-fairness costs $\mathbf{c} = \{c_i\}_{i \in [n]}$, cardinality upper bound K , a well-behaving interval $I = [W_{\min}, W_{\max}) \subset [0, \infty)$ per Definition 1.

Output: assortment S_I .

1. **Initialization.** Rank the items by their utility-to-weight ratios. Let h_j be the index of the item with the j th highest utility-to-weight ratio, for $j \in [n]$, and define $H_j = \{h_1, \dots, h_j\}$, for $j \in [K]$ and $W_{\text{TH}} = w(H_K)$, and initialize the collection of assortments $\mathcal{C}_I = \emptyset$. For $j \in [n]$, add $\{j\}$ to \mathcal{C}_I .
2. **Interval** $I_{\text{low}} = I \cap [0, W_{\text{TH}})$. If I_{low} is non-empty:
 - (a) For $j = 1, \dots, K$, add H_j to \mathcal{C}_I .
 - (b) *Stopping rule.* If $u_{h_K}(W_{\text{TH}}) \geq 0$, go to Step 3; otherwise, go to Step 4 (i.e., the termination step).
3. **Interval** $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$. If I_{high} is non-empty:
 - (a) **Initialize the profile.**
 - i. If $W_{\min} < W_{\text{TH}}$, set $P_1 = H_K, P_0 = [n] \setminus H_K$, and $W_{\text{next}} = W_{\text{TH}}$.
 - ii. If $W_{\min} \geq W_{\text{TH}}$, compute an optimal basic solution for Problem (KP-RELAX(W_{\min}, K)) with profile $\mathcal{P}(W_{\min}) = \{P_1(W_{\min}), (i, j), P_0(W_{\min})\}$, where $w_i < w_j$. Add $P_1(W_{\min}) \cup \{i\}$ to \mathcal{C}_I . Set $P_1 = P_1(W_{\min}) \cup \{j\}$, $P_0 = [n] \setminus P_1$, and $W_{\text{next}} = w(P_1)$.
 - (b) **Adaptively partitioning** I_{high} . While there exist $i \in P_1, j \in P_0$ such that $w_i < w_j$:
 - i. Update indices i^*, j^* as follows:

$$(i^*, j^*) \leftarrow \arg \max_{\substack{i \in P_1, j \in P_0 \\ w_i < w_j}} \left[\frac{u_j(W_{\text{next}}) - u_i(W_{\text{next}})}{w_j - w_i} \right]. \quad (7)$$

- ii. *Stopping rule.* If $W_{\text{next}} \geq W_{\max}$ or $u_{i^*}(W_{\text{next}}) > u_{j^*}(W_{\text{next}})$, go to Step 4 (i.e., the termination step).
- iii. *Swapping the two items.* Update $P_1, P_0, W_{\text{next}}$ as follows:

$$P_1 \leftarrow P_1 \cup \{j^*\} \setminus \{i^*\} \quad \text{and} \quad P_0 \leftarrow P_0 \cup \{i^*\} \setminus \{j^*\} \quad \text{and} \quad W_{\text{next}} \leftarrow W_{\text{next}} - w_{i^*} + w_{j^*}.$$

Add P_1 to \mathcal{C}_I .

4. **Termination Step.** Return the set $S_I = \arg \max_{S \in \mathcal{C}_I} \text{REV-COST}(S, \mathbf{z})$.
-

We define $H_j = \{h_1, \dots, h_j\} \subset [n]$ as the j items in $[n]$ with the highest utility-to-weight ratios. Recall that on a well-behaving interval I , the ordering of utility-to-weight ratios of items remains constant, so the sets $\{H_j\}_{j=1}^K$ are well-defined. Algorithm 1 partitions $I = [W_{\min}, W_{\max})$ into two intervals: $I_{\text{low}} = I \cap [0, W_{\text{TH}})$ and $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$, where $W_{\text{TH}} = w(H_K)$ is the total weight of the K items with the highest utility-to-weight ratios. We now discuss I_{low} and I_{high} separately.

Interval $I_{\text{low}} = I \cap [0, W_{\text{TH}})$. Solving the relaxed problem (KP-RELAX(W, K)) for any $W \in I_{\text{low}}$ is straightforward because the cardinality constraint is not binding (recall that $W_{\text{TH}} = w(H_K)$). Thus, the solution involves filling the knapsack with items with the highest utility-to-weight ratios until reaching capacity W . Consequently, the profile $\mathcal{P}(W) = \{P_1(W), P_f(W), P_0(W)\}$ of our optimal basic solution always follows this structure: $P_1(W) = H_{j-1}$ and $P_f(W) = (h_j, 0)$ for some $j \in [K]$. This explains why sets $H_j, j \in [K]$ are added to \mathcal{C}_I (see Step 2 of Algorithm 1).

Interval $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$. Solving Problem (KP-RELAX(W, K)) for $W \in I_{\text{high}}$ is more challenging because profile of the optimal basic solution no longer maintains the structured form seen in interval I_{low} . Intuitively, as the capacity W increases beyond W_{TH} , the cardinality constraint becomes binding, and it is no longer optimal to simply fill the knapsack with items with the highest utility-to-weight ratios. Inspired by Lemma 1, we wish to partition I_{high} into a polynomial number of sub-intervals where the profile $\mathcal{P}(W)$ remains unchanged in order to consider the same 1/2-approx. solution(s) for this sub-interval. However, the main hurdle here is that these sub-intervals are not known in advance and need to be determined *adaptively*.

Adaptive determination of sub-intervals. The algorithm keeps updating two quantities as it increases the capacity W : (i) capacity *change points*, denoted by W_{next} , and (ii) two sets that represent the profile at W_{next} . The first set, denoted by P_1 , is $P_1(W_{\text{next}})$ that contains all items completely added to the knapsack in Problem (KP-RELAX(W_{next}, K)), and the second set, denoted by P_0 , is $P_0(W_{\text{next}})$ that contains all items not added to the knapsack. Here, W_{next} is chosen such that $P_f(W_{\text{next}}) = (0, 0)$. To update the sets P_1 and P_0 , as well as W_{next} , the algorithm finds two items $i^* \in P_1$ and $j^* \in P_0$ by solving a simple optimization problem stated in Step 3(b)i, where this problem aims to find two items i^*, j^* such that swapping them yields the highest marginal increase in utility. The algorithm then swaps these two items—i.e., i^* is removed from P_1 and added to P_0 , while j^* is removed from P_0 and added to P_1 . This is one of the main novel aspects of the algorithm that makes obtaining a 1/2-approx. solution in polynomial time possible.

7.3. Performance of Algorithm 1

THEOREM 7 (1/2-Approx. Algorithm). *Consider a well-behaving interval $I \subset [0, \infty)$ per Definition 1. For any $\mathbf{z} \geq \mathbf{0}$, set S_I , returned by Algorithm 1, satisfies*

$$\text{REV-COST}(S_I, \mathbf{z}) \geq \frac{1}{2} \max_{W \in I} \text{KP}(W, K).$$

The runtime of Algorithm 1 is in the order of $\mathcal{O}(n^2 \log n + nK^2)$.

Recall that we partition $[0, \infty)$ into $\mathcal{O}(n^3)$ well-behaving sub-intervals I and then apply Algorithm 1 to each I . Among all of the 1/2-approx. sets S_I , we select the one with the highest cost-adjusted revenue, denoted as $S_{1/2} = \arg \max_{S' \in S_I: I \in \mathcal{G}} \text{REV-COST}(S', \mathbf{z})$. This $S_{1/2}$ satisfies $\text{REV-COST}(S_{1/2}, \mathbf{z}) \geq \frac{1}{2} \max_{W \geq 0} \text{KP}(W, K)$, making it a 1/2-approx. solution for Problem (SUB-DUAL(\mathbf{z}, K)). Consequently, the overall complexity for solving Problem (SUB-DUAL(\mathbf{z}, K)) is $\mathcal{O}(n^5 \log n + n^4 K^2)$.

8. FPTAS for Problem (SUB-DUAL(\mathbf{z}, K))

In this section, we further propose an FPTAS for general instances of Problem (SUB-DUAL(\mathbf{z}, K)), where we crucially rely on the transformation to the infinite series of knapsack problems, as well as our 1/2-approx. algorithm. Combining the FPTAS for Problem (SUB-DUAL(\mathbf{z}, K)) with the fair Ellipsoid-based framework in Section 5.3, we obtain an *FPTAS fair Ellipsoid-based algorithm*.

As in Section 7, we begin by transforming Problem (SUB-DUAL(\mathbf{z}, K)) into $\max_{W \geq 0} \text{KP}(W, K)$, following Theorem 6. We then solve the infinite knapsack problems by drawing inspiration from the FPTAS for a single cardinality-constrained knapsack problem, developed by (Caprara et al. 2000), which uses a dynamic programming (DP) scheme. However, we encounter several new challenges due to having infinite knapsack problems: (i) it is impractical to apply the DP scheme to every $W \in [0, \infty)$; (ii) unlike in the FPTAS for a single knapsack problem, where the utility of each item can be rescaled based on a fixed 1/2-approx. solution and accuracy parameter ϵ , rescaling becomes ambiguous here due to the varying 1/2-approx. solutions with W . In the following, we elaborate on how these challenges are addressed in our approach.

8.1. Description of the FPTAS

Similar to what we did in the design of the 1/2-approx. algorithm, we start by pre-partitioning the interval $[0, \infty)$ into $\mathcal{O}(n^3)$ well-behaving intervals based on Definition 1. Then, for each of these well-behaving interval I , we design an FPTAS for $\max_{W \in I} \text{KP}(W, K)$.

Adaptive partitioning via the 1/2-approx. algorithm. Given a well-behaving interval I , our FPTAS starts by applying a slightly modified version of our 1/2-approx. algorithm, detailed in Algorithm 5 of Section D, to handling I . Algorithm 5 remains largely consistent with Algorithm 1, with the key difference being its keeping track of the partition generated by our adaptive partitioning process. Algorithm 5 returns a partition of I containing at most $\mathcal{O}(nK)$ sub-intervals, denoted by $\Pi_I = \{I_\ell : \ell = 0, 1, \dots, L\}$, where $I_\ell = [W_\ell, W_{\ell+1})$ with $I = [W_0, W_L)$ and $W_0 < W_1 < \dots < W_L$. Moreover, it produces a mapping \mathcal{D} assigning each sub-interval I_ℓ a set $\mathcal{D}(I_\ell)$, which

constitutes a feasible 1/2-approx. solution for any $W \in I_\ell$. In other words, for any $W \in I_\ell$, we have $\sum_{i \in \mathcal{D}(I_\ell)} u_i(W) \geq \frac{1}{2} \text{KP}(W, K)$ and $\sum_{i \in \mathcal{D}(I_\ell)} w_i \leq W$.

Partitioning via monotonicity. We next focus on each sub-interval I_ℓ that is well-behaving and admits a common 1/2-approx. solution $\mathcal{D}(I_\ell)$. Our FPTAS adopts a DP scheme that resembles the one used for a single knapsack problem with cardinality constraint (Caprara et al. 2000). However, the DP scheme necessitates rescaling each item's utility, which is not straightforward for us.

One idea is to follow the approach in Caprara et al. (2000) and re-scale the utility of each item i using a factor that depends on K, ϵ and the total utility of the 1/2-approx. solution $\mathcal{D}(I_\ell)$, as follows:

$$\tilde{u}_i(W) = \left\lceil \frac{u_i(W)}{\sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W)} \cdot \frac{K}{\epsilon} \right\rceil. \quad (8)$$

Nonetheless, the hurdle here is that the utility of our 1/2-approx. solution $\sum_{i \in \mathcal{D}(I_\ell)} u_i(W)$ evolves with W and the scaled utility $\tilde{u}_i(W)$ might change its value within interval I_ℓ . To tackle this, we show that $\tilde{u}_i(W)$ only changes monotonically within interval I_ℓ , as stated in the following lemma:

LEMMA 3. *If an interval I_ℓ is well-behaving and admits a common 1/2-approx. solution $\mathcal{D}(I_\ell)$, the re-scaled utility $\tilde{u}_i(W)$ defined in Eq. (8) changes monotonically with respect to W .*

A similar monotonicity property was also adopted by Holzhauser and Krumke (2017), who designed an FPTAS for a single parametric knapsack problem. Given Lemma 3, and given that $\tilde{u}_i(W) \in [0, 2K/\epsilon]$ since we rescale the utility using the 1/2-approx. solution, we know that for any $i \in [n]$, the value of $\tilde{u}_i(W)$ changes at most $O(K/\epsilon)$ times within the interval I_ℓ . This allows us to further divide I_ℓ into at most $O(nK/\epsilon)$ intervals, each denoted by I'_ℓ , such that on each interval I'_ℓ , the re-scaled utility $\tilde{u}_i(W)$ defined in Eq. (8) takes the same value for all items $i \in [N]$.

The DP scheme. After two rounds of partitioning described above, we focus on each interval $I'_\ell = [W_{\min}, W_{\max}] \subseteq I_\ell$ such that I'_ℓ is well-behaving, admits a common 1/2-approx. solution $\mathcal{D}(I'_\ell)$, and the rescaled utility $\tilde{u}_i(W)$ of each item i takes the same integer value for all $W \in I'_\ell$. This allows us to simply write the rescaled utility of each item i as $\tilde{u}_i(W) = \tilde{u}_i$ for all $W \in I'_\ell$.

Recursion in DP. For any $W \in I'_\ell$, since the optimal value to our original knapsack problem $\text{KP}(W, K)$ is bounded by twice our 1/2-approx. solution, $2 \sum_{i' \in \mathcal{D}(I'_\ell)} u_{i'}(W)$, the optimal value with re-scaled utilities is thus bounded by $2 \cdot \frac{K}{\epsilon} + K := \chi_{\max}$. For any $\chi \in \{0, 1, \dots, \chi_{\max}\}$, $\kappa \in \{0, 1, \dots, K\}$, and $i \in [n]$, let $\text{MIN-WT}_i(\chi, \kappa)$ denote the minimum total weight of κ items from $\{1, \dots, i\}$ that can yield total utility χ , and let $\text{SET}_i(\chi, \kappa)$ be the corresponding assortment consisting of these κ items. If we cannot find exactly κ items from $\{1, \dots, i\}$ whose total utility is χ ,

Algorithm 2 FPTAS($\mathbf{w}, r, \mathbf{c}, K, I$): FPTAS for $\max_{W \in I} \text{KP}(W, K)$

Input: weights $\mathbf{w} = \{w_i\}_{i \in [n]}$, post-fairness revenues $\tau = \{\tau_i\}_{i \in [n]}$, post-fairness costs $\mathbf{c} = \{c_i\}_{i \in [n]}$, cardinality upper bound K , a well-behaving interval $I \subset [0, \infty)$ per Definition 1, accuracy parameter $\epsilon \in (0, 1)$.

Output: assortment S_I

1. Initialize the collection of assortments $\mathcal{C}_I = \emptyset$.
2. **Adaptive partitioning via the 1/2-approx. algorithm.** Apply the modified 1/2-approx. algorithm (Algorithm 5):

$$\Pi_I, \mathcal{D} \leftarrow \mathcal{A}_{1/2}^m(\mathbf{w}, \tau, \mathbf{c}, K, I),$$

where $\Pi_I = \{I_\ell\}_{\ell \in [L]}$ is a partition of I and $\mathcal{D}(I_\ell)$ is the 1/2-approx. solution corresponding to interval I_ℓ .

3. **Further partitioning via monotonicity.** For each $I_\ell \in \Pi_I$, partition I_ℓ into at most $\mathcal{O}(nK/\epsilon)$ sub-intervals I'_ℓ such that $\tilde{u}_i(W)$ defined in Eq. (8) takes the same value for all $i \in [N]$
4. **Dynamic Programming (DP).** For each $I'_\ell = [W_{\min}, W_{\max}] \subseteq I_\ell$, perform the following DP scheme.

- (a) **Re-scale the utilities.** Re-scale the utility of each item i to be

$$\tilde{u}_i = \left\lceil \frac{u_i(W_{\min})}{\sum_{i' \in \mathcal{D}(I'_\ell)} u_{i'}(W_{\min})} \cdot \frac{K}{\epsilon} \right\rceil.$$

- (b) **Initialization.** Let $\chi_{\max} = \lceil 2 \cdot \frac{K}{\epsilon} + K \rceil$. Let $\text{MIN-WT}_0(0, 0) = 0$, $\text{SET}_0(0, 0) = \emptyset$. Let $\text{MIN-WT}_0(\chi, \kappa) = \infty$ for all $\chi \in \{0, \dots, \chi_{\max}\}$, and $\kappa \in \{0, \dots, K\}$. Finally, for any $i \in \{0, 1, \dots, n\}$, set $\text{MIN-WT}_i(\chi, \kappa) = \infty$ and $\text{SET}_i(\chi, \kappa) = \emptyset$ when either χ or κ are negative.

- (c) **Recursion.** For $i = 1, \dots, n$,

- For any $\chi \in \{0, \dots, \chi_{\max}\}$ and $\kappa \in \{0, \dots, K\}$, compute the entries of $\text{MIN-WT}_i(\cdot)$ as follows:

$$\text{MIN-WT}_i(\chi, \kappa) = \min \left\{ \text{MIN-WT}_{i-1}(\chi, \kappa), \text{MIN-WT}_{i-1}(\chi - \tilde{u}_i, \kappa - 1) + w_i \right\}$$

- If $\text{MIN-WT}_i(\chi, \kappa) < \infty$, update its corresponding assortment:

$$\text{SET}_i(\chi, \kappa) = \begin{cases} \text{SET}_{i-1}(\chi, \kappa) & \text{if } \text{MIN-WT}_i(\chi, \kappa) = \text{MIN-WT}_{i-1}(\chi, \kappa) \\ \text{SET}_{i-1}(\chi - \tilde{u}_i, \kappa - 1) \cup \{i\} & \text{if } \text{MIN-WT}_i(\chi, \kappa) = \text{MIN-WT}_{i-1}(\chi - \tilde{u}_i, \kappa - 1) + w_i \end{cases} \quad (9)$$

- (d) **Collect assortments.** For any $\chi \leq \chi_{\max}$ and $\kappa \leq K$ such that $\text{MIN-WT}_n(\chi, \kappa) \leq W_{\max}$, add $\text{SET}_n(\chi, \kappa)$ to \mathcal{C}_I .

5. Return the assortment $S_I = \arg \max_{S \in \mathcal{C}_I} \text{REV-COST}(S, \mathbf{z})$.
-

we set $\text{MIN-WT}_i(\chi, \kappa) = \infty$. We compute the values for $\text{MIN-WT}_i(\cdot)$ using values from $\text{MIN-WT}_{i-1}(\cdot)$, and construct the assortment $\text{SET}_i(\cdot)$ from $\text{SET}_{i-1}(\cdot)$ in a recursive manner. For $i = 1, \dots, n$, we let:

$$\text{MIN-WT}_i(\chi, \kappa) = \min \left\{ \text{MIN-WT}_{i-1}(\chi, \kappa), \text{MIN-WT}_{i-1}(\chi - \tilde{u}_i, \kappa - 1) + w_i \right\}. \quad (10)$$

In the first term, we do not include item i in the set, while in the second term, we include item i in the set. If $\text{MIN-WT}_i(\chi, \kappa) < \infty$, we update its corresponding assortment according to Eq. (9).

⁶ This then gives us access to the matrix $\text{MIN-WT}_n(\chi, \kappa)$. Set $\text{SET}_n(\chi, \kappa)$, if $\text{MIN-WT}_n(\chi, \kappa) < \infty$, is the assortment with minimum weight that satisfies $\sum_{i \in \text{SET}_n(\chi, \kappa)} \tilde{u}_i = \chi$ and $|\text{SET}_n(\chi, \kappa)| = \kappa$.

⁶ When $\text{MIN-WT}_i(\chi, \kappa) = \infty$, its corresponding set is not used by our algorithm, and hence we do not define it.

If we were to solve a single knapsack problem $\text{KP}(W, K)$ for a fixed W , a near-optimal solution value would be given by $\max_{\chi, \kappa} \{\chi : \text{MIN-WT}_n(\chi, \kappa) \leq W\}$. Here, since our interval I_ℓ involves infinite knapsack problems, we instead consider all $\text{SET}_n(\chi, \kappa)$ that can fit into a knapsack of capacity W_{\max} , i.e., $\text{MIN-WT}_n(\chi, \kappa) \leq W_{\max}$. One of these assortments is guaranteed to be an $(1 - \epsilon)$ -approx. solution to $\max_{W \in I'_\ell} \text{KP}(W, K)$. This then results in Theorem 8 below.

8.2. Performance of Algorithm 2

THEOREM 8 (Near-optimality of Algorithm 2). *Consider a well-behaving interval $I \subset [0, \infty)$ per Definition 1. For any $\epsilon > 0$ and $\mathbf{z} \geq \mathbf{0}$, set S_I , returned by Algorithm 2, satisfies*

$$\text{REV-COST}(S_I, \mathbf{z}) \geq (1 - \epsilon) \max_{W \in I} \text{KP}(W, K).$$

The runtime of Algorithm 2 is in the order of $\mathcal{O}(n^3 K^4 / \epsilon^2)$.

Similar to Section 7, we can apply Algorithm 2 separately to each well-behaving sub-interval I and out of the returned assortments S_I , pick the one with the highest cost-adjusted revenue. It would then be an $(1 - \epsilon)$ -approx. solution to Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. The overall runtime of our FPTAS is $\mathcal{O}(n^6 K^4 / \epsilon^2)$, since we apply Algorithm 2 to $\mathcal{O}(n^3)$ well-behaving sub-intervals.

9. Case Study on MovieLens Dataset

In this section, we numerically evaluate our algorithms in a real-world movie recommendation setting based on the MovieLens 100K dataset (Harper and Konstan 2015). We apply both the 1/2-approx. algorithm (Section 7) and the FPTAS (Section 8) to solving Problem (FAIR) associated with this setting. The approximation ratio of our FPTAS is set to be $1 - \epsilon = 0.9$.⁷ We have also performed numerical studies on a number of real-world inspired, synthetic datasets where items have heterogeneous revenues; see Section E. Our code has been made available.⁸

9.1. Dataset and Set up

The MovieLens 100K dataset contains 100,000 movie ratings that range from 1 to 5, from 943 users on 1682 movies. The ratings were collected on the MovieLens website from September 1997 to April 1998. We focus on the subset of $n = 20$ drama movies⁹ that have at least five ratings with an average rating of at least 3. Let γ_i be the average rating of the i th movie. Without loss

⁷ Here, for better runtime performance, we employed a column generation method in combination with our 1/2-approx. algorithm and FPTAS for Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. In comparison, the approximate solutions obtained using the column generation method and the Ellipsoid-based algorithm produce very similar marketshares, but the column generation method is much faster in terms of runtime. See Section C for more details.

⁸ <https://github.com/qinyichen/fair-assortment-planning>

⁹ We have performed the same experiments on movies of different genres and the results are consistent across genres.

of generality, let $\gamma_1 \geq \gamma_2 \geq \dots \geq \gamma_{20}$. Among them, the highest average rating is $\gamma_1 = 4.09$ and the lowest is $\gamma_{20} = 3.14$. We let the popularity weight of each movie be proportional to their average rating: $w_i = s \cdot \gamma_i$. In the following, we take the scaling factor to be $s = 1/20$.¹⁰ We measure the quality of each movie using their popularity weight, i.e., $q_i = w_i$, for $i \in [20]$.

Consider a setting where the platform can recommend at most 5 out of these 20 drama movies. There are a total of $\sum_{k=1}^5 \binom{20}{k} = 21,699$ different assortments that the platform can randomize over. The platform’s goal is to maximize its marketshare since movies do not have associated revenues. Meanwhile, it also wishes to be δ -fair for all of its movies, where a movie’s outcome is its visibility, and δ ranges from 0 to 5. We apply our 1/2-approx. algorithm and FPTAS to this problem.

9.2. Results

1/2-approx. algorithm versus FPTAS. The solutions returned by the 1/2-approx. algorithm and the FPTAS are quite comparable under all levels of fairness (see Figure 3), despite that the FPTAS has better theoretical guarantee. As δ gets larger, the 1/2-approx. algorithm even very slightly outperforms the FPTAS in terms of the marketshare. Intuitively, this is because the weights (ratings) of the 20 movies are very close to each other. Due to the re-scaling mechanism of the FPTAS, if the weights are close, the movies might be indistinguishable by their scaled utilities. The FPTAS tends to prioritize movies with smaller weights when it construct the assortments in the DP scheme, which can potentially result in lower marketshare.

In Table 1, we record the runtime of our algorithms. We note that the 1/2-approx. algorithm clearly outperforms the FPTAS in terms of runtime, which is expected given that the 1/2-approx. algorithm is a subroutine of the FPTAS (Step 2 in Algorithm 2). The superior computational performance of the 1/2-approx. algorithm, along with its high-quality solutions, makes it an attractive practical option. On the other hand, although the FPTAS takes longer to run, its value lies in the stronger guarantee it offers, which makes it a reliable benchmark for assessing the performance of the 1/2-approx. algorithm.

Table 1 Runtime comparison of 1/2-approx. and FPTAS algorithms on the MovieLens dataset.

	δ	0	1	2	3	4	5
Time taken by a single execution (s)	1/2-approx	2.27×10^{-2}	1.75×10^{-2}	1.78×10^{-2}	1.64×10^{-2}	1.55×10^{-2}	1.69×10^{-2}
	FPTAS	8.84×10^{-1}	5.53×10^{-1}	4.56×10^{-1}	4.62×10^{-1}	4.85×10^{-1}	5.63×10^{-1}
Total time taken in solving (FAIR) (s)	1/2-approx	1.77	0.47	0.64	0.29	0.23	0.18
	FPTAS	36.74	11.85	17.78	5.68	5.46	3.46

Price of fairness. Given the approximate solutions from both algorithms, we investigate the price introduced by the fairness constraints, which can be seen from the following two aspects:

¹⁰ The scaling factor s determines how each movie is weighted against the no-purchase option. We obtain consistent results when we set the scaling factor to be $s = 1/10$. Additionally, note that when we set $s = 1/20$, the weights of the movies $\{w_i\}_{i \in [20]}$ are close to each other, and hence it becomes crucial to enforce fairness constraints.

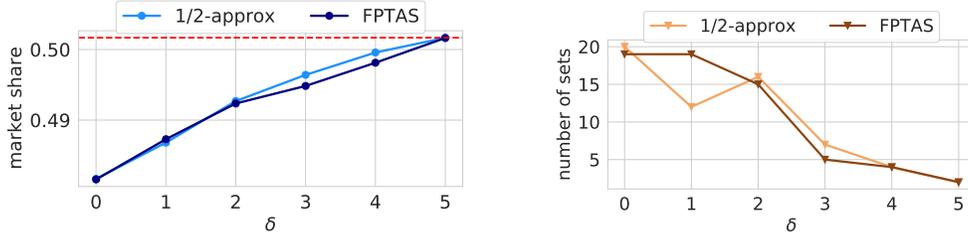


Figure 3 Price of fairness constraints in the MovieLens case study. Left: platform’s marketshare obtained under different fairness parameters δ . The dashed line is the optimal marketshare attainable in the absence of fairness. Right: Number of sets to randomize over under different fairness parameters δ .

- Impact on platform’s marketshare.** The left-hand side of Figure 3 shows the marketshare obtained by our algorithms under different levels of fairness (i.e., δ). There exists a clear tradeoff between fairness and marketshare: as the fairness constraints get relaxed (as δ increases), the marketshare increases and approaches the maximum marketshare in the absence of fairness. That being said, even when the platform is 0-fair, the price of fairness remains quite small, with the average marketshare reduced by only around 4% in our near-optimal solutions. This implies that the platform can achieve a high level of fairness without inserting a heavy impact on its marketshare.
- Impact on the number of randomized sets.** The right-hand side of Figure 3 plots the number of sets that we need to randomize over in our near-optimal solutions, under different levels of fairness. The number of sets ranges from 1 to 20, highlighting that our algorithms can be effectively implemented in practice. Additionally, with the increase in δ leading to more relaxed fairness constraints, there is generally a reduction in the number of sets to be randomized over.

Visibility. Figure 4 shows the visibility received by each movie given by our 1/2-approx. solution under different levels of fairness. In general, movies with lower qualities receive less visibility. For each δ , there is a rough threshold such that any movie with an index greater than this threshold receives nonzero visibility, and this threshold decreases as δ increases. This highlights the adaptability of our approach, as the platform can tune parameter δ to adjust the level of fairness.

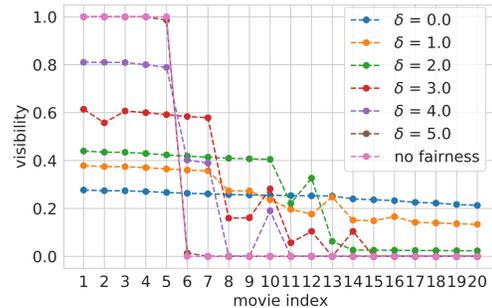


Figure 4: Visibility of movie i under different δ , based on the 1/2-approx. solution to Problem (FAIR). Movie are ranked in descending order of qualities.

10. Conclusion and Future Directions

In our work, we design viable approaches for the fair assortment planning problem, which uses a novel pairwise fairness notion to promote equality of opportunities among items on digital plat-

forms, resolving an important issue in operations management. Our work opens up a number of exciting future directions. One avenue is to explore how our framework adapts to various settings (e.g. different choice models, more constraints on the feasible set of assortments). Another intriguing topic is to study fair assortment planning in a dynamic setting, where the quality or popularity of items evolves over time depending on past assortment planning decisions and needs to be continuously learned. In such dynamic settings, it is crucial to ensure that fairness is preserved as our decisions can impact the attributes of the items, potentially exacerbating the “winner-takes-all” phenomenon in the long run. Although we do not address the dynamic setting in this work, we posit that integrating our fairness constraint could yield long-term benefits, ensuring equitable growth opportunities for items. In sum, fairness has only been scarcely studied in operational decisions of online platforms, and we hope that this work would inspire a new stream of research in this area.

Acknowledgments

N.G. was supported in part by an award from the the Office of Naval Research (ONR) (Award Number: N00014-23-1-2584) and the MIT Indonesia seed grant. We extend our gratitude to Heng Zhang, whose key insights helped advance the technical results of this paper. We also thank Vivek Farias, Daniel Freund, Omar El Housni, Denis Sauré, Rad Niazadeh, and Edy Baskoro for their invaluable comments during our work.

References

- Mohammad Reza Aminian, Vahideh Manshadi, and Rad Niazadeh. Fair markovian search. *Available at SSRN 4347447*, 2023.
- Jackie Baek and Vivek F Farias. Fair exploration via axiomatic bargaining. *arXiv preprint arXiv:2106.02553*, 2021.
- Santiago Balseiro, Haihao Lu, and Vahab Mirrokni. Regularized online allocation problems: Fairness and beyond. In *International Conference on Machine Learning*, pages 630–639. PMLR, 2021.
- Théo Barré, Omar El Housni, and Andrea Lodi. Assortment optimization with visibility constraints. *arXiv preprint arXiv:2307.13656*, 2023.
- Mohammad Hossein Bateni, Yiwei Chen, Dragos Florin Ciocan, and Vahab Mirrokni. Fair resource allocation in a volatile marketplace. *Operations Research*, 2021.
- Dimitris Bertsimas and John N Tsitsiklis. *Introduction to linear optimization*. Athena Scientific, 1997.
- Dimitris Bertsimas, Vivek F Farias, and Nikolaos Trichakis. The price of fairness. *Operations research*, 59(1):17–31, 2011.
- Dimitris Bertsimas, Vivek F Farias, and Nikolaos Trichakis. On the efficiency-fairness trade-off. *Management Science*, 58(12):2234–2250, 2012.

-
- Alex Beutel, Jilin Chen, Tulsee Doshi, Hai Qian, Li Wei, Yi Wu, Lukasz Heldt, Zhe Zhao, Lichan Hong, Ed H Chi, et al. Fairness in recommendation ranking through pairwise comparisons. In *Proceedings of the 25th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 2212–2220, 2019.
- Asia J Biega, Krishna P Gummadi, and Gerhard Weikum. Equity of attention: Amortizing individual fairness in rankings. In *The 41st international acm sigir conference on research & development in information retrieval*, pages 405–414, 2018.
- Arpita Biswas, Gourab K Patro, Niloy Ganguly, Krishna P Gummadi, and Abhijnan Chakraborty. Toward fair recommendation in two-sided platforms. *ACM Transactions on the Web (TWEB)*, 16(2):1–34, 2021.
- Toon Calders, Faisal Kamiran, and Mykola Pechenizkiy. Building classifiers with independency constraints. In *2009 IEEE International Conference on Data Mining Workshops*, pages 13–18. IEEE, 2009.
- Alberto Caprara, Hans Kellerer, Ulrich Pferschy, and David Pisinger. Approximation algorithms for knapsack problems with cardinality constraints. *European Journal of Operational Research*, 123(2):333–345, 2000.
- Hongyu Chen, Hanwei Li, David Simchi-Levi, Michelle Xiao Wu, and Weiming Zhu. Assortment display, price competition and fairness in online marketplaces. *Price Competition and Fairness in Online Marketplaces (August 30, 2021)*, 2021.
- Qinyi Chen, Jason Cheuk Nam Liang, Negin Golrezaei, and Djallel Bouneffouf. Interpolating item and user fairness in recommendation systems. *arXiv preprint arXiv:2306.10050*, 2023.
- Maxime C Cohen, Adam N Elmachtoub, and Xiao Lei. Price discrimination with fairness constraints. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, pages 2–2, 2021a.
- Maxime C Cohen, Sentao Miao, and Yining Wang. Dynamic pricing with fairness constraints. *Available at SSRN 3930622*, 2021b.
- Yuan Deng, Negin Golrezaei, Patrick Jaillet, Jason Cheuk Nam Liang, and Vahab Mirrokni. Fairness in the autobidding world with machine-learned advice. *arXiv preprint arXiv:2209.04748*, 2022.
- Antoine Désir, Vineet Goyal, and Jiawei Zhang. Capacitated assortment optimization: Hardness and approximation. *Operations Research*, 70(2):893–904, 2022.
- Kate Donahue and Jon Kleinberg. Fairness and utilization in allocating resources with uncertain demand. In *Proceedings of the 2020 Conference on Fairness, Accountability, and Transparency*, pages 658–668, 2020.
- Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. Fairness through awareness. In *Proceedings of the 3rd innovations in theoretical computer science conference*, pages 214–226, 2012.

- Guillermo Gallego and Huseyin Topaloglu. Constrained assortment optimization for the nested logit model. *Management Science*, 60(10):2583–2601, 2014.
- Naman Goel, Mohammad Yaghini, and Boi Faltings. Non-discriminatory machine learning through convex fairness criteria. In *Thirty-Second AAAI Conference on Artificial Intelligence*, 2018.
- Moritz Hardt, Eric Price, and Nati Srebro. Equality of opportunity in supervised learning. *Advances in neural information processing systems*, 29:3315–3323, 2016.
- F. Maxwell Harper and Joseph A. Konstan. The movielens datasets: History and context. *ACM Trans. Interact. Intell. Syst.*, 5(4), dec 2015. ISSN 2160-6455.
- Brian Hayes. Computing science: The easiest hard problem. *American Scientist*, 90(2):113–117, 2002.
- Michael Holzhauser and Sven O Krumke. An fptas for the parametric knapsack problem. *Information Processing Letters*, 126:43–47, 2017.
- John N Hooker and H Paul Williams. Combining equity and utilitarianism in a mathematical programming model. *Management Science*, 58(9):1682–1693, 2012.
- Mikael Høgsgaard, Panagiotis Karras, Wenyue Ma, Nidhi Rathi, and Chris Schwiegelshohn. Optimally interpolating between ex-ante fairness and welfare, 2023.
- Sham M Kakade, Adam Tauman Kalai, and Katrina Ligett. Playing games with approximation algorithms. In *Proceedings of the thirty-ninth annual ACM symposium on Theory of computing*, pages 546–555, 2007.
- Nathan Kallus and Angela Zhou. The fairness of risk scores beyond classification: Bipartite ranking and the xauc metric. *Advances in neural information processing systems*, 32:3438–3448, 2019.
- Maximilian Kasy and Rediet Abebe. Fairness, equality, and power in algorithmic decision-making. In *Proceedings of the 2021 ACM Conference on Fairness, Accountability, and Transparency*, pages 576–586, 2021.
- Michael Kearns, Seth Neel, Aaron Roth, and Zhiwei Steven Wu. Preventing fairness gerrymandering: Auditing and learning for subgroup fairness. In *International Conference on Machine Learning*, pages 2564–2572, 2018.
- A Gurhan Kok, Marshall L Fisher, and Ramnath Vaidyanathan. Assortment planning: Review of literature and industry practice. *Retail supply chain management*, 122:99–153, 2008.
- Caitlin Kuhlman, MaryAnn VanValkenburg, and Elke Rundensteiner. Fare: Diagnostics for fair ranking using pairwise error metrics. In *The World Wide Web Conference*, pages 2936–2942, 2019.
- Sumit Kunnumkal and Victor Martínez-de Albéniz. Tractable approximations for assortment planning with product costs. *Operations Research*, 67(2):436–452, 2019.
- Sumit Kunnumkal, Paat Rusmevichientong, and Huseyin Topaloglu. Assortment optimization under multinomial logit model with product costs. 2010. URL https://drive.google.com/file/d/1fkGNk_7sPdo24T7WZAE51isRvm4vzjVR.

-
- Matt J Kusner, Joshua R Loftus, Chris Russell, and Ricardo Silva. Counterfactual fairness. *arXiv preprint arXiv:1703.06856*, 2017.
- Tian Lan, David Kao, Mung Chiang, and Ashutosh Sabharwal. An axiomatic theory of fairness in network resource allocation. In *Proceedings of the 29th Conference on Information Communications, INFOCOM'10*, page 1343–1351. IEEE Press, 2010. ISBN 9781424458363.
- LinkedIn. A closer look at how linkedin integrates fairness into its ai products. <http://www.linkedin.com/blog/engineering/fairness/a-closer-look-at-how-linkedin-integrates-fairness-into-its-ai-pr>, 2022.
- Wentao Lu, Ozge Sahin, and Ruxian Wang. A simple way towards fair assortment planning: Algorithms and welfare implications. *Available at SSRN 4514495*, 2023.
- Will Ma, Pan Xu, and Yifan Xu. Fairness maximization among offline agents in online-matching markets. *arXiv preprint arXiv:2109.08934*, 2021.
- Vahideh Manshadi, Rad Niazadeh, and Scott Rodilitz. Fair dynamic rationing. *Available at SSRN 3775895*, 2021.
- Nimrod Megiddo and Arie Tamir. Linear time algorithms for some separable quadratic programming problems. *Operations Research Letters*, 13(4):203–211, 1993. ISSN 0167-6377.
- Jeonghoon Mo and Jean Walrand. Fair end-to-end window-based congestion control. *IEEE/ACM Trans. Netw.*, 8(5):556–567, oct 2000. ISSN 1063-6692.
- Justin Mulvany and Ramandeep S Randhawa. Fair scheduling of heterogeneous customer populations. *Available at SSRN 3803016*, 2021.
- Harikrishna Narasimhan, Andrew Cotter, Maya Gupta, and Serena Wang. Pairwise fairness for ranking and regression. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 5248–5255, 2020.
- Rad Niazadeh, Negin Golrezaei, Joshua R Wang, Fransisca Susan, and Ashwinkumar Badanidiyuru. Online learning via offline greedy algorithms: Applications in market design and optimization. In *Proceedings of the 22nd ACM Conference on Economics and Computation*, pages 737–738, 2021.
- Official Journal of the European Union. Regulation (eu) 2022/1925 of the european parliament and of the council of 14 september 2022 on contestable and fair markets in the digital sector and amending directives (eu) 2019/1937 and (eu) 2020/1828 (digital markets act). <https://eur-lex.europa.eu/legal-content/EN/TXT/?uri=CELEX%3A32022R1925>, 2023. Accessed: 2023-04-19.
- Manfred Padberg. *Linear optimization and extensions*, volume 12. Springer Science & Business Media, 2013.
- Gourab K Patro, Lorenzo Porcaro, Laura Mitchell, Qiuyue Zhang, Meike Zehlike, and Nikhil Garg. Fair ranking: a critical review, challenges, and future directions. In *2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 1929–1942, 2022.

- Paat Rusmevichientong, Zuo-Jun Max Shen, and David B Shmoys. Dynamic assortment optimization with a multinomial logit choice model and capacity constraint. *Operations research*, 58(6):1666–1680, 2010.
- Jakob Schoeffer, Alexander Ritchie, Keziah Naggita, Faidra Monachou, Jessie Finocchiaro, and Marc Juarez. Online platforms and the fair exposure problem under homophily. *arXiv preprint arXiv:2202.09727*, 2022.
- Search Engine Journal. Amazon’s search engine ranking algorithm: What marketers need to know. <https://www.searchenginejournal.com/amazon-search-engine-ranking-algorithm-explained/>, 2018. Accessed: 2022-05-22.
- Sean R. Sinclair, Gauri Jain, Siddhartha Banerjee, and Christina Lee Yu. Sequential fair allocation: Achieving the optimal envy-efficiency tradeoff curve, 2021.
- Ashudeep Singh and Thorsten Joachims. Fairness of exposure in rankings. In *Proceedings of the 24th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining*, pages 2219–2228, 2018.
- Ashudeep Singh and Thorsten Joachims. Policy learning for fairness in ranking. In *Conference on Neural Information Processing Systems (NeurIPS 2019)*, 2019.
- Ashudeep Singh, David Kempe, and Thorsten Joachims. Fairness in ranking under uncertainty. *Advances in Neural Information Processing Systems*, 34, 2021.
- The New York Times. Food businesses lose faith in instagram after algorithm changes. <https://www.nytimes.com/2022/03/22/dining/instagram-algorithm-reels.html>, 2022. Accessed: 2022-03-22.
- Kenneth Train. *Qualitative choice analysis: Theory, econometrics, and an application to automobile demand*, volume 10. MIT press, 1986.
- Kenneth E Train. *Discrete choice methods with simulation*. Cambridge university press, 2009.
- Berk Ustun, Yang Liu, and David Parkes. Fairness without harm: Decoupled classifiers with preference guarantees. In *International Conference on Machine Learning*, pages 6373–6382. PMLR, 2019.
- Yao Wu, Jian Cao, Guandong Xu, and Yudong Tan. Tfrom: A two-sided fairness-aware recommendation model for both customers and providers. In *Proceedings of the 44th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 1013–1022, 2021.
- Muhammad Bilal Zafar, Isabel Valera, Manuel Gomez-Rodriguez, and Krishna P Gummadi. Fairness constraints: A flexible approach for fair classification. *The Journal of Machine Learning Research*, 20(1): 2737–2778, 2019.

Appendices

Appendix A: Applicability of our Framework under Alternative Fairness Notions

Our Ellipsoid-based framework and approximation methods can readily handle alternative fairness notions beyond pairwise fairness studied in this work.

For example, in a recent follow-up work Lu et al. (2023), the authors studied an alternative fairness constraint in assortment planning, where the fairness constraint ensures that each item i receives at least γ_i amount of visibility. The cardinality-constrained version of this problem can be formulated as follows:

$$\begin{aligned} \max_{p(S) \geq 0, |S| \leq K} \quad & \sum_{S: |S| \leq K} p(S) \cdot \text{REV}(S) \\ \text{s.t.} \quad & \sum_{S: i \in S} p(S) \geq \gamma_i, \quad \forall i \in [n], \\ & \sum_{S: |S| \leq K} p(S) \leq 1. \end{aligned}$$

Note that to solve the above problem, one can follow the same procedure in Section 5.2 and formulate the dual counterpart of the problem, which is:

$$\min_{\rho, z_i \geq 0} \quad \rho - \sum_{i \in [n]} \gamma_i z_i \quad \text{s.t.} \quad \rho - \sum_{i \in S} z_i \geq \text{REV}(S), \quad \forall S: |S| \leq K$$

where $z_i \geq 0$ is the dual variable associated with the fairness constraint of item i and $\rho \geq 0$ is the dual variable associated with the probability distribution constraint. By the same arguments as in Theorem 5, to find a β -approx. solution to the problem above, it suffices to find a β -approx. solution to the following:

$$\max_{S: |S| \leq K} \left[\sum_{i \in S} z_i + \text{REV}(S) \right].$$

Note that the maximization problem above is essentially a capacitated assortment planning problem with fixed costs, where $-z_i$ can be viewed as the fixed cost of item i . Since our proposed 1/2-approx. algorithm and FPTAS in Sections 7 and 8 can tackle capacitated assortment planning problem with arbitrary fixed costs, our 1/2-approx. and FPTAS fair Ellipsoid-based algorithms naturally handle the assortment planning problem that adopts this alternative fairness notion.

Appendix B: Details on the Ellipsoid Method

In this section, we provide more details on the Ellipsoid method used in Step 1 of the fair Ellipsoid-based algorithm, proposed in Section 5.3. Recall that in Section 5.3, we assume that we have access to a polynomial-time algorithm \mathcal{A} that gives a β -approx. solution for Problem (SUB-DUAL(\mathbf{z} , K)). We will use algorithm \mathcal{A} within the Ellipsoid method, as part of our approximate separation oracle.

In Step 1 of the fair Ellipsoid-based algorithm, we apply the Ellipsoid method, outlined in Algorithm 3, to solve Problem (FAIR-DUAL). Here, we restate Problem (FAIR-DUAL):

$$\begin{aligned} \text{FAIR-DUAL} = \min_{\rho \geq 0, \mathbf{z} \geq \mathbf{0}} \quad & \rho + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij} \\ \text{s.t.} \quad & \sum_{i \in S} \left(\sum_{j=1, j \neq i}^n (z_{ij} - z_{ji}) q_j \right) + \rho \geq \text{REV}(S), \quad \forall S: |S| \leq K \end{aligned} \tag{FAIR-DUAL}$$

For simplicity of notation, we can rewrite Problem (FAIR-DUAL) in the form of $\min\{\mathbf{d}^\top \mathbf{s} : \mathbf{A}\mathbf{s} \geq \mathbf{b}, \mathbf{s} \geq 0\}$. Here, $\mathbf{s} = (\mathbf{z}, \rho) \in \mathbb{R}^{n^2+1}$ is the vector of decision variables. \mathbf{d} is a vector of size $n^2 + 1$ chosen such that $\mathbf{d}^\top \mathbf{s} = \rho + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij}$. \mathbf{A} is a $N \times (n^2 + 1)$ matrix and \mathbf{b} is a vector of size N , where $N = |\{S \subseteq [n] : |S| \leq K\}|$. Let each row of \mathbf{A} and \mathbf{b} be indexed by a set S with $|S| \leq K$. The matrix \mathbf{A} is chosen such that $\mathbf{a}_S^\top \mathbf{s} = \sum_{i \in S} \left(\sum_{j \in [n], j \neq i} (z_{ij} - z_{ji}) q_j \right) + \rho$, where \mathbf{a}_S is the row vector in \mathbf{A} indexed by set S . The vector \mathbf{b} is chosen such that $b_S = \text{REV}(S)$, where b_S is component of \mathbf{b} indexed by set S .

Within the Ellipsoid method, we keep track of the following quantities: (i) $(\mathbf{z}, \rho) \in \mathbb{R}^{n^2+1}$, the center of the current ellipsoid, which is also the current solution to the dual problem; note that this solution might not be feasible for the dual problem. (ii) (\mathbf{z}^*, ρ^*) , the best feasible solution to the dual problem we have found so far. We initialize (\mathbf{z}^*, ρ^*) to be $(\mathbf{0}_{n^2}, 1)$, where $\mathbf{0}_{n^2}$ is a zero vector of length n^2 ; this is always a feasible solution to Problem (FAIR-DUAL). (iii) the current best objective OBJ. We initialize it to be 1, which is the objective of $(\mathbf{0}_{n^2}, 1)$. (iv) a positive-definite matrix $\mathbf{D} \in \mathbb{R}^{(n^2+1) \times (n^2+1)}$, which represents the shape of the ellipsoid. (v) a collection \mathcal{V} of sets that have violated the dual fairness constraint during the execution of the Ellipsoid method.

At a high level, the Ellipsoid method for Problem (FAIR-DUAL) (Algorithm 3) works as follows. At each iteration, it generates an ellipsoid E centered at the current solution $\mathbf{s} = (\mathbf{z}, \rho)$, which is defined as:

$$E = \{\mathbf{x} : (\mathbf{x} - \mathbf{s})^\top \mathbf{D}^{-1} (\mathbf{x} - \mathbf{s}) \leq 1\}.$$

By design of the Ellipsoid method, the ellipsoid E always contains the intersection of the feasibility region of Problem (FAIR-DUAL) and the half space $\{\mathbf{s} : \mathbf{d}^\top \mathbf{s} < \text{OBJ}\}$.

In Step 2(a), the algorithm first attempts to check if the current solution is feasible and improves our objective, via finding a violated constraint. There are three types of violated constraints that we consider: (i) the *objective constraint* is violated if the current solution (\mathbf{z}, ρ) does not yield an objective less than OBJ; (ii) the *non-negativity constraint* is violated if any of the entries in (\mathbf{z}, ρ) is negative; (iii) the *dual fairness constraint* is violated if we can find a set S with $|S| \leq K$ such that $\text{REV-COST}(S, \mathbf{z}) > \rho$. Note that when examining the dual fairness constraint, instead of examining the dual fairness constraint for every S such that $|S| \leq K$, we instead use an approximate separation oracle that relies on algorithm \mathcal{A} . First, it applies the β -approx. algorithm \mathcal{A} to Problem (SUB-DUAL(\mathbf{z}, K)), and gets $S_{\mathcal{A}}$ with $|S_{\mathcal{A}}| \leq K$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}, K)$. Then, if $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) > \rho$, set $S_{\mathcal{A}}$ has violated the dual fairness constraint. Otherwise, the solution (\mathbf{z}, ρ) is declared feasible. In the proof of Theorem 5, we will show that the use of the approximate separation oracle might cause the solution (\mathbf{z}^*, ρ^*) returned by the Ellipsoid method to be infeasible for Problem (FAIR-DUAL); however, the objective OBJ returned by the Ellipsoid method would stay close to the true optimal objective FAIR-DUAL.

Algorithm 3 The Ellipsoid method for Problem (FAIR-DUAL)

Input: Starting solution (\mathbf{z}_0, ρ_0) , starting matrix \mathbf{D}_0 , maximum number of iterations t_{\max} , a β -approx. algorithm \mathcal{A} for Problem (SUB-DUAL(\mathbf{z}, K)). Here, we rewrite Problem (FAIR-DUAL) in the form of $\min\{\mathbf{d}^\top \mathbf{s} : \mathbf{A}\mathbf{s} \geq \mathbf{b}, \mathbf{s} \geq 0\}$. The matrix \mathbf{A} is chosen such that $\mathbf{a}_S^\top \mathbf{s} = \sum_{i \in S} \left(\sum_{j \in [n], j \neq i} (z_{ij} - z_{ji}) q_j \right) + \rho$, where \mathbf{a}_S is the row vector in \mathbf{A} indexed by set S . The vector \mathbf{b} is chosen such that $b_S = \text{REV}(S)$, where b_S is component of \mathbf{b} indexed by set S .

Output: (i) A collection \mathcal{V} of sets that have violated constraints. (ii) An optimal, feasible solution $(\mathbf{z}^*, \rho^*) \geq 0$ (iii) optimal objective OBJ.

1. **Initialization.** $(\mathbf{z}, \rho) = (\mathbf{z}_0, \rho_0)$, $(\mathbf{z}^*, \rho^*) = (0, 1)$, OBJ = 1, $\mathbf{D} = \mathbf{D}_0$, $\mathcal{V} = \emptyset$, and $t = 0$.

2. While $t \leq t_{\max}$:

(a) **Find a violated constraint.**

- Check if we can reduce the objective further. If $\rho + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij}^n \geq \text{OBJ}$, set $\mathbf{a} = -\mathbf{d}$ and go to Step 2(b).
- Check if the non-negativity constraints hold. If $\rho < 0$, set $\mathbf{a} = \mathbf{e}_{n^2+1}$; else if $z_{ij} < 0$ for some (i, j) , set $\mathbf{a} = \mathbf{e}_{i \cdot n + j}$, where \mathbf{e}_k is the unit vector with a 1 in the k th coordinate. Go to Step 2(b).
- Check if the dual fairness constraints holds using the approximate separation oracle.
 - Apply the β -approx. algorithm \mathcal{A} to Problem (SUB-DUAL(\mathbf{z}, K)) that returns $S_{\mathcal{A}}$ with $|S_{\mathcal{A}}| \leq K$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}, K)$.
 - If $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) > \rho$, then set $S_{\mathcal{A}}$ is violating the constraint. Set $\mathbf{a} = \mathbf{a}_S$ and add $S_{\mathcal{A}}$ to \mathcal{V} .
- If we have found no violated constraint, update our best feasible solution and its objective:

$$(\mathbf{z}^*, \rho^*) \leftarrow (\mathbf{z}, \rho) \quad \text{and} \quad \text{OBJ} \leftarrow \rho^* + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij}^*.$$

Then, go back to the start of Step 2 and re-enter the while loop.

(b) **Use the violated constraint to decrease the volume of the ellipsoid and find a new solution.**

$$\begin{aligned} (\mathbf{z}, \rho) &\leftarrow (\mathbf{z}, \rho) + \frac{1}{n^2 + 2} \frac{\mathbf{D}\mathbf{a}}{\sqrt{\mathbf{a}^\top \mathbf{D}\mathbf{a}}}; \\ \mathbf{D} &\leftarrow \frac{(n^2 + 1)^2}{(n^2 + 1)^2 - 1} \left(\mathbf{D} - \frac{2}{n^2 + 2} \frac{\mathbf{D}\mathbf{a}\mathbf{a}^\top \mathbf{D}}{\mathbf{a}^\top \mathbf{D}\mathbf{a}} \right). \end{aligned}$$

(c) $t \leftarrow t + 1$.

3. **The ellipsoid is sufficiently small.** Return $\mathcal{V}, (\mathbf{z}^*, \rho^*), \text{OBJ}$.

If we have found one of the constraints violated in Step 2(a), which can be written as $\mathbf{a}^\top \mathbf{s} < b$ for some $\mathbf{a} \in \mathbb{R}^{n^2+1}$ and $b \in \mathbb{R}$, we then go to Step 2(b) and construct a new ellipsoid E' . We do so by updating the center of the ellipsoid (\mathbf{z}, ρ) and the positive-definite matrix \mathbf{D} that defines our ellipsoid; see Step 2(b) (with slight differences in notations).

$$(\mathbf{z}', \rho') \leftarrow (\mathbf{z}, \rho) + \frac{1}{n^2 + 2} \frac{\mathbf{D}\mathbf{a}}{\sqrt{\mathbf{a}^\top \mathbf{D}\mathbf{a}}} \quad \text{and} \quad \mathbf{D}' \leftarrow \frac{(n^2 + 1)^2}{(n^2 + 1)^2 - 1} \left(\mathbf{D} - \frac{2}{n^2 + 2} \frac{\mathbf{D}\mathbf{a}\mathbf{a}^\top \mathbf{D}}{\mathbf{a}^\top \mathbf{D}\mathbf{a}} \right).$$

The volume of the new ellipsoid E' defined by (\mathbf{z}', ρ') and \mathbf{D}' is only a fraction of the volume of the previous ellipsoid E . In addition, this new ellipsoid has a new center $\mathbf{s}' = (\mathbf{z}', \rho')$ that satisfies $\mathbf{a}^\top \mathbf{s}' > \mathbf{a}^\top \mathbf{s}$. We then start a new iteration, in which we check whether the new solution (\mathbf{z}', ρ') is feasible and improves our objective.

On the other hand, if we have found no violated constraint, this means that our current solution (\mathbf{z}, ρ) is (approximately) feasible and also improves the objective OBJ obtained by the previous best feasible solution (\mathbf{z}^*, ρ^*) . If this happens, we then set the current solution to be our current best feasible solution, i.e., $(\mathbf{z}^*, \rho^*) \leftarrow (\mathbf{z}, \rho)$, and update the current optimal objective OBJ to be the objective obtained by the current solution. Then, we start a new iteration by re-entering Step 2, and seeks to find a feasible solution that can further reduce our objective function.

The Ellipsoid method for Problem (FAIR-DUAL) terminates when the ellipsoid E is sufficiently small, by selecting a sufficiently large t_{\max} . Recall that the ellipsoid E always contains the intersection of the feasibility region of Problem (FAIR-DUAL) and the half space $\{\mathbf{s} : \mathbf{d}^\top \mathbf{s} < \text{OBJ}\}$. Intuitively, when the ellipsoid gets reduced to a sufficiently small volume, it is unlikely that there exists a feasible solution that can further reduce our objective. It is shown, in Bertsimas and Tsitsiklis (1997), that given a separation oracle, the Ellipsoid method is guaranteed to terminate in $t_{\max} = \mathcal{O}(n^{12} \log(nq_{\max}))$ iterations, where q_{\max} is the the maximum *adjusted* measurement of quality (see definition in Section 5.3). When the Ellipsoid method terminates, it returns the following: (i) the collection \mathcal{V} of sets that have violated the dual fairness constraint; (ii) the optimal solution (\mathbf{z}^*, ρ^*) and (iii) the optimal objective OBJ. Note that this collection \mathcal{V} would then play an important role in Step 2 of the fair Ellipsoid-based algorithm. As discussed in Section 5.3, we use the collection \mathcal{V} to reduce the number of variables to be considered in the primal problem (FAIR) to a polynomial size.

Appendix C: Details on the Column Generation Method

In this section, we provide a brief description of the column generation method for Problem (FAIR) (see Bertsimas and Tsitsiklis (1997) for more information on this method). We have employed this method, in combination with our approximation algorithms (1/2-approx. algorithm and FPTAS) for Problem (SUB-DUAL(\mathbf{z}, K)), to numerically solve the fair assortment planning problems in Sections 9 and E. While there is no polynomial-time guarantee for the column generation method, it is often computationally efficient in practice and serves as a viable alternative to the fair Ellipsoid-based framework in Section 5.3, which theoretically establishes that Problem (FAIR) can be solved near-optimally in polynomial time.

In Algorithm 4, we outline the column generation method for Problem (FAIR). At a high level, the column generation considers two optimization problems—a master problem and a subproblem. The master problem is a simplified version of the original optimization problem, which, in our case, is Problem (FAIR), restricted to a subset of variables. The subproblem is a new problem that identifies one additional variable that we can consider in the master problem, which would further improve the objective function. In our case, the subproblem reduces to solving Problem (SUB-DUAL(\mathbf{z}, K)).

Algorithm 4 Column generation method for Problem (FAIR)

Input: Problem instance $\Theta = (\mathbf{a}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q})$, a β -approx. algorithm \mathcal{A} for Problem (SUB-DUAL(\mathbf{z}, K)).

Output: A β -approx. solution $\widehat{p}(S)$ to Problem (FAIR).

1. **Initialization.** Initialize the collection of sets to include only sets with size one: $\mathcal{V} = \{\{1\}, \dots, \{n\}\}$.
 2. Repeatedly solve the master and the subproblem until the stopping rule is satisfied.
 - (a) **Solve the master problem.** Solve Problem (FAIR) with $p(S) = 0$ for all $S \notin \mathcal{V}$, which returns primal solution $\widehat{p}(S)$ and dual solution (\mathbf{z}, ρ) .
 - (b) **Solve the subproblem.** Apply the β -approx. algorithm \mathcal{A} to solving Problem (SUB-DUAL(\mathbf{z}, K)), which returns $S_{\mathcal{A}}$ with $|S_{\mathcal{A}}| \leq K$, $S_{\mathcal{A}} \notin \mathcal{V}$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}, K)$.
 - (c) **Check whether $S_{\mathcal{A}}$ can improve the objective of Problem (FAIR)**
 - If $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) > \rho$, then set $S_{\mathcal{A}}$ is an improving variable. Add $S_{\mathcal{A}}$ to \mathcal{V} and go back to Step 2(a).
 - *Stopping rule.* If $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) \leq \rho$, return the solution $\widehat{p}(S)$.
-

At each iteration of the column generation method, we first solve the master problem, i.e., Problem (FAIR), with only a subset of variables under consideration. That is, we only consider a restricted collection of sets $\mathcal{V} \subset \{S \subset [n] : |S| \leq K\}$ when solving Problem (FAIR), and let $p(S) = 0$ for all $S \notin \mathcal{V}$. We then need to solve a subproblem to determine if there is an additional set $S \notin \mathcal{V}$ that we wish to consider, in order to improve the objective of Problem (FAIR). To do that, we can simply compute the *reduced cost* associated with each S such that $S \notin \mathcal{V}$ (see Section M for a formal definition of the reduced cost) and pick the set S with the highest reduced cost. Given problem instance $\Theta = (\mathbf{a}, \mathbf{b}, \mathbf{r}, \mathbf{w}, \mathbf{q})$ and the dual variables (\mathbf{z}, ρ) , the reduced cost C_S associated with each set $S \notin \mathcal{V}$ is:

$$\bar{C}_S = \text{REV-COST}(S, \mathbf{z}) - \rho.$$

Hence, if we found $S \notin \mathcal{V}$ such that $\text{REV-COST}(S, \mathbf{z}) > \rho$, adding it to the collection \mathcal{V} and resolving Problem (FAIR) would allow us to obtain a better objective. On the other hand, if there exists no set $S \notin \mathcal{V}$ with a positive reduced cost (i.e., $\text{REV-COST}(S, \mathbf{z}) \leq \rho$ for all $S \notin \mathcal{V}$), the optimality conditions of Problem (FAIR) are satisfied (see Section M) and the current solution of Problem (FAIR) is optimal. In Algorithm 4, in order to solve the subproblem and find the set S with the highest reduced cost, we apply a β -approx. algorithm \mathcal{A} for Problem (SUB-DUAL(\mathbf{z}, K)), which returns a β -approx. solution $S_{\mathcal{A}}$ for $\max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z})$. We then compare $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z})$ with the dual variable ρ : (i) if $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}) > \rho$, adding $S_{\mathcal{A}}$ to the collection \mathcal{V} and resolving Problem (FAIR) would improve the objective; (ii) otherwise, we simply terminate our algorithm and return the current solution.

Using the same proof presented in Segment 1 of proof for Theorem 5, it can be shown that Algorithm 4, utilizing the column generation method, returns a β -approx. feasible solution $\widehat{p}(S)$, $S \subset [n]$, to Problem (FAIR). Since the number of columns (variables) is finite, the column generation method is also guaranteed to terminate in finite, but not necessarily polynomial, number of iterations.

Appendix D: A Modified 1/2-Approx. Algorithm as a Subroutine of FPTAS

In Algorithm 5, we present a slightly modified version of the 1/2-approx. algorithm (Algorithm 1) from Section 7, which we use as a subroutine of our FPTAS (Algorithm 2) from Section 8.

Algorithm 5 $\mathcal{A}_{1/2}^m(\mathbf{w}, \varepsilon, \mathbf{c}, K, I)$: Modified 1/2-approx. algorithm for $\max_{W \in I} \text{KP}(W, K)$

Input: Same input as Algorithm 1

Output: In addition to assortment S_I , return partition $\Pi_I = \{I_\ell : \ell = 0, 1, \dots, L\}$, where $I_\ell = [W_\ell, W_{\ell+1})$ with $I = [W_0, W_L)$ and $W_0 < W_1 < \dots < W_L$, and a mapping \mathcal{D} that maps each I_ℓ to its 1/2-approx. solution.

1. **Initialization.** In addition to step (1a) and (1b) in Algorithm 1, initialize partition $\Pi_I = \emptyset$, and mapping \mathcal{D} .
2. **Interval** $I_{\text{low}} = I \cap [0, W_{\text{TH}})$. If I_{low} is non-empty:
 - (a) For $j = 1, \dots, K - 1$, in addition to step (2a) in Algorithm 1, if $w(H_j) \in I$, let $I' = [w(H_j), w(H_{j+1})) \cap I$ and update:

$$(\Pi_I, \mathcal{D}) \leftarrow \text{update}(I', H_j, \{h_{j+1}\}, \Pi_I, \mathcal{D})$$
 - (b) Same stopping rule as step (2b) in Algorithm 1

3. **Interval** $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$. If I_{high} is non-empty:

- (a) **Initialize the profile.** In addition to step (3a)-i and (3a)-ii, of Algorithm 1 when $W_{\min} \geq W_{\text{TH}}$, with the parameters obtained in step (3a)-ii, let $I' = [W_{\min}, w(P_1(W_{\min})) + w_j) \cap I$ and update

$$(\Pi_I, \mathcal{D}) \leftarrow \text{update}(I', P_1(W_{\min}) \cup \{i\}, \{j\}, \Pi_I, \mathcal{D}).$$

- (b) **Adaptively partitioning** I_{high} . While there exist $i \in P_1, j \in P_0$ such that $w_i < w_j$:

In addition to and after steps (3b)-i, (3b)-ii, and before step (3b)-iii in Algorithm 1, let $I' = [W_{\text{next}}, W_{\text{next}} - w_{i^*} + w_{j^*}) \cap I$ and update:

$$(\Pi_I, \mathcal{D}) \leftarrow \text{update}(I', P_1, \{j^*\}, \Pi_I, \mathcal{D}).$$

4. **Termination Step.** Return Π_I and mapping \mathcal{D} .
-

Algorithm 5 follows the same procedures as in Algorithm 1. The only difference is that it additionally keeps track of the partition of the well-behaving interval I that we obtained in Step 2 and 3. Instead of directly returning the 1/2-approx. solution to $\max_{W \in I} \text{KP}(W, K)$, it returns the following:

1. Partition of I , denoted by $\Pi_I = \{I_\ell : \ell = 0, 1, \dots, L\}$ where $I_\ell = [W_\ell, W_{\ell+1})$ with $I = [W_0, W_L)$ and $W_0 < W_1 < \dots < W_L$.
2. A mapping \mathcal{D} that maps each sub-interval I_ℓ to its 1/2-approx. solution $\mathcal{D}(I_\ell)$. That is, for any $W \in I_\ell$,

$$\sum_{i \in \mathcal{D}(I_\ell)} u_i(W) \geq \frac{1}{2} \text{KP}(W, K) \quad \text{and} \quad \sum_{i \in \mathcal{D}(I_\ell)} w_i \leq W.$$

Both the partition Π_I and the mapping \mathcal{D} would be used in the design of our FPTAS (Algorithm 2) when we rescale the utility for each item.

Whenever we find a well-behaving sub-interval $I' \in I$ on which the profile $\mathcal{P}(W) = (P_1, \{i, j\}, P_0)$ is the same for all $W \in I'$, we know from Lemma 1 that there are at most two candidate sets,

denoted by S_0 and S_1 , that might serve as the 1/2-approx. solution for $W \in I'$. For instance, if $i, j \neq 0$ and $w_i \leq w_j$, then $S_0 = P_1 \cup \{i\}$ and $S_1 = \{j\}$ would be the two candidates. Given this, the following procedure differentiates our original 1/2-approx. algorithm (Algorithm 1) and the modified algorithm (Algorithm 5):

1. In our original 1/2-approx. algorithm (Algorithm 1), we simply add both S_0 and S_1 to the collection of assortments \mathcal{C}_I without determining which set is the exact 1/2-approx. set.
2. In the slightly modified 1/2-approx. algorithm (Algorithm 5), we instead try to determine the exact 1/2-approx. set for every $W \in I'$. Since the 1/2-approx. solution is limited to at most 2 candidates S_0 , and S_1 and the ordering between $\sum_{i \in S_0} u_i(W)$ and $\sum_{i \in S_1} u_i(W)$ only changes at \widehat{W} such that $\sum_{i \in S_0} u_i(\widehat{W}) = \sum_{i \in S_1} u_i(\widehat{W})$ (defined in Eq. (11)), we would need to divide I' at most once to create a one-to-one mapping \mathcal{D} between a sub-interval and its 1/2-approx. solution.

Hence, in Algorithm 5, when we find an interval I' on which the profile stays the same, we feed it and its candidate 1/2-approx. sets S_0, S_1 into our **update** subroutine (detailed in Algorithm 6), which determines the exact 1/2-approx. solution for $W \in I'$ using the idea above, and update our partition Π_I and mapping \mathcal{D} accordingly.

Algorithm 6 $\text{update}(I', S_0, S_1, \Pi_I, \mathcal{D}_I)$

Input: a well-behaving interval $I' = [\underline{W}, \overline{W})$ on which the profile does not change, the two candidate 1/2-approx. solutions S_0, S_1 , partition Π_I , mapping \mathcal{D}

1. Compute the utility generated by S_0, S_1 at two end points of I' :

$$\underline{U}_0 = \sum_{i \in S_0} u_i(\underline{W}), \quad \underline{U}_1 = \sum_{i \in S_1} u_i(\underline{W}), \quad \overline{U}_0 = \sum_{i \in S_0} u_i(\overline{W}), \quad \overline{U}_1 = \sum_{i \in S_1} u_i(\overline{W}).$$

Compute the dividing point:

$$\widehat{W} = \frac{\sum_{i \in S_0} \zeta_i w_i - \sum_{i \in S_1} \zeta_i w_i}{\sum_{i \in S_0} \zeta_i - \sum_{i \in S_1} \zeta_i} - 1. \quad (11)$$

and let $I'_0 = [\underline{W}, \widehat{W})$ and $I'_1 = [\widehat{W}, \overline{W})$.

2. Update the partition Π_I , the collection \mathcal{C}_I and the mapping \mathcal{D} :
 - **Case 1:** If $\underline{U}_0 \geq \underline{U}_1$ and $\overline{U}_0 \geq \overline{U}_1$, S_0 is the 1/2-approx. solution for all $W \in I'$. Add I' to Π_I . Set $\mathcal{D}(I') \leftarrow S_0$.
 - **Case 2:** If $\underline{U}_1 \geq \underline{U}_0$ and $\overline{U}_1 \geq \overline{U}_0$, S_1 is the 1/2-approx. solution for all $W \in I'$. Add I' to Π_I . Set $\mathcal{D}(I') \leftarrow S_1$.
 - **Case 3:** If $\underline{U}_0 \geq \underline{U}_1$ and $\overline{U}_1 \geq \overline{U}_0$. S_0 is the 1/2-approx. solution for $W \in I'_0$ and S_1 is the 1/2-approx. solution for $W \in I'_1$. Add I'_0, I'_1 to Π_I . Set $\mathcal{D}(I'_0) \leftarrow S_0, \mathcal{D}(I'_1) \leftarrow S_1$.
 - **Case 4:** If $\underline{U}_1 \geq \underline{U}_0$ and $\overline{U}_0 \geq \overline{U}_1$. S_1 is the 1/2-approx. solution for $W \in I'_0$ and S_0 is the 1/2-approx. solution for $W \in I'_1$. Add I'_0, I'_1 to Π_I . Set $\mathcal{D}(I'_0) \leftarrow S_1, \mathcal{D}(I'_1) \leftarrow S_0$.
 3. Return the updated partition Π_I and mapping \mathcal{D} .
-

Using the same proof for Theorem 7, we have the following corollary:

COROLLARY 1 (Modified 1/2-Approx. Algorithm). Consider a well-behaving interval $I \subset [0, \infty)$ per Definition 1. For any $\mathbf{z} \geq \mathbf{0}$, Algorithm 5 returns a partition $\Pi_I = \{I_\ell\}_{\ell \in [L]}$ of interval I and a mapping \mathcal{D} such that $\mathcal{D}(I_\ell)$ is a feasible 1/2-approx. set for any $W \in I_\ell \subseteq \Pi_I$. That is, for any $W \in I_\ell$,

$$\sum_{i \in \mathcal{D}(I_\ell)} u_i(W) \geq \frac{1}{2} \text{KP}(W, K) \quad \text{and} \quad \sum_{i \in \mathcal{D}(I_\ell)} w_i \leq W.$$

The overall complexity of Algorithm 5 is in the order of $\mathcal{O}(n^2 \log n + nK^2)$.

Note that the runtime of Algorithm 5 is the same as that of Algorithm 1. This is because determining the identity of the 1/2-approx. set for each well-behaving interval I' with the same profile using Algorithm 6 is an $O(1)$ operation.

Appendix E: Experiments on Synthetic Data

In this section, we numerically compare the performance of our 1/2-approx. algorithm (Section 7) and FPTAS (Section 8) on a number of synthetically generated datasets, inspired by real-world settings. Similar to our case study in Section 9, here instead of applying the fair Ellipsoid-based framework, we adopted the column generation method in combination with the approximation algorithms for Problem (SUB-DUAL(\mathbf{z}, K)) for better computational performance; see Section C for the details of the column generation method. The approximation ratio of the FPTAS is again set to be $1 - \epsilon = 0.9$.

Our main goal of this section is to examine the performance of our 1/2-approx. algorithm and FPTAS designed for the general setting and investigate the price of fairness in the presence of heterogeneous revenues. In terms of price of fairness, we observe a tradeoff between fairness and expected revenue/number of randomized sets of the platform; in particular, our experiments show how different levels of price sensitivity in the markets would impact the price of fairness differently. In terms of the performance of our approximation algorithms, the 1/2-approx. algorithm is again shown to be a good practical option. Similar to what we observed in our case study in Section 9, the 1/2-approx. algorithm generates solutions of comparable quality as the FPTAS, and displays outstanding runtime performance.

Setup. We consider an assortment planning problem with $n = 10$ items, where the cardinality of the offered assortment is at most $K = 5$. Under this setting, there are a total of $\sum_{k=1}^5 \binom{10}{k} = 637$ different assortments to randomize over.

We generate 100 instances, where in every instance, each $r_i, i \in [n]$ is drawn independently from a uniform distribution in $[0, 1]$, which is the revenue generated by item i . We also draw $\theta_i, i \in [n]$ independently from a uniform distribution in $[0, 0.5]$, which represents other features associated with item i that is independent of its revenue. We then define the popularity score of item i to

be $w_i = \exp(\beta \cdot r_i + \theta_i)$, which correlates the popularity of each item with its revenue and other features (Train 2009). Here, $\beta < 0$ is a price sensitivity parameter that determines the extent to which the price of an item influences its popularity among users. We consider two different values of the price sensitivity parameter: $\beta = -1$ and $\beta = -0.1$. The former represents the case when users are highly sensitive to price differences, while the latter represents the case when users are less reliant on prices in determining the attractiveness of an item. Here, we simply treat the popularity score of each item as its value of quality, i.e., $q_i = w_i$ for $i \in [n]$.


Here, the platform’s goal is to maximize its expected revenue, while being δ -fair for all of its items, where an item’s outcome is its visibility, with δ taking values in $\{0, 0.2, 0.4, 0.6, 0.8, 1.0\}$. We apply our 1/2-approx. algorithm and FPTAS to this problem.

Price of fairness. In Figures 5 and 6 respectively, we examine the impact of fairness constraints on two aspects—the expected revenue and the number of randomized sets—in the near-optimal solutions generated by our 1/2-approx. algorithm and FPTAS. In Figure 5, we see that in both settings (high price sensitivity and low price sensitivity), there exists a tradeoff between fairness and expected revenue, where a fairer platform tends to experience a decrease in the expected revenue. We can see from Figures 5a and 5b that the amount of expected revenue achievable in the absence of fairness constraints is higher in a market with lower price sensitivity. This is because by design of our datasets, in a market with low price sensitivity, the items’ popularity scores are less impacted by their prices, and hence the customers are less likely to walk away with no purchases. However, after we impose the fairness constraints at varying levels, the amount of decrease due to fairness differs in markets with low and high price sensitivities as well. In a market with high price sensitivity, when the platform chooses to be fair with fairness parameter $\delta \in [0, 1]$, the loss in expected revenue, compared to the highest expected revenue achievable in the absence of fairness, ranges from approximately 39.3% to 14.1%. On the other hand, in a market with low price sensitivity, the loss in expected revenue when the platform imposes fairness constraints with $\delta \in [0, 1]$ ranges from 30.3% to 0.15%, which turns out to be much lower.¹¹

We remark that in the setting of heterogeneous revenues, the loss in the expected revenue appears to be higher compared to the setting of uniform revenues (as seen in our case study in Section 9), especially when the market has high price sensitivity. This is mainly because in our synthetic experiments, we evaluate the qualities of items based on their popularity scores, which is negatively correlated with the revenues of items. As a result, a fair platform would allocate more visibility to

¹¹ We remark that when $\delta = 1.0$, the line in the boxplot of Figure 5b exceeds the dashed line that represents the average optimal revenue in the absence of fairness. This is because when $\delta = 1.0$, the revenue generated by our approximate solutions are very close to the optimal attainable revenue in every instance, and the *median* revenue exceeds the average optimal revenue.

items with higher qualities, which might not be the ones with high revenues. In practice, a platform is free to determine how they wish to evaluate the quality of an item by adopting a different quality function $q_i(\cdot)$, as discussed in Section 3.

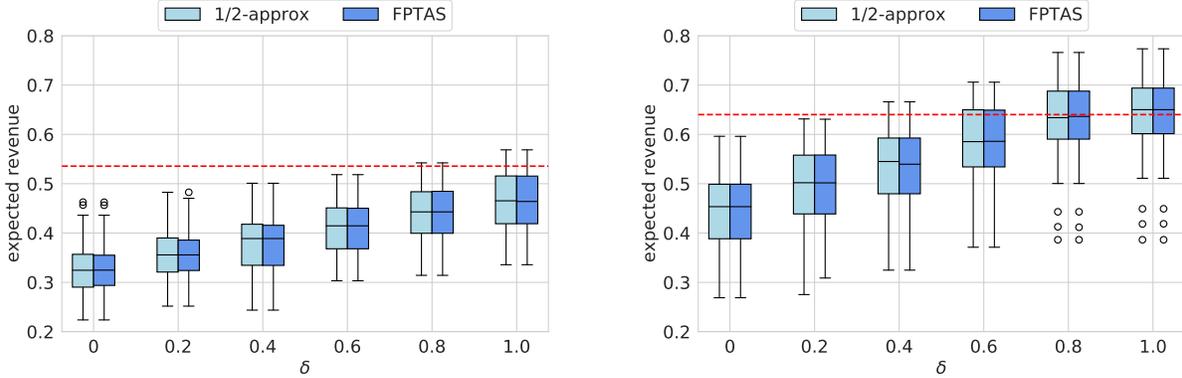


(a) The setting of high price sensitivity ($\beta = -1$).

(b) The setting of low price sensitivity ($\beta = -0.1$).

Figure 5 The boxplots of expected revenue obtained by our 1/2-approx. algorithm and FPTAS under different levels of fairness constraints (i.e., δ). The boxplot extends from the first quartile to the third quartile, with a line at the median. The dashed line is the average optimal revenue in the absence of fairness constraints.

In terms of the number of sets we need to randomize over, what we observe in our synthetic experiments match our observations in Section 9. Figure 6 shows that in both settings with high and low price sensitivity, as δ increases, the average number of sets we need to randomize over decreases and the variance in the number of sets increases. This implies that there are more opportunities to consider a much smaller number of sets as fairness constraints relax.

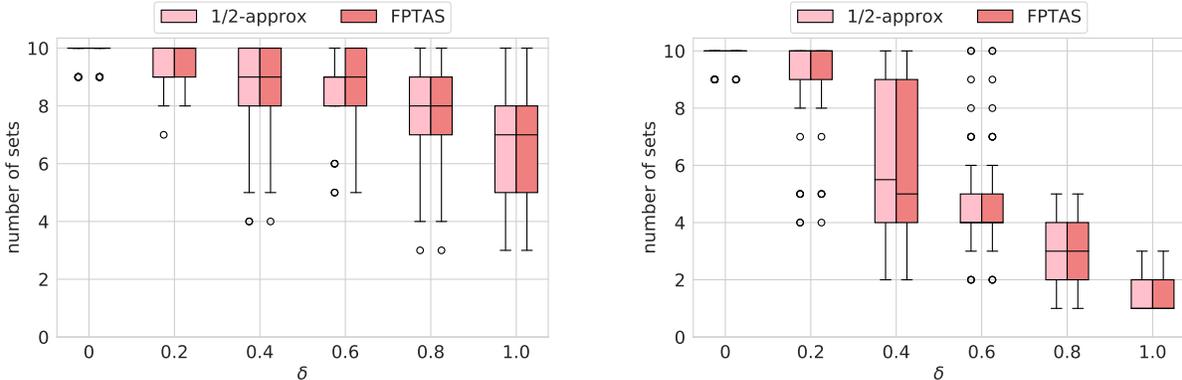

(a) The setting of high price sensitivity ($\beta = -1$).

(b) The setting of low price sensitivity ($\beta = -0.1$).

Figure 6 The boxplots of the number of randomized sets in the approximate solutions generated by our 1/2-approx. algorithm and FPTAS, under different levels of fairness constraints (i.e., δ).

Comparison of 1/2-Approx. Algorithm and FPTAS. We note from Figures 5 and 6 that in both settings and under different levels of fairness constraints, the solutions returned by our 1/2-approx. algorithm and FPTAS are very close to each other, in terms of both the expected revenue

and the number of randomized sets in the near-optimal solutions they produce. From Figure 6, it can be seen that both algorithms generate solutions that only involve a small number (at most 10) assortments. This also matches what we observed in our case study in Section 9. In Table 2, we record the average runtime of the 1/2-approx. algorithm and the FPTAS on all of the synthetically generated instances. We observe that the 1/2-approx. algorithm again demonstrates much faster computational performance than the FPTAS, in terms of both the time taken by a single execution and the total time taken to solving Problem (FAIR). Note that the time taken to solve Problem (FAIR) by both algorithms gets longer for smaller δ , which is because when the fairness constraint gets tighter, the feasibility region of Problem (FAIR) shrinks. Consequently, finding a near-optimal solution becomes more difficult, as at each iteration of the column generation method, the primal objective increases at a slower rate. Therefore, it usually takes more iterations for the column generation method to converge (i.e., when we no longer find a set that violates the dual fairness constraint of Problem (FAIR-DUAL) using our approximation algorithms). Nevertheless, under such a more difficult setting, the 1/2-approx. algorithm still achieves much better runtime results. Given our observations in the synthetic experiments, we consider our 1/2-approx. algorithm to be a viable practical option that not only produces near-optimal solutions far exceeding its theoretical guarantee, but also has fast computational performance.

Table 2 Average runtime comparison of 1/2-approx. and FPTAS algorithms in the synthetic experiments (the runtime is averaged across all instances with low/high price sensitivities).

	δ	0	0.2	0.4	0.6	0.8	1.0
Time taken by a single execution (s)	1/2-approx	8.7×10^{-2}	8.1×10^{-2}	6.7×10^{-2}	5.5×10^{-2}	4.1×10^{-2}	3.2×10^{-2}
	FPTAS	1.9	1.7	1.4	1.3	1.0	7.2×10^{-1}
Total time taken in solving (FAIR) (s)	1/2-approx	2.6	2.1	1.5	1.1	8.1×10^{-1}	5.9×10^{-1}
	FPTAS	47.2	37.4	24.1	19.1	14.9	9.8

Appendix F: Proof of Proposition 1

Here, we restate Problem (FAIR) for reader's convenience.

$$\begin{aligned}
 \text{FAIR} &= \max_{p(S): S \subseteq [n]} \sum_{S: |S| \leq K} p(S) \cdot \text{REV}(S) \\
 \text{s.t.} & \quad q_j \cdot \sum_{S: i \in S} O_i(S) p(S) - q_i \cdot \sum_{S: j \in S} O_j(S) p(S) \leq \delta \cdot q_i q_j \quad i, j \in [n], i \neq j \\
 & \quad \sum_{S: |S| \leq K} p(S) \leq 1 \\
 & \quad p(S) \geq 0 \quad S \subseteq [n], |S| \leq K, \quad (12)
 \end{aligned}$$

We start by showing that Problem (FAIR) admits an optimal basic feasible solution (for definition of basic feasible solution, see Definition 2.9 in Bertsimas and Tsitsiklis (1997) or Section M). Consider

the polyhedron defined by the feasibility region of Problem (FAIR). Note that this polyhedron is (i) nonempty, because $p(S) = 0$ for all $S \subseteq [n], |S| \leq K$ is a feasible solution for any $\delta \geq 0$; (ii) bounded, because $p(S) \in [0, 1]$ for all $S \subseteq [n], |S| \leq K$. Then, by Theorem 2.6 in Bertsimas and Tsitsiklis (1997), there exists at least one extreme point in the polyhedron (for definition of extreme point, see Definition 2.6 in Bertsimas and Tsitsiklis (1997)). Since we have $\text{REV}(S) = \sum_{i \in S} \frac{r_i w_i}{1+w(S)} \leq \bar{r}$ for any S , this implies that $\sum_{S: |S| \leq K} p(S) \text{REV}(S) \leq \bar{r}$; that is, the objective of Problem (FAIR) is also bounded. By Theorem 2.8 in Bertsimas and Tsitsiklis (1997), since the polyhedron has at least one extreme point and Problem (FAIR) has a bounded optimal objective, there must exist one extreme point of the polyhedron that is optimal. By Theorem 2.3 in Bertsimas and Tsitsiklis (1997), we have that an extreme point is equivalent to a basic feasible solution. Hence, we must have a basic feasible solution to Problem (FAIR) that is optimal, which we denote by $p^*(\cdot)$.

Now, let $N = |\{S \subseteq [n] : |S| \leq K\}|$ be the number of variables in Problem (FAIR). There are $n(n-1) + 1 + N$ constraints in Problem (FAIR), where $n(n-1)$ of them are in the first set of constraints, and N of them are the non-negativity constraints. By definition of a basic feasible solution, we must have that at least N active (binding) constraints at $p^*(\cdot)$. That implies that at most $n(n-1) + 1$ of the non-negativity constraints can be inactive, i.e. $p^*(S) > 0$. We have thus showed that $|\{S : p^*(S) > 0\}| \leq n(n-1) + 1$. ■

Appendix G: Proof of Theorem 4

Revenue/marketshare-fair instance. We first consider the revenue/marketshare-fair instance, where $\Theta = (\mathbf{a}, 0, \mathbf{r}, \mathbf{w}, \mathbf{q})$. By Proposition 2, the STATICMNL algorithm introduced by Rusmevichientong et al. (2010) solves Problem (SUB-DUAL(\mathbf{z}, K)) optimally and returns the optimal assortment $S^* = \arg \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z})$. The STATICMNL algorithm leverages the structural properties of the MNL model to generate a sequence of $\mathcal{O}(n^2)$ assortments that is guaranteed to include the optimal assortment. Hence, its running time is of order $\mathcal{O}(n^2)$.

Visibility-fair and general instances. We now focus on visibility-fair and general instances, and establish the NP-completeness of Problem (SUB-DUAL(\mathbf{z}, K)). We first show that Problem (SUB-DUAL(\mathbf{z}, K)) is in NP. Then, we reduce an arbitrary instance of the partition problem, which is known to be NP-complete, to polynomially many visibility-fair instances of Problem (SUB-DUAL(\mathbf{z}, K)).

To show that Problem (SUB-DUAL(\mathbf{z}, K)) is in NP, note that the decision version of Problem (SUB-DUAL(\mathbf{z}, K)) is: given a set S and some value γ , we need to determine if $\text{REV-COST}(S, \mathbf{z})$ is greater than γ . We can compute $\text{REV-COST}(S, \mathbf{z})$ in polynomial time using Eq. (3), since $\mathbf{z}, \mathbf{r}, \mathbf{w}, \mathbf{q}$ are all known. This then allow us to tell if $\text{REV-COST}(S, \mathbf{z}) > \gamma$ immediately. Hence, Problem (SUB-DUAL(\mathbf{z}, K)) is in NP.

We will now show the NP-completeness of Problem (SUB-DUAL(\mathbf{z}, K)) by considering an arbitrary instance of the *partition problem*, and solving it using polynomially many *visibility-fair* instances of Problem (SUB-DUAL(\mathbf{z}, K)). The partition problem is known to be NP-complete (Hayes 2002), and is stated as follows: given a set of n positive integers $\{\alpha_1, \alpha_2, \dots, \alpha_n\}$, we would like to determine if there exists a subset $S \subset [n]$ such that $\sum_{i \in S} \alpha_i = \frac{1}{2} \sum_{i \in [n]} \alpha_i := L$, and find the set S if it exists.

Before proceeding, let us first define an auxiliary optimization problem that we will work with throughout the proof. For some given vector \mathbf{c}' , we define Problem (SUB-DUAL-AUX(\mathbf{c}', K)) as:

$$\text{SUB-DUAL-AUX}(\mathbf{c}', K) = \max_{S: |S| \leq K} \frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c'_i. \quad (\text{SUB-DUAL-AUX}(\mathbf{c}', K))$$

We denote the objective function of Problem (SUB-DUAL-AUX(\mathbf{c}', K)) as

$$\text{REV-COST-AUX}(S, \mathbf{c}') := \frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c'_i.$$

Our proof of Theorem 4 consists of two parts. In Part 1, we reduce an arbitrary instance of the partition problem to a particular instance of Problem (SUB-DUAL-AUX(\mathbf{c}', K)). In Part 2, we show that this instance of Problem (SUB-DUAL-AUX(\mathbf{c}', K)) can be further reduced to a polynomial number of visibility-fair instances of Problem (SUB-DUAL(\mathbf{z}, K)).

Part 1. Let $\{\alpha_1, \alpha_2, \dots, \alpha_n\}$ be an instance of the partition problem. We first reduce it to the auxiliary optimization problem by creating an instance of Problem (SUB-DUAL-AUX(\mathbf{c}', K)) as follows. For each $i \in [n]$, let $w_i = \alpha_i/L$ and $c'_i = \alpha_i/4L$. Let $K = n/2$. Additionally, let $A(S) := \sum_{i \in S} \alpha_i$. We can rewrite the objective function of Problem (SUB-DUAL-AUX(\mathbf{c}', K)) to be a function dependent on $A(S)$:

$$\frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c'_i = \frac{A(S)}{L + A(S)} - \frac{A(S)}{4L} = \frac{3LA(S) - (A(S))^2}{4L^2 + 4LA(S)} := f(A(S)),$$

where we let $f(x) = \frac{3Lx - x^2}{4L^2 + 4Lx}$ for $x \geq 0$. Differentiating $f(x)$ with respect to x gives

$$f'(x) = \frac{-x^2 - 2Lx + 3L^2}{4L(L+x)^2}.$$

Taking $f'(x) = 0$ gives $x = L$. Since $f'(x) < 0$ for $x > L$ and $f'(x) > 0$ for $0 \leq x < L$, we have that for $x \geq 0$, $f(x)$ is uniquely maximized at $x = L$ and $\max_{x \geq 0} f(x) = f(L) = \frac{1}{4}$.

We now show that we can determine whether a partition S exists and, if it exists, find S if and only if we can find the optimal set S^* for instance of Problem (SUB-DUAL-AUX(\mathbf{c}', K)) and it attains optimal objective value of $1/4$. Suppose a partition S^* exists¹² such that $A(S^*) = \sum_{i \in S^*} a_i = L$, we have

$$\frac{1}{4} \geq \text{SUB-DUAL-AUX}(\mathbf{c}', K) = \max_{\substack{S \subset [n] \\ |S| \leq K}} f(A(S)) \geq f(A(S^*)) = f(L) = \frac{1}{4}.$$

¹²Note that we can assume without loss of generality that $|S^*| \leq n/2$. This is because if S^* satisfies $\sum_{i \in S^*} a_i = \frac{1}{2} \sum_{i \in [n]} a_i$, we must also have $\sum_{i \in [n] \setminus S^*} a_i = \frac{1}{2} \sum_{i \in [n]} a_i$. That is, S^* and $[n] \setminus S^*$ are both valid partitions.

Hence, the inequalities above should be equalities. We have that S^* is the optimal set for Problem (SUB-DUAL-AUX(\mathbf{c}' , K)) and the optimal objective value is $f(A(S^*)) = 1/4$. Reversely, if we find $S^* = \arg \max_{\substack{S \subset [n] \\ |S| \leq K}} f(A(S))$ and $\max_{\substack{S \subset [n] \\ |S| \leq K}} f(A(S)) = f(L) = \frac{1}{4}$, we must have that $A(S^*) = \sum_{i \in S^*} \alpha_i = L$, and S^* is thus a solution to the partition problem. The discussion above shows that we can reduce the partition problem to the instance of Problem (SUB-DUAL-AUX(\mathbf{c}' , K)).

Part 2. Now, it suffices to show that the instance of Problem (SUB-DUAL-AUX(\mathbf{c}' , K)) defined above can be solved using polynomially many instances of Problem (SUB-DUAL(\mathbf{z} , K)). In particular, here we consider visibility-fair instances of Problem (SUB-DUAL(\mathbf{z} , K)) where $a_i = 0$ and $b_i = 1$ for all $i \in [n]$. We would also let all items have unit revenue, i.e., $r_i = 1$ for all $i \in [n]$. Such visibility-fair instances of Problem (SUB-DUAL(\mathbf{z} , K)) takes the following form:

$$\text{SUB-DUAL}(\mathbf{z}, K) = \max_{S: |S| \leq K} \frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c_i(\mathbf{z}) = \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z}), \quad (13)$$

where post-fairness revenue of item i is $\tau_i(\mathbf{z}) = 1$, post-fairness cost of item i is $\mathbf{c}_i(\mathbf{z}) = c_i(\mathbf{z})$, and cost $c_i(\mathbf{z})$ is defined in Eq. (5). Note that Problem (SUB-DUAL-AUX(\mathbf{c}' , K)) only differs from such visibility-fair instance of Problem (SUB-DUAL(\mathbf{z} , K)) in the second term of the objective function, where \mathbf{c}' can be any vector and does not depend on \mathbf{z} .

Without loss of generality, assume that $\alpha_1 \geq \alpha_2 \geq \dots \geq \alpha_n$. Before proceeding, let us first make the following definitions.

- (1) For every $k \in [n]$, let (SUB-DUAL-AUX $^{(k)}$) denote an instance of Problem (SUB-DUAL-AUX(\mathbf{c}' , K)) with k items, where $\mathbf{w} = (w_1, \dots, w_k) = (\alpha_1/L, \dots, \alpha_k/L)$, $\mathbf{c}' = (c'_1, \dots, c'_k) = (\alpha_1/4L, \dots, \alpha_k/L)$ and $K = n/2$. The instance of Problem (SUB-DUAL-AUX(\mathbf{c}' , K)) that we considered in Part 1 of the proof is (SUB-DUAL-AUX $^{(n)}$).
- (2) For every $k \in [n]$, let (SUB-DUAL $^{(k)}$) denote a visibility-fair instance of Problem (SUB-DUAL(\mathbf{z} , K)) with k items, where $\mathbf{a} = \mathbf{0}$, $\mathbf{b} = \mathbf{1} = (1, \dots, 1)$, $\mathbf{r} = \mathbf{1} = (1, \dots, 1)$, $\mathbf{w} = (w_1, \dots, w_k) = (\alpha_1/L, \dots, \alpha_k/L)$, $\mathbf{q} = \mathbf{w}$, and $K = n/2$. We choose $\mathbf{z} = \mathbf{z}^{(k)}$ such that $c_i(\mathbf{z}^{(k)}) = c'_i = \alpha_i/4L$ for $i \in [k-1]$. Note that such $\mathbf{z}^{(k)}$ always exists, since the linear system

$$c_i(\mathbf{z}^{(k)}) = \sum_{j \neq i} (z_{ij}^{(k)} - z_{ji}^{(k)}) q_j = \sum_{j \neq i} (z_{ij}^{(k)} - z_{ji}^{(k)}) w_j = \frac{\alpha_i}{4L}, \quad \forall i \in [k-1]$$

can be written as

$$\sum_{j \neq i} \mathbb{1}_{\{i < j\}} \frac{\alpha_j}{L} x_{ij} = \frac{\alpha_i}{4L}, \quad \forall i \in [k-1]$$

where $x_{ij} = z_{ij}^{(k)} - z_{ji}^{(k)}$ for all $i < j$. The rows of this $(k-1) \times (k-1)(k-2)$ linear system are linearly independent, and hence there exists a feasible solution. However, via row operations, one can check that the values of $c_1(\mathbf{z}^{(k)}), \dots, c_{k-1}(\mathbf{z}^{(k)})$ uniquely determine the value of $c_k(\mathbf{z}^{(k)})$ to be

$$c_k(\mathbf{z}^{(k)}) = -\frac{\sum_{i < k} \alpha_i^2}{4L\alpha_k}.$$

Note that the only difference between the instance (SUB-DUAL^(k)) and (SUB-DUAL-AUX^(k)) is in the difference between $c_k(\mathbf{z}^{(k)})$ and c'_k . Additionally, we have $c_k(\mathbf{z}^{(k)}) = -(\sum_{i < k} \alpha_i^2)/(4L\alpha_k) \leq \alpha_k/4L = c'_k$ because α_i 's are all positive integers.

Having defined the two types of instances, our proof of Part 2 proceeds in three steps: (i) first, we establish an important relationship between the two functions REV-COST and REV-COST-AUX; (ii) next, we show that for any $k \in [n]$, we can solve the instance (SUB-DUAL-AUX^(k)) if we can solve (SUB-DUAL^(k)) and (SUB-DUAL-AUX^(k-1)); (iii) based on that, we use a recursive approach to show that the instance (SUB-DUAL-AUX⁽ⁿ⁾) considered in Part 1 of the proof can be solved as long as we can solve (SUB-DUAL⁽ⁿ⁾), ..., (SUB-DUAL⁽²⁾), which are $n - 1$ instances of Problem (SUB-DUAL(\mathbf{z}, K)).

Step 1. Fix $k \in [n]$. Let us start by considering the two instances (SUB-DUAL^(k)) and (SUB-DUAL-AUX^(k)). Recall that the objective function of (SUB-DUAL^(k)) is:

$$\text{REV-COST}(S, \mathbf{z}^{(k)}) = \frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c_i(\mathbf{z}^{(k)})$$

and the objective function of (SUB-DUAL-AUX^(k)) is

$$\text{REV-COST-AUX}(S, \mathbf{c}) = \frac{\sum_{i \in S} w_i}{1 + \sum_{i \in S} w_i} - \sum_{i \in S} c'_i.$$

Since $c_i(\mathbf{z}^{(k)}) = c'_i$ for all $i \in [k - 1]$, we must have the following:

- For any set S such that $k \notin S$, we must have $\text{REV-COST}(S, \mathbf{z}^{(k)}) = \text{REV-COST-AUX}(S, \mathbf{c}')$.
- For any set S such that $k \in S$, we must have

$$\text{REV-COST}(S, \mathbf{z}^{(k)}) = \text{REV-COST-AUX}(S, \mathbf{c}') + \frac{\alpha_k}{4L} + \frac{\sum_{i < k} \alpha_i^2}{4L\alpha_k} \geq \text{REV-COST-AUX}(S, \mathbf{c}').$$

Step 2. Now, suppose that we have solved (SUB-DUAL^(k)) with S_k^* as its optimal solution, and we have also solved (SUB-DUAL-AUX^(k-1)) with S'_{k-1} as its optimal solution. We claim that the optimal solution to (SUB-DUAL-AUX^(k)), S'_k , would then be the best set among S_k^* and S'_{k-1} .

To see why, we divide our arguments into the following cases:

- **Case 1:** $k \notin S_k^*$. In this case, we claim that S_k^* is an optimal solution to (SUB-DUAL-AUX^(k)). Let $S' \in [k], |S'| \leq K$ be any set that is different from S_k^* . There are again two possibilities:
 - If $k \notin S'$, we have

$$\text{REV-COST-AUX}(S', \mathbf{c}') = \text{REV-COST}(S', \mathbf{z}^{(k)}) \leq \text{REV-COST}(S_k^*, \mathbf{z}^{(k)}) = \text{REV-COST-AUX}(S_k^*, \mathbf{c}'),$$

where the two equalities follow from Step 1.

— If $k \in S'$, we have

$$\text{REV-COST-AUX}(S', \mathbf{c}') \leq \text{REV-COST}(S', \mathbf{z}^{(k)}) \leq \text{REV-COST}(S_k^*, \mathbf{z}^{(k)}) = \text{REV-COST-AUX}(S_k^*, \mathbf{c}'),$$

where the first inequality and the last equality follow from Step 1.

Since we have $\text{REV-COST-AUX}(S', \mathbf{c}') \leq \text{REV-COST-AUX}(S_k^*, \mathbf{c})$ for any set S' , S_k^* must be an optimal solution to $(\text{SUB-DUAL-AUX}^{(k)})$.

- **Case 2:** $k \in S'_k$. In this case, we claim that the optimal solution to $(\text{SUB-DUAL-AUX}^{(k)})$, which we denote by S'_k , is either S_k^* or S'_{k-1} . Let us again consider the two possibilities:

— If $k \in S'_k$, we must have

$$\begin{aligned} \text{REV-COST-AUX}(S'_k, \mathbf{c}') &= \text{REV-COST}(S'_k, \mathbf{z}^{(k)}) - \left(\frac{\alpha_k}{4L} + \frac{\sum_{i < k} \alpha_i^2}{4L\alpha_k} \right) \\ &\leq \text{REV-COST}(S_k^*, \mathbf{z}^{(k)}) - \left(\frac{\alpha_k}{4L} + \frac{\sum_{i < k} \alpha_i^2}{4L\alpha_k} \right) \\ &= \text{REV-COST-AUX}(S_k^*, \mathbf{c}'). \end{aligned}$$

where the equalities follow from Step 1. Hence, in this case, S_k^* is an optimal solution to $(\text{SUB-DUAL-AUX}^{(k)})$.

- If $k \notin S'_k$. In this case, an optimal solution to $(\text{SUB-DUAL-AUX}^{(k)})$ is simply the optimal solution to $(\text{SUB-DUAL-AUX}^{(k-1)})$; that is, S'_{k-1} .

To summarize, our case discussion above shows that to solve $(\text{SUB-DUAL-AUX}^{(k)})$, it suffices to solve $(\text{SUB-DUAL}^{(k)})$ and $(\text{SUB-DUAL-AUX}^{(k-1)})$.

Step 3. Finally, we consider the instance $(\text{SUB-DUAL-AUX}^{(n)})$ from Part 1 of the proof. Since we have shown in Step 2 that for any $k \in [n]$, we can solve $(\text{SUB-DUAL-AUX}^{(k)})$ as long as we can solve $(\text{SUB-DUAL}^{(k)})$ and $(\text{SUB-DUAL-AUX}^{(k-1)})$, we can solve $(\text{SUB-DUAL-AUX}^{(n)})$ in a recursive manner. This requires us to solve at most $n - 1$ visibility-fair instances of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$, i.e., $(\text{SUB-DUAL}^{(n)}), (\text{SUB-DUAL}^{(n-1)}), \dots, (\text{SUB-DUAL}^{(2)})$ and one instance of Problem $(\text{SUB-DUAL-AUX}(\mathbf{c}', K))$, i.e., $(\text{SUB-DUAL-AUX}^{(1)})$, for which the solution is trivial to obtain.

In summary, in Part 2 we have shown that $(\text{SUB-DUAL-AUX}^{(n)})$ can be solved using a polynomial number of visibility-fair instances of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. Together, Part 1 and 2 of the proof show that an arbitrary instance of the partition problem can be solved using polynomially many visibility-fair instances of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. This establishes the NP-completeness of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$. In particular, since we only consider visibility-fair instances of Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$ with uniform revenues (i.e., $r_i = 1$ for all $i \in [n]$), our proof above in fact shows that even for visibility-fair instances with uniform revenues, Problem $(\text{SUB-DUAL}(\mathbf{z}, K))$ is also NP-complete. ■

Appendix H: Proof of Theorem 5

Our proof of Theorem 5 consists of two segments. In Segment 1, we show that our fair Ellipsoid-based algorithm gives a β -approx. solution for Problem (FAIR), and the returned solution requires us to randomize over a polynomial number of sets. In Segment 2, we show that the runtime of our fair Ellipsoid-based algorithm is polynomial in the size of our input.

Segment 1. Before proceeding, recall that in Section 5.3, we define $\mathcal{V} = \{S : |S| \leq K\}$ as the collection of sets that violate the dual fairness constraint. The first segment of our proof consists of three parts: (i) We first show that if we apply the Ellipsoid method equipped with a β -approx. separation oracle to the dual problem (FAIR-DUAL), we will end up with a dual objective r' that is not too far away from the optimal primal objective FAIR. That is, it satisfies $r' \geq \beta \cdot \text{FAIR}$. (ii) We then construct an auxiliary dual problem (FAIR-DUAL-AUX), in which we only keep the dual fairness constraints for $S \in \mathcal{V}$; and the corresponding auxiliary primal problem (FAIR-AUX), in which we enforce $p(S) = 0$ for all $S \notin \mathcal{V}$. The auxiliary primal problem is the one we solve in Step 2 of our algorithm. We will show that the optimal objectives of both Problem (FAIR-DUAL-AUX) and (FAIR-AUX) exceeds r' , and hence exceeds $\beta \cdot \text{FAIR}$. (iii) Finally, we show that the number of sets in \mathcal{V} is polynomial, which implies that $|\{S : \widehat{p}(S) > 0\}|$ is polynomial.

Part 1. As described in Step 1 of the fair Ellipsoid-based algorithm, suppose that we apply the Ellipsoid method to the dual problem (FAIR-DUAL), and use algorithm \mathcal{A} as the β -approx. separation oracle. Let (\mathbf{z}', ρ') be the solution we get at the end of the Ellipsoid method, and let $r' = \rho' + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z'_{ij}$ denote its dual objective. We first note that the solution (\mathbf{z}', ρ') is not necessarily feasible for Problem (FAIR-DUAL). This is because when we examine the feasibility of this solution, our separation oracle first solves Problem (SUB-DUAL(\mathbf{z}', K)), and obtained a set $S_{\mathcal{A}}$ such that $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}') \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}', K)$. The Ellipsoid method has declared solution (\mathbf{z}', ρ') feasible because $\text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}') \leq \rho'$. However, it is still possible that $\text{SUB-DUAL}(\mathbf{z}', K) = \max_{|S| \leq K} \text{REV-COST}(S, \mathbf{z}') > \rho'$. We will first show that the dual objective that we obtain here would still be close to the optimal primal objective FAIR.

Suppose that we solve the dual problem (FAIR-DUAL) by additionally fixing $\mathbf{z} = \mathbf{z}'$. This problem has a trivial solution because ρ is the only decision variable, and it must be chosen such that the inequality in Eq. (3) is tight. That is, we set $\rho = \text{SUB-DUAL}(\mathbf{z}', K)$ and the optimal objective is

$$r_{\mathbf{z}'} := \text{SUB-DUAL}(\mathbf{z}', K) + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z'_{ij}$$

Clearly, we must have $\text{FAIR-DUAL} \leq r_{\mathbf{z}'}$ since fixing $\mathbf{z} = \mathbf{z}'$ is equivalent to introducing more constraints into Problem (FAIR-DUAL). Note that we also have

$$r' = \rho' + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z'_{ij} \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}', K) + \beta \cdot \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z'_{ij} = \beta \cdot r_{\mathbf{z}'},$$

where the inequality follows from $\rho' \geq \text{REV-COST}(S_{\mathcal{A}}, \mathbf{z}') \geq \beta \cdot \text{SUB-DUAL}(\mathbf{z}', K)$ and $z'_{ij} \geq 0$. Together, the two inequalities above give

$$r' \geq \beta \cdot r_{\mathbf{z}'} \geq \beta \cdot \text{FAIR-DUAL} = \beta \cdot \text{FAIR}, \quad (14)$$

where the last equality follows from strong duality.¹³ The inequality in Eq. (14) is a key inequality that we will continue to work with in Part 2.

Part 2. In Part 2, we first create an auxiliary version of the dual problem, defined as follows:

$$\begin{aligned} \text{FAIR-DUAL-AUX} = \min_{\rho \geq 0, \mathbf{z} \geq \mathbf{0}} \quad & \rho + \sum_{i=1}^n \sum_{j=1, j \neq i}^n \delta \cdot q_i q_j \cdot z_{ij} \\ \text{s.t.} \quad & \sum_{i \in S} O_i(S) \cdot \left(\sum_{j=1, j \neq i}^n (z_{ij} - z_{ji}) q_j \right) + \rho \geq \text{REV}(S), \quad \forall S \in \mathcal{V} \end{aligned} \quad (\text{FAIR-DUAL-AUX})$$

Note that the auxiliary dual problem is different from Problem (FAIR-DUAL), because in the auxiliary dual problem, we only enforces the constraints on sets $S \in \mathcal{V}$, where \mathcal{V} is the collection sets for which the dual fairness constraint has been violated when we solve Problem (FAIR-DUAL). Since the unviolated constraints did not impact any of the iteration in the Ellipsoid method when we solve Problem (FAIR-DUAL), if we now apply the Ellipsoid method with the β -approx. separation oracle to solve Problem (FAIR-DUAL-AUX), the solution we obtain would still be (\mathbf{z}', ρ') , which gives objective value r' .

Similar to our arguments in Part 1, we note that when we apply the Ellipsoid method using our approximate separation oracle, we essentially increases the feasibility region of the linear program. Hence, the solution (\mathbf{z}', ρ') we found at the end of the Ellipsoid method might not be feasible and the objective we obtain is less than or equal to the actual optimal objective. That is, we must have $r' \leq \text{FAIR-DUAL-AUX}$. This, along with the inequality we established in Eq. (14), gives

$$\text{FAIR-DUAL-AUX} \geq r' \geq \beta \cdot \text{FAIR}.$$

Consider the primal counterpart to the auxiliary dual problem (FAIR-DUAL-AUX) defined below:

$$\begin{aligned} \text{FAIR-AUX} = \max_{p(S) \geq 0: S \in \mathcal{V}} \quad & \sum_{S: S \in \mathcal{V}} p(S) \cdot \text{REV}(S) \\ \text{s.t.} \quad & q_j \cdot \sum_{S: i \in S} O_i(S) p(S) - q_i \cdot \sum_{S: j \in S} O_j(S) p(S) \leq \delta \quad i, j \in [n] \\ & \sum_{S: |S| \in \mathcal{V}} p(S) \leq 1 \end{aligned} \quad (\text{FAIR-AUX})$$

¹³ Since both Problem (FAIR) and Problem (FAIR-DUAL) are feasible and bounded, they both admit an optimal solution. This allows us to invoke the strong duality theorem (see Theorem 4.4 in Bertsimas and Tsitsiklis (1997)), which suggests that $\text{FAIR} = \text{FAIR-DUAL}$.

Essentially, this differs from Problem (FAIR) in that here, we set $p(S) = 0$ for all $S \notin \mathcal{V}$. This is the primal problem that we solve in Step 2 of the fair Ellipsoid-based algorithm. Let $\widehat{p}(S)$ denote the optimal solution to Problem (FAIR-AUX). By the strong duality theorem¹⁴, we have $\text{FAIR-AUX} = \text{FAIR-DUAL-AUX} \geq \beta \cdot \text{FAIR}$. We have thereby showed that our algorithm returns a solution $\widehat{p}(S)$ that is an β -approx. feasible solution to Problem (FAIR).

Part 3. Since we have $\widehat{p}(S) = 0$ for all $S \notin \mathcal{V}$, the number of sets that we need to randomize over, i.e. $|\{S : \widehat{p}(S) > 0\}|$, is bounded by $|\mathcal{V}|$. Recall that in the dual problem (FAIR-DUAL), we have $\mathcal{O}(n^2)$ variables. By Bertsimas and Tsitsiklis (1997), given a separation oracle, the Ellipsoid method would solve (FAIR-DUAL) in at most $\mathcal{O}(n^{12} \log(nq_{\max}))$ iterations. Within each iteration, one violated constraint is identified. Hence, we must have that $|\mathcal{V}|$, i.e., the number of sets for which the dual fairness constraints in (FAIR-DUAL) is violated, is polynomial in n and $\log(q_{\max})$. This thus proves that $|\{S : \widehat{p}(S) > 0\}|$ is polynomial in the size of our input.

Segment 2. In the second segment of the proof, we remark on the runtime of our fair Ellipsoid-based algorithm. In Step 1 of the algorithm, the Ellipsoid method equipped with a polynomial-time separating oracle runs in polynomial time. In Step 2 of the algorithm, solving a linear program with polynomial number of variables also takes polynomial time. Hence, given a polynomial-time separation oracle, the total time taken by the fair Ellipsoid-based algorithm is polynomial in the size of our input. ■

Appendix I: Proof of Theorem 6

Let $S^* \in \arg \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z})$ and let $W^* = \sum_{i \in S^*} w_i$. We must have

$$\text{SUB-DUAL}(\mathbf{z}, K) = \text{REV-COST}(S^*, \mathbf{z}) \leq \text{KP}(W^*, K) \leq \max_{W \geq 0} \text{KP}(W, K). \quad (15)$$

The first inequality follows from the fact that (i) S^* is a feasible solution to Problem $\text{KP}(W^*, K)$ since $|S^*| \leq K$ and $\sum_{i \in S^*} w_i = W^*$ by definition, and (ii)

$$\text{REV-COST}(S^*, \mathbf{z}) = \frac{\sum_{i \in S^*} \zeta_i w_i}{1 + \sum_{i \in S^*} w_i} - \sum_{i \in S^*} \mathbf{c}_i = \sum_{i \in S^*} \left(\frac{\zeta_i w_i}{1 + W^*} - \mathbf{c}_i \right),$$

where the right-hand side (i.e., $\sum_{i \in S^*} (\frac{\zeta_i w_i}{1 + W^*} - \mathbf{c}_i)$) is the objective value of the knapsack problem ($\text{KP}(W^*, K)$) at set S^* , which is clearly upper bounded by its optimal objective value $\text{KP}(W^*, K)$.

¹⁴ Here, both Problem (FAIR-AUX) and Problem (FAIR-DUAL-AUX) are again feasible and bounded, hence they both admit an optimal solution. For Problem (FAIR-AUX), $p(S) = 0$ for all $S \in \mathcal{V}$ is a feasible solution; its objective is upper bounded by \bar{r} . For Problem (FAIR-DUAL-AUX), $\rho = \bar{r}, \mathbf{z} = \mathbf{0}$ is a feasible solution; its objective is lower bounded by 0. This again allows us to invoke the strong duality theorem (see Theorem 4.4 in Bertsimas and Tsitsiklis (1997)), which suggests that $\text{FAIR-AUX} = \text{FAIR-DUAL-AUX}$.

Conversely, let $\max_{W \geq 0} \text{KP}(W, K)$ be obtained at capacity \widetilde{W} and with optimal set \widetilde{S} , i.e., \widetilde{S} is the optimal solution to Problem $\text{KP}(\widetilde{W}, K)$. We then have

$$\begin{aligned} \max_{W \geq 0} \text{KP}(W, K) &= \text{KP}(\widetilde{W}, K) = \sum_{i \in \widetilde{S}} \left[\frac{\tau_i w_i}{1 + \widetilde{W}} - \mathbf{c}_i \right] \\ &\leq \sum_{i \in \widetilde{S}} \frac{\tau_i w_i}{1 + \sum_{i \in \widetilde{S}} w_i} - \sum_{i \in \widetilde{S}} \mathbf{c}_i = \text{REV-COST}(\widetilde{S}, \mathbf{z}) \leq \max_{|S| \leq K} \text{REV-COST}(S, \mathbf{z}), \end{aligned} \quad (16)$$

where the first inequality follows from the feasibility of \widetilde{S} for Problem $\text{KP}(\widetilde{W}, K)$, which implies that $\sum_{i \in \widetilde{S}} w_i \leq \widetilde{W}$, and the second inequality follows from $|\widetilde{S}| \leq K$.

Overall, Eqs. (15) and (16) together imply that $\text{SUB-DUAL}(\mathbf{z}, K) = \max_{S: |S| \leq K} \text{REV-COST}(S, \mathbf{z}) = \max_{W \geq 0} \text{KP}(W, K)$, as desired. ■

Appendix J: Proof of Lemma 2

We pre-partition the interval $[0, \infty)$ into sub-intervals I , each being the largest well-behaving sub-interval attainable. To identify these I 's, we seek the values of W where conditions in Definition 1 cease to hold. For condition (i), the sign change in item i 's utilities occurs at $u_i(W) = \frac{\tau_i w_i}{1+W} - \mathbf{c}_i = 0$, yielding $\mathcal{O}(n)$ such W values. Condition (ii) pertains to utility ordering shifts, happening at $\mathcal{O}(n^2)$ points where $\frac{\tau_i w_i}{1+W} - \mathbf{c}_i = \frac{\tau_j w_j}{1+W} - \mathbf{c}_j$ for some $i \neq j$. Similarly, condition (iii) involves changes in utility-to-weight ratios, occurring at $\mathcal{O}(n^2)$ W values where $\frac{\tau_i}{1+W} - \frac{\mathbf{c}_i}{w_i} = \frac{\tau_j}{1+W} - \frac{\mathbf{c}_j}{w_j}$ for some $i \neq j$. Lastly, for condition (iv), which deals with marginal utility changes upon replacing items, $\mathcal{O}(n^3)$ W values are relevant, marked by $\frac{u_j(W) - u_i(W)}{w_j - w_i} = \frac{u_k(W) - u_i(W)}{w_k - w_i}$. Overall, we can divide $[0, \infty)$ at at most $\mathcal{O}(n^3)$ values of W , which yields at most $\mathcal{O}(n^3)$ well-behaving sub-intervals. ■

Appendix K: Proof of Theorem 7

The proof consists of two segments. In the first segment, let \mathcal{C}_I be the collection of assortments accumulated by Step 4 of Algorithm 1 and let $S_I = \arg \max_{S \in \mathcal{C}_I} \text{REV-COST}(S, \mathbf{z})$ be the returned assortment. We show that for any $W \in I$, there exists a set $S_W \in \mathcal{C}_I$ such that

$$\text{REV-COST}(S_W, \mathbf{z}) \geq \frac{1}{2} \text{KP}(W, K),$$

which then implies

$$\text{REV-COST}(S_I, \mathbf{z}) \geq \frac{1}{2} \max_{W \in I} \text{KP}(W, K).$$

In the second segment, we bound the runtime of the algorithm.

Segment 1. We start by considering the LP relaxation of the original knapsack problem, i.e., Problem $(\text{KP-RELAX}(W, K))$, and making the following claim:

CLAIM 1. For any $W \in I$, in the collection of assortments \mathcal{C}_I returned by Algorithm 1, there exists an assortment S_W such that S_W is an integer $1/2$ -approx. feasible solution for Problem $\text{KP-RELAX}(W, K)$.

Given that Claim 1 holds, we then have

$$\text{REV-COST}(S_W, \mathbf{z}) = \sum_{i \in S_W} \left(\frac{\tau_i w_i}{1 + \sum_{i \in S_W} w_i} - \mathbf{c}_i \right) \geq \sum_{i \in S_W} \left(\frac{\tau_i w_i}{1 + W} - \mathbf{c}_i \right) \geq \frac{1}{2} \text{KP-RELAX}(W, K) \geq \frac{1}{2} \text{KP}(W, K), \quad (17)$$

where the first inequality follows from the feasibility of S_W (i.e., $\sum_{i \in S_W} w_i \leq W$); the second inequality follows from Claim 1; and the third inequality follows from $\text{KP-RELAX}(W, K)$ being an upper bound of $\text{KP}(W, K)$. Let $W^* = \arg \max_{W \in I} \text{KP}(W, K)$. This then further gives

$$\text{REV-COST}(S_I, \mathbf{z}) \geq \text{REV-COST}(S_{W^*}, \mathbf{z}) \geq \frac{1}{2} \text{KP}(W^*, K) = \frac{1}{2} \max_{W \in I} \text{KP}(W, K), \quad (18)$$

where the first inequality follows from $S_I = \arg \max_{S \in \mathcal{C}_I} \text{REV-COST}(S, \mathbf{z})$ (Step 4 of Algorithm 1) and that $S_{W^*} \in \mathcal{C}_I$; and the second inequality follows from Eq. (17). This thus proves the statement of Theorem 7.

In the following, we provide a proof for Claim 1.

Proof of Claim 1. Our proof consists of five parts. In Part 1, we first consider the capacity level W_{binding} , which is the maximum capacity level under which the capacity constraint is binding for the relaxed knapsack problems on I . We show that it suffices to show Claim 1 for $W < W_{\text{binding}}$. This then allows us to justify the stopping rules in Step 2b and Step 3(b)iii of the algorithm; see Parts 2 and 3 of the proof. Recall that in Algorithm 1, we consider the two intervals $I_{\text{low}} = I \cap [0, W_{\text{TH}})$ and $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$ separately. In Part 2, we show that when we hit the stopping rule in Step 2b, we have reached the upper bound W_{binding} and there is no need to consider the interval I_{high} . Similarly, in Part 3, we show that when we hit stopping rule in Step 3(b)iii, we have reached W_{binding} and there is no need to consider larger W 's. In Part 4 of the proof, we show that if $W \in I_{\text{low}}$, there exists a $1/2$ -approx. solution $S_W \in \mathcal{C}_I$. In Part 5, which is one of the most challenging parts of the proof, using induction, we show that if $W \in I_{\text{high}}$, there exists a $1/2$ -approx. solution $S_W \in \mathcal{C}_I$.

Part 1: we only need to show Claim 1 for $W \leq W_{\text{binding}}$. Let W_{binding} be the maximum capacity level $W \in I$ for which the capacity constraint is binding for Problem $(\text{KP-RELAX}(W, K))$, i.e.,

$$W_{\text{binding}} := \sup \left\{ W \in I : \sum_{i \in [n]} w_i x_i^*(W) = W \right\} \text{ and } \sum_{i \in [n]} w_i x_i^*(W') < W' \quad \forall W' \in I \cap (W_{\text{binding}}, \infty). \quad (19)$$

If the capacity constraint is binding for all $W \in I$, we let $W_{\text{binding}} = W_{\text{max}}$; if the capacity constraint is non-binding for all $W \in I$, we let $W_{\text{binding}} = W_{\text{min}}$. Lemma 4 shows that W_{binding} is well-defined.

The lemma states that if the capacity constraint is non-binding at some capacity level \widetilde{W} , Problem (KP-RELAX(W, K)) will have a non-binding capacity constraint for all $W > \widetilde{W}$.

LEMMA 4. Consider a capacity level $\widetilde{W} > 0$, and suppose that the capacity constraint is non-binding at the optimal basic solution $\mathbf{x}^*(\widetilde{W})$ to KP-RELAX(\widetilde{W}, K). That is, $\sum_{i \in [n]} w_i x_i^*(\widetilde{W}) < \widetilde{W}$. Then, for any $W > \widetilde{W}$ such that $W \in I$, we have $\sum_{i \in [n]} w_i x_i^*(W) < W$.

We now note that if $W > W_{\text{binding}}$, then we must have

$$\text{KP}(W_{\text{binding}}, K) > \text{KP}(W, K).$$

To see why, we first assume, without loss of generality, that on the well-behaving interval I , the items are ranked by the order of their utilities, i.e., $u_1(W) \geq u_2(W) \geq \dots \geq u_n(W)$. Then, if there exists $W \in I$ such that $W > W_{\text{binding}}$, we must have that $W_{\text{binding}} \geq \sum_{i \in [K]} w_i$. That is, the K items with the top utilities can fit into the knapsack of size W_{binding} . Since the ordering of utilities of items do not change on I , we then have

$$\text{KP}(W_{\text{binding}}, K) = \sum_{i \in [k]} u_i(W_{\text{binding}}) > \sum_{i \in [k]} u_i(W) = \text{KP}(W, K).$$

Given that, any set S such that $\text{REV-COST}(S, \mathbf{z}) \geq \frac{1}{2} \text{KP}(W_{\text{binding}}, K)$ would also satisfy $\text{REV-COST}(S, \mathbf{z}) \geq \frac{1}{2} \text{KP}(W, K)$ for any $W > W_{\text{binding}}$. Hence, we only need to show Claim 1 for $W < W_{\text{binding}}$.

Part 2: hitting the stopping rule in Step 2b. Assuming I_{low} is non-empty (i.e., $W_{\text{min}} < W_{\text{TH}}$), we would enter Step 2 of Algorithm 1. We show that if we hit the stopping rule in Step 2b of Algorithm 1, we must have $W_{\text{binding}} \in I_{\text{low}}$ and hence, we do not need to consider interval I_{high} , where $I_{\text{low}} = I \cap [0, W_{\text{TH}})$ and $I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$. Recall that in Step 2b of of Algorithm 1, we stop the algorithm when $u_{h_K}(W_{\text{TH}}) < 0$, where h_K is the index of the item with the K th highest utility-to-weight ratio. Note that if $u_{h_K}(W_{\text{TH}}) < 0$, then all items with lower utility-to-weight ratios must also have negative utilities, i.e. $u_{h_j}(W_{\text{TH}}) < 0$ for all $j \geq K$. Hence, the optimal solution $\mathbf{x}^*(W_{\text{TH}})$ for Problem (KP-RELAX(W_{TH}, K)) should not include any of the items h_j for all $j \geq K$. This implies that at W_{TH} , the capacity constraint is no longer binding. (Recall that $W_{\text{TH}} = w(H_K)$ is the sum of the weights of items h_1, \dots, h_K .) Then, by Lemma 4, we have $W_{\text{binding}} < W_{\text{TH}}$. Since in Part 1 of the proof, we show that we only need to work with $W \in I$ such that $W \leq W_{\text{binding}}$, we do not need to consider I_{high} . This justifies the stopping rule in Step 2b.

Part 3: hitting the stopping rule in Step 3b. Assuming that I_{high} is non-empty (i.e., $W_{\text{max}} > W_{\text{TH}}$), we would enter Step 3 of Algorithm 1. Here, we show that if we hit the stopping rule in Step 3b, we must have reached W_{binding} and we do not need to consider larger W 's.

Before proceeding, we first make the following definitions. In Step 3b of Algorithm 1, we adaptively partition the interval I_{high} . In particular, at each iteration, the algorithm updates two quantities: (i) the capacity *change point* W_{next} ; (ii) two sets of indices that represent the profile at W_{next} : P_1 and P_0 . We let $W_{\text{next}}^{(k)}$ be the change point updated in the k th iteration of the while loop, and $P_1^{(k)}, P_0^{(k)}$ be the sets of indices updated in the k th iteration. Additionally, we let $W_{\text{next}}^{(0)} = W_{\text{TH}}$ denote the initial change point, and $P_1^{(0)} = H_K, P_0^{(0)} = [n] \setminus H_K$ denote the initial sets of indices; both are defined in Step 3a.

Now, suppose that $W_{\text{next}}^{(\ell)}$ is the last change point computed in the while loop, before the stopping rule of Step 3b is invoked. That is, one of the following cases takes place:

- (i) There does not exist $i \in P_1^{(\ell)}, j \in P_0^{(\ell)}$ such that $w_i < w_j$. In this case, we exit the while loop before the start of the $(\ell + 1)$ th iteration.
- (ii) Within the $(\ell + 1)$ th iteration, Step 3(b)i of Algorithm 1, after making the following update:

$$(i^*, j^*) \in \arg \max_{\substack{i \in P_1^{(\ell)}, j \in P_0^{(\ell)} \\ w_i < w_j}} \left[\frac{u_j(W_{\text{next}}^{(\ell)}) - u_i(W_{\text{next}}^{(\ell)})}{w_j - w_i} \right], \quad (20)$$

we have $u_{j^*}(W_{\text{next}}^{(\ell)}) - u_{i^*}(W_{\text{next}}^{(\ell)}) < 0$. That is, we hit the stopping rule in Step 3(b)ii.

We show, for each of these cases, that by the time we reach our last change point $W_{\text{next}}^{(\ell)}$, we have already reached W_{binding} . That is, $W_{\text{next}}^{(\ell)} = W_{\text{binding}}$.

For Case (i), observe that in Step 3 of Algorithm 1, in every iteration of the while loop, the set P_1 always contain K items. Hence, if there does not exist $i \in P_1^{(\ell)}, j \in P_0^{(\ell)}$ such that $w_i < w_j$, this means that $P_1^{(\ell)}$ already contains the K items with the highest weights. Since we cannot find a set of at most K items with total weight higher than $w(P_1^{(\ell)}) = W_{\text{next}}^{(\ell)}$, the capacity constraint must be non-binding for Problem KP-RELAX(W', K) for any $W' > W_{\text{next}}^{(\ell)}$. Hence, $W_{\text{next}}^{(\ell)} = W_{\text{binding}}$.

For Case (ii), if we hit the stopping rule, this means that for any $i \in P_1^{(\ell)}$ and any $j \in P_0^{(\ell)}$ such that $w_i < w_j$, we must have $u_j(W_{\text{next}}^{(\ell)}) < u_i(W_{\text{next}}^{(\ell)})$. We will show, in Part 5 of this proof, that at capacity level $W_{\text{next}}^{(\ell)}$, we have that $\mathcal{P}(W_{\text{next}}^{(\ell)}) = \{P_1^{(\ell)}, (0, 0), P_0^{(\ell)}\}$ and $w(P_1^{(\ell)}) = W_{\text{next}}^{(\ell)}$. That is, the capacity constraint is binding for Problem (KP-RELAX($W_{\text{next}}^{(\ell)}, K$)). Based on that, we have that there also does not exist $j \in P_0^{(\ell)}$ such that $w_j \leq w_i$ and $u_j(W_{\text{next}}^{(\ell)}) > u_i(W_{\text{next}}^{(\ell)})$; otherwise, the profile $\mathcal{P}(W_{\text{next}}^{(\ell)})$ no longer represents the optimal solution. Therefore, we must have that the set $P_1^{(\ell)}$ contains the K items with the highest utilities. Recall that on the interval I , the ordering of utilities of items do not change. This means that for all $W' > W_{\text{next}}^{(\ell)}$ and $W' \in I$, the profile no longer changes, i.e. $\mathcal{P}(W') = \mathcal{P}(W_{\text{next}}^{(\ell)})$, and the capacity constraint becomes non-binding. That is, we have $W_{\text{next}}^{(\ell)} = W_{\text{binding}}$.

Hence, if we hit the stopping rule in Step 3b, this implies that our last change point $W_{\text{next}}^{(\ell)} = W_{\text{binding}}$, and we no longer need to consider larger W 's.

Part 4: for $W \in I_{\text{low}}$ such that $W \leq W_{\text{binding}}$, a 1/2-approx. solution S_W is found in Step 2 of Algorithm 1. First note that on the well-behaving interval I , the ordering of the utility-to-weight ratios of items do not change. Hence, the set H_j that includes the j items with the highest utility-to-weight ratios is well-defined for any $j \in [n]$ and does not change for all $W \in I$. Now, suppose that $W \in I_{\text{low}}$ and $W \leq W_{\text{binding}}$. We can use the following lemma:

LEMMA 5. *Consider the relaxed knapsack problem $(\text{KP-RELAX}(W, K))$. If the capacity level satisfies $W \in I_{\text{low}} = I \cap [0, w(H_K))$, where $H_K \subset [n]$ is the set of K items in $[n]$ with the highest utility-to-weight ratios, the optimal solution to $(\text{KP-RELAX}(W, K))$ is given by filling up the knapsack with items with positive utilities in the descending order of the utility-to-weight ratio until the capacity is reached.*

Since $W \in I_{\text{low}}$, Lemma 5 shows that an optimal basic feasible solution $\mathbf{x}^*(W)$ to the relaxed knapsack problem $(\text{KP-RELAX}(W, K))$ is simply filling up the knapsack with the items with the highest utility-to-weight ratios until we reach capacity W . This means that the profile $\mathcal{P}(W)$ of the optimal solution must take one of the following forms:

- (i) $P_1(W) = H_j$ for some $j < K$, and $P_f(W) = (0, 0)$. That is, the knapsack is precisely filled by the j items in $[n]$ with the highest utility-to-weight ratios.
- (ii) $P_1(W) = H_{j-1}$ for some $j \in [K]$, and $P_f(W) = (h_j, 0)$. This means that the knapsack is filled by the $(j-1)$ items in $[n]$ with the highest utility-to-space ratios, and partially filled by the item h_j , i.e., the item with the j -th highest utility-to-space ratio.

Given the form of the profile $\mathcal{P}(W)$, we know from Lemma 1 that there must exist a 1/2-approx. feasible assortment S_W to Problem $(\text{KP-RELAX}(W, K))$ in the following collection: $\{\{j\} : j \in [n]\} \cup \{H_j : j \in [K-1]\}$. Observe that in Step 1 of Algorithm 1, we add $\{j\}$ to \mathcal{C}_I for all $j \in [n]$. In Step 2 of Algorithm 1, we add $\{H_j : j \in [K-1]\}$ to \mathcal{C}_I . Therefore,

$$S_W \in \{\{j\} : j \in [n]\} \cup \{H_j : j \in [K-1]\} \subseteq \mathcal{C}_I,$$

where S_W is a 1/2-approx. solution for Problem $(\text{KP-RELAX}(W, K))$.

Part 5: for $W \in I_{\text{high}}$ such that $W \leq W_{\text{binding}}$, a 1/2-approx. solution S_W is found in Step 3 of Algorithm 1. Similar to Part 3 of the proof, we define $W_{\text{next}}^{(k)}$ as the change point updated in the k th iteration of the while loop, and $P_1^{(k)}, P_0^{(k)}$ as the sets of indices updated in the k th iteration. Let $W_{\text{next}}^{(0)}, P_1^{(0)}, P_0^{(0)}$ be the initial change points and sets of indices we have in the initialization step (see Step 3a).

Let us start by showing the following statement: suppose that at the k th iteration of Step 3b, for some $k \geq 0$, Algorithm 1 has not hit the stopping rule in Step 3(b)ii and updated the change point to be $W_{\text{next}}^{(k)}$ and the two sets to be $P_1^{(k)}, P_0^{(k)}$, then, as long as $W_{\text{next}}^{(k)} \in I_{\text{high}}$, the optimal

basic solution to Problem $\text{KP-RELAX}(W_{\text{next}}^{(k)}, K)$ must have profile $\mathcal{P}(W_{\text{next}}^{(k)}) = \{P_1^{(k)}, (0, 0), P_0^{(k)}\}$, and $W_{\text{next}}^{(k)} = w(P_1^{(k)})$. We will prove this statement via induction:

- *Base step* ($k = 0$): For the base step, we would like to show that $\mathcal{P}(W_{\text{next}}^{(0)}) = \{P_1^{(0)}, (0, 0), P_0^{(0)}\}$ and $W_{\text{next}}^{(0)} = w(P_1^{(0)})$, where $W_{\text{next}}^{(0)}, P_1^{(0)}, P_0^{(0)}$ are the initial change points and sets of indices we have in the initialization step. That is, the profile for Problem $\text{KP-RELAX}(W_{\text{next}}^{(0)}, K)$ is represented by the two sets $P_1^{(0)}$ and $P_0^{(0)}$, and the capacity constraint is binding. Since we have two different ways of initialization based on whether $W_{\text{min}} < W_{\text{TH}}$ or $W_{\text{min}} \geq W_{\text{TH}}$, we divide our base step into two cases.

- (i) **Case (i):** $W_{\text{min}} < W_{\text{TH}}$. In this case, we perform the following initialization: $W_{\text{next}}^{(0)} = W_{\text{TH}}$ is the initial change point, and the initial sets of indices are $P_1^{(0)} = H_K, P_0^{(0)} = [n] \setminus H_K$. Since $W_{\text{min}} < W_{\text{TH}}$, I_{low} must be non-empty and we have already entered Step 2 of Algorithm 1. Given that Algorithm 1 has not terminated at Step 2b, we must have that $u_j(W_{\text{TH}}) > 0$ for all $j \in H_K$.

Then, by Lemma 5, we know that the optimal basic solution $\mathbf{x}^*(W_{\text{TH}})$ for Problem $\text{KP-RELAX}(W_{\text{TH}}, K)$ has the profile $P_1(W_{\text{TH}}) = H_K, P_f(W_{\text{TH}}) = (0, 0), P_0(W_{\text{TH}}) = [n] \setminus H_K$, where $W_{\text{TH}} = w(H_K)$. Given our definitions of the initial change points and sets of indices, this is precisely $\mathcal{P}(W_{\text{next}}^{(0)}) = \{P_1^{(0)}, (0, 0), P_0^{(0)}\}$ and $W_{\text{next}}^{(0)} = w(P_1^{(0)})$. Hence, the base step holds under Case (i).

- (ii) **Case (ii):** $W_{\text{min}} \geq W_{\text{TH}}$. In this case, we solve Problem $(\text{KP-RELAX}(W_{\text{min}}, K))$ and obtain an optimal basic solution, which has the profile $\mathcal{P}(W_{\text{min}}) = \{P_1(W_{\text{min}}), (i, j), P_0(W_{\text{min}})\}$. We set $P_1^{(0)} = P_1(W_{\text{min}}) \cup \{j\}, P_0^{(0)} = [n] \setminus P_1^{(0)}, W_{\text{next}}^{(0)} = w(P_1^{(0)})$ as our initial sets of indices and change point. To see why this initialization satisfies the base case, we can invoke Lemma 6 stated below.

LEMMA 6. *Suppose that at capacity level $\widehat{W} \in I_{\text{high}}$, an optimal basic solution $\mathbf{x}^*(\widehat{W})$ to Problem $(\text{KP-RELAX}(\widehat{W}, K))$ has profile $\mathcal{P}(\widehat{W}) = \{P_1 \setminus \{i\}, (i, j), P_0 \setminus \{j\}\}$. Then, for any $\widetilde{W} \in [w(P_1), w(P_1) - w_i + w_j]$ such that $\widetilde{W} \in I_{\text{high}}$, we have an optimal basic solution \mathbf{x} to Problem $(\text{KP-RELAX}(\widetilde{W}, K))$ such that $x_k = 1$ for any $k \in P_1 \setminus \{i\}$, $x_k = 0$ for any $k \in P_0 \setminus \{j\}$, and*

$$x_k = \begin{cases} \frac{\widetilde{W} - w(P_1) + w_i - w_j}{w_i - w_j} & k = i \\ \frac{\widetilde{W} - w(P_1)}{w_j - w_i} & k = j \end{cases}. \quad (21)$$

By invoking Lemma 6 with $\widehat{W} = W_{\text{min}}$ and $\widetilde{W} = w(P_1(W_{\text{min}})) + w_j = W_{\text{next}}^{(0)}$, we have that as long as $W_{\text{next}}^{(0)} \in I_{\text{high}}$, the optimal basic solution \mathbf{x} to Problem $(\text{KP-RELAX}(W_{\text{next}}^{(0)}))$ takes the form that $x_k = 1$ for any $k \in P_1(W_{\text{min}}) \cup \{j\}$ and $x_k = 0$ for any $k \in P_0(W_{\text{min}}) \cup \{i\}$. That

is, we have that the profile $\mathcal{P}(\text{KP-RELAX}(W_{\text{next}}^{(0)})) = \{P_1(W_{\min}) \cup \{j\}, (0, 0), P_0(W_{\min}) \cup \{i\}\} = \{P_1^{(0)}, (0, 0), P_0^{(0)}\}$ and $W_{\text{next}}^{(0)} = w(P_1(W_{\min}) \cup \{j\}) = w(P_1^{(0)})$, which shows that the base case also holds for Case (ii).

- *Inductive step:* Suppose that $W_{\text{next}}^{(k)}, P_1^{(k)}, P_0^{(k)}$ are the change point and the sets of indices at the k th iteration. By our inductive assumption, assume that the optimal solution to Problem $(\text{KP-RELAX}(W_{\text{next}}^{(k)}, K))$ indeed has profile $\mathcal{P}(W_{\text{next}}^{(k)}) = \{P_1^{(k)}, (0, 0), P_0^{(k)}\}$ and $w(P_1^{(k)}) = W_{\text{next}}^{(k)}$. Now, assume that at the $(k+1)$ th iteration of Step 3b, Algorithm 1 has not hit the stopping rule in Step 3(b)ii and updated the change point to be $W_{\text{next}}^{(k+1)}$ and the two sets to be $P_1^{(k+1)}, P_0^{(k+1)}$. We would like to show that as long as $W_{\text{next}}^{(k+1)} \in I_{\text{high}}$, the optimal basic solution to Problem $(\text{KP-RELAX}(W_{\text{next}}^{(k+1)}, K))$ must have profile $\mathcal{P}(W_{\text{next}}^{(k+1)}) = \{P_1^{(k+1)}, (0, 0), P_0^{(k+1)}\}$, and $W_{\text{next}}^{(k+1)} = w(P_1^{(k+1)})$.

Recall that within the $(k+1)$ th iteration of Step 3b of Algorithm 1, we first solve the following optimization problem $(i^*, j^*) \in \arg \max_{\substack{i \in P_1^{(k)}, j \in P_0^{(k)} \\ w_i < w_j}} \left[\frac{u_j(W_{\text{next}}^{(k)}) - u_i(W_{\text{next}}^{(k)})}{w_j - w_i} \right]$, and then, given that $W_{\text{next}}^{(k)} < W_{\max}$ and $u_{j^*}(W_{\text{next}}^{(k)}) > u_{i^*}(W_{\text{next}}^{(k)})$, make the following updates: $W_{\text{next}}^{(k+1)} = W_{\text{next}}^{(k)} - w_{i^*} + w_{j^*}$, $P_1^{(k+1)} = P_1^{(k)} \cup \{j^*\} \setminus \{i^*\}$ and $P_0^{(k+1)} = P_0^{(k)} \cup \{i^*\} \setminus \{j^*\}$. To show the result, we use the following lemma:

LEMMA 7. *Suppose that at capacity level $W \in I_{\text{high}}$, the capacity constraint is binding and the relaxed knapsack problem $(\text{KP-RELAX}(W, K))$ has a degenerate, integer optimal basic solution \mathbf{x}^* , with profile $\mathcal{P}(W) = \{P_1, (0, 0), P_0\}$. Let $(i^*, j^*) \in \arg \max_{\substack{i \in P_1, j \in P_0 \\ w_i < w_j}} \left[\frac{u_j(W) - u_i(W)}{w_j - w_i} \right]$. If $u_{j^*}(W) > u_{i^*}(W)$, for any $\eta \in [0, w_{j^*} - w_{i^*}]$ such that $W + \eta \in I_{\text{high}}$, Problem $(\text{KP-RELAX}(W + \eta, K))$ has an optimal basic solution \mathbf{x} such that $x_k = 1$ for any $k \in P_1 \setminus \{i^*\}$, $x_k = 0$ for any $k \in P_0 \setminus \{j^*\}$, and*

$$x_k = \begin{cases} 1 - \frac{\eta}{w_{j^*} - w_{i^*}} & k = i^* \\ \frac{\eta}{w_{j^*} - w_{i^*}} & k = j^* \end{cases}. \quad (22)$$

The proof of the inductive step is then completed by invoking Lemma 7 with $W = W_{\text{next}}^{(k)}$ and $\eta = w_{j^*} - w_{i^*}$. We indeed have that the optimal basic solution to Problem $(\text{KP-RELAX}(W_{\text{next}}^{(k+1)}, K))$ has the profile $\mathcal{P}(W_{\text{next}}^{(k+1)}) = \{P_1^{(k)} \cup \{j^*\} \setminus \{i^*\}, (0, 0), P_0^{(k+1)} \cup \{i^*\} \setminus \{j^*\}\} = \{P_1^{(k+1)}, (0, 0), P_0^{(k+1)}\}$, and $w(P_1^{(k+1)}) = w(P_1^{(k)}) - w_{i^*} + w_{j^*} = W_{\text{next}}^{(k+1)}$, as long as $W_{\text{next}}^{(k+1)} \in I_{\text{high}}$.

The base step and the inductive step together prove the statement that at the k th iteration of Step 3b for any given $k \geq 0$, as long as the change point $W_{\text{next}}^{(k)} \in I_{\text{high}}$, the optimal basic solution to Problem $(\text{KP-RELAX}(W_{\text{next}}^{(k)}, K))$ has profile $\mathcal{P}(W_{\text{next}}^{(k)}) = \{P_1^{(k)}, (0, 0), P_0^{(k)}\}$ and the capacity constraint is binding, i.e., $w(P_1^{(k)}) = W_{\text{next}}^{(k)}$.

Now, suppose that throughout Algorithm 1, we have the following change points: $W_{\text{next}}^{(0)} < W_{\text{next}}^{(1)} < \dots < W_{\text{next}}^{(\ell)}$, where $W_{\text{next}}^{(\ell)}$ is the last change point computed by Algorithm 1 before the stopping

rule in Step 3b is invoked. We have shown, in part 3 of the proof, that $W_{\text{next}}^{(\ell)} = W_{\text{binding}}$. Now, consider any $W \in I_{\text{high}}$ such that $W \leq W_{\text{binding}}$. We must have one of the following two cases: (1) $W \in [W_{\text{TH}}, W_{\text{next}}^{(0)}]$; note that this interval is non-empty only when $W_{\text{min}} > W_{\text{TH}}$; or (2) W lies between two consecutive change points, i.e. $W \in [W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)})$ for some $0 \leq k < l$ (or, $W = W_{\text{next}}^{(\ell)}$).

Let us discuss these two cases separately:

1. **Case 1:** $W \in [W_{\text{TH}}, W_{\text{next}}^{(0)}]$.¹⁵ Since this interval is only non-empty when $W_{\text{min}} > W_{\text{TH}}$, in the initialization step (Step 3a), we will compute the optimal basic solution for Problem (KP-RELAX(W_{min}, K)), which has the profile $\mathcal{P}(W_{\text{min}}) = \{P_1(W_{\text{min}}), (i, j), P_0(W_{\text{min}})\}$. By invoking Lemma 6 with $\widehat{W} = W_{\text{min}}$ and $\widetilde{W} = W$, we know that the optimal basic solution $x^*(W)$ has profile $\mathcal{P}(W) = \{P_1(W_{\text{min}}), (i, j), P_0(W_{\text{min}})\}$. Given the form of the profile $\mathcal{P}(W)$, we know from Lemma 1 that either $P_1(W_{\text{min}}) \cup \{i\}$ or $\{j\}$ is a 1/2-approx. feasible solution S_W to Problem (KP-RELAX(W, K)). Observe that in Step 3a, we have added $P_1(W_{\text{min}}) \cup \{i\}$ to the collection \mathcal{C}_I . In Step 1, we have added $\{j\}$ to \mathcal{C}_I . Therefore, if $W \in [W_{\text{TH}}, W_{\text{next}}^{(0)})$, we must have $S_W \in \mathcal{C}_I$.
2. **Case 2:** $W \in [W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)})$ for some $0 \leq k < l$ (or, $W = W_{\text{next}}^{(\ell)}$). Since $W \leq W_{\text{binding}}$, we must also have $W_{\text{next}}^{(k)} \leq W_{\text{binding}}$; hence, our inductive statement holds for the k th iteration. At the k th iteration of Step 3b, we have updated the change point to be $W_{\text{next}}^{(k)}$, and the two sets to be $P_1^{(k)}, P_0^{(k)}$. By the inductive statement, we have that $\mathcal{P}(W_{\text{next}}^{(k)}) = \{P_1^{(k)}, (0, 0), P_0^{(k)}\}$. Since $W \in [W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)})$ and that the capacity constraint is binding at W , by Lemma 7, we have:
 - (i) if $W = W_{\text{next}}^{(k)}$ for some $k \in \{0, \dots, l\}$, the profile of $\mathbf{x}^*(W)$ is $\mathcal{P}(W) = \{P_1^{(k)}, (0, 0), P_0^{(k)}\}$.
 - (ii) if $W \in (W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)})$ for some $k \in \{0, \dots, l-1\}$, the profile of $\mathbf{x}^*(W)$ is $\mathcal{P}(W) = \{P_1^{(k)} \setminus \{i^*\}, (i^*, j^*), P_0^{(k)} \setminus \{j^*\}\}$.

Given the form of the profile $\mathcal{P}(W)$, we know from Lemma 1 that either $P_1^{(k)}$ or $\{j^*\}$ is an 1/2-approx. feasible solution S_W to Problem KP-RELAX(W, K). Observe that in Step 3(b)iii of the k th iteration, we have added $P_1^{(k)}$ to the collection \mathcal{C}_I . In Step 1, we have added $\{j\}$ to \mathcal{C}_I for all $j \in [n]$. Therefore, in this case, we again have $S_W \in \mathcal{C}_I$.

This concludes Part 5 of this proof, which shows that for any $W \in I_{\text{high}}$ such that $W \leq W_{\text{binding}}$, we must also have $S_W \in \mathcal{C}_I$, where S_W is a 1/2-approx. solution for Problem (KP-RELAX(W, K)).

Overall, Parts 2–5 imply that for any $W \in I$ such that $W \leq W_{\text{binding}}$, Algorithm 1 would add a 1/2-approx. feasible solution S_W to the collection \mathcal{C}_I . Together with Part 1 of the proof, we show that Claim 1 holds.

¹⁵ Recall from Part 1 that if the capacity constraint is non-binding for all $W \in I$, we have defined $W_{\text{binding}} = W_{\text{min}}$. We remark that in this case, our statement of Part 5 trivially holds for $W = W_{\text{min}}$. In the initialization step (Step 3a), we compute an optimal basic solution for Problem (KP-RELAX(W_{min}, K)). Since the capacity constraint is non-binding at W_{min} , the profile $\mathcal{P}(W_{\text{min}})$ will take the form $\mathcal{P}(W_{\text{min}}) = \{P_1(W_{\text{min}}), (0, 0), P_0(W_{\text{min}})\}$, where $P_1(W_{\text{min}})$ includes the K items with the highest positive utilities. By design of Algorithm 1, we will add $P_1(W_{\text{min}})$ to the collection \mathcal{C}_I , and $P_1(W_{\text{min}})$ serves as a 1/2-approx. solution for the knapsack problem (KP-RELAX(W_{min}, K)).

Segment 2. We now comment on the runtime of Algorithm 1.

1. *Step 1.* Adding n singletons to \mathcal{C}_I takes $\mathcal{O}(n)$, and ranking the items by their utility-to-weight ratios takes $\mathcal{O}(n \log n)$.
2. *Step 2.* Adding n assortments to \mathcal{C}_I and checking the signs of the utilities takes $\mathcal{O}(n)$.
3. *Step 3.* The initialization step (Step 3a) requires us to solve a relaxed knapsack problem with n items, which takes at most $\mathcal{O}(n)$ (see Megiddo and Tamir (1993)).

In Step 3(b)i, we need to find the pair of items (i^*, j^*) to be swapped at each iteration. Instead of solving the problem directly at every iteration, we can do the following to improve the time complexity. At the start of Step 3b, we first pre-compute and sort the array $\mathcal{A}_i = \left\{ \frac{u_j(W) - u_i(W)}{w_j - w_i} : j \in [n], w_j > w_i \right\}$ for each $i \in [n]$, for any given $W \in I_{\text{high}}$. Note that since interval I is well-behaving, by Definition 1, the ordering of terms in \mathcal{A}_i for any fixed $i \in [n]$ does not change as long as $W \in I$. This pre-computing step takes $\mathcal{O}(n^2)$, and sorting these n arrays takes $\mathcal{O}(n^2 \log n)$ in total. The first iteration of Step 3b will take $\mathcal{O}(K^2 + K)$ time. This is because we will restrict our attention to the K sorted arrays $\{\mathcal{A}_i : i \in P_1\}$ that correspond to elements $i \in P_1$, and for each of these arrays, finding the optimal index $j_{\max}(i) := \arg \max \left\{ \frac{u_j(W_{\text{next}}) - u_i(W_{\text{next}})}{w_j - w_i} : j \in P_0, w_j > w_i \right\}$ takes $\mathcal{O}(K)$ given that \mathcal{A}_i has been sorted. We can now determine $(i^*, j^*) = \arg \max \left\{ \frac{u_j(W_{\text{next}}) - u_i(W_{\text{next}})}{w_j - w_i} : i \in P_1, j \in P_0, w_i < w_j \right\}$ by simply choosing the maximizing index $i^* = \arg \max \left\{ \frac{u_{j_{\max}(i)}(W_{\text{next}}) - u_i(W_{\text{next}})}{w_{j_{\max}(i)} - w_i} : i \in P_1 \right\}$, which takes $\mathcal{O}(K)$.

Each time after we determine (i^*, j^*) of the current iteration, checking the stopping rule and updating $P_1, P_0, W_{\text{next}}$ take $\mathcal{O}(1)$ time. Then, we can perform $\mathcal{O}(K)$ updates to find the pair of items to be swapped in the next iteration. For each sorted array \mathcal{A}_i where $i \in P_1 \setminus \{i^*\}$, we will now consider i^* as an element in P_0 and no longer consider j^* when we search for the next optimal index $j_{\max}(i)$. In addition, we will now consider \mathcal{A}_{j^*} as one of the K sorted arrays that correspond to items in P_1 , and no longer consider \mathcal{A}_{i^*} . Therefore, the time taken in each iteration of Step 3b would be $\mathcal{O}(K)$.

We further remark that the adaptive partition of I_{high} would divide I_{high} into at most $\mathcal{O}(nK)$ sub-intervals. This is because at each iteration of Step 3b, we need to swap some item $i \in P_1$ and $j \in P_0$ such that $w_i < w_j$; that is, at each iteration, we always replace one item in P_1 with another item of higher weight. Let us think of P_1 as a set of K spots, where each spot can hold one item. Since the weight of item in one spot in P_1 is strictly increasing, each spot in P_1 can only undergo n replacement of items. Hence, in total, we can perform at most $\mathcal{O}(nK)$ such replacements for the items in P_1 .

Overall, time taken by Step 3 is $\mathcal{O}(n + n^2 + n^2 \log n + (K^2 + K) + nK \cdot K) = \mathcal{O}(n^2 \log n + nK^2)$.

4. *Step 4.* Finally, since $\mathcal{O}(n)$ assortments are added in Step 1, $\mathcal{O}(n)$ assortments are added in Step 2, and $\mathcal{O}(nK)$ assortments are added in Step 3, there are at most $\mathcal{O}(nK)$ assortments in the collection \mathcal{C}_I . The time taken to find the assortment that maximizes the cost-adjusted revenue is thus $\mathcal{O}(nK)$.

The overall runtime of Algorithm 1 is at most $\mathcal{O}(n \log n + n + n^2 \log n + nK^2 + nK) = \mathcal{O}(n^2 \log n + nK^2)$. ■

K.1. Proof of Corollary 1

Corollary 1 immediately follows from the proof of Theorem 7. Given any $W \subseteq I$, we have:

1. If $W \in I_{\text{low}} = I \cap [0, W_{\text{TH}})$, by Part 4 of the proof of Theorem 7, an 1/2-approx. solution for Problem KP-RELAX(W, K) is found in Step 2 of Algorithm 5. In particular, there exists $j \in [K - 1]$ such that $W \in [w(H_j), w(H_{j+1}))$. By Lemma 1, we know that for any $W \in I' = [w(H_j), w(H_{j+1})) \cap I$, the profile $\mathcal{P}(W) = \{H_j, (h_{j+1}, 0), [n] \setminus H_{j+1}\}$ remains the same and the 1/2-approx. set should be either $S_0 = H_j$ or $S_1 = \{h_{j+1}\}$. We thus inputs I', S_0, S_1 into Algorithm 6 in Step 2(a) of Algorithm 5.
2. If $W \in I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$, by Part 5 of the proof of Theorem 7, an 1/2-approx. solution for Problem KP-RELAX(W, K) is found in Step 3 of Algorithm 5. In particular,
 - If $W \in [W_{\text{TH}}, W_{\text{next}}^{(0)})$, where $W_{\text{next}}^{(0)} = w(P_1(W_{\text{min}})) + w_j$, by Lemma 1, we know that for any $W \in I' = [W_{\text{TH}}, W_{\text{next}}^{(0)}) \cap I$, the profile $\mathcal{P}(W) = \{P_1(W_{\text{min}}), (i, j), P_0(W_{\text{min}})\}$ remains the same and the 1/2-approx. set should be either $S_0 = P_1(W_{\text{min}}) \cup \{i\}$ and $S_1 = \{j\}$. We thus inputs I', S_0, S_1 into Algorithm 6 in Step 3(a) of Algorithm 5.
 - If $W \in [W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)})$ for some $k \geq 0$, by Lemma 1, we know that for any $W \in I' = [W_{\text{next}}^{(k)}, W_{\text{next}}^{(k+1)}) \cap I$, the profile $\mathcal{P}(W) = \{P_1^{(k)} \setminus \{i^*\}, (i^*, j^*), P_0^{(k)} \setminus \{j^*\}\}$ remains the same and the 1/2-approx. set should be either $S_0 = P_1^{(k)}$ or $S_1 = \{j^*\}$. We thus inputs I', S_0, S_1 into Algorithm 6 in Step 3(b) of Algorithm 5.

Given a well-behaving interval I' , on which the profile does not change, and the two candidates for its 1/2-approx. solutions S_0, S_1 , Algorithm 6 (i) determines whether we need to further partition I' once and (ii) maps each sub-interval I_ℓ to its exact 1/2-approx. solution $\mathcal{D}(I_\ell)$. Given that the ordering of the total utilities produced by our two candidate sets— $\sum_{i \in S_0} u_i(W)$ and $\sum_{i \in S_1} u_i(W)$ —would change at most once at value \widehat{W} such that $\sum_{i \in S_0} u_i(\widehat{W}) = \sum_{i \in S_1} u_i(\widehat{W})$ (defined in Eq.(11)), we can simply compare the utilities generated by S_0 and S_1 at the two end points of I' to determine the exact identities of the 1/2-approx sets. The details are outlined in Step 2 of Algorithm 6.

The design of Algorithm 5 ensures that Π_I forms a partition of interval I . Given the results shown above, we also have that for any $I_\ell \in \Pi_I$, $\mathcal{D}(I_\ell)$ is a feasible 1/2-approx. set for any $W \in I_\ell$. ■

K.2. Proof of Lemma 4

Consider a capacity level $\widetilde{W} > 0$, and suppose that the capacity constraint is non-binding at the optimal basic solution $\mathbf{x}^*(\widetilde{W})$ to $\text{KP-RELAX}(\widetilde{W}, K)$. That is, $\sum_{i \in [n]} w_i x_i^*(\widetilde{W}) < \widetilde{W}$. We would like to show that for any $W > \widetilde{W}$, we have $\sum_{i \in [n]} w_i x_i^*(W) < W$. To do so, for any $\eta > 0$, we show that the optimal solution $x^*(\widetilde{W})$ is in fact also the optimal solution for Problem $(\text{KP-RELAX}(W^* + \eta, K))$, and hence the capacity constraint remains non-binding at capacity level $\widetilde{W} + \eta$ for any $\eta > 0$.

To do that, we first consider the following auxiliary relaxed problem:

$$\max_{\mathbf{x} \in [0,1]^n} \sum_{i \in [n]} u_i(\widetilde{W}) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i \leq \widetilde{W} + \eta \quad \text{and} \quad \sum_{i \in [n]} x_i \leq K \quad (23)$$

Note that the above relaxed problem only differs from $\text{KP-RELAX}(\widetilde{W}, K)$ in the capacity constraint. Since the capacity constraint is non-binding for Problem $\text{KP-RELAX}(\widetilde{W}, K)$, we have that $\mathbf{x}^*(\widetilde{W})$ is also the optimal solution to Problem (23). This is because both feasibility and optimality conditions remain unchanged.

We claim that the optimal solution $\mathbf{x}^*(\widetilde{W})$ must fully contain the K items with the highest utilities (here, we assume that at least K items have positive utilities at capacity level \widetilde{W} ; otherwise, this Lemma holds trivially). Without loss of generality, let the items be ranked based on their utilities $u_i(\widetilde{W})$; that is, $u_1(\widetilde{W}) \geq u_2(\widetilde{W}) \geq \dots \geq u_n(\widetilde{W})$. (Recall that on I , the ordering of utilities of items does not change.) We will show that (i) $x_k^*(\widetilde{W}) = 0$ for $k \geq K + 1$ and (ii) $x_k^*(\widetilde{W}) = 1$ for $k \leq K$. To show the first statement, suppose by contradiction that there exists $i \geq K + 1$ such that $x_i^*(\widetilde{W}) > 0$. Then, there must exist some $j \in [K]$ such that $x_j^*(\widetilde{W}) < 1$. Suppose $w_i \geq w_j$, then if we set \mathbf{x} to be $x_i = x_i^*(\widetilde{W}) + x_j^*(\widetilde{W}) - x_j$, $x_j = \min\{1, x_i^*(\widetilde{W}) + x_j^*(\widetilde{W})\}$, and $x_k = x_k^*(\widetilde{W})$ for any $k \neq i, j$, \mathbf{x} is a better, feasible solution to Problem (23). On the other hand, suppose $w_i < w_j$, then if we set \mathbf{x} to be $x_i = x_i^*(\widetilde{W}) + x_j^*(\widetilde{W}) - x_j$, $x_j = \min\{1, x_j^*(\widetilde{W}) + \frac{\eta}{w_j - w_i}\}$, and $x_k = x_k^*(\widetilde{W})$ for any $k \neq i, j$, \mathbf{x} is a better, feasible solution to Problem (23). The above arguments thus raise a contradiction. Therefore, we must have $x_k^*(\widetilde{W}) = 0$ for all $k \geq K + 1$. To show the second statement, suppose by contradiction that $x_i^*(\widetilde{W}) < 1$ for some $i \in [K]$, then if we set \mathbf{x} to be $x_i = \min\{1, x_i^*(\widetilde{W}) + \frac{\eta}{w_i}\}$, and $x_k = x_k^*(\widetilde{W})$ for any $k \neq i$, \mathbf{x} is a better, feasible solution to Problem (23). Therefore, we must have $x_k^*(\widetilde{W}) = 1$ for all $k \leq K$.

Since the ordering of the utilities of items do not change on I , when we consider Problem $(\text{KP-RELAX}(W^* + \eta, K))$, the optimal solution $\mathbf{x}^*(\widetilde{W})$ is again a feasible solution to Problem $(\text{KP-RELAX}(W^* + \eta, K))$ that fully contains the K items with the highest utilities. Hence, $\mathbf{x}^*(\widetilde{W})$ again serves as the optimal solution to Problem $(\text{KP-RELAX}(W^* + \eta, K))$. Since $\sum_{i \in [n]} w_i x_i^*(\widetilde{W}) < \widetilde{W} < \widetilde{W} + \eta$, we thus have that the capacity constraint is non-binding for Problem $(\text{KP-RELAX}(W^* + \eta, K))$. ■

K.3. Proof of Lemma 5

Consider the following relaxed knapsack problem without the cardinality constraint:

$$\max_{\mathbf{x} \in [0,1]^n} \sum_{i=1}^n u_i(W)x_i \quad \text{s.t.} \quad \sum_{i=1}^n w_i x_i \leq W \quad (24)$$

It is known that the optimal solution to Problem (24) is given by filling up the knapsack with items in descending order of the utility-to-weight ratio until the capacity is reached. Recall that H_K is the set of K items with the highest utility-to-weight ratios. Since $W \leq w(H_K)$, this optimal solution also satisfies $|\sum_{i \in [n]} x_i| \leq K$ and is thus feasible for Problem (KP-RELAX(W, K)) as well. Since KP-RELAX(W, K) is always upper bounded by the optimal objective of (24), we have the optimal solution to Problem (24) is also optimal for Problem (KP-RELAX(W, K)). ■

K.4. Proof of Lemma 6

Suppose that at capacity level $\widehat{W} \in I_{\text{high}}$, an optimal basic solution $\mathbf{x}^*(\widehat{W})$ to Problem (KP-RELAX(\widehat{W}, K)) has profile $\mathcal{P}(\widehat{W}) = \{P_1 \setminus \{i\}, (i, j), P_0 \setminus \{j\}\}$. By Lemma 9, we know that $x^*(\widehat{W})$ either has two fractional variables, or no fractional variables. If $(i, j) = (0, 0)$ (i.e., $x^*(\widehat{W})$ has no fractional variables), the statement of Lemma 6 is trivially satisfied. In the following of this proof, we focus on the case when $x^*(\widehat{W})$ has two fractional variables, i.e., $i \neq 0, j \neq 0$.

Fix $\widetilde{W} \in [w(P_1), w(P_1) - w_i + w_j]$ such that $\widetilde{W} \in I_{\text{high}}$. For simplicity of notation, we let $\mathbf{x}^* = \mathbf{x}^*(\widehat{W})$ and $\mathbf{x} = \mathbf{x}^*(\widetilde{W})$. As shown in Caprara et al. (2000), for any $W \geq 0$, in the optimal basic solution of a relaxed knapsack problem KP-RELAX(W, K), we have at most two basic variables. Here, for Problem KP-RELAX(\widehat{W}, K), x_i^* and x_j^* are the two fractional variables, hence they also serve as the two basic variables in the optimal basic solution \mathbf{x}^* . In the following proof, we will show that if we move from Problem (KP-RELAX(\widehat{W}, K)) to Problem (KP-RELAX(\widetilde{W}, K)), x_i and x_j will continue to be the two basic variables. To show that, recall that a basic solution that satisfies (i) the optimality condition and (ii) the feasibility condition is an optimal basic solution (see Section M for formal definitions of both conditions). In the following, we will show that both conditions continue to hold with the same basis when we transition to Problem (KP-RELAX(\widetilde{W}, K)). This then allows us to solve for $\mathbf{x} = \mathbf{x}^*(\widetilde{W})$ using a linear system defined by capacity and cardinality constraints.

Optimality condition. We first consider the optimality condition, which requires that the reduced costs of non-basic variables that attain their lower bounds to be non-positive, and the reduced costs of non-basic variables that attain their upper bounds to be non-negative (see Section M for formal definition of *reduced cost*). Since x^* is a nondegenerate, optimal basic solution to Problem (KP-RELAX(\widehat{W}, K)), we know that it satisfies the optimality condition. Our main idea here is to show that if we now transition to Problem (KP-RELAX(\widetilde{W}, K)), the signs of the reduced costs of all variables remain unaffected.

To see that, we consider $(\text{KP-RELAX}(\widehat{W}, K))$ in the following equivalent form:

$$\max_{\mathbf{x} \in [0,1]^n, s_1, s_2 \geq 0} \sum_{i \in [n]} u_i(\widehat{W}) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i + s_1 = \widehat{W} \quad \text{and} \quad \sum_{i \in [n]} x_i + s_2 = K$$

(KP-RELAX-EQ(\widehat{W} , K))

Since x_i^* and x_j^* are the two basic variables in the optimal solution for the above problem, we know that for any non-basic variable x_k^* , where $k \neq i, j$, the reduced cost $\bar{C}_k \leq 0$ if $x_k^* = 0$ and $\bar{C}_k \geq 0$ if $x_k^* = 1$ (intuitively, we can think of the reduced cost as the change in our total utility due to including non-basic variables into our basis. These conditions ensure that changing the values of any of the non-basic variables above will only decrease our objective function; see Section M for more details). The non-basic variables s_1, s_2 , also have non-positive reduced costs.

Let us first focus on any non-basic variables with $x_k^* = 0$. The corresponding reduced cost of this variable is as follows:

$$\begin{aligned} \bar{C}_k &= u_k(\widehat{W}) + u_i(\widehat{W}) \frac{w_k - w_j}{w_j - w_i} - u_j(\widehat{W}) \frac{w_k - w_i}{w_j - w_i} \leq 0 \\ &\iff (w_j - w_i)u_k(\widehat{W}) + (w_k - w_j)u_i(\widehat{W}) + (w_i - w_k)u_j(\widehat{W}) \leq 0 \\ &\iff (u_k(\widehat{W}) - u_i(\widehat{W}))(w_j - w_i) \leq (u_j(\widehat{W}) - u_i(\widehat{W}))(w_k - w_i) \end{aligned}$$

Note that since $\widehat{W}, \widetilde{W} \in I$, based on Definition 1 of the well-behaving interval, we must have the ordering of $\frac{u_k(W) - u_i(W)}{w_k - w_i}$ and $\frac{u_j(W) - u_i(W)}{w_j - w_i}$ for any $W \in I$. This implies that we must also have

$$(w_j - w_i)u_k(\widetilde{W}) + (w_k - w_j)u_i(\widetilde{W}) + (w_i - w_k)u_j(\widetilde{W}) \leq 0.$$

A similar argument applies to non-basic variables x_k^* that takes value 1. That is, the reduced cost associated with any item k such that $k \neq i, k \neq j$ does not change sign as we transition from Problem $(\text{KP-RELAX}(\widehat{W}, K))$ to Problem $(\text{KP-RELAX}(\widetilde{W}, K))$. Let us now consider the reduced cost of s_1 , which is non-positive when we consider Problem $(\text{KP-RELAX-EQ}(\widehat{W}, K))$

$$\bar{C}_{s_1} = \frac{u_j(\widehat{W}) - u_i(\widehat{W})}{w_i - w_j} \leq 0.$$

As $w_i < w_j$, this condition essentially implies that $u_j(\widehat{W}) \geq u_i(\widehat{W})$. Recall that on interval I , the ordering of utilities of items do not change, so we must also have

$$\frac{u_j(\widetilde{W}) - u_i(\widetilde{W})}{w_i - w_j} \leq 0.$$

Hence, the optimality condition associated with s_1 continues to hold under Problem $(\text{KP-RELAX-EQ}(\widetilde{W}, K))$. Finally, we compute the reduced cost of s_2 when we consider Problem $(\text{KP-RELAX-EQ}(\widehat{W}, K))$:

$$\bar{C}_{s_2} = \frac{w_j}{w_i - w_j} u_i(\widehat{W}) - \frac{w_i}{w_i - w_j} u_j(\widehat{W}) \leq 0 \quad \iff \quad \frac{u_i(\widehat{W})}{w_i} \geq \frac{u_j(\widehat{W})}{w_j} \quad \text{since } w_i < w_j.$$

Recall that the ordering of utility-to-weight ratios of items do not change on I . Hence, replacing \widehat{W} with \widetilde{W} again does not change the sign of the reduced cost of s_2 . Overall, we have showed that optimality conditions are unaffected when we move from Problem $(\text{KP-RELAX}(\widehat{W}, K))$ to $(\text{KP-RELAX}(\widetilde{W}, K))$.

Feasibility condition. We then check whether the feasibility condition still holds for Problem $(\text{KP-RELAX}(\widetilde{W}, K))$. To do that, we simply let \mathbf{x} have the same basis as \mathbf{x}^* (that is, x_i and x_j are the two basic variables), and see if \mathbf{x} is a feasible solution for Problem $(\text{KP-RELAX}(\widetilde{W}, K))$. To compute \mathbf{x} , we solve the following linear system:

$$w_i x_i + w_j x_j = \widetilde{W} - \sum_{k \in P_1 \setminus \{i\}} w_k \quad \text{and} \quad x_i + x_j = 1,$$

where the first linear equation ensures that the capacity constraint is binding at solution \mathbf{x} , and the second linear equation ensures that the cardinality constraint is binding at solution \mathbf{x} . The aforementioned linear system has the following solution

$$x_i = \frac{\widetilde{W} - \sum_{k \in P_1} w_k + w_i - w_j}{w_i - w_j} \quad \text{and} \quad x_j = \frac{\widetilde{W} - \sum_{k \in P_1} w_k}{w_j - w_i}. \quad (25)$$

It is then easy to verify that for any $\widetilde{W} \in [\sum_{k \in P_1} w_k, \sum_{k \in P_1} w_k - w_i + w_j]$, we have $x_i, x_j \in [0, 1]$. That is, the basic solution \mathbf{x} with x_i and x_j as the two basic variables is always feasible for any $\widetilde{W} \in [\sum_{k \in P_1} w_k, \sum_{k \in P_1} w_k - w_i + w_j]$. In particular, the solution takes the form $x_k = x_k^*$ for any $k \neq i, j$ and x_i, x_j are defined as in Eq. (25). Hence, the feasibility condition also holds.

To summarize, when we transition from Problem $(\text{KP-RELAX}(\widehat{W}, K))$ to Problem $(\text{KP-RELAX}(\widetilde{W}, K))$ and keep x_i, x_j as our two basic variables, both the optimality and feasibility conditions continue to hold. Hence, the optimal solution to Problem $(\text{KP-RELAX}(\widetilde{W}, K))$ satisfies that $x_k = x_k^*$ for any $k \neq i, j$, while x_i and x_j takes the form in Eq. (25). We thus show the desired result. ■

K.5. Proof of Lemma 7

The result trivially holds when $\eta = 0$. For any fixed $\eta \in (0, w_{j^*} - w_{i^*}]$, we can first choose some $\eta' \in (0, \min\{\eta, \min_{w_i \neq w_j} |w_i - w_j|\})$ such that $W + \eta' \in I_{\text{high}}$ and $W + \eta' \neq \sum_{i \in S} w_i$ for any $S \subset [n], |S| = K$. Note that such η' always exists. We will see shortly in the following discussion why we consider such a value of η' .

Our proof consists of two parts: (i) we first solve for the optimal solution to Problem $(\text{KP-RELAX}(W + \eta', K))$, (ii) we next show that the optimal solutions to Problem $(\text{KP-RELAX}(W + \eta', K))$ and $(\text{KP-RELAX}(W + \eta, K))$ share the same profile, which allows us to derive $\mathbf{x}^*(W + \eta)$.

First, let us solve for the optimal solution to Problem $(\text{KP-RELAX}(W + \eta', K))$ using the following lemma:

LEMMA 8. Suppose that at capacity level $W \in I_{\text{high}}$, the capacity constraint is binding and the relaxed knapsack problem $(\text{KP-RELAX}(W, K))$ has a degenerate, integer optimal basic solution \mathbf{x}^* , with profile $\mathcal{P}(W) = \{P_1, (0, 0), P_0\}$. Let $(i^*, j^*) \in \arg \max_{\substack{i \in P_1, j \in P_0 \\ w_i < w_j}} \left[\frac{u_j(W) - u_i(W)}{w_j - w_i} \right]$, and assume $u_{j^*}(W) > u_{i^*}(W)$. For any $0 < \eta' \leq \min_{w_i \neq w_j} |w_i - w_j|$ such that $W + \eta' \in I_{\text{high}}$ and $W + \eta' \neq \sum_{i \in S} w_i$ for any $S \subset [n], |S| = K$, Problem $(\text{KP-RELAX}(W + \eta', K))$ has an optimal basic solution, where $x_k = 1$ for any $k \in P_1 \setminus \{i^*\}$, $x_k = 0$ for any $k \in P_0 \setminus \{j^*\}$, and

$$x_k = \begin{cases} 1 - \frac{\eta'}{w_{j^*} - w_{i^*}} & k = i^* \\ \frac{\eta'}{w_{j^*} - w_{i^*}} & k = j^* \end{cases}. \quad (26)$$

Using Lemma 8, we can solve for the optimal basic solution $\mathbf{x}^*(W + \eta')$, which takes the form in Eq. (26). The solution has the profile $\mathcal{P}(W + \eta') = \{P_1 \setminus \{i^*\}, (i^*, j^*), P_0 \setminus \{j^*\}\}$.

Now, consider $\eta \geq \eta'$, which falls into the interval $(0, w_{j^*} - w_{i^*}]$. We can now invoke Lemma 6 by taking $\widetilde{W} = W + \eta'$ and $\widetilde{W} = W + \eta \in [w(P_1), w(P_1) + w_{j^*} - w_{i^*}]$. Recall that we have assumed that $\widetilde{W} \in I_{\text{high}}$. Then, given the profile $\mathcal{P}(W + \eta') = \{P_1 \setminus \{i^*\}, (i^*, j^*), P_0 \setminus \{j^*\}\}$, by Lemma 6, we have that the optimal basic solution \mathbf{x} to Problem $(\text{KP-RELAX}(W + \eta, K))$ takes the following form: $x_k = 1$ for any $k \in P_1 \setminus \{i^*\}$, $x_k = 0$ for any $k \in P_0 \setminus \{j^*\}$,

$$x_{i^*} = \frac{W + \eta - W + w_{i^*} - w_{j^*}}{w_{i^*} - w_{j^*}} = 1 - \frac{\eta}{w_{j^*} - w_{i^*}} \quad \text{and} \quad x_{j^*} = \frac{W + \eta - W}{w_{j^*} - w_{i^*}} = \frac{\eta}{w_{j^*} - w_{i^*}},$$

which is the desired form. ■

K.6. Proof of Lemma 8

Suppose that at capacity level W , the capacity constraint is binding and the relaxed knapsack problem $(\text{KP-RELAX}(W, K))$ has a degenerate, integer optimal basic solution \mathbf{x}^* , with profile $\mathcal{P}(W) = \{P_1, (0, 0), P_0\}$. Fix $0 < \eta' \leq \min_{i \neq j} |w_i - w_j|$ such that $W + \eta' \in I_{\text{high}}$ and $W + \eta' \neq \sum_{i \in S} w_i$ for any $S \subset [n], |S| = K$. Let us first consider the following auxiliary relaxed problem, in which we only increase the capacity level from W to $W + \eta'$, without changing the utility of each item:

$$\max_{\mathbf{x} \in [0, 1]^n, s_1, s_2 \geq 0} \sum_{i \in [n]} u_i(W) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i + s_1 = W + \eta' \quad \text{and} \quad \sum_{i \in [n]} x_i + s_2 = K \quad (27)$$

Note that in the above optimization problem, we introduce s_1, s_2 to turn inequality constraints into equality constraints. Our proof consists of two parts. In Part 1, we find an optimal basic solution $\widehat{\mathbf{x}}$ to the auxiliary problem in (27). To do that, we apply ideas from the dual simplex method, and show that the optimal basis (i^*, j^*) are the two indices that satisfy: (i) $i^* \in P_1, j^* \in P_0$ and $w_{i^*} < w_{j^*}$, and (ii) $(i^*, j^*) \in \arg \max_{\substack{i \in P_1, j \in P_0 \\ w_i < w_j}} \left[\frac{u_j(W) - u_i(W)}{w_j - w_i} \right]$. That is, $(i^*, j^*) = (i^*, j^*)$. In Part 2, we show that such an optimal solution $\widehat{\mathbf{x}}$ is also an optimal basic solution to Problem $(\text{KP-RELAX}(W + \eta', K))$. Our proof again relies on notions such as optimality and feasibility conditions, reduced costs, the simplex and dual simplex methods, which are defined and described in more details in Section M.

Part 1: Find an optimal basic solution $\hat{\mathbf{x}}$ to the auxiliary problem. Observe that when we increase the capacity level from W to $W + \eta'$, the optimality condition still holds, since the reduced cost associated with each variable is unaffected. However, the feasibility condition does not necessarily hold for the original basic variables. To look for a new optimal basis for the auxiliary problem, we can apply the dual simplex method. By design of the dual simplex method, throughout its execution, the optimality condition always hold (i.e., the reduced costs for all non-basic variables at their lower bounds are non-positive; the reduced costs for all non-basic variables at their upper bounds are non-negative; the reduced costs for all basic variables are zero). The dual simplex method terminates when the feasibility condition is also satisfied; see Section M and Bertsimas and Tsitsiklis (1997) for details.

Before applying the dual simplex method to find a new optimal basis, we first remark that an optimal basic solution to Problem (27), which we denote as $\hat{\mathbf{x}}$, must have two fractional components. To see that, we can invoke Lemma 9 as follows. Since we have $i^* \in P_1$ and $j^* \in P_0$ such that $u_{i^*}(W) < u_{j^*}(W)$, there must exist some $i \in P_1$ such that $i \notin G_K$, where G_K is the set of items with top K utilities (recall that on interval I , the ordering of utilities of items does not change). Then, since we also have $\eta' < \min_{w_i \neq w_j} |w_i - w_j|$, by Part (iii) of Lemma 9, we must have that the capacity constraint is binding at $\hat{\mathbf{x}}$. By Part (ii) of Lemma 9, this further implies that the cardinality constraint is also binding at $\hat{\mathbf{x}}$. That is, we must have $s_1 = 0$ and $s_2 = 0$ at the optimal basic solution to Problem (27). By Part (i) of Lemma 9, we know that $\hat{\mathbf{x}}$ either has two fractional variables, or all variables are integers. Since we have assumed that $W + \eta' \neq \sum_{i \in S} w_i$ for any $S \subset [n], |S| = K$, we know that $\hat{\mathbf{x}}$ cannot be integer. Hence, the optimal basic solution $\hat{\mathbf{x}}$ must have two fractional variables, which we denote as $\hat{\mathbf{x}}_{i^*}$ and $\hat{\mathbf{x}}_{j^*}$, that also serve as the two basic variables. In the following, we look for this optimal basis (i^*, j^*) with the help of the dual simplex method.

Suppose that we apply the dual simplex method to solving Problem (27). The dual simplex method works in the following way. At each iteration, it updates the basis (i, j) by removing one index out of the basis and adding a different index into the basis. It then computes the values of the basic variables x_i, x_j to ensure that the capacity and cardinality constraints are tight. The non-basic variables $\{x_k : k \neq i, k \neq j\}$ would remain at their respective lower/upper bounds. The dual simplex method then checks whether the feasibility condition is satisfied, i.e., $x_i, x_j \in [0, 1]$. If it is satisfied, the dual simplex terminates; otherwise, it starts a new iteration. (For more details on the dual simplex method, please see Section M or Bertsimas and Tsitsiklis (1997).) Our first claim is that when we apply the dual simplex method to solving Problem (27) and it terminates at the optimal basis $\{i^*, j^*\}$, we must have $i^* \in P_1, j^* \in P_0$ and $w_{i^*} < w_{j^*}$. Recall that we assumed that $(\text{KP-RELAX}(W, K))$ has a degenerate, integer optimal basic solution \mathbf{x}^* , with profile $\mathcal{P}(W) = \{P_1, (0, 0), P_0\}$. Further recall that the dual simplex method terminates when the

feasibility conditions hold for our chosen basis. We can check the feasibility conditions for the following three cases:

1. Case 1: Both i^* and j^* are from P_0 . If we solve for $\hat{x}_{i^*}, \hat{x}_{j^*}$ using the binding capacity and cardinality constraints, i.e.

$$w_{i^*}\hat{x}_{i^*} + w_{j^*}\hat{x}_{j^*} = \eta' \quad \text{and} \quad \hat{x}_{i^*} + \hat{x}_{j^*} = 0,$$

we have

$$\hat{x}_{i^*} = -\frac{\eta'}{w_{j^*} - w_{i^*}} \quad \text{and} \quad \hat{x}_{j^*} = \frac{\eta'}{w_{j^*} - w_{i^*}}.$$

Clearly, here the feasibility condition is not satisfied because one of the variables would take a negative value. Hence, $\hat{\mathbf{x}}$ can not be the optimal solution.

2. Case 2: Both i^* and j^* are from P_1 . If we solve for $\hat{x}_{i^*}, \hat{x}_{j^*}$ using the binding capacity and cardinality constraints, i.e.

$$w_{i^*}\hat{x}_{i^*} + w_{j^*}\hat{x}_{j^*} = w_{i^*} + w_{j^*} + \eta' \quad \text{and} \quad \hat{x}_{i^*} + \hat{x}_{j^*} = 2,$$

we have

$$\hat{x}_{i^*} = 1 - \frac{\eta'}{w_{j^*} - w_{i^*}} \quad \text{and} \quad \hat{x}_{j^*} = 1 + \frac{\eta'}{w_{j^*} - w_{i^*}}.$$

Clearly, here the feasibility condition is again not satisfied because one of the variables would exceed one. Hence, $\hat{\mathbf{x}}$ cannot be the optimal solution.

3. Case 3: One variable is from P_1 and the other is from P_0 . (WLOG, let $i^* \in P_1$ and $j^* \in P_0$.) If we solve for $\hat{x}_{i^*}, \hat{x}_{j^*}$ using the binding capacity and cardinality constraints, i.e.

$$w_{i^*}\hat{x}_{i^*} + w_{j^*}\hat{x}_{j^*} = w_{i^*} + \eta' \quad \text{and} \quad \hat{x}_{i^*} + \hat{x}_{j^*} = 1,$$

we get

$$\hat{x}_{i^*} = 1 - \frac{\eta'}{w_{j^*} - w_{i^*}} \quad \text{and} \quad \hat{x}_{j^*} = \frac{\eta'}{w_{j^*} - w_{i^*}}.$$

Here, the solution $\hat{\mathbf{x}}$ would be feasible if and only if $w_{j^*} - w_{i^*} > 0$.

From the case discussion above, we have seen that the dual simplex method must terminate at an optimal basis (i^*, j^*) that satisfies $i^* \in P_1, j^* \in P_0$ and $w_{i^*} < w_{j^*}$. In particular, in the optimal basic solution $\hat{\mathbf{x}}$ returned by the dual simplex method, the two basic variables would take the value $\hat{x}_{i^*} = 1 - \frac{\eta'}{w_{j^*} - w_{i^*}}$ and $\hat{x}_{j^*} = \frac{\eta'}{w_{j^*} - w_{i^*}}$, while the other non-basic variables would remain unchanged from the optimal solution to problem $(\text{KP-RELAX}(W, K))$, i.e., $\hat{x}_k = x^*(k)$.

To determine (i^*, j^*) , we further note that if we choose $i \in P_1, j \in P_0$ where $w_i < w_j$ to be in our basis, and let $x_i = 1 - \frac{\eta'}{w_j - w_i}, x_j = \frac{\eta'}{w_j - w_i}$, the objective of (27) would be

$$\begin{aligned} \sum_{k \in [n]} u_k(W)x_k &= \sum_{k \in P_1 \setminus \{i\}} u_k(W)x_k + \left(1 - \frac{\eta'}{w_j - w_i}\right)u_i(W) + \frac{\eta'}{w_j - w_i}u_j(W) \\ &= \sum_{k \in P_1} u_k(W)x_k + \eta' \frac{u_j(W) - u_i(W)}{w_j - w_i} \end{aligned}$$

Therefore, a basis (i^*, j^*) that maximizes $\frac{u_j(W) - u_i(W)}{w_j - w_i}$ would also maximize the objective.

Our discussion above shows that $(i^*, j^*) \in \arg \max_{\substack{i \in P_1, j \in P_0 \\ w_i < w_j}} \left[\frac{u_j(W) - u_i(W)}{w_j - w_i} \right]$ is the optimal basis for the optimal basic solution $\hat{\mathbf{x}}$. That is, $(i^*, j^*) = (i^*, j^*)$. Further, $\hat{\mathbf{x}}$ takes the following form:

$$\hat{x}_k = \begin{cases} 1 - \frac{\eta'}{w_{j^*} - w_{i^*}} & k = i^* \\ \frac{\eta'}{w_{j^*} - w_{i^*}} & k = j^* \end{cases}.$$

and $\hat{x}_k = 1$ for any $k \in P_1 \setminus \{i^*\}$, $\hat{x}_k = 0$ for any $k \in P_0 \setminus \{j^*\}$. This is the desired form given in Eq. (26).

Part 2: $\hat{\mathbf{x}}$ is also an optimal basic solution to Problem $(\text{kp-relax}(W + \eta', K))$. To see this, we again consider an equivalent form of Problem $(\text{KP-RELAX}(W + \eta', K))$ stated below:

$$\max_{\mathbf{x} \in [0,1]^n, s_1, s_2 \geq 0} \sum_{i \in [n]} u_i(W + \eta') \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i + s_1 = W + \eta' \quad \text{and} \quad \sum_{i \in [n]} x_i + s_2 = K$$

where we introduced slack variables s_1, s_2 to turn inequality constraints into equalities. Note that when we transition from Problem (27) to $(\text{KP-RELAX}(W + \eta', K))$, we only change the utility of each item. Hence, the feasibility condition still hold. It suffices to check whether the optimality condition hold for each variable. Applying the same argument as in the proof of Lemma 6, we have that the signs of reduced costs associated with the non-basic variables $\{x_k : k \neq i^*, k \neq j^*\}$, s_1 and s_2 do not change as we change the utility of each item k from $u_k(W)$ to $u_k(W + \eta')$, since $W, W + \eta' \in I$. Hence, the optimality conditions related to these variables continue to hold. Since both feasibility and optimality conditions hold for $\hat{\mathbf{x}}$, it is indeed an optimal basic solution to Problem $(\text{KP-RELAX}(W + \eta, K))$, and it takes the desired form. ■

K.7. Other Lemmas

LEMMA 9. *Suppose that $W \in I_{\text{high}} = I \cap [W_{\text{TH}}, \infty)$. For any fixed $\eta' \geq 0$ such that $W + \eta' \in I_{\text{high}}$, consider the knapsack problem of the following form:*

$$\max_{\mathbf{x} \in [0,1]^n, s_1, s_2 \geq 0} \sum_{i \in [n]} u_i(W) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i + s_1 = W + \eta' \quad \text{and} \quad \sum_{i \in [n]} x_i + s_2 = K \quad (28)$$

where $u_i(W) = \frac{z_i w_i}{1+W} - \mathbf{c}_i$ is the utility of item i . Assume that \mathbf{x}^* is an optimal basic solution to this knapsack problem. We must have the following:

- (i) \mathbf{x}^* either has exactly two fractional components, or all variables take integer values.
- (ii) If the capacity constraint is binding at \mathbf{x}^* , the cardinality constraint must also be binding at \mathbf{x}^* .
- (iii) If Problem $(\text{KP-RELAX}(W, K))$ has a degenerate, integer optimal basic solution $\mathbf{x}^*(W)$ with profile $\mathcal{P}(W) = \{P_1, (0,0), P_0\}$, and there exists $i \in P_1$ such that $i \notin G_K$, where G_K is the set of items with top K utilities, we must have that the capacity constraint is binding at \mathbf{x}^* for any $\eta' \leq \min_{w_i \neq w_j} |w_i - w_j|$.

Proof of Lemma 9. For fixed $W \in I_{\text{high}}$ and $\eta' \geq 0$ such that $W + \eta' \in I_{\text{high}}$, let \mathbf{x}^* be an optimal basic solution to the knapsack problem in (28). We will now prove each of the statements.

- (i) Recall from Lemma 1 in Caprara et al. (2000) that an optimal basic solution \mathbf{x}^* has at most two fractional variables. Hence, it suffices to show that we cannot have an optimal basic solution \mathbf{x}^* that has only one fractional component. Suppose by contradiction that \mathbf{x}^* is an optimal basic solution to Problem (28) that has one fractional component x_i^* , which implies that the cardinality constraint $\sum_{i \in [n]} x_i^* \leq K$ is not tight. That is, the slack variable $s_2 > 0$. In this case, x_i and s_2 are the two basic variables that take fractional values. Let P_1 denote the indices of variables with value 1, and let $m := |P_1| \leq K - 1$. Now, suppose that we decrease the capacity limit $W + \eta'$ to some $W' = \sum_{j \in P_1} w_j$, without changing the utilities of items. That is, we consider the following relaxed knapsack problem:

$$\max_{\mathbf{x} \in [0,1]^n, s_1, s_2 \geq 0} \sum_{i \in [n]} u_i(W) x_i \quad \text{s.t.} \quad \sum_{i \in [n]} w_i x_i + s_1 = W' \quad \text{and} \quad \sum_{i \in [n]} x_i + s_2 = K \quad (29)$$

Let \mathbf{x} be an optimal basic solution to Problem (29). Observe that Problem (29) only differs from Problem (28) in the capacity limit. We note that if we keep x_i and s_2 as our basic variables in a basic solution to Problem (29), the optimality condition does not change (since the utility of the items are not changed). Then, if we solve for x_i and s_2 using the capacity/cardinality constraints in (29), we have the linear system

$$\sum_{j \in P_1} w_j + w_i x_i = W' \quad \text{and} \quad \sum_{j \in P_1} x_j + x_i + s_2 = K$$

which gives $x_i = 0, s_2 = K - m$, where $m = |P_1| \leq K - 1$. Here, the feasibility condition holds because $x_i \in [0, 1]$ and $s_2 \geq 0$. Since both optimality and feasibility conditions hold, the solution \mathbf{x} where $x_i = 0$ and $x_k = x_k^*$ for all $k \neq i$ is an optimal solution to Problem (29).

Recall that the ordering of utility-to-weight ratios of items does not change on the interval I . We will now derive a contradiction by dividing our analysis into two cases: (1) if P_1 contains the m items with the highest utility-to-weight ratios, we cannot have $W \geq w(H_K) = W_{\text{TH}}$, which violates our assumption in the lemma; (2) if P_1 contains an item that is not among the items with top m utility-to-weight ratios, the solution \mathbf{x} cannot be an optimal solution to Problem (29). We now discuss the two possibilities:

- **Case 1:** P_1 contains the m items with the highest utility-to-weight ratios. In this case, we have that $W' = \sum_{j \in P_1} w_j = w(H_m) < w(H_K)$. By Lemma 5, we must have that i is the item with the $(m + 1)$ th highest utility-to-weight ratio. However, this implies that $W + \eta' \leq w(H_K)$, and hence $W \leq w(H_K) = W_{\text{TH}}$, which leads to a contradiction.

- **Case 2:** There exists an item $j \in P_1$ and another item $k \in [n] \setminus P_1$ such that the utility-to-weight ratio of item k is higher than that of item j , i.e. $\frac{u_k(W)}{w_k} > \frac{u_j(W)}{w_j}$. We will show, in this case, that \mathbf{x} cannot be optimal for Problem (29). In particular, we will find another solution \mathbf{x}' that yields a higher objective than \mathbf{x} in Problem (29). Let us define \mathbf{x}' as follows:

—if $w_k \geq w_j$, we define \mathbf{x}' as

$$x'_i = \begin{cases} 1 & \text{if } i \in P_1 \text{ and } i \neq j \\ \frac{w_j}{w_k} & \text{if } i = k \\ 0 & \text{otherwise} \end{cases}$$

The solution \mathbf{x}' is feasible for Problem (29) since $\sum_{i \in [n]} w_i x'_i = \sum_{j \in P_1} w_j = W'$ and $\sum_{i \in [n]} x'_i = (m-1) + \frac{w_j}{w_k} < K$. It yields a higher objective than \mathbf{x} in Problem (29), since $\frac{w_j}{w_k} u_k(W) > u_j(W)$.

—if $w_k < w_j$, we define \mathbf{x}' as:

$$x'_i = \begin{cases} 1 & \text{if } i \in P_1 \setminus \{j\} \text{ or } i = k \\ \frac{w_j - w_k}{w_j} & \text{if } i = j \\ 0 & \text{otherwise} \end{cases}$$

The solution \mathbf{x}' is feasible for Problem (29) since $\sum_{i \in [n]} w_i x'_i = \sum_{j \in P_1} w_j = W'$ and $\sum_{i \in [n]} x'_i = m + \frac{w_j - w_k}{w_j} < K$. It again yields a higher objective than \mathbf{x} in Problem (29), since $u_k(W) + \frac{w_j - w_k}{w_j} u_j(W) > u_j(W)$.

To summarize, we can always find a feasible solution \mathbf{x}' to Problem (29) that gives a higher objective value than \mathbf{x} ; hence, \mathbf{x} cannot be optimal for Problem (29). This again leads to a contradiction.

Overall, we have showed that it is not possible for \mathbf{x}^* to have just one fractional component. Hence, it either has exactly two fractional components, or all variables take integer values.

- (ii) Assume that the capacity constraint is binding at \mathbf{x}^* , and suppose by contradiction that the cardinality constraint is non-binding at \mathbf{x}^* . That is, $s_1 = 0$ and $s_2 > 0$ in Problem (28). We have already showed, in Part (i) of this proof, that \mathbf{x}^* cannot have just one fractional component. Hence, \mathbf{x}^* must be an integer solution with $\sum_{i \in [n]} x_i^* = m \leq K - 1$. However, using the same argument as in Part (i) of this proof, we can show that such \mathbf{x}^* cannot be an optimal solution to Problem (28). That is, if the optimal solution contains the m items with highest utility-to-weight ratios, we would have $W + \eta' = w(H_m) < w(H_K) = W_{\text{TH}}$, which leads to a contradiction; otherwise, we can find another solution \mathbf{x}' which yields higher utilities, which contradicts the optimality of \mathbf{x}' .

Via proof of contradiction, we have showed that if the capacity constraint is binding at \mathbf{x}^* , the cardinality constraint must also be binding at \mathbf{x}^* .

(iii) First, note that if $W + \eta' \leq w(G_K)$, where G_K is the set of items with the top K utilities, the capacity constraint must be binding at \mathbf{x}^* . Now, suppose Problem (KP-RELAX(W, K)) has a degenerate, integer optimal basic solution $\mathbf{x}^*(W)$ with profile $\mathcal{P}(W) = \{P_1, (0, 0), P_0\}$, and there exists $i \in P_1$ such that $i \notin G_K$. This means that there must exist $j \in P_0$ such that $j \in G_K$.

We must also have $w_i < w_j$. To see this, suppose $w_i \geq w_j$ by contradiction. We can define \mathbf{x}' such that $x'_k = 1$ if $k \in P_1 \cup \{j\} \setminus \{i\}$ and $x'_k = 1$ if $k \in P_0 \cup \{i\} \setminus \{j\}$. This \mathbf{x}' is feasible for Problem (KP-RELAX(W, K)) and yields higher utilities, which contradicts the optimality of $\mathbf{x}^*(W)$.

Therefore, we must have $w(G_K) - W \geq w_j - w_i \geq \min_{w_i \neq w_j} |w_i - w_j|$. That is, if $\eta' \leq \min_{w_i \neq w_j} |w_i - w_j|$, we must have that the capacity constraint is binding at \mathbf{x}^* . ■

Appendix L: Proof of Theorem 8

The proof consists of two segments. In the first segment, we show that

$$\text{REV-COST}(S_I, \mathbf{z}) \geq (1 - \epsilon) \max_{W \in I} \text{KP}(W, K),$$

where S_I is the set returned by Algorithm 2. In the second segment, we bound the runtime of the algorithm.

Segment 1. Suppose the maximum $\max_{W \in I} \text{KP}(W, K)$ is achieved at $W^* \in I$ with assortment S^* . Given our partition rules, there exists a sub-interval $I'_\ell \subseteq I_\ell \subseteq I$ such that $W^* \in I'_\ell$. Let us focus on the interval $I'_\ell = [W_{\min}, W_{\max})$.

Let $(\chi^*, \kappa^*) = \arg \max_{\chi \in \{0, \dots, \chi_{\max}\}, \kappa \in \{0, \dots, K\}} \{\chi : \text{MIN-WT}_n(\chi, \kappa) \leq W^*\}$. Consider the set $\tilde{S} := \text{SET}_n(\chi^*, \kappa^*) \in \mathcal{C}_I$. We must have

$$\sum_{i \in \tilde{S}} \tilde{u}_i \geq \sum_{i \in S^*} \tilde{u}_i \tag{30}$$

since \tilde{S} is the set, among all sets with weights bounded by W^* , that yields that highest total scaled utility. Now, given the way we rescale the utilities in Eq. (8), and since for any $W \in I'_\ell$, the rescaled utility $\tilde{u}_i(W) = \tilde{u}_i$ takes the same value, we have that for all $i \in [n]$,

$$\tilde{u}_i = \left\lceil \frac{u_i(W^*)}{\sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*)} \cdot \frac{K}{\epsilon} \right\rceil.$$

This gives

$$(\tilde{u}_i - 1) \cdot \frac{\epsilon}{K} \sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*) < u_i(W^*) \leq \tilde{u}_i \cdot \frac{\epsilon}{K} \sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*). \tag{31}$$

Hence, we have

$$\begin{aligned}
\sum_{i \in S^*} u_i(W^*) - \sum_{i \in \tilde{S}} u_i(W^*) &\stackrel{(a)}{\leq} \frac{\epsilon}{K} \sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*) \cdot \left[\sum_{i \in S^*} \tilde{u}_i + \kappa^* - \sum_{i \in \tilde{S}} \tilde{u}_i \right] \\
&\stackrel{(b)}{\leq} \frac{\epsilon}{K} \sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*) \cdot \kappa^* \\
&\stackrel{(c)}{\leq} \epsilon \cdot \sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W^*) \\
&\stackrel{(d)}{\leq} \epsilon \cdot \sum_{i' \in S^*} u_{i'}(W^*).
\end{aligned}$$

where (a) follows from (31), (b) follows from (30), (c) follows from $\kappa^* \leq K$ and (d) follows from S^* being the utility-maximizing set. Hence,

$$\sum_{i \in \tilde{S}} u_i(W^*) \geq (1 - \epsilon) \sum_{i \in S^*} u_i(W^*) = (1 - \epsilon) \max_{W \in I} \text{KP}(W, K).$$

Finally, since $\tilde{S} \in \mathcal{C}_I$ and $w(\tilde{S}) \leq W^*$, we have

$$\begin{aligned}
\text{REV-COST}(S_I, \mathbf{z}) &\geq \text{REV-COST}(\tilde{S}, \mathbf{z}) = \sum_{i \in \tilde{S}} \frac{z_i w_i}{1 + \sum_{i \in \tilde{S}} w_i} - \sum_{i \in \tilde{S}} \mathbf{c}_i \\
&= \sum_{i \in \tilde{S}} u_i(w(\tilde{S})) \geq \sum_{i \in \tilde{S}} u_i(W^*) \geq (1 - \epsilon) \max_{W \in I} \text{KP}(W, K).
\end{aligned}$$

Segment 2. We now comment on the runtime of our FPTAS. Step 2 of Algorithm 2 takes $\mathcal{O}(n^2 \log n + nK^2)$, which is the runtime of our 1/2-approx. algorithm established in Theorem 7. In our proof of Theorem 7, we have shown that I would get adaptively partitioned into at most $\mathcal{O}(nK)$ sub-intervals, denoted by $\{I_\ell\}_{\ell \in [L]}$, such that each I_ℓ admits a common 1/2-approx. solution. Step 3 of Algorithm 2, by Lemma 3, would further partition each sub-interval I_ℓ into at most $\mathcal{O}(nK/\epsilon)$ sub-intervals I'_ℓ such that on each I'_ℓ the rescaled utility takes the same value for all $i \in [n]$, which takes at most $\mathcal{O}(nK/\epsilon)$ time. The total runtime of Steps 2 and 3 is thus $\mathcal{O}(n^2 \log n + nK^2 + nK/\epsilon)$. Note that after Steps 2 and 3, we have partitioned our well-behaving interval I into at most $\mathcal{O}(nK \cdot nK/\epsilon) = \mathcal{O}(n^2 K^2/\epsilon)$ sub-intervals I'_ℓ .

In Step 4, for each sub-interval I'_ℓ we perform a dynamic programming scheme. Step 4(a) takes $\mathcal{O}(n)$ since it simply rescales the utilities of each item. In Steps 4(b) and 4(c), we operate on a matrix of size $\mathcal{O}(n \cdot \chi_{\max} \cdot K) = \mathcal{O}(nK^2/\epsilon)$. Computing each entry of the matrix $(\text{MIN-WT}_i(\chi, \kappa))$ takes $\mathcal{O}(1)$. For each entry of the matrix, updating its corresponding assortment $\text{SET}_i(\chi, \kappa)$ also takes $\mathcal{O}(1)$. Hence the overall complexity of Step 4(b) and 4(c) is $\mathcal{O}(nK^2/\epsilon)$. In Step 4(d), we collect at most $\mathcal{O}(\chi_{\max} \cdot K) = \mathcal{O}(K^2/\epsilon)$ sets $\text{MIN-WT}_n(\chi, \kappa)$. Overall, for each sub-interval I'_ℓ , our

DP scheme takes runtime of at most $\mathcal{O}(nK^2/\epsilon)$, and collects at most $\mathcal{O}(K^2/\epsilon)$ sets. The total runtime of Step 4 is thus $\mathcal{O}(n^2K^2/\epsilon \cdot nK^2/\epsilon) = \mathcal{O}(n^3K^4/\epsilon^2)$.

In Step 5, the collection \mathcal{C}_I contains at most $\mathcal{O}(n^2K^2/\epsilon \cdot K^2/\epsilon) = \mathcal{O}(n^2K^4/\epsilon^2)$ sets. Finding the set that maximizes $\text{REV-COST}(S, \mathbf{z})$ hence takes $\mathcal{O}(n^2K^4/\epsilon^2)$.

In summary, the overall runtime complexity of Algorithm 2 is dominated by Step 4, which is at most $\mathcal{O}(n^3K^4/\epsilon^2)$. ■

L.1. Proof of Lemma 3

Consider a well-behaving interval I_ℓ that admits a common 1/2-approx. solution $\mathcal{D}(I_\ell)$ for all $W \in I_\ell$. Recall from Eq. (8) that the rescaled utility $\tilde{u}_i(W)$ is defined as follow:

$$\tilde{u}_i(W) = \left\lceil \frac{u_i(W)}{\sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W)} \cdot \frac{K}{\epsilon} \right\rceil.$$

For simplicity, let us perform the following changes of variables: $\gamma = \frac{1}{1+W}$, $\alpha_i = \tau_i w_i$, $A_i = \sum_{i' \in \mathcal{D}(I_\ell)} \tau_i w_i$, $C_i = \sum_{i' \in \mathcal{D}(I_\ell)} \mathbf{c}_i$. These allows us to write $u_i(W) = \alpha_i \gamma - \mathbf{c}_i$ and $\sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W) = \sum_{i' \in \mathcal{D}(I_\ell)} A_i \gamma - C_i$. To show the monotonicity of $\tilde{u}_i(W)$, it suffices to show the monotonicity of the following function f_i :

$$f_i(\gamma(W)) = \frac{\alpha_i \gamma - \mathbf{c}_i}{A_i \gamma - C_i} = \frac{u_i(W)}{\sum_{i' \in \mathcal{D}(I_\ell)} u_{i'}(W)}.$$

We have that

$$f'_i(W) = f'_i(\gamma) \cdot \gamma'(W) = \frac{A_i \mathbf{c}_i - \alpha_i C_i}{(A_i \gamma - C_i)^2} \cdot \frac{-1}{(1+W)^2}.$$

Since the sign of $f'_i(W)$ does not change with respect to W , we thus have $f_i(W)$ is monotonic in terms of W . This thus implies that the rescaled utility $\tilde{u}_i(W)$ also changes monotonically with respect to W on interval I_ℓ . ■

Appendix M: Backgrounds on Linear Programming

In this section, we provide an brief overview of the key terminologies in linear programming that we used throughout the paper. For an more detailed discussion, see Bertsimas and Tsitsiklis (1997).

In our overview, we consider a linear program in its standard form, i.e.

$$\max_{\mathbf{x}} \quad \mathbf{c}^\top \mathbf{x} \quad \text{s.t.} \quad \mathbf{A}\mathbf{x} = \mathbf{b} \quad \text{and} \quad \mathbf{x} \geq \mathbf{0},$$

where the dimension of \mathbf{A} is $m \times n$, and its rows are linearly independent; $\mathbf{x}, \mathbf{c}, \mathbf{z}$ are vectors of size n . We remark that an LP with inequality constraints can be transformed into the standard form by introducing extra slack variables (see Bertsimas and Tsitsiklis (1997)).

Basic solution. We first provide the formal definition of a basic solution to the LP. We say that a solution $\mathbf{x} \in \mathbb{R}^n$ is a *basic solution* to the LP if and only if we have $\mathbf{A}\mathbf{x} = \mathbf{b}$ and there exist indices $B(1), \dots, B(m)$ such that:

1. The columns of matrix \mathbf{A} indexed by $B(1), \dots, B(m)$, which we denote as $\mathbf{A}_{B(1)}, \dots, \mathbf{A}_{B(m)}$, are linearly independent;
2. If $i \notin \{B(1), \dots, B(m)\}$, then $x_i = 0$.

In addition, we call $x_{B(1)}, \dots, x_{B(m)}$ the *basic variables* and x_i for $i \notin \{B(1), \dots, B(m)\}$ the non-basic variables. We say that a basic solution $\mathbf{x} \in \mathbb{R}^n$ is a *basic feasible solution* if it is also feasible (i.e., $\mathbf{x} \geq \mathbf{0}$). We say that a basic solution $\mathbf{x} \in \mathbb{R}^n$ is an *optimal basic solution* if it is both feasible and optimal to the LP.

Simplex/dual simplex method. It is known that if an LP in the standard form has an optimal solution, there must exist an optimal basic solution. The simplex and dual simplex method are both algorithms designed to find the *optimal basic solution* \mathbf{x}^* to the LP. In the implementation of the simplex/dual simplex method, the algorithm keeps track of two sets of conditions:

1. **Optimality condition.** Let \mathbf{x} be a basic solution and let $\mathbf{B} = [\mathbf{A}_{B(1)}, \dots, \mathbf{A}_{B(m)}]$ be its associated basis matrix. Let $\mathbf{c}_B = [c_{B(1)}, \dots, c_{B(m)}]^\top$ be the vector of costs of the basic variables. For each $j \in [n]$, we define the *reduced cost* \bar{C}_j of the variable x_j as:

$$\bar{C}_j = c_j - \mathbf{c}_B^\top \mathbf{B}^{-1} \mathbf{A}_j. \quad (32)$$

At a high level, for a non-basic variable x_j , the reduced cost of \bar{C}_j measures the rate of cost change if we bring x_j into the basis and move along the direction of x_j . Intuitively, if there exists a non-basic variable with positive reduced-cost, we should put it into our basis. Our *optimality condition* is thus defined as :

$$\bar{\mathbf{C}} \leq \mathbf{0}.$$

Intuitively, if the optimality condition is satisfied at some solution \mathbf{x} , then moving along any direction would only decrease our objective function.

2. **Feasibility condition.** Let \mathbf{x} and \mathbf{B} be its corresponding basis matrix; let $\mathbf{x}_B = [x_{B(1)}, \dots, x_{B(m)}]$. Since the columns of \mathbf{B} are independent and $\mathbf{A}\mathbf{x} = \mathbf{B}\mathbf{x}_B = \mathbf{b}$, the *feasibility condition* is defined as:

$$\mathbf{x}_B = \mathbf{B}^{-1} \mathbf{b} \geq \mathbf{0}.$$

This ensures that $\mathbf{x} \geq \mathbf{0}$.

In Theorem 3.1 of Bertsimas and Tsitsiklis (1997), it is shown that a basic solution that satisfies both the optimality and feasibility conditions is an optimal solution to the LP. Reversely, we also have that a nondegenerate, optimal basic solution to the LP must satisfy both the optimality and feasibility conditions.

Both the simplex method and the dual simplex methods are designed based on the optimality and feasibility conditions above. In the simplex method, the algorithm keeps a basis \mathbf{B} at each iteration, which corresponds to m basic variables. At every iteration, the simplex method makes sure that the feasibility condition is always satisfied, and it swaps a basic variable with a non-basic variable that can increase the objective function. In the dual simplex method, the algorithm also keeps a basis \mathbf{B} at each iteration, which corresponds to a basic solution that might not be feasible. At every iteration, the dual simplex method makes sure that the optimality condition is always satisfied for its basic solution, and it swaps a basic variable with a non-basic variable such that the basic solution gets closer to the feasibility region. The simplex/dual simplex method terminates when both optimality and feasibility conditions are satisfied, which implies that given the current choice of basis \mathbf{B} , an optimal basic solution has been found. See Bertsimas and Tsitsiklis (1997) for an extended discussion of simplex/dual-simplex method.