

Easy Differentially Private Linear Regression

Kareem Amin Matthew Joseph Mónica Ribero Sergei Vassilvitskii*

August 16, 2022

Abstract

Linear regression is a fundamental tool for statistical analysis. This has motivated the development of linear regression methods that also satisfy differential privacy and thus guarantee that the learned model reveals little about any one data point used to construct it. However, existing differentially private solutions assume that the end user can easily specify good data bounds and hyperparameters. Both present significant practical obstacles. In this paper, we study an algorithm which uses the exponential mechanism to select a model with high Tukey depth from a collection of non-private regression models. Given n samples of d -dimensional data used to train m models, we construct an efficient analogue using an approximate Tukey depth that runs in time $O(d^2n + dm \log(m))$. We find that this algorithm obtains strong empirical performance in the data-rich setting with no data bounds or hyperparameter selection required.

1 Introduction

Existing methods for differentially private linear regression include objective perturbation [16], ordinary least squares (OLS) using noisy sufficient statistics [12, 37, 33], and DP-SGD [1]. Carefully applied, these methods can obtain high utility in certain settings. However, each method also has its drawbacks. Objective perturbation and sufficient statistics require the user to provide bounds on the feature and label norms, and DP-SGD requires extensive hyperparameter tuning (of clipping norm, learning rate, batch size, and so on).

In practice, users of differentially private algorithms struggle to provide instance-specific inputs like feature and label norms without looking at the private data [32]. Unfortunately, looking at the private data also nullifies the desired differential privacy guarantee. Similarly, while recent work has advanced the state of the art of private hyperparameter tuning [18, 27], non-private hyperparameter tuning remains the most common and highest utility approach in practice. Even ignoring its (typically elided) privacy cost, this tuning adds significant time and implementation overhead. Both considerations present obstacles to differentially private linear regression in practice.

With these challenges in mind, the goal of this work is to provide an easy differentially private linear regression algorithm that works quickly and with no user input beyond the data itself. Here, “ease” refers to the experience of end users. The algorithm we propose requires care to construct and implement, but it only requires an end user to specify their dataset and desired level of privacy. We also emphasize that ease of use, while nice to have, is not itself the primary goal. Ease of use affects both privacy and utility, as an algorithm that is difficult to use will sacrifice one or both when data bounds and hyperparameters are imperfectly set.

*{kamin, mtjoseph, mribero, sergeiv}@google.com. Part of this work done while Mónica was at UT Austin.

1.1 Contributions

Our algorithm generalizes previous work by Alabi, McMillan, Sarathy, Smith, and Vadhan [3], which proposes a differentially private variant of the Theil-Sen estimator for one-dimensional linear regression [34]. The core idea is to partition the data into m subsets, non-privately estimate a regression model on each, and then apply the exponential mechanism with some notion of depth to privately estimate a high-depth model from a restricted domain that the end user specifies. In the simple one-dimensional case [3] each model is a slope, the natural notion of high depth is the median, and the user provides an interval for candidate slopes.

We generalize this in two ways to obtain our algorithm, TukeyEM. The first step is to replace the median with a multidimensional analogue based on Tukey depth. Second, we adapt a technique based on propose-test-release (PTR), originally introduced by Brown, Gaboardi, Smith, Ullman, and Zakyntinou [7] for private estimation of unbounded Gaussians, to construct an algorithm which does not require bounds on the domain for the overall exponential mechanism. We find that a version of TukeyEM using an approximate and efficiently computable notion of Tukey depth achieves empirical performance competitive with (and often exceeding) that of *non-privately tuned* baseline private linear regression algorithms, across several synthetic and real datasets. We highlight that the approximation only affects utility and efficiency; TukeyEM is still differentially private. Given an instance where TukeyEM constructs m models from n samples of d -dimensional data, the main guarantee for our algorithm is the following:

Theorem 1.1. TukeyEM is (ϵ, δ) -DP and takes time $O(d^2n + dm \log(m))$.

It’s instructive to compare the running time to non-private OLS. The first term captures the running time of computing m OLS models on d dimensional datasets, each of size n/m . The second term bounds the running time of privately sampling a high Tukey depth model. For the reasonable range of m , $1 \leq m \leq n/d$, the second term is subsumed by the first, unless $n \gg 2^{d^2}$.

Two caveats apply. First, our use of PTR comes at the cost of an approximate (ϵ, δ) -DP guarantee as well as a failure probability: depending on the dataset, it is possible that the PTR step fails, and no regression model is output. Second, the algorithm technically has one hyperparameter, the number m of models trained. Our mitigation of both issues is empirical. Across several datasets, we observe that a simple heuristic about the relationship between the number of samples n and the number of features d , derived from synthetic experiments, typically suffices to ensure that the PTR step passes and specifies a high-utility choice of m . For the bulk of our experiments, the required relationship is on the order of $n \gtrsim 1000 \cdot d$. We emphasize that this heuristic is based only on the data dimensions n and d and does not require further knowledge of the data itself.¹

Organization. Basic preliminaries appear in Section 2. A full exposition of our private algorithm using approximate Tukey depth appears in Section 3, with experiments in Section 4. We conclude with a discussion and some future directions in Section 5.

1.2 Related Work

Linear regression is a specific instance of the more general problem of convex optimization. Ignoring dependence on the parameter and input space diameter for brevity, DP-SGD [4] and objective perturbation [16] obtain the optimal $O(\sqrt{d}/\epsilon)$ error for empirical risk minimization. AdaOPS and AdaSSP also match this bound [37]. Similar results are known for population loss [5], and still

¹For simplicity, this paper uses swap privacy, where n is not private data. However, since the requirements on n are coarse, a conservative noisy lower bound on n suffices in the add-remove model.

stronger results using additional statistical assumptions on the data [8, 36]. Recent work provides theoretical guarantees with no boundedness assumptions on the features or labels [23] but requires bounds on the data’s covariance matrix to use an efficient subroutine for private Gaussian estimation and does not include an empirical evaluation. The main difference between these works and ours is empirical utility without data bounds and hyperparameter tuning.

Another relevant work is that of Liu, Kong, and Oh [20], which also composes a PTR step adapted from Brown et al. [7] with a call to a restricted exponential mechanism for estimating parameters, with output domain restricted to parameters of low loss. The main drawback of this work is that, as with the previous work [7], neither the PTR step nor the restricted exponential mechanism step is efficient. This applies to other works that have applied Tukey depth to private estimation as well [6, 15, 19, 29]. The main difference between these works and ours is that our approach produces an efficient, implemented mechanism.

Finally, concurrent independent work by Cumings-Menon [10] also studies the usage of Tukey depth, as well as the separate notion of regression depth, to privately select from a collection of non-private regression models. A few differences exist between their work and ours. First, they rely on additive noise scaled to smooth sensitivity to construct a private estimate of a high-depth point. Second, their methods are not computationally efficient beyond small d , and are only evaluated for $d \leq 2$. Third, their methods require the end user to specify bounds on the parameter space.

2 Preliminaries

We start with the definition of differential privacy, using the “swap” variant.

Definition 2.1 ([11]). *Databases D, D' from data domain \mathcal{X} are neighbors, denoted $D \sim D'$ if D' can be obtained by changing one record from D . A randomized mechanism $\mathcal{M} : \mathcal{X} \rightarrow \mathcal{Y}$ is (ϵ, δ) -differentially private (DP) if for all $D \sim D' \in \mathcal{X}$ and any $S \subseteq \mathcal{Y}$*

$$\mathbb{P}_{\mathcal{M}}[\mathcal{M}(D) \in S] \leq e^{\epsilon} \mathbb{P}_{\mathcal{M}}[\mathcal{M}(D') \in S] + \delta.$$

When $\delta = 0$, \mathcal{M} is ϵ -DP.

One general ϵ -DP algorithm is the exponential mechanism.

Definition 2.2 ([21]). *Given database D and utility function $u : \mathcal{X} \times \mathcal{Y} \rightarrow \mathbb{R}$ mapping (database, output) pairs to scores with sensitivity*

$$\Delta_u = \max_{D \sim D', y \in \mathcal{Y}} |u(D, y) - u(D', y)|,$$

the exponential mechanism selects item $y \in \mathcal{Y}$ with probability proportional to $\exp(\frac{\epsilon u(D, y)}{2\Delta_u})$. We say the utility function u is monotonic if, for $D_1 \subset D_2$, for any y , $u(D_1, y) \leq u(D_2, y)$. If an instance of the exponential mechanism uses a monotonic u , then the 2 inside the exponent denominator can be dropped.

Lemma 2.3 ([21]). *The exponential mechanism is ϵ -DP.*

Finally, we define Tukey depth.

Definition 2.4 ([35]). *A halfspace h_v is defined by a vector $v \in \mathbb{R}^d$, $h_v = \{y \in \mathbb{R}^d \mid \langle v, y \rangle \geq 0\}$. Let $D \subset \mathbb{R}^d$ be a collection of n points. The Tukey depth $T_D(y)$ of a point $y \in \mathbb{R}^d$ with respect to D is the minimum number of points in D in any halfspace containing y ,*

$$T_D(y) = \min_{h_v \mid y \in h_v} \sum_{x \in D} \mathbb{1}_{x \in h_v}.$$

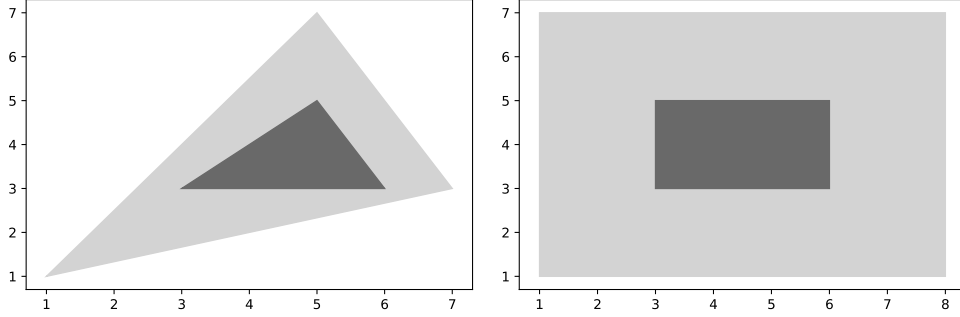


Figure 1: An illustrated comparison between exact (left) and approximate (right) Tukey depth. In both figures, the set of points is $\{(1, 1), (7, 3), (5, 7), (3, 3), (5, 5), (6, 3)\}$, the region of depth 0 is white, the region of depth 1 is light gray, and the region of depth 2 is dark gray. Note that for exact Tukey depth, the regions of different depths form a sequence of nested convex polygons; for approximate Tukey depth, they form a sequence of nested rectangles.

Note that for a collection of n points, the maximum possible Tukey depth is $n/2$. We will prove a theoretical utility result for a version of our algorithm that uses exact Tukey depth. However, Tukey depth is NP-hard to compute for arbitrary d [14], so our experiments instead use a notion of approximate Tukey depth that can be computed efficiently. The approximate notion of Tukey depth only takes a minimum over the $2d$ halfspaces corresponding to the canonical basis.

Definition 2.5. Let $E = \{e_1, \dots, e_d\}$ be the canonical basis for \mathbb{R}^d and let $D \subset \mathbb{R}^d$. The approximate Tukey depth of a point $y \in \mathbb{R}^d$ with respect to D , denoted $\tilde{T}_D(y)$, is the minimum number of points in D in any of the $2d$ halfspaces determined by E containing y ,

$$\tilde{T}_D(y) = \min_{e_j | e_j \in \pm E, y \in h_{y_i \cdot e_j}} \sum_{x \in D} \mathbb{1}_{x \in h_{y_i \cdot e_j}}.$$

Stated more plainly, approximate Tukey depth only evaluates depth with respect to the d axis-aligned directions.² A simple illustration of the difference between exact and approximate Tukey depth appears in Figure 1. For both exact and approximate Tukey depth, when D is clear from context, we omit it for neatness.

3 Main Algorithm

Our algorithm, TukeyEM, consists of four steps:

1. Randomly partition the dataset into m subsets, non-privately compute the OLS estimator on each subset, and collect the m estimators into set $\{\beta_i\}_{i=1}^m$.
2. Compute the volumes of regions of different approximate Tukey depths with respect to $\{\beta_i\}_{i=1}^m$.
3. Run a propose-test-release (PTR) algorithm using these volumes. If it passes, set B to be the region of \mathbb{R}^d with approximate Tukey depth at least $m/4$ in $\{\beta_i\}_{i=1}^m$ and proceed to the next step. If not, release \perp (failure).

²Another reasonable approach evaluates depth with respect to random directions. However, measuring and sampling from the resulting regions of different depth, which are intersections of random halfspaces, is significantly more complicated. With the canonical basis, regions of different depth are simply rectangles.

4. If the previous step succeeds, apply the exponential mechanism, using approximate Tukey depth as the utility function, to privately select a point from B .

A basic utility result for the version of TukeyEM using exact Tukey depth appears in the next subsection. The remaining subsections elaborate on the details of our version using approximate Tukey depth, culminating in the full pseudocode in Algorithm 4 and overall result, Theorem 1.1.

3.1 Exact Utility Result

To build intuition, we first state a utility guarantee for the (inefficient) version of our algorithm that uses exact Tukey depth. The result is a direct application of a result from [7] showing that a point of high Tukey depth with respect to samples from a Gaussian distribution P approximates $\mathbb{E}[P]$ in Mahalanobis distance.

Theorem 3.1 ([7]). *Let α and γ be constants such that $0 < \alpha, \gamma < 1$ and let $S = \{\beta_1, \dots, \beta_m\}$ be an i.i.d. sample from the multivariate normal distribution $\mathcal{N}(\beta^*, \Sigma)$ with covariance $\Sigma \in \mathbb{R}^{d \times d}$ and mean $\mathbb{E}[\beta_i] = \beta^* \in \mathbb{R}^d$. Let $\hat{\beta} \in \mathbb{R}^d$ have Tukey depth at least p with respect to S . Then there exists a constant $c > 0$ such that when $m \geq c \left(\frac{d + \log(1/\gamma)}{\alpha^2} \right)$ with probability $1 - \gamma$, $\|\hat{\beta} - \beta^*\|_\Sigma \leq \Phi^{-1}(1 - p/m + \alpha)$, where Φ denotes the CDF of the standard univariate Gaussian.*

Proof. This is a direct application of the results of Brown et al. [7]. They analyzed a notion of probabilistic (and normalized) Tukey depth over samples from a distribution: $T_{\mathcal{N}(\mu, \Sigma)}(y) := \min_v \mathbb{P}_{X \sim \mathcal{N}(\mu, \Sigma)} [\langle X, v \rangle \geq \langle y, v \rangle]$. Their Proposition 3.3 shows that $T_{\mathcal{N}(\mu, \Sigma)}(y)$ can be characterized in terms of Φ , the CDF of the standard one-dimensional Gaussian distribution. Specifically, they show $T_{\mathcal{N}(\mu, \Sigma)}(y) = \Phi(-\|y - \mu\|_\Sigma)$. From their Lemma 3.5, if $m \geq c \left(\frac{d + \log(1/\gamma)}{\alpha^2} \right)$, then with probability $1 - \gamma$, $|p/m - T_{\mathcal{N}(\beta^*, \Sigma)}(\hat{\beta})| \leq \alpha$. Thus

$$\begin{aligned} -\alpha &\leq T_{\mathcal{N}(\beta^*, \Sigma)}(\hat{\beta}) - p/m \\ p/m - \alpha &\leq \Phi(-\|\hat{\beta} - \beta^*\|_\Sigma) \\ p/m - \alpha &\leq 1 - \Phi(\|\hat{\beta} - \beta^*\|_\Sigma) \\ \Phi(\|\hat{\beta} - \beta^*\|_\Sigma) &\leq 1 - p/m + \alpha \\ \|\hat{\beta} - \beta^*\|_\Sigma &\leq \Phi^{-1}(1 - p/m + \alpha) \end{aligned}$$

where the third inequality used the symmetry of Φ . □

In practice, we observe that empirical distributions of models for real data often feature Gaussian-like concentration, fast tail decay, and symmetry. Figure 2 displays histograms for the coefficients of models learned by TukeyEM on one of our experiment datasets. Similar plots for the other datasets appear in Section 7.3. Nonetheless, we emphasize that Theorem 3.1 is a statement of sufficiency, not necessity. TukeyEM does not require any distributional assumption to be private, nor does non-Gaussianity preclude accurate estimation.

3.2 Computing Volumes

We start by describing how to compute volumes corresponding to different Tukey depths. As shown in the next subsection, these volumes will be necessary for the PTR subroutine.

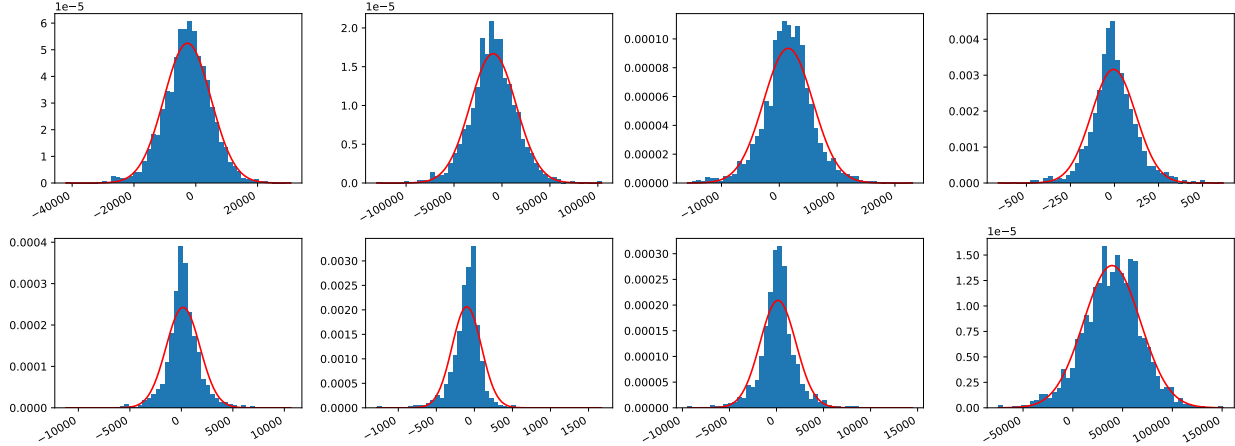


Figure 2: Histograms of models on the California dataset (see Section 4.2). Each plot corresponds to one of the eight regression coefficients. The red curve plots a Gaussian distribution whose mean and standard deviation match that of the underlying data.

Definition 3.2. Given database D , define $V_{i,D} = \text{vol}(\{y \mid y \in \mathbb{R}^d \text{ and } \tilde{T}_D(y) \geq i\})$, the volume of the region of points in \mathbb{R}^d with approximate Tukey depth at least i in D . When D is clear from context, we write V_i for brevity.

Since our notion of approximate Tukey depth uses the canonical basis (Definition 2.5), it follows that $V_1, V_2, \dots, V_{m/2}$ ³ form a sequence of nested (hyper)rectangles, as shown in Figure 1. With this observation, computing a given V_i is simple. For each axis, project the non-private models $\{\beta_i\}_{i=1}^m$ onto the axis and compute the distance between the two points of exact Tukey depth i (from the “left” and “right”) in the one-dimensional sorted array. This yields one side length for the hyperrectangle. Repeating this d times in total and taking the product then yields the total volume of the hyperrectangle, as formalized next.

Lemma 3.3. Lines 5 to 10 of Algorithm 4 compute $\{V_i\}_{i=1}^{m/2}$ in time $O(dm \log(m))$.

Proof. By the definition of approximate Tukey depth, for arbitrary $y = (y_1, \dots, y_d)$ of Tukey depth at least i , each of the $2d$ halfspaces $h_{y_1 \cdot e_1}, h_{y_1 \cdot -e_1}, \dots, h_{y_d \cdot e_d}, h_{y_d \cdot -e_d}$ contains at least i points from D , where $x \cdot y$ denotes multiplication of a scalar and vector. Fix some dimension $j \in [d]$. Since $\min(|h_{y_j \cdot e_j} \cap D|, |h_{y_j \cdot -e_j} \cap D|) \geq i$, $y_j \in [S_{j,i}, S_{j,m-(i-1)}]$. Thus $V_{i,D} = \prod_{j=1}^d (S_{j,m-(i-1)} - S_{j,i})$. The computation of S starting in Line 5 sorts d arrays of length m and so takes time $O(dm \log(m))$. Line 9 iterates over $m/2$ depths and computes d quantities, each in constant time, so its total time is $O(dm)$. \square

3.3 Applying Propose-Test-Release

The next step of TukeyEM is its use of PTR to restrict the output region eventually used by the exponential mechanism. We collect this process into a subroutine PTRCheck.

The overall strategy applies work done by Brown et al. [7]. Their algorithm tests if the given database has a large Hamming distance to any “unsafe” database and then, if this PTR check passes, runs an exponential mechanism restricted to a domain of high Tukey depth. Since the PTR

³We assume m is even for simplicity. The algorithm and its guarantees are essentially the same when m is odd, and our implementation handles both cases.

check is DP, and a “safe” database is defined as one where the restricted exponential mechanism has a similar output distribution on any neighboring database, the overall algorithm is DP. As part of their utility analysis, they prove an ancillary lemma translating a volume condition on regions of different Tukey depths to a lower bound on the Hamming distance to an unsafe database (Lemma 3.6 below). This enables them to argue that the PTR check typically passes if it receives enough Gaussian data, and the success probability of their utility guarantee follows. However, their algorithm requires computing both exact Tukey depths of the samples and the current database’s exact Hamming distance to unsafety. The given runtimes for both are exponential in the dimension d (see their Section C.2 [7]).

We rely on approximate Tukey depth (Definition 2.5) to resolve both issues. First, as the previous section demonstrated, computing the approximate Tukey depths of a collection of m d -dimensional points only takes time $O(dm \log(m))$. Second, we observe that the volume condition of Lemma 3.6 can be adapted to give a 1-sensitive lower bound on the Hamming distance between the current database and any unsafe database. This yields an efficient replacement for the exact Hamming distance calculation in the algorithm of [7].

The overall structure of PTRCheck is therefore as follows: use the volume condition to compute a 1-sensitive lower bound on the given database’s distance to unsafety; add noise to the lower bound and compare it to a threshold calibrated so that an unsafe dataset has probability $\leq \delta$ of passing; and if the check passes, run the exponential mechanism to pick a point of high approximate Tukey depth from the domain of points with moderately high approximate Tukey depth.

Before proceeding to the details of the algorithm, we first define a few necessary terms.

Definition 3.4 (Definition 2.1 [7]). *Two distributions \mathcal{P}, \mathcal{Q} over domain \mathcal{W} are (ε, δ) -indistinguishable, denoted $\mathcal{P} \approx_{\varepsilon, \delta} \mathcal{Q}$, if for any measurable subset $W \subset \mathcal{W}$,*

$$\mathbb{P}_{w \sim \mathcal{P}} [w \in W] \leq e^\varepsilon \mathbb{P}_{w \sim \mathcal{Q}} [w \in W] + \delta \text{ and } \mathbb{P}_{w \sim \mathcal{Q}} [w \in W] \leq e^\varepsilon \mathbb{P}_{w \sim \mathcal{P}} [w \in W] + \delta.$$

Note that (ε, δ) -DP is equivalent to (ε, δ) -indistinguishability between output distributions on arbitrary neighboring databases. Indistinguishability will define collections of “safe” and “unsafe” databases. Given database D , let A denote the exponential mechanism with utility function \tilde{T}_D (see Definition 2.5). Given nonnegative integer t , let A_t denote the same mechanism that assigns score $-\infty$ to any point with score $< t$, i.e., only samples from points of score $\geq t$. We will say a database is safe if A_t is indistinguishable between neighbors.

Definition 3.5 (Definition 3.1 [7]). *Database D is (ε, δ, t) -safe if for all neighboring $D' \sim D$, we have $A_t(D) \approx_{\varepsilon, \delta} A_t(D')$. Let $\mathbf{Safe}_{(\varepsilon, \delta, t)}$ be the set of safe databases, and let $\mathbf{Unsafe}_{(\varepsilon, \delta, t)}$ be its complement.*

We can now state the main lemma from [7], which translates a relationship between the volumes of regions of different approximate Tukey depths into a lower bound on the Hamming distance between the given database and any unsafe one.

Lemma 3.6 (Lemma 3.8 [7]). *For any $k \geq 0$, if there exists a $g > 0$ such that $\frac{V_{t-k-1, D}}{V_{t+k+g+1, D}} \cdot e^{-\varepsilon g/2} \leq \delta$, then for every database z in $\mathbf{Unsafe}_{(\varepsilon, 4e^\varepsilon \delta, t)}$, $d_H(D, z) > k$, where d_H denotes Hamming distance.*

Simplifying slightly, the lemma says that if $V_{t-k, D}$ is not substantially larger than $V_{t+k+g, D}$, then making D unsafe requires changing more than k points. This relies on the usage of an exponential mechanism whose utility function has sensitivity 1.

One more step is necessary to complete PTRCheck. Lemma 3.6 provides a way to compute a lower bound on the distance between the current database and any unsafe database, but it does not guarantee that this lower bound is 1-sensitive. We use this result to construct a 1-sensitive lower bound in Lemma 3.7.

Lemma 3.7. Define $M(D)$ to be a mechanism that receives as input database D and computes the largest $k \in \{0, \dots, t-1\}$ such that there exists $g > 0$ where, for volumes V defined using a monotonic utility function,

$$\frac{V_{t-k-1,D}}{V_{t+k+g+1,D}} \cdot e^{-\varepsilon g/2} \leq \delta$$

or outputs -1 if the inequality does not hold for any such k . Then for arbitrary D

1. M is 1-sensitive, and
2. for all $z \in \text{Unsafe}_{(\varepsilon, 4e^\varepsilon \delta, t)}$, $d_H(D, z) > M(D)$.

Proof. We first prove item 1. Let k_D^* denote the mechanism's output on database D . Let D' be a neighbor of D , $D = D_0 \cup \{x\}$ and $D' = D_0 \cup \{x'\}$. We want to show $|k_D^* - k_{D'}^*| \leq 1$.

Case 1: $k_{D'}^* \geq 0$, with associated $g_{D'}^* \geq 1$. By the definition of $k_{D'}^*$, setting $d' = k_{D'}^* + 1$,

$$\frac{V_{t-d',D'}}{V_{t+d'+g_{D'}^*,D'}} \leq \delta \cdot e^{\varepsilon g_{D'}^*/2}. \quad (1)$$

We start with the numerator. Two subcases arise.

1. If x' has approximate Tukey depth in D_0 at most $t - d' - 1$, the monotonicity of our utility function means that x' does not decrease the size of all regions of depth larger than $t - d' - 1$ from D_0 to D' . In particular, $V_{t-d',D'} \geq V_{t-d',D_0}$.
2. If x' has depth in D_0 at least $t - d'$, then $V_{t-d',D'} = V_{t-d',D_0}$.

Thus $V_{t-d',D'} \geq V_{t-d',D_0}$. D adds a point to D_0 , so $V_{t-d',D_0} \geq V_{t-d'+1,D}$, and in turn $V_{t-d',D'} \geq V_{t-d'+1,D}$.

Nearly identical logic applies to the denominator. D' adds a point to D_0 , so $V_{t+d'+g_{D'}^*,D'} \leq V_{t+(d'-1)+g_{D'}^*,D_0}$. Two subcases again arise.

1. If x has depth in D_0 at most $t + (d' - 2) + g_{D'}^*$, the monotonicity of our utility function means that x increases the size of all regions of depth larger than $t + (d' - 2) + g_{D'}^*$ from D_0 to D . In particular, $V_{t+(d'-1)+g_{D'}^*,D_0} \leq V_{t+(d'-1)+g_{D'}^*,D}$.
2. If x has depth in D_0 at least $t + (d' - 1) + g_{D'}^*$, then $V_{t+(d'-1)+g_{D'}^*,D_0} = V_{t+(d'-1)+g_{D'}^*,D}$.

Thus $V_{t+d'+g_{D'}^*,D'} \leq V_{t+(d'-1)+g_{D'}^*,D}$. Returning to Equation 1, we can substitute in $d' = k_{D'}^* + 1$ to get

$$\frac{V_{t-(k_{D'}^*-1)-1,D}}{V_{t+(k_{D'}^*-1)+g_{D'}^*,D}} \leq \delta \cdot e^{\varepsilon g_{D'}^*/2}.$$

It follows that $k_D^* \geq k_{D'}^* - 1$.

Case 2: $k_{D'}^* = -1$. Assume for contradiction that $k_D^* \geq 1$, with associated g_D^* . Then we can apply the argument from Case 1 to obtain $k_{D'}^* \geq k_D^* - 1$, a contradiction. Thus $k_D^* \leq 0$.

Since we're in the swap model, the same logic applies in both cases with D and D' reversed. This concludes the proof that $|k_D^* - k_{D'}^*| \leq 1$, and in turn that M is 1-sensitive.

We now prove item 2. This holds for $k \geq 0$ by Lemma 3.6; for $k = -1$, the lower bound on Hamming distance to unsafety is the trivial one, $d_H(D, z) \geq 0$. \square

Algorithm 1 PTRCheck

- 1: **Input:** Tukey depth region volumes V , privacy parameters ε and δ
 - 2: Use Lemma 3.7 with $t = \frac{|V|}{2}$ and $\frac{\delta}{8e^\varepsilon}$ to compute lower bound k for distance to unsafe database
 - 3: **if** $k + \text{Lap}(1/\varepsilon) \geq \frac{\log(1/2\delta)}{\varepsilon}$ **then**
 - 4: Return True
 - 5: **else**
 - 6: Return False
-

Our implementation of the algorithm described by Lemma 3.6 randomly perturbs the models with a small amount of noise to avoid having regions with 0 volume. We note that this does not affect the overall privacy guarantee.

PTRCheck therefore runs the mechanism defined by Lemma 3.7, add Laplace noise scaled to sensitivity 1 to the result, and proceed to the restricted exponential mechanism if the noisy statistic crosses a threshold. When PTRCheck is called with parameter δ , the threshold is set so that the probability of an unsafe dataset producing a sufficiently large noisy statistic is upper bounded by δ . Pseudocode appears in Algorithm 1, and we now state its guarantee.

Lemma 3.8. *Given the depth volumes V computed in Lines 9 to 10 of Algorithm 4, $\text{PTRCheck}(V, \varepsilon, \delta)$ is ε -DP and takes time $O(m \log(m))$.*

Proof. The privacy guarantee follows from the 1-sensitivity of computing k (Lemma 3.7). For the runtime guarantee, we perform a binary search over the distance lower bound k starting from the maximum possible $m/4$ and, for each k , an exhaustive search over g . Note that if some k, g pair satisfies the inequality in Lemma 3.6, there exists some g' for every $k' < k$ that satisfies it as well. Thus since both have range $\leq m/4$, the total time is $O(m \log(m))$. \square

3.4 Sampling

If PTRCheck passes, TukeyEM then calls the exponential mechanism restricted to points of approximate Tukey depth at least $t = m/4$, a subroutine denoted RestrictedTukeyEM (Line 12 in Algorithm 4). Note that the passage of PTR ensures that with probability at least $1 - \delta$, running RestrictedTukeyEM is (ε, δ) -DP. We use a common two step process for sampling from an exponential mechanism over a continuous space:

1. Sample a depth using the exponential mechanism.
2. Return a uniform sample from the region corresponding to the sampled depth.

3.4.1 Sampling a Depth

We first define a slight modification W of the volumes V introduced earlier.

Definition 3.9. *Given database D , define $W_{i,D} = \text{vol}(\{y \mid y \in \mathbb{R}^d \text{ and } \tilde{T}_D(y) = i\})$, the volume of the region of points in \mathbb{R}^d with approximate Tukey depth exactly i in D .*

To execute the first step of sampling, for $i \in \{m/4, m/4 + 1, \dots, m/2\}$, $W_{i,D} = V_{i,D} - V_{i+1,D}$, so we can compute $\{W_{i,D}\}_{i=m/4}^{m/2}$ from the V computed earlier in time $O(m)$. The restricted exponential mechanism then selects approximate Tukey depth $i \in \{m/4, m/4 + 1, \dots, m/2\}$ with probability

$$\mathbb{P}[i] \propto W_{i,D} \exp\left(\frac{\varepsilon \cdot i}{2}\right).$$

For numerical stability, racing sampling [22] can sample from this distribution using logarithmic quantities.

3.4.2 Uniformly Sampling From a Region

Having sampled a depth \hat{i} , it remains to return a uniform random point of approximate Tukey depth \hat{i} . By construction, $W_{\hat{i},D}$ is the volume of the set of points $y = (y_1, \dots, y_d)$ such that the depth along every dimension j is at least \hat{i} , and the depth along at least one dimension j' is exactly \hat{i} . The result is straightforward when $d = 1$: draw a uniform sample from the union of the two intervals of points of depth exactly \hat{i} (depth from the “left” and “right”).

For $d > 1$, the basic idea of the sampling process is to partition the overall volume into disjoint subsets, compute each subset volume, sample a subset according to its proportion in the whole volume, and then sample uniformly from that subset. Our partition will split the overall region of depth exactly i according to the first dimension with dimension-specific depth exactly i . Since any point in the overall region has at least one such dimension, this produces a valid partition, and we will see that computing the volumes of these partitions is straightforward using the S computed earlier. Finally, the last sampling step will be easy because the final subset will simply be a pair of (hyper)rectangles. We start by formally defining our partition.

Definition 3.10. *Given d -dimensional database D and dimension $j \in [d]$, for $y \in \mathbb{R}^d$, let $T_{D,j}(y)$ denote the exact (one-dimensional) Tukey depth of point y with respect to dimension j in database D . Let B_i denote the region of points with approximate Tukey depth i . Define the partition $\{C_{j,i}\}_{j=1}^d$ of B_i as the volume of points where depth i occurs in dimension j for the first time, i.e.,*

$$C_{j,i} := \{y \in \mathbb{R}^d \mid \min_{j' < j} T_{D,j'}(y) > i \text{ and } T_{D,j}(y) = i \text{ and } \min_{j' > j} T_{D,j'}(y) \geq i\}.$$

The partition is well defined because any point with approximate Tukey depth i is in exactly one of the $C_{j,i}$ volumes. Each $C_{j,i}$ is also the Cartesian product of three sets: any $y \in C_{j,i}$ must have 1) depth strictly greater than i in dimensions $1, \dots, j - 1$, 2) depth i in dimension j , and 3) depth at least i in dimensions $j + 1, \dots, d$. Being the Cartesian product of three sets, the total volume of $C_{j,i}$ can be computed as the product of the three corresponding volumes in lower dimensions. We will denote these by $V_{<j,i}, W_{j,i}, V_{>j,i}$, formalized below.

Definition 3.11. *Given d -dimensional database D , dimension $j \in [d]$, and depth i , define*

1. $V_{j,i,D} = \text{vol}(\{y_j \mid y \in \mathbb{R}^d, \tilde{T}_D(y) \geq i\})$, the total length in dimension j of the region with approximate Tukey depth at least i .
2. $W_{j,i,D} = \text{vol}(\{y_j \mid y \in \mathbb{R}^d, T_{D,j}(y) = i \text{ and } \tilde{T}_D(y) \geq i\})$, the total length in dimension j of the region with depth exactly i in dimension j and approximate Tukey depth at least i .
3. $V_{<j,i,D} = \text{vol}(\{y_{1:j-1} \mid y \in \mathbb{R}^d, \tilde{T}_D(y) \geq i\})$, the volume of the projection onto the first $j - 1$ dimensions of points with approximate Tukey depth at least i . Define $V_{>j,i,D}$ analogously.

When D is clear from context, we drop it from the subscript.

The next lemma shows how to compute these and other relevant volumes. We again note that we fix m to be even for neatness. The odd case is similar.

Lemma 3.12. *Given matrix $S \in \mathbb{R}^{d \times m}$ of projected and sorted models, as in Line 8 of Algorithm 4,*

1. $V_{j,i} = S_{j,m-(i-1)} - S_{j,i}$,

Algorithm 2 RestrictedTukeyEM

- 1: **Input:** Tukey depth region volumes V , sorted collection of estimators S , depth restriction t , privacy parameter ε
 - 2: **for** $i = t, t + 1, \dots, |V| - 1$ **do**
 - 3: Compute volume of region of Tukey depth exactly i , $W_i \leftarrow V_i - V_{i+1}$
 - 4: Sample depth \hat{i} from distribution where $\mathbb{P}[\hat{i}] \propto W_i \exp\left(\frac{\varepsilon \cdot i}{2}\right)$
 - 5: Return $y \leftarrow \text{SamplePointWithDepth}(S, \hat{i})$
-

2. $W_{j,i} = V_{j,i} - V_{j,i+1}$,

3. $V_{<j,i} = \prod_{j'=1}^{j-1} V_{j',i}$ and $V_{>j,i} = \prod_{j'=j+1}^d V_{j',i}$

Proof. The proofs of the first item uses essentially the same reasoning as the proof of Lemma 3.3. For the second item, any point contributing to $V_{j,i}$ but not $V_{j,i+1}$ has depth exactly i in dimension j . For the third item, a point contributes to $V_{<j,i}$ if and only if it has depth at least i in all d dimensions; since the resulting region is a rectangle, its volume is the product of its side lengths. \square

With Lemma 3.12, we can now prove that `SamplePointWithDepth` works as intended.

Lemma 3.13. `SamplePointWithDepth`(S, i) returns a uniform random sample from the region of points with approximate Tukey depth i in S in time $O(d)$.

Proof. Given $S \in \mathbb{R}^{d \times m}$, define B_i and $\{C_{j,i}\}_{j=1}^d$ as in Definition 3.10. To show the outcome of `SamplePointWithDepth`(S, i) is uniformly distributed over points with approximate Tukey depth i , it suffices to show the algorithm samples a $C_{j,i}$ with probability proportional to its volume. Recall that $C_{j,i}$ is the set of points with depth greater than i in dimensions $1, 2, \dots, j - 1$, exactly i in dimension j , and at least i in the remaining dimensions. With this interpretation, $C_{j,i}$ is the Cartesian product of three lower dimensional regions, and thus its volume is the product of the corresponding volumes,

$$\text{vol}(C_{j,i}) = V_{<j,i+1} \cdot W_{j,i} \cdot V_{>j,i}.$$

These quantities, along with the normalizing constant $V_{\geq 1,i}$, can be computed using Lemma 3.12.

Since i is fixed, computing the full set of $V_{j,i}$ and $W_{j,i}$ takes time $O(d)$, and by tracking partial sums and using logarithms, we can compute the full set of $V_{<j,i}$ and $V_{>j,i}$ in time $O(d)$ as well. The last step is sampling the final point y , which takes time $O(d)$ using the previously computed S . \square

3.5 Overall Algorithm

We now have all of the necessary material for the main result, Theorem 1.1, restated below. The proof simply collects the results so far into a concise summary.

Theorem 3.14. TukeyEM, given in Algorithm 4, is (ε, δ) -DP and takes time $O(d^2n + dm \log(m))$.

Proof. Line 11 of the TukeyEM pseudocode in Algorithm 4 calls the check with privacy parameters $\varepsilon/2$ and $\delta/[8e^\varepsilon]$. By the sensitivity guarantee of Lemma 3.7, the check itself is $\varepsilon/2$ -DP. By the safety guarantee of Lemma 3.7 and our choice of threshold, if it passes, with probability at least $1 - \delta/2$, the given database lies in $\text{Safe}_{(\varepsilon/2, \delta/2, t)}$. A passing check therefore ensures that the sampling step in Line 12 is $(\varepsilon/2, \delta)$ -DP. By composition, the overall privacy guarantee is (ε, δ) -DP.

Turning to runtime, the m OLS computations inside Line 3 each multiply $d \times \frac{n}{m}$ and $\frac{n}{m} \times d$ matrices, for $O(d^2n)$ time overall. From Lemma 3.3, Lines 5 to 10 take time $O(dm \log(m))$. Lemma 3.8 gives the $O(m \log(m))$ time for Line 11, and Lemma 3.13 gives the $O(d)$ time for Line 12. \square

Algorithm 3 SamplePointWithDepth

- 1: **Input:** Sorted collection of estimators S , depth i
- 2: $d, m \leftarrow$ number of rows and columns in S
- 3: Compute $V_{\geq 1, i}$ using Lemma 3.12
- 4: **for** $j = 1, \dots, d$ **do**
- 5: Compute $V_{< j, i+1}$, $W_{j, i}$, and $V_{> j, i}$ using Lemma 3.12
- 6: Compute $\text{vol}(C_{j, i}) = V_{< j, i+1} \cdot W_{j, i} \cdot V_{> j, i}$
- 7: Sample index $j^* \in [d]$ with probability $\frac{\text{vol}(C_{j, i})}{V_{\geq 1, i}}$
- 8: **for** $j' = 1, \dots, j^* - 1$ **do**
- 9: $y_{j'} \leftarrow$ uniform random sample from $[S_{j', i+1}, S_{j', m-i}]$
- 10: $y_{j^*} \leftarrow$ uniform random sample from $[S_{j^*, i}, S_{j^*, i+1}] \cup (S_{j^*, m-i}, S_{j^*, m-(i-1)})$
- 11: **for** $j' = j^* + 1, \dots, d$ **do**
- 12: $y_{j'} \leftarrow$ uniform random sample from $[S_{j', i}, S_{j', m-(i-1)}]$
- 13: Return y

Algorithm 4 TukeyEM

- 1: **Input:** Features matrix $X \in \mathbb{R}^{n \times d}$, label vector $y \in \mathbb{R}^n$, number of models m , privacy parameters ε and δ
- 2: Evenly and randomly partition X and y into subsets $\{(X_i, y_i)\}_{i=1}^m$
- 3: **for** $i = 1, \dots, m$ **do**
- 4: Compute OLS estimator $\beta_i \leftarrow (X_i^T X_i)^{-1} X_i^T y_i$
- 5: **for** dimension $j \in [d]$ **do**
- 6: $\{\beta_{i, j}\}_{i=1}^m \leftarrow$ projection of $\{\beta_i\}_{i=1}^m$ onto dimension j
- 7: $(S_{j, 1}, \dots, S_{j, m}) \leftarrow \{\beta_{i, j}\}_{i=1}^m$ sorted in nondecreasing order
- 8: Collect projected estimators into $S \in \mathbb{R}^{d \times m}$, where each row is nondecreasing
- 9: **for** $i \in [m/2]$ **do**
- 10: Compute volume of region of depth $\geq i$, $V_i \leftarrow \prod_{j=1}^d (S_{j, m-(i-1)} - S_{j, i})$
- 11: **if** PTRCheck($V, \varepsilon/2, \delta$) **then**
- 12: $\hat{\beta} \leftarrow$ RestrictedTukeyEM($V, S, m/4, \varepsilon/2$)
- 13: Return $\hat{\beta}$
- 14: **else**
- 15: Return \perp

4 Experiments

We now turn to an empirical evaluation of TukeyEM. A description of baseline comparison algorithms appears in Section 4.1, and details for the datasets used appear in Section 4.2. Section 4.3 describes experiments on synthetic data to investigate the role of the number of models m in TukeyEM's performance. We then present and discuss experiments evaluating accuracy (Section 4.4) and runtime (Section 4.5). All experiment code can be found on Github [13].

4.1 Baselines

We evaluate TukeyEM against three baselines:

1. NonDP uses the standard non-private OLS estimator $\beta^* = (X^T X)^{-1} X^T y$.
2. Introduced by Wang [37], AdaSSP computes a private OLS estimator based on noisy versions

of $X^T X$ and $X^T y$. To do so, AdaSSP requires the end user to supply bounds on the norms of both the feature vectors and the labels. Our implementation of AdaSSP uses these values non-privately for each dataset. The implementation is therefore technically not private and represents an artificially strong version of AdaSSP. As specified by Wang [37], AdaSSP also (privately) selects a ridge parameter and ultimately runs ridge regression using the noisy sufficient statistics and the selected parameter.

3. DPSGD [1] uses DP-SGD, as implemented in TensorFlow Privacy and Keras [9], to optimize mean squared error using a single linear layer. The learned weights for this layer are linear regression coefficients. Details on the choice of hyperparameters for DPSGD appear in the following sections. As we will see, appropriate selection of these hyperparameters is both dataset-specific and crucial to DPSGD’s performance. Since we allow DPSGD to tune these non-privately for each dataset, the implementation of DPSGD is also artificially strong.

4.2 Datasets

We evaluate the three baseline algorithms and TukeyEM on the following datasets. The first dataset is synthetic, and the rest are real. The datasets are intentionally selected to be relatively easy use cases for linear regression, as reflected by the consistent high R^2 for NonDP.⁴ However, we emphasize that, beyond the constraints on d and n suggested by Section 4.3, they have not been selected to favor TukeyEM: all feature selection occurred before running any of the algorithms, and the following is a complete list of datasets evaluated where NonDP achieved a positive R^2 . A complete description of feature selection appears both in the public code and Section 7.1. For each dataset, we additionally add an intercept feature.

1. **Synthetic** ($d = 11$, $n = 22,000$). We construct this dataset using `sklearn.make_regression` [28] and $N(0, \sigma^2)$ label noise with $\sigma = 10$.
2. **California** [24] ($d = 9$, $n = 20,433$), predicting house price.
3. **Diamonds** [2] ($d = 10$, $n = 53,940$), predicting diamond price.
4. **Traffic** [25] ($d = 3$, $n = 7,909$), predicting number of passenger vehicles.
5. **NBA** [17] ($d = 6$, $n = 21,613$), predicting home team score.
6. **Beijing** [30] ($d = 25$, $n = 159,376$), predicting house price.
7. **Garbage** [26] ($d = 8$, $n = 18,810$), predicting tons of garbage collected.
8. **MLB** [31] ($d = 11$, $n = 140,657$), predicting home team score.

4.3 Choosing the Number of Models

Before turning to the results of this comparison, recall from Section 3 that TukeyEM privately aggregates m non-private OLS models. We briefly discuss the selection of this parameter m .

An appropriate choice of m balances two desiderata: accuracy of the models and likelihood of passing PTRCheck. When m is low, each model is trained on many data points and is likely to

⁴ R^2 , also known as the coefficient of determination, measures the variation in labels accounted for by the features. $R^2 = 1$ is perfect, $R^2 = 0$ is the trivial baseline achieved by simply predicting the average label, and $R^2 < 0$ is worse than the trivial baseline.

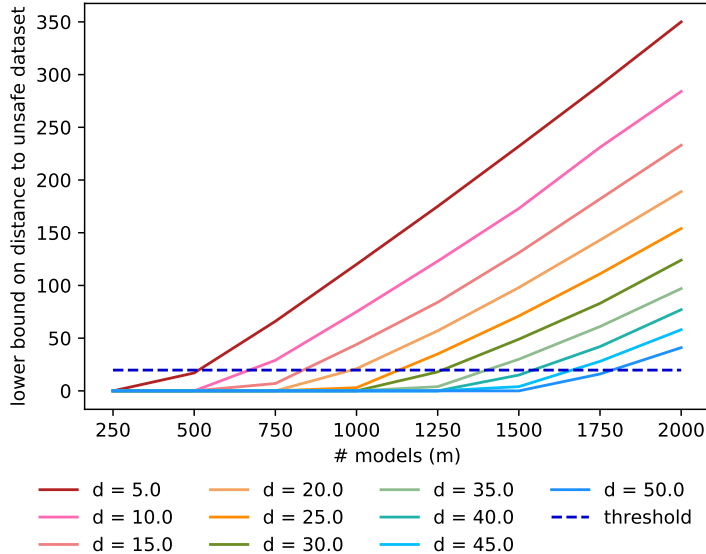


Figure 3: A plot of the lower bound on the Hamming distance to an unsafe dataset, computed from Lemma 3.6, as the number of models m ranges over 250, 500, \dots , 2000, and the feature dimension d ranges over 5, 10, \dots , 50 for synthetic data. The threshold for PTR to pass is the dashed horizontal line. As might be expected, larger d requires larger m to pass this threshold.

have high accuracy. However, lower m increases the risk of failing PTRCheck, as PTRCheck works best when the space of models is “dense.” At the other extreme, we could set m to be as large as possible, $m = \lfloor n/d \rfloor$. However, this raises the possibility that even a non-private aggregation of many inaccurate models will be an inaccurate model as well.

Experiments on synthetic datasets support this intuition. In Figure 3, each solid line represents synthetic data with a different number of features, generated by the same process as the Synthetic dataset described in the previous section. We vary the number of models m on the x -axis and plot the median distance computed by Lemma 3.7 over 5 trials. This illustrates that as d grows, the number of models required to consistently pass the PTRCheck threshold, demarcated by the dashed horizontal line, grows as well.

One caveat for the plot in Figure 3 is that the Synthetic regression problem is unusually easy. As shown in Section 4.4, all DP algorithms obtain near-perfect R^2 ; as demonstrated by the other datasets, this is atypical. It nonetheless suggests that a minimum of 500 models is necessary for the PTR step to pass even for $d \leq 5$.

To select the value of R^2 used for TukeyEM, we ran it on each dataset using $m = 250, 500, \dots, 2000$ and selected the smallest m where all PTR checks passed. We give additional details in Section 7.2 but note here that the resulting choices closely track those given by Figure 3. Furthermore, across many datasets, simply selecting $m = 1000$ typically produces nearly optimal R^2 , with several datasets exhibiting little dependence on the precise choice of m .

4.4 Accuracy Comparison

Our main experiments compare the four methods at $(\ln(3), 10^{-5})$ -DP. A concise summary of the experiment results appears in Figure 4. For every method other than NonDP (which is deterministic), we report the 25th, 50th, and 75th percentile R^2 values across the trials. For each dataset, the

Dataset	NonDP	AdaSSP	TukeyEM	DPSGD (tuned)	DPSGD (90% tuned)
Synthetic	0.997	0.991	0.997	0.997	0.997
California	0.637	-1.285	0.099	0.085	-1.03
Diamonds	0.907	0.216	0.307	0.828	0.371
Traffic	0.966	0.944	0.965	0.938	0.765
NBA	0.621	0.018	0.618	0.531	0.344
Beijing	0.700	-2.327	-3.848 1e7	-461.762	-530.687
Garbage	0.542	0.119	0.534	0.215	0.152
MLB	0.722	0.519	0.721	0.718	0.712

Figure 4: For each dataset, the DP method obtaining the highest median R^2 is bolded whenever it is well-separated, i.e., its 25th percentile R^2 exceeds the 75th percentile R^2 of any other method.

methods with interquartile ranges overlapping that of the method with the highest median R^2 are bolded. Extended plots recording R^2 for various m appear in Section 7.2. All datasets use 10 trials, except for California and Diamonds, which use 50.

A few takeaways are immediate. First, on most datasets TukeyEM obtains R^2 exceeding or matching that of both AdaSSP and DPSGD. TukeyEM achieves this even though AdaSSP receives non-private access to the true feature and label norms, and DPSGD receives non-private access to extensive hyperparameter tuning.

We briefly elaborate on the latter. Our experiments tune DPSGD over a large grid consisting of 2,184 joint hyperparameter settings, over **learning_rate** $\in \{10^{-6}, 10^{-5}, \dots, 1\}$, **clip_norm** $\in \{10^{-6}, 10^{-5}, \dots, 10^6\}$, **microbatches** $\in \{2^5, 2^6, \dots, 2^{10}\}$, and **epochs** $\in \{1, 5, 10, 20\}$. Ignoring the extensive computational resources required to do so at this scale (100 trials of each of the 2,184 hyperparameter combinations, for each dataset), we highlight that even mildly suboptimal hyperparameters are sufficient to significantly decrease DPSGD’s utility. Figure 4 quantifies this by recording the R^2 obtained by the hyperparameters that achieved the highest and 90th percentile median R^2 during tuning. While the optimal hyperparameters consistently produce results competitive with or sometimes exceeding that of TukeyEM, even the mildly suboptimal hyperparameters nearly always produce results significantly worse than those of TukeyEM. The exact hyperparameters used appear in Section 7.2.

We conclude our discussion of DPSGD by noting that it has so far omitted any attempt at differentially private hyperparameter tuning. We suggest that the results here indicate that any such method will have to select hyperparameters with high accuracy while using little privacy budget, and emphasize that the presentation of DPSGD in our experiments is generous.

Finally, we note that TukeyEM performs poorly on one dataset, Beijing. This is because TukeyEM relies on selecting a model from many models trained on disjoint subsets of the data. On Beijing, $d = 25$ and TukeyEM must use $m \geq 1250$ models to pass PTR. This means that each model is trained on only $159, 376/1250 \approx 125$ data points. The left plot in Figure 5 records the R^2 obtained by NonDP when given random samples of size 100, 200, \dots , 1000 from Beijing. As the figure demonstrates, even 1,000 data points is insufficient to obtain nontrivial R^2 from NonDP. TukeyEM’s performance on Beijing is therefore a consequence of the fact that small models, with or without privacy, cannot achieve nontrivial accuracy on this dataset, and aggregating them does not ameliorate this. We also note that no private algorithm achieves nontrivial $R^2 > 0$ on this dataset.

Nonetheless, TukeyEM’s overall performance on the eight datasets is strong. We propose that the empirical evidence is enough to justify TukeyEM as a first-cut method for linear regression problems

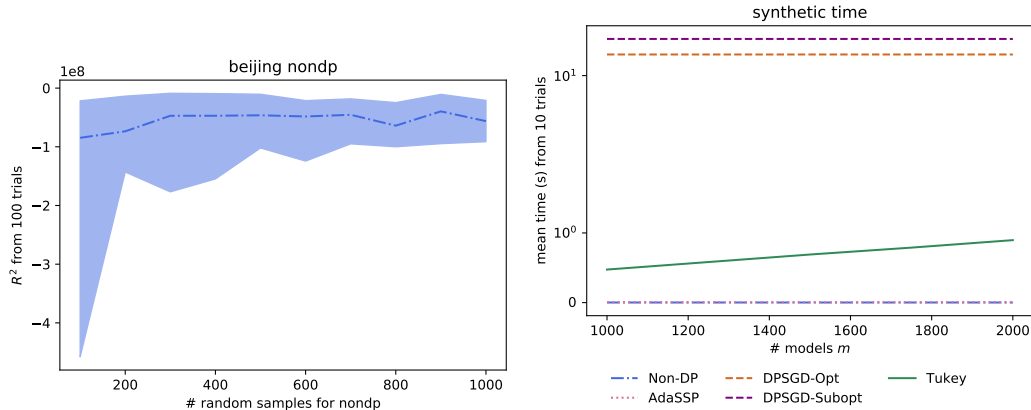


Figure 5: Left: plot of median R^2 obtained by NonDP as the number of random samples from Beijing it uses varies. Right: plot of average time in seconds as the number of models m used by TukeyEM varies

whose data dimensions satisfy its heuristic requirements ($n \gtrsim 1000 \cdot d$).

4.5 Time Comparison

We conclude with a brief discussion of runtime. The rightmost plot in Figure 5 records the average runtime in seconds over 10 trials of each method. TukeyEM is slower than the covariance matrix-based methods NonDP and AdaSSP, but it still runs in under one second, and it is substantially faster than DPSGD. TukeyEM’s runtime also, as expected, depends linearly on the number of models m . Since the plots are essentially identical across datasets, we only include results for the Synthetic dataset here. Finally, we note that, for most reasonable settings of m , TukeyEM has runtime asymptotically identical to that of NonDP (Theorem 1.1). The gap in practical performance is likely a consequence of the relatively unoptimized nature of our implementation.

5 Future Directions

An immediate natural extension of TukeyEM would generalize the approach to similar problems such as logistic regression. More broadly, while this work focused on linear regression for the sake of simplicity and wide applicability, the basic idea of TukeyEM can in principle be applied to select from arbitrary non-private models that admit expression as vectors in \mathbb{R}^d . Part of our analysis observed that TukeyEM may benefit from algorithms and data that lead to Gaussian-like distributions over models; describing the characteristics of algorithms and data that induce this property — or a similar property that better characterizes the performance of TukeyEM — is an open question.

6 Acknowledgments

We thank Gavin Brown for helpful discussion of [7], and we thank Jenny Gillenwater for useful feedback on an early draft. We also thank attendees of the Fields Institute Workshop on Differential Privacy and Statistical Data Analysis for helpful general discussions.

References

- [1] Martin Abadi, Andy Chu, Ian Goodfellow, H Brendan McMahan, Ilya Mironov, Kunal Talwar, and Li Zhang. Deep learning with differential privacy. In *Conference on Computer and Communications Security (CCS)*, 2016.
- [2] Shivam Agarwal. Diamonds dataset. <https://www.kaggle.com/datasets/shivam2503/diamonds>, 2017. Accessed: 2022-7-6.
- [3] Daniel Alabi, Audra McMillan, Jayshree Sarathy, Adam Smith, and Salil Vadhan. Differentially private simple linear regression. In *Privacy Enhancing Technologies Symposium (PETS)*, 2022.
- [4] Raef Bassily, Adam Smith, and Abhradeep Thakurta. Private empirical risk minimization: Efficient algorithms and tight error bounds. In *Foundations of Computer Science (FOCS)*, 2014.
- [5] Raef Bassily, Vitaly Feldman, Kunal Talwar, and Abhradeep Guha Thakurta. Private stochastic convex optimization with optimal rates. In *Neural Information Processing Systems (NeurIPS)*, 2019.
- [6] Amos Beimel, Shay Moran, Kobbi Nissim, and Uri Stemmer. Private center points and learning of halfspaces. In *Conference on Learning Theory (COLT)*, 2019.
- [7] Gavin Brown, Marco Gaboardi, Adam Smith, Jonathan Ullman, and Lydia Zakynthinou. Covariance-aware private mean estimation without private covariance estimation. In *Neural Information Processing Systems (NeurIPS)*, 2021.
- [8] T Tony Cai, Yichen Wang, and Linjun Zhang. The cost of privacy: Optimal rates of convergence for parameter estimation with differential privacy. *Annals of Statistics*, 2020.
- [9] François Chollet et al. Keras. <https://keras.io>, 2015.
- [10] Ryan Cumings-Menon. Differentially private estimation via statistical depth. *arXiv preprint arXiv:2207.12602*, 2022.
- [11] Cynthia Dwork, Frank McSherry, Kobbi Nissim, and Adam Smith. Calibrating noise to sensitivity in private data analysis. In *Theory of Cryptography Conference (TCC)*, 2006.
- [12] Cynthia Dwork, Kunal Talwar, Abhradeep Thakurta, and Li Zhang. Analyze gauss: optimal bounds for privacy-preserving principal component analysis. In *Symposium on the Theory of Computing (STOC)*, 2014.
- [13] Google. dp_regression. https://github.com/google-research/google-research/tree/master/dp_regression, 2022.
- [14] David S. Johnson and Franco P Preparata. The densest hemisphere problem. *Theoretical Computer Science*, 1978.
- [15] Haim Kaplan, Micha Sharir, and Uri Stemmer. How to find a point in the convex hull privately. In *Symposium on Computational Geometry (SoCG)*, 2020.
- [16] Daniel Kifer, Adam Smith, and Abhradeep Thakurta. Private convex empirical risk minimization and high-dimensional regression. In *Conference on Learning Theory (COLT)*, 2012.

- [17] Nathan Lauga. Nba games dataset. <https://www.kaggle.com/datasets/nathanlauga/nba-games?select=games.csv>, 2022. Accessed: 2022-7-6.
- [18] Jingcheng Liu and Kunal Talwar. Private selection from private candidates. In *Symposium on the Theory of Computing (STOC)*, 2019.
- [19] Xiyang Liu, Weihao Kong, Sham Kakade, and Sewoong Oh. Robust and differentially private mean estimation. *arXiv preprint arXiv:2102.09159*, 2021.
- [20] Xiyang Liu, Weihao Kong, and Sewoong Oh. Differential privacy and robust statistics in high dimensions. In *Conference on Learning Theory (COLT)*, 2022.
- [21] Frank McSherry and Kunal Talwar. Mechanism design via differential privacy. In *Foundations of Computer Science (FOCS)*, 2007.
- [22] Andrés Muñoz Medina and Jenny Gillenwater. Duff: A dataset-distance-based utility function family for the exponential mechanism. *arXiv preprint arXiv:2010.04235*, 2020.
- [23] Jason Milionis, Alkis Kalavasis, Dimitris Fotakis, and Stratis Ioannidis. Differentially private regression with unbounded covariates. In *Artificial Intelligence and Statistics (AISTATS)*, 2022.
- [24] Cam Nugent. California housing prices dataset. <https://www.kaggle.com/datasets/camnugent/california-housing-prices>, 2017. Accessed: 2022-7-6.
- [25] NYSDOT. New york weigh-in-motion station vehicle traffic counts dataset. <https://data.ny.gov/Transportation/Weigh-In-Motion-Station-Vehicle-Traffic-Counts-201/gdpg-i86w>, 2013. Accessed: 2022-7-6.
- [26] Department of Sanitation (DSNY). Dsny monthly tonnage data. <https://data.cityofnewyork.us/City-Government/DSNY-Monthly-Tonnage-Data/ebb7-mvp5>, 2022. Accessed: 2022-7-28.
- [27] Nicolas Papernot and Thomas Steinke. Hyperparameter tuning with renyi differential privacy. In *International Conference on Learning Representations (ICLR)*, 2022.
- [28] F. Pedregosa, G. Varoquaux, A. Gramfort, V. Michel, B. Thirion, O. Grisel, M. Blondel, P. Prettenhofer, R. Weiss, V. Dubourg, J. Vanderplas, A. Passos, D. Cournapeau, M. Brucher, M. Perrot, and E. Duchesnay. Scikit-learn: Machine learning in Python. *Journal of Machine Learning Research (JMLR)*, 2011.
- [29] Kelly Ramsay and Shoja’eddin Chenouri. Differentially private depth functions and their associated medians. *arXiv preprint arXiv:2101.02800*, 2021.
- [30] ruiqurm. Housing price in beijing. <https://www.kaggle.com/datasets/ruiqurm/lianjia>, 2018. Accessed: 2022-7-28.
- [31] Antonio Samaniego. Mlb games data from retrosheet. https://www.kaggle.com/datasets/samaxtech/mlb-games-data-from-retrosheet?select=game_log.csv, 2018. Accessed: 2022-7-28.
- [32] Jayshree Sarathy, Sophia Song, Audrey Emma Haque, Tania Schlatter, and Salil Vadhan. Don’t look at the data! how differential privacy reconfigures data subjects, data analysts, and the practices of data science. In *Theory and Practice of Differential Privacy (TPDP)*, 2022.

- [33] Or Sheffet. Old techniques in differentially private linear regression. In *Algorithmic Learning Theory (ALT)*, 2019.
- [34] Henri Theil. A rank-invariant method of linear and polynomial regression analysis, 1992.
- [35] John W Tukey. Mathematics and the picturing of data. In *International Congress of Mathematicians (IMC)*, 1975.
- [36] Prateek Varshney, Abhradeep Thakurta, and Prateek Jain. (nearly) optimal private linear regression for sub-gaussian data via adaptive clipping. In *Conference on Learning Theory (COLT)*, 2022.
- [37] Yu-Xiang Wang. Revisiting differentially private linear regression: optimal and adaptive prediction & estimation in unbounded domain. In *Uncertainty in Artificial Intelligence (UAI)*, 2018.

7 Appendix

7.1 Dataset Feature Selection Details

This section provides details for each of the real datasets evaluated in our experiments.

1. **California Housing** [24]: The label is `median_housevalue`, and the categorical `ocean_proximity` is dropped.
2. **Diamonds** [2]: The label is `price`. Ordinal categorical features (`carat`, `color`, `clarity`) are replaced with integers $1, 2, \dots$
3. **Traffic** [25]: The label is passenger vehicle count (`Class 2`), and the remaining features are motorcycles (`Class 1`) and pickups, panels, and vans (`Class 3`).
4. **NBA** [17]: The label is `PTS_home`, and the features are `FT_PCT_home`, `FG3_PCT_home`, `FG_PCT_home`, `AST_home`, and `REB_home`.
5. **Beijing Housing** [30]: The label is `totalPrice`. Features are days on market (`DOM`), `followers`, area of house in meters (`square`), number of kitchens (`kitchen`), `buildingType`, `renovationCondition`, building material (`buildingStructure`), ladders per residence (`ladderRatio`), elevator presence `elevator`, whether previous owner owned for at least five years (`fiveYearsProperty`), proximity to subway (`subway`), `district`, and nearby average housing price (`communityAverage`). Categorical `buildingType`, `renovationCondition`, and `buildingStructure` are encoded as one-hot variables.
6. **New York Garbage** [26]: The label is `REFUSETONSCOLLECTED`. The features are `PAPERTONSCOLLECTED` and `MPGTONSCOLLECTED`. The categorical `BOROUGH` is encoded as one-hot variables.
7. **MLB** [31]: The label is home team runs (`h_score`) and the features are `v_strikeouts`, `v_walks`, `v_pitchers_used`, `v_errors`, `h_at_bats`, `h_hits`, `h_doubles`, `h_triples`, `h_homeruns`, and `h_stolen_bases`.

7.2 Extended Experiment Results

Figure 6 presents R^2 statistics for all experiment algorithms. Each plot varies the number of models m in increments of 250, starting with the m sufficient to pass PTR in all trials on the given dataset. Each line records a median, and the shaded regions span the 25th and 75th percentiles. Methods other than TukeyEM appear as flat lines because they do not vary with m .

Figure 7 records the hyperparameters used by DPSGD (tuned) and DPSGD (90% tuned) for each dataset.

7.3 Distribution of models for all datasets

Figures 8 through 14 display histograms of models trained on each dataset. For each plot, we train 2,000 standard OLS models on disjoint partitions of the data and plot the resulting histograms for each coefficient. The red curve plots a Gaussian distribution with the same mean and standard deviation as the underlying data.

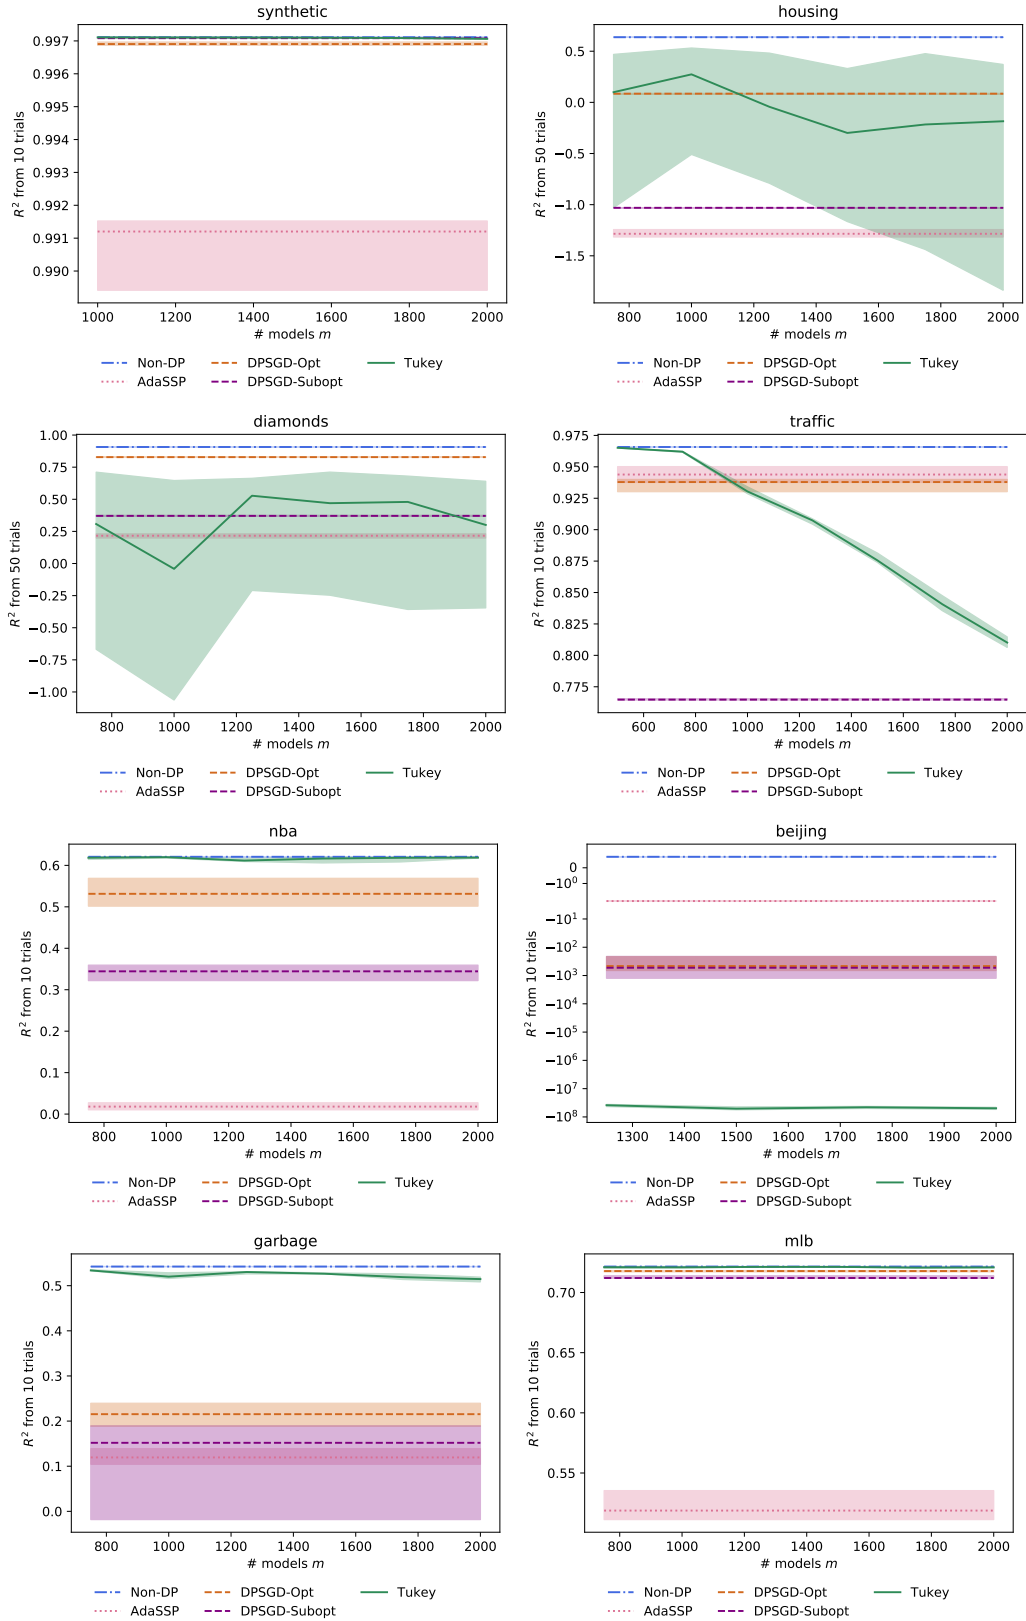


Figure 6: Plots of R^2 as the number of models m used by TukeyEM varies. The lines mark medians and the shaded regions span the first and third quartiles. All datasets except Housing and Diamonds use 10 trials. Housing and Diamonds use 50 trials due to the variance of TukeyEM.

Dataset	DPSGD (tuned)	DPSGD (90% tuned)
Synthetic	(20, 1, 1, 128)	(20, 10^{-3} , 0.1, 64)
California	(20, 100, 1, 64)	(10, 1000, 0.01, 64)
Diamonds	(20, 10^6 , 1, 128)	(10, 10^6 , 0.1, 32)
Traffic	(1, 10^6 , 1, 1024)	(10, 10^5 , 0.1, 512)
NBA	(20, 100, 1, 512)	(20, 10^{-6} , 0.1, 32)
Beijing	(20, 10^5 , 0.001, 512)	(5, 100, 10^{-4} , 32)
Garbage	(20, 1, 1, 32)	(5, 1000, 1, 64)
MLB	(10, 100, 0.01, 512)	(10, 10^{-5} , 0.001, 128)

Figure 7: Hyperparameter settings used by DPSGD on each dataset. Each tuple records, respectively, the number of epochs, the clipping norm, the learning rate, and the number of microbatches.

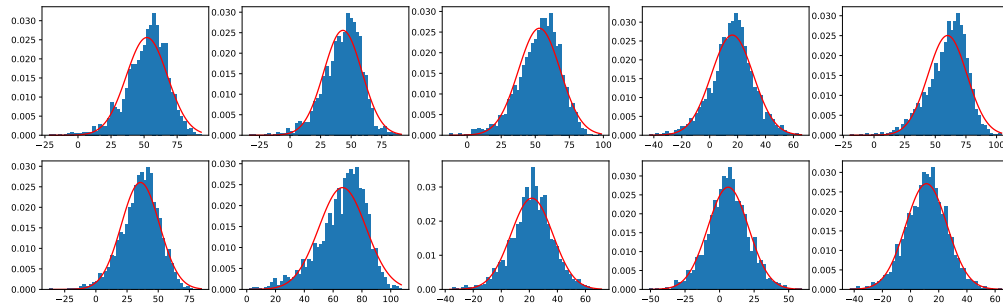


Figure 8: Histograms of models on Synthetic.

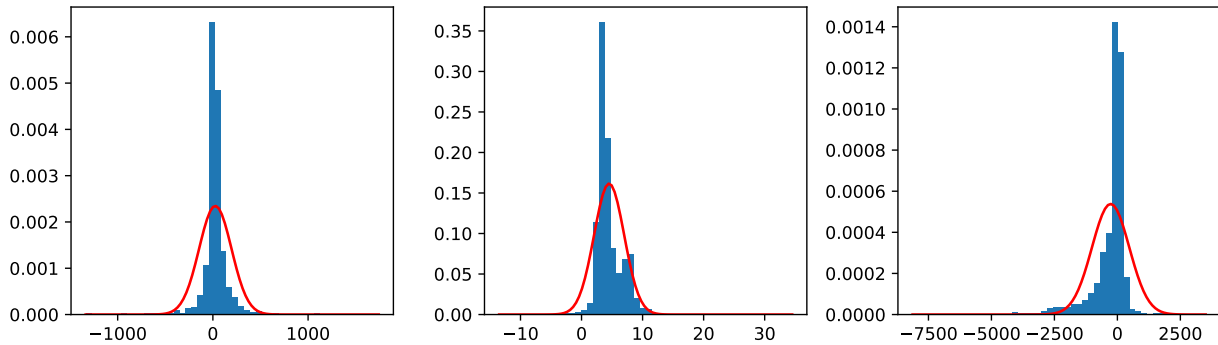


Figure 9: Histograms of models on Traffic.

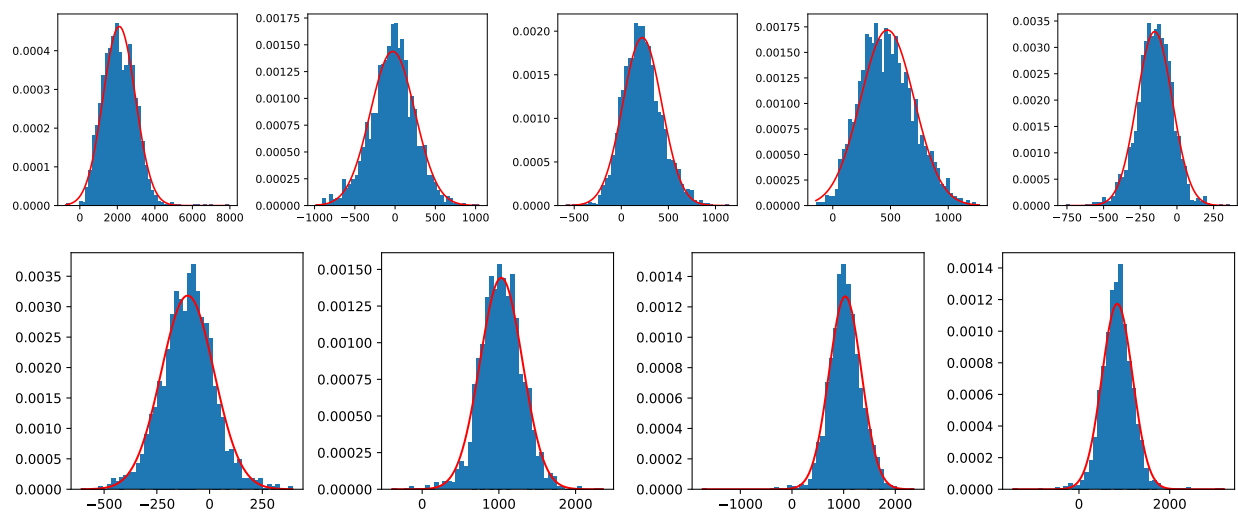


Figure 10: Histograms of models on Diamonds.

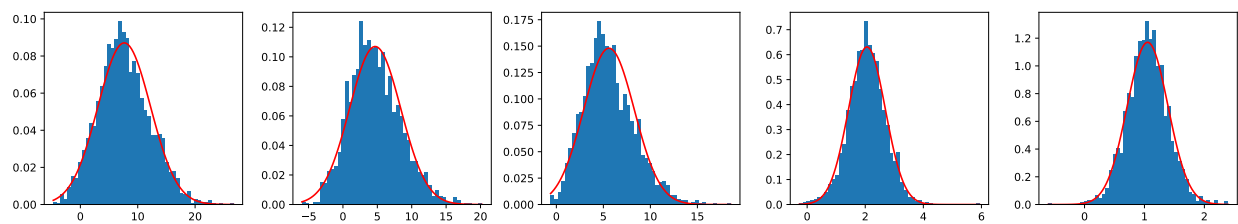


Figure 11: Histograms of models on NBA.

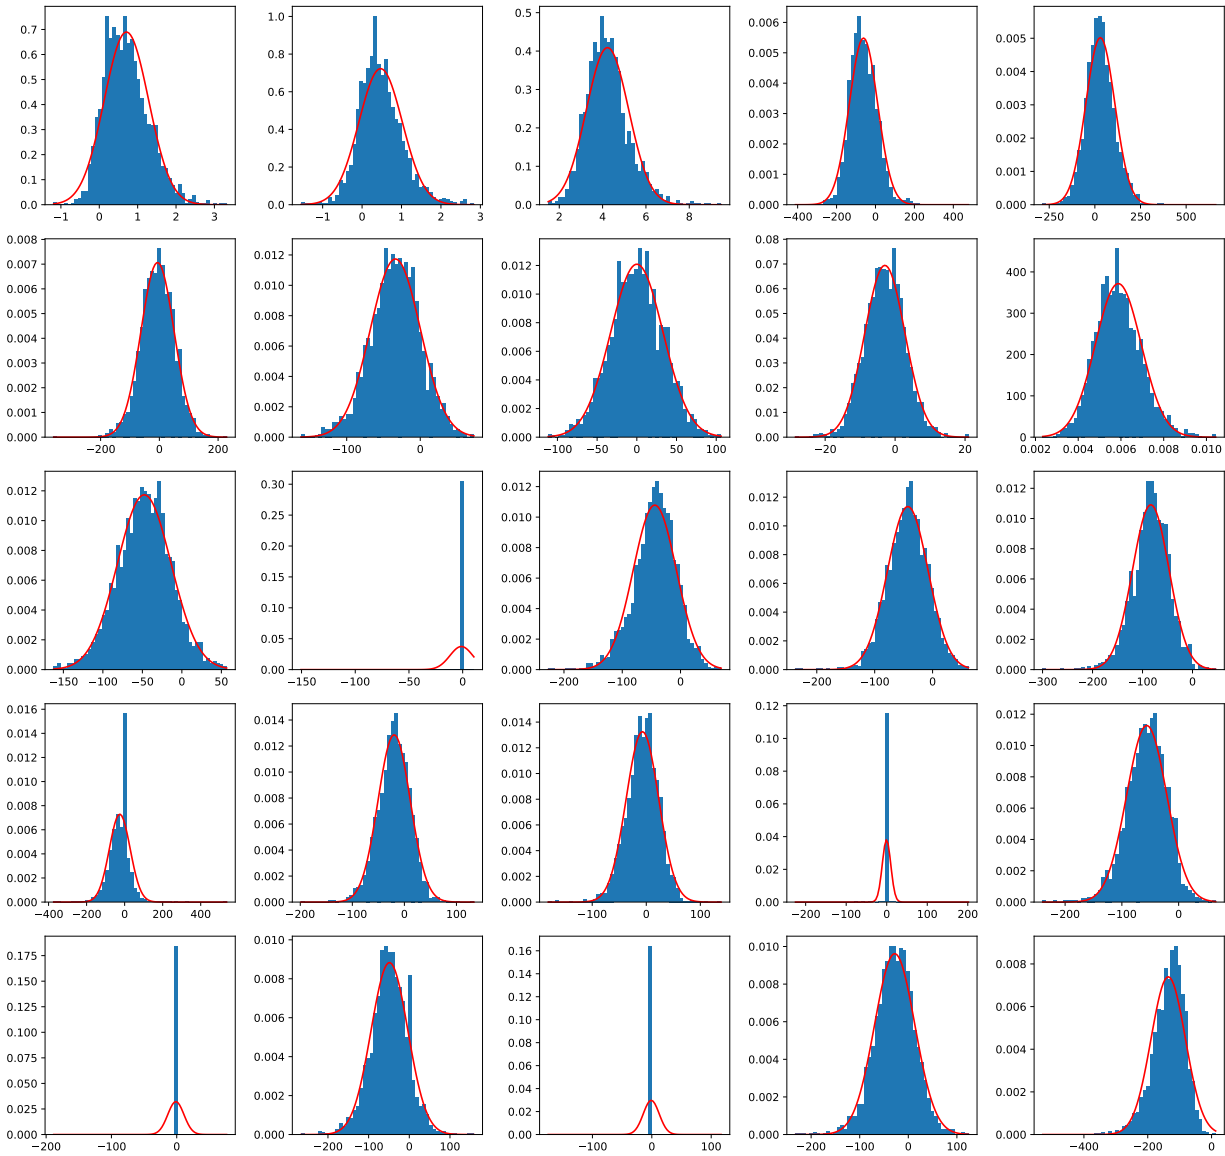


Figure 12: Histograms of models on Beijing.

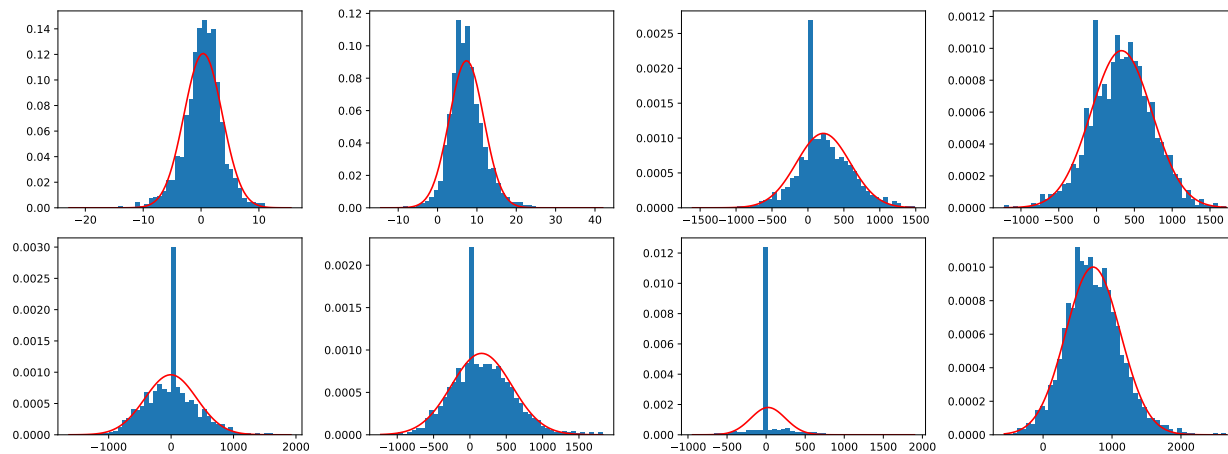


Figure 13: Histograms of models on Garbage.

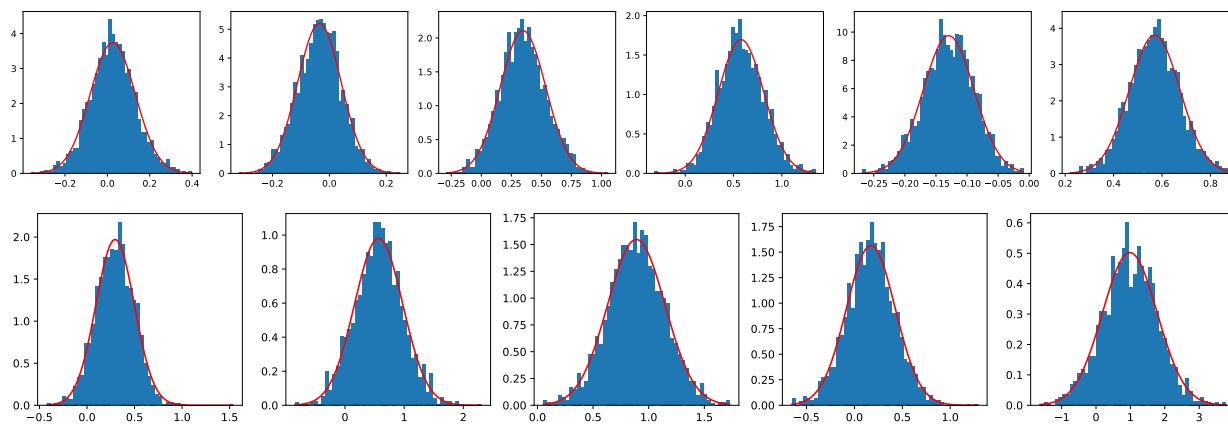


Figure 14: Histograms of models on MLB.