

Diameter Minimization by Shortcutting with Degree Constraints

1st Florian Adriaens

KTH Royal Institute of Technology
Stockholm, Sweden
adriaens@kth.se

2nd Aristides Gionis

KTH Royal Institute of Technology
Stockholm, Sweden
argioni@kth.se

Abstract—We consider the problem of adding a fixed number of new edges to an undirected graph in order to minimize the diameter of the augmented graph, and under the constraint that the number of edges added for each vertex is bounded by an integer. The problem is motivated by network-design applications, where we want to minimize the worst case communication in the network without excessively increasing the degree of any single vertex, so as to avoid additional overload. We present three algorithms for this task, each with their own merits. The special case of a matching augmentation—when every vertex can be incident to at most one new edge—is of particular interest, for which we show an inapproximability result, and provide bounds on the smallest achievable diameter when these edges are added to a path. Finally, we empirically evaluate and compare our algorithms on several real-life networks of varying types.

Index Terms—approximation algorithms, network design, edge augmentation, diameter reduction.

I. INTRODUCTION

The diameter of a graph is defined as the greatest distance between any pair of vertices. It is a fundamental notion of a network, measuring the worst-case point-to-point distance in information networks, social networks, and communication networks. Ensuring a small diameter is a crucial property in network-design applications, e.g., minimizing latency in multi-core processor networks [1], or forming a small-world network to maximize the influence of a campaign [2].

There has been a considerable amount of research on the problem of augmenting undirected graphs with new edges in order to minimize the diameter of the resulting graph. This operation has been described in the literature as *shortcutting* [3]–[6]; and the newly-added edges are referred to as *shortcut edges*. Li, McCormick and Simchi-Levi [7] introduced the *Bounded Cardinality Minimum Diameter* (BCMD) problem, where the goal is to add at most k shortcut edges so as to minimize the diameter of the augmented graph.

A potential downside of the BCMD problem formulation is that optimal solutions (and their approximations) might increase the degree of a single vertex by a substantial amount. In fact, this is a guaranteed side effect for solutions obtained by the known approximation algorithms for BCMD (see Section II), as a common theme in many of these algorithms is that they first partition the graph into $k + 1$ non-overlapping parts (the clustering step), and then connect the clusters by picking one cluster center and connecting it to the centers of

all other clusters. The latter step is called the *star-shortcutting* step and adds at most k shortcut edges to the graph, by increasing the degree of a single vertex by k . For certain applications, however, it is desirable to limit the increase of the degree of any single vertex. Due to physical, economical, or other limitations, many real-life network problems introduce such a degree constraint [5], [10]. For example, the work of Bokhari and Raza [11] was motivated by a question on how to decrease the diameter of a computer network, by adding additional links, under the constraint that no more than one I/O port is added to each processor. A second example is in the area of social networks: a service provider might be interested in recommending new friendships to users with the aim of increasing the overall connectivity of the network, so as to facilitate information diffusion and reducing polarization [12]–[14]. In [14] the largest distance between two members of different groups (i.e., the *colored* diameter) has been used as a measure of polarization. Recommending too many friendships to one individual user might not result in many actual links being materialized, due to the risk of overburdening that user. A better strategy might be to limit the number of recommendations per individual user.

Motivated by these application scenarios and the need for a different algorithmic approach than prior algorithms for BCMD, as *star-shortcutting* is not allowed anymore, we introduce and study a degree-constrained generalization of BCMD (see Problem 1). In this variant, denoted as BCMD- δ , the increase of the degree of each vertex is limited to at most δ . The original BCMD problem corresponds to BCMD- δ with $\delta = k$. Studying the BCMD problem with degree constraints was left as an open question in the recent work of Tan, E. J. Van Leeuwen and J. Van Leeuwen. [5]. Fig. 1 shows an illustrative example of the BCMD- δ problem, for different settings of δ . In Fig. 1b we have an unlimited degree increase budget, corresponding to the original BCMD problem. In Fig. 1c we illustrate a solution to the BCMD- δ problem with $\delta = 1$: the vertex degrees are allowed to increase by at most one, meaning that the newly added edges have to form a matching in the augmented graph.

Preliminaries. All graphs $G = (V, E)$ in this paper are simple, undirected and unweighted. Let $n = |V|$, and $m = |E|$. The distance $d_G(u, v)$ between two vertices $u, v \in V$ is defined as the number of edges in a shortest path between

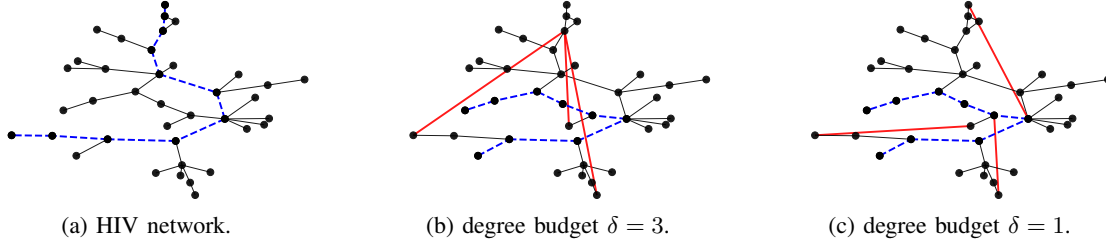


Fig. 1. The result of our algorithm (Section IV-B) after adding $k = 3$ shortcut edges (indicated by the red edges) to the HIV network [8], [9]. Fig. (a) shows the original network. In (b) we have shortcut the network with a degree increase constraint of $\delta = 3$ for each vertex. In (c) we set $\delta = 1$, so the augmentation has to form a matching. The diameter of the original network is 10, as indicated by a longest shortest path (blue dashed edges). In both (b) and (c), the diameter of the augmented network is reduced to 8.

u and v (∞ if no connecting path exists). The eccentricity $e_G(u) = \max_{v \in V} d_G(u, v)$ of a vertex u is the largest distance between u and any other vertex. The diameter $D_G = \max_{u, v \in V} d_G(u, v)$ is the maximum eccentricity of any vertex. This distance between two sets of vertices is always defined as the shortest distance between any two vertices, one from each set. For $X \subseteq V$, the induced subgraph $G[X]$ of G by X is the graph whose vertex set is X , and whose edge set consists of all of the edges in E that have both endpoints in X . In case we omit the subscript in a notation, we always refer to the original graph G .

Results and outline. Problem 1 introduces a generalization of the BCMD problem that restricts the maximum degree increase of each vertex. Specifically, given a budget δ for each vertex, we ask to augment the graph by adding at most k new edges so as to minimize the diameter of the augmented graph, and the degree of each vertex increases by at most δ .

Problem 1 (Bounded Cardinality Minimum Diameter with degree constraints (BCMD- δ)). *Given a graph $G = (V, E)$ and integers $k, \delta \geq 1$, find a set M of at most k non-edges in G that minimize the diameter of the augmented graph $G' = (V, E \cup M)$, and for all $v \in V$ it holds that $\text{degree}_{G'}(v) \leq \text{degree}_G(v) + \delta$.*

In the most restrictive setting, which corresponds to $\delta = 1$, each vertex can be incident to at most one shortcut edge, so the augmentation has to form a matching. Since this problem is of particular interest, we denote it as BCMD-M (Bounded Cardinality Minimum Diameter with Matching constraint).

Our results are summarized as follows:

- 1) In Section III we present lower and upper bounds on the optimum value of the BCMD-M problem when the input graph is an n -vertex path, thereby extending a result of Chung and Garey [10] to the setting of a matching augmentation.
- 2) We give three algorithms for the BCMD- δ problem in Section IV. Section IV-A details a $\mathcal{O}(\log_{\delta+1} k)$ -approximation algorithm for connected graphs. In Section IV-B we give a constant-factor approximation in the case that $k \leq \sqrt{\delta n} - 1$. Section IV-C details an intuitive heuristic without guarantees. All algorithms

need $\mathcal{O}(km)$ time, and hence scale quite well for limited values of k .

- 3) In Section VI we show that there exists no $(\frac{4}{3} - \epsilon)$ -approximation for BCMD-M, assuming $\mathbf{P} \neq \mathbf{NP}$.
- 4) In Section VII we empirically evaluate and compare the performance of our algorithms proposed in Section IV on real-life networks of varying types and sizes.

II. RELATED WORK

Several constant-factor approximation algorithms for the BCMD problem, and weighted variants thereof, are known. Besides proving NP-completeness, Li, McCormick and Simchi-Levi [7] proposed an elegant $(4 + \frac{2}{D^*})$ -approximation algorithm for BCMD, where D^* denotes the smallest achievable diameter. Bilò, Gualà and Proietti [15] refined the performance analysis of [7], and showed that the algorithm in fact guarantees a $(2 + \frac{2}{D^*})$ -approximation. Demaine and Zadimoghaddam [3] considered weighted graphs, with the requirement that all shortcut edges have an equal nonnegative weight, and they provided a $(4 + \epsilon)$ -approximation for arbitrary $\epsilon > 0$. Dodis and Khanna [16] generalized the problem by assigning costs to the shortcut edges, and requiring that the sum of the costs of all shortcut edges does not exceed a given budget parameter. They showed that the general variant of BCMD, with arbitrary positive edge weights and arbitrary nonnegative shortcut edge costs, admits a $(2 + \frac{2}{D^*})$ -approximation if one is allowed to exceed the budget by a factor of $\mathcal{O}(\log k)$. Finally, Frati et al. [17] showed that the general variant of BCMD admits a fixed-parameter tractable 4-approximation algorithm.

Prior work on shortcutting with degree constraints. The problem of shortcutting a graph while respecting degree constraints has been studied before. Chung and Garey [10] provided lower and upper bounds on the smallest achievable diameter when edges are added to a path. They posed it as an open question to extend their results when there is a constraint on the maximum degree increase of each vertex. In Section III we extend their bounds to the case of a matching augmentation ($\delta = 1$). Bollobás and Chung [18] showed that adding a random matching of maximum possible size to a cycle gives a graph with diameter close to the optimum value, which is about $\log_2 n$. Bokhari and Raza [11] proved that by adding at most $\lfloor \frac{n}{2} \rfloor$ matching edges, any connected graph

can be shortcut to a diameter of $\mathcal{O}(\log n)$. More recently, Tan et al. [5] improved the results of [11] and showed that $\mathcal{O}(\frac{n}{\log n})$ matching edges are sufficient to achieve a diameter of $\mathcal{O}(\log n)$. Moreover, they provided several complexity results on the dual problem (see also [17], [19]), i.e., minimizing the number of edges that need to be added to achieve a target diameter, while respecting degree constraints.

III. WARM UP: SHORTCUTTING A PATH WITH MATCHING EDGES

We present several results on the BCMD-M problem when the input graph is an n -vertex path. The ideas presented here are intuitive and they serve as a building block for our shortcutting algorithms on general graphs in Section IV.

Chung and Garey [10] provided lower and upper bounds on the smallest achievable diameter when k shortcut edges are added to an n -vertex path, without any constraints on the maximum increase of the degrees. They proved that it is not possible to achieve a diameter smaller than $\frac{n}{k+1} - 1$, and gave an algorithm that reduces the diameter to $\frac{n}{k+1} + 3$. In the following sections we extend their bounds on the smallest achievable diameter when the vertex-degree increase is limited to one, i.e., when k matching edges are added to a path.

A. Lower bound

Let $M(n, k)$ denote the smallest achievable diameter after adding k matching edges to an n -vertex path. The lower bound of Chung and Garey [10] also applies to our setting, and we immediately find that $M(n, k) \geq \frac{n}{k+1} - 1$. On the other hand, it is known that any graph with maximum degree three has diameter at least $\log_2(n) - 2$ [18]. Theorem 1 unifies both results into one lower bound. Theorem 2 gives a method that achieves this lower bound, up to constant factors.

Theorem 1. *For all $1 \leq k \leq n/2$, the smallest achievable diameter after adding k matching edges to an n -vertex path satisfies*

$$M(n, k) \geq \frac{n}{2(k+1)} + \log_2(k+1) - 2. \quad (1)$$

Proof: Consider the rooted shortest-path tree T formed by a breadth-first-search (BFS) in the optimal augmentation (i.e., a shortcutting that achieves diameter $M(n, k)$), starting from a vertex v , until we encounter all vertices. The height h_T of T is a lower bound for $M(n, k)$. We provide a lower bound to h_T to establish the result. The height h_T is minimized when the degree-three vertices are explored first, since the degree-two vertices do not lead to any branching in T . So we may assume that the first levels of T are filled with degree-three vertices (in particular, the root vertex v has degree three), after that the degree-two and vertices, and finally the degree-one vertices. Furthermore, we may assume that none of the added k shortcut edges are incident to any of the two endpoints of the path. Since in this case, we have the maximum possible number of degree-three vertices, which yields the smallest possible height h_T . After the addition of any such set of k matching edges, there are $2k$ vertices of degree three, $n - 2k - 2$ vertices of

degree two, and the two endpoints of the path have degree one.

Let level i be the largest level containing degree-three vertices, where we place the root vertex v at level 0. There are $2k$ degree-three vertices, so it follows that $i = \lceil \log_2(\frac{2k+2}{3}) \rceil \geq \log_2(k+1) - 1$. After encountering the degree-three vertices in T , we encounter the degree-two vertices and ultimately the two degree-one endpoints of the path. Some of the degree-two vertices might be at level i , but from level $i+1$ the tree consists only of vertices with degree at most two. This implies that the tree T will not branch any further after level $i+1$. We now quantify how many additional levels the remaining $n - 2k$ vertices of degree at most two induce. Note that there are at most $k+1$ degree-three vertices at level i , and this is tight if the level i is filled fully with degree-three vertices. It follows that the additional number of levels induced by the $n - 2k$ remaining vertices of at most degree-two is at least $\frac{n-2k}{2(k+1)}$, since the degree-three vertices at level i might induce two branches of degree-two vertices in level $i+1$. Hence,

$$\begin{aligned} M(n, k) &\geq h_T \geq \frac{n-2k}{2(k+1)} + \log_2(k+1) - 1 \\ &\geq \frac{n}{2(k+1)} + \log_2(k+1) - 2. \end{aligned}$$

■

B. Upper bound

Next we describe a procedure that achieves a matching upper bound, up to constant factors.

Definition 1. *A full (or Moore) d -tree is an (undirected) rooted tree in which every vertex has degree d , and all levels are filled to maximum size except possibly the leaf level [5, Section 2.1.2].*

Theorem 2. *For all $1 \leq k \leq n/2$, the smallest achievable diameter after adding k matching edges to an n -vertex path satisfies*

$$M(n, k) \leq \frac{n}{k+1} + 4\log_2(k+1) + 1. \quad (2)$$

Proof: First, we discuss a procedure when $k \leq \frac{n}{3} - 1$. We divide the path into $k+1$ non-overlapping intervals of roughly equal size. For every interval we find the center vertex, i.e., the midpoint of the interval. If there is a tie between two centers, choose one arbitrarily. Each interval will contain at least $\lfloor n/(k+1) \rfloor$ vertices and at most $\lceil n/(k+1) \rceil$ vertices. The distance from any vertex to the center of its respective interval is at most $\lceil n/(k+1) \rceil / 2$. Since $k \leq \frac{n}{3} - 1$, every interval has at least three vertices. In each interval we select a line *segment* (a path of length two) consisting of the left-neighbor of the center, the center itself, and the right-neighbor of the center (see Fig. 2a). We now connect the segments by embedding them into a *full 3-tree* (see Definition 1). The segments are regarded as supernodes in the tree. Take an arbitrary segment as the root in the tree, and shortcut each vertex in the segment to the centers of three other segments. Each of these three segments will now be shortcut to the




Fig. 2. a) Dividing the path into $k + 1$ intervals I_i . A segment consists of an interval center (red) together with its two neighbors (pastel red). b) Embedding the segments into a full 3-tree. Dashed edges indicate the newly added edges.




Fig. 3. A graph with diameter $n/2 - 1$ that is shortcut to a graph with diameter four by adding $k = n/2 - 1$ matching shortcut edges (dashed edges).

centers of two new segments and so on, until all segments are part of the tree. Note that all vertices are incident to at most one shortcut edge. Fig. 2b) gives an example of how such a construction looks like.

The height of this tree is at most $\log_2(k + 1)$, and it takes at most two steps to traverse each segment. So the distance between any two center vertices in the shortcutted graph is at most $4 \log_2(k + 1)$. The distance from an arbitrary vertex to the closest segment in the same interval is at most $\lceil n/(k + 1) \rceil / 2$. The total diameter D of the shortcutted graph is hence bounded by

$$D \leq \left\lceil \frac{n}{k + 1} \right\rceil + 4 \log_2(k + 1) \leq \frac{n}{k + 1} + 4 \log_2(k + 1) + 1.$$

In case that $k > \frac{n}{3} - 1$, it suffices to add $\frac{n}{3} - 1$ edges in the aforementioned manner. Indeed, a straightforward calculation shows that the bound (2) is increasing as a function of k , when $k > \frac{n \ln(2)}{4} - 1$. ■

C. Achievable diameter in connected graphs

Chung and Garey [10, Section 3] used their lower bound on the achievable diameter of a shortcutted path to show that any connected graph with diameter D cannot be shortcut to a diameter less than $\frac{D+1}{k+1} - 1$, using at most k edges. One can try to extend their result to our case of matching shortcut edges, but the example in Fig. 3 shows that their bound is tight in certain cases. The example shows a graph with diameter $n/2 - 1$ (assume that n is even) that is being shortcut to a graph with diameter four by adding $k = n/2 - 1$ matching edges. This is in contrast with shortcutting a path, which also has diameter linear in n . However, unlike the example in Fig. 3, a path has constant vertex degrees and this restricts the achievable diameter. Indeed, Theorem 1 states that adding any $k = n/2 - 1$ matching edges to an n -vertex path gives a graph with diameter at least $\log_2(n) - 2$. For shortcutting general connected graphs with diameter D with matching edges, it appears one cannot improve the lower bound of $\mathcal{O}(\frac{D}{k})$ as given by [10] without taking into account additional information about the graph (e.g., degrees).

Algorithm 1 Log. approximation BCMD- δ .

Input: graph G , $k \geq 1$, $\delta \geq 1$ and $3 \leq \beta \leq n$.

- 1: $\mathcal{X} \leftarrow \emptyset$
- 2: $\mathcal{C} =$ a maximal family of disjoint β -segments.
- 3: **for** $\min\{k + 1, |\mathcal{C}|\}$ **times do**
- 4: Pick segment $C^* \in \mathcal{C} \setminus \mathcal{X}$ with $d_G(C^*, \mathcal{X}) = \max_{C \in \mathcal{C} \setminus \mathcal{X}} d_G(C, \mathcal{X})$.
- 5: $\mathcal{X} \leftarrow \mathcal{X} \cup \{C^*\}$.
- 6: **end for**
- 7: Connect the segments in $\mathcal{X}$ into a full d -tree with $d = \beta \delta$, such that every vertex has at most δ incident shortcut edges. See Fig. 2b for an example with $\delta = 1$ and $\beta = 3$.

IV. SHORTCUTTING GENERAL GRAPHS

We present three algorithms for shortcutting general graphs with degree constraints. In Section IV-A we present an algorithm that achieves a $\mathcal{O}(\log_{\delta+1} k)$ -approximation for connected graphs. In Section IV-B we present a constant-factor approximation when $k \leq \sqrt{\delta n} - 1$. In Section IV-C we detail a fast heuristic without approximation guarantees. All three algorithms need $\mathcal{O}(km)$ time, making them scalable on most real-life networks when k is not too large.

A. A $\mathcal{O}(\log_{\delta+1} k)$ -approximation for connected graphs.

The high-level strategy is reminiscent of the path case. After finding at most $k + 1$ small connected segments in the graph, we embed them into a full tree by connecting the segments using at most k shortcut edges. The branching factor of the tree will depend on the degree budget δ and the size of the segments. The main difference with the path case is that we will require the segments to be far apart (this will later be defined more precisely). Our strategy consists of first finding a maximal family of vertex-disjoint segments. From this family, we select a set of at most $k + 1$ segments that are far apart, using a similar idea as the k -center heuristic of Dyer and Frieze [20], [21]. This heuristic has been used in previous algorithms for the BCMD problem [7], [15], [17], and allows us to bound the maximum distance, in terms of the optimum diameter, of a vertex to the chosen set of $k + 1$ segments (Corollary 1).

We start by formally defining a segment.

Definition 2. A β -segment C , for $1 \leq \beta \leq n$, is a set of vertices $C \subseteq V$ with $|C| = \beta$, such that the induced subgraph $G[C]$ is connected.

The following proposition bounds the distance between a vertex and a maximal family of vertex-disjoint segments.

Proposition 1. Assume G is connected. For any maximal family $\mathcal{C} = \{C_1, \dots, C_\alpha\}$ of vertex-disjoint β -segments, it holds that $\forall v \notin \cup_{i=1}^\alpha C_i: d_G(v, \mathcal{C}) \leq \beta - 1$.

Proof: Suppose for some $v \notin \cup_{i=1}^\alpha C_i$ we have $d_G(v, \mathcal{C}) > \beta - 1$. Since G is connected, there is a shortest path from v to $\cup_{i=1}^\alpha C_i$ that consists of at least β vertices that are not in $\cup_{i=1}^\alpha C_i$, contradicting the maximality of $\mathcal{C}$. ■

Let D_k^* denote the minimum achievable diameter after adding at most k edges to G (the optimum of BCMD), and let $D_{k,\delta}^*$ be the minimum achievable diameter after adding at most k edges to G , without increasing the degree of any vertex by more than $\delta \geq 1$ (the optimum of BCMD- δ).

After running Algorithm 1 (lines 1–6), we prove (Lemma 1) that the distance from any remaining segments in $\mathcal{C} \setminus \mathcal{X}$ to $\mathcal{X}$ is bounded by $D_{k,\delta}^*$. The first segment in $\mathcal{X}$ can be chosen arbitrarily. Algorithm 1 (lines 3–6) then selects segments with the largest distance from the already selected ones.

Lemma 1. *For all β -segments $C \in \mathcal{C} \setminus \mathcal{X}$ it holds $d_G(C, \mathcal{X}) \leq D_{k,\delta}^*$.*

Proof: We can assume that $\mathcal{C} \setminus \mathcal{X} \neq \emptyset$. This implies that $k+1 < |\mathcal{C}|$, and thus $|\mathcal{X}| = k+1$. Suppose there exists a β -segment $C \in \mathcal{C} \setminus \mathcal{X}$ such that $d_G(C, \mathcal{X}) > D_k^*$. Algorithm 1 greedily selects the segments that are furthest away from the already selected set of segments. This implies that when the iteration (lines 3–6) terminates we have a set of $|\mathcal{X}| + 1 = k+2$ segments with pairwise distances between them that is larger than D_k^* . In particular, we have a set of at least $k+2$ vertices with pairwise distances larger than D_k^* . Now we use the following proposition — the proof can be found in the paper of Frati et al. [17, Claim 1]:

Proposition 2. [17, Claim 1] *Let $X \subseteq V$ be a set of vertices with $|X| \geq 3$ and $d(u, v) > \alpha$, for all $u \neq v \in X$, for some $\alpha > 0$. Then for any graph $G' = G \cup \{e\}$, where $e \in \binom{V}{2}$, there exists a subset $X' \subseteq X$ with $|X'| = |X| - 1$, such that $d_{G'}(u, v) > \alpha$, for all $u \neq v \in X'$.*

By iteratively applying Proposition 2, any graph G' obtained by adding any k shortcut edges (not necessarily with degree-constraints) to G will have a set of at least two vertices with pairwise distances in G' strictly larger than D_k^* , which contradicts the optimality of D_k^* . So it must be that $\forall C \in \mathcal{C} \setminus \mathcal{X}$ it holds that $d_G(C, \mathcal{X}) \leq D_k^*$, and the result follows since $D_k^* \leq D_{k,\delta}^*$. ■

Lemma 1 enables us to bound the distance from any vertex v to the set of segments $\mathcal{X}$, as given by the following corollary.

Corollary 1. *Assume G is connected. For all vertices $v \in V$ it holds $d_G(v, \mathcal{X}) \leq \beta - 1 + D_{k,\delta}^*$.*

Proof: If $|\mathcal{C}| \leq k+1$, then $d_G(v, \mathcal{X}) \leq \beta - 1$ since $\mathcal{X} = \mathcal{C}$ after running Algorithm 1 (lines 1–6) and because $\mathcal{C}$ is a maximal family of β -segments (Proposition 1). If $|\mathcal{C}| > k+1$, then $\mathcal{C} \setminus \mathcal{X} \neq \emptyset$ and the result follows from Lemma 1 and the triangle inequality. ■

Now we are ready to analyse Algorithm 1:

Theorem 3. *Assume G is connected. Algorithm 1 returns a shortcut graph whose diameter is at most $2(\beta - 1 + D_{k,\delta}^* + \beta \log_{\beta\delta-1}(k+1))$, by adding at most k edges to G .*

Proof: By Corollary 1, the distance in G (and thus, also in the augmented graph) of any vertex to its nearest segment in $\mathcal{X}$ is at most $\beta - 1 + D_{k,\delta}^*$. The constructed full d -tree has height at most $\log_{\beta\delta-1}$ (since $\beta \geq 3$ and $\delta \geq 1$, otherwise

Algorithm 2 Constant approximation BCMD- δ .

Input: graph G , $1 \leq k \leq \sqrt{\delta n} - 1$, $\delta \geq 1$.

- 1: $\{c_i\} = k+1$ cluster centers computed according to [20].
 - 2: $C_{\max} (c_{\max}) \leftarrow$ largest cluster (center).
 - 3: $\forall c_i \neq c_{\max}$: add edge (c_i, v) for some $v \in C_{\max}$
s.t. v is incident to less than δ new shortcut edges.
-

there is no branching of the tree), and it takes at most $\beta - 1$ steps to traverse each β -segment. Hence, the total distance in the augmented graph between any two segments in $\mathcal{X}$ is at most $2\beta \log_{\beta\delta-1} |\mathcal{X}|$. So the total diameter is at most $2(\beta - 1 + D_{k,\delta}^* + \beta \log_{\beta\delta-1} |\mathcal{X}|)$. The result follows since $|\mathcal{X}| \leq k+1$.

Note that Algorithm 1 (line 7) adds at most k shortcut edges to the original graph; constructing the full d -tree needs at most $|\mathcal{X}| - 1$ edges, and $|\mathcal{X}| \leq k+1$ (line 3). ■

Corollary 2. *Assume G is connected. Algorithm 1 is a $\mathcal{O}(\log_{\delta+1} k)$ -approximation for the BCMD- δ problem, for the choice $\beta = 3$.*

Proof: If $D_{k,\delta}^* \geq \log_{3\delta-1}(k+1)$, then Theorem 3 gives a constant-factor guarantee. If $D_{k,\delta}^* < \log_{3\delta-1}(k+1)$ then the resulting diameter guarantee is $\mathcal{O}(\log_{\delta+1} k)$, and the result follows since $D_{k,\delta}^* \geq 1$. ■

Running time. Algorithm 1 needs $\mathcal{O}(km)$ time for connected graphs when $\beta = 3$. Finding a maximal family of 3-segments (line 2) can be done in linear time $\mathcal{O}(m)$ (see e.g., [5, Section 3.1]). Lines 3–5 can be implemented in $\mathcal{O}(km)$ time (similarly as in the k -center heuristic [20]); in every iteration, keep a dictionary of the distances from all segments to the current set $\mathcal{X}$. After adding C^* to $\mathcal{X}$, we update the dictionary efficiently by first computing the distances from C^* to all other segments (by doing a BFS in $\mathcal{O}(m)$ time), and then for each segment taking the minimum of the old dictionary value and this newly computed distance.

B. Constant-factor approximation for small k

In case when $k \leq \sqrt{\delta n} - 1$, we obtain a constant-factor approximation for the BCMD- δ problem, even for disconnected graphs, using a slightly different approach. Algorithm 2 first computes $k+1$ non-necessarily distinct cluster centers (line 1), again according to the k -center heuristic of Dyer and Frieze [20], [21]. In particular, the clustering phase (line 1) computes a set of $k+1$ non-necessarily distinct cluster centers $C = \{c_1, \dots, c_{k+1}\} \subseteq V$ as follows: the first center c_1 is an arbitrary vertex. For $2 \leq i \leq k+1$, the center c_i is chosen as a vertex that maximizes the distance $d_G(c_i, \{c_1, \dots, c_{i-1}\})$. The cluster partitions are defined by assigning every non-center vertex to the nearest center, breaking ties arbitrarily. If k is small (or δ is large), we can prove that the largest cluster contains enough vertices to shortcut to all other centers, leading to a constant-factor approximation. Fig. 4 shows an example in case of $\delta = 1$. Lemma 2 formalizes this.

Lemma 2. *If $k \leq \sqrt{\delta n} - 1$, Algorithm 2 is a $(4 + 2/D_{k,\delta}^*)$ -approximation algorithm for BCMD- δ .*

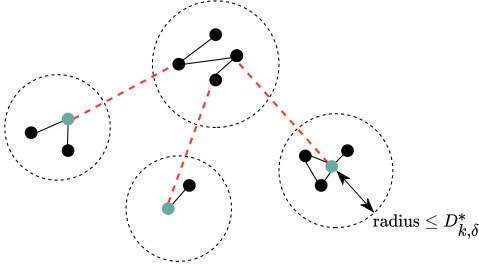


Fig. 4. Schematic idea of the constant-factor approximation. In this example, we consider a matching augmentation ($\delta = 1$). The radius of each cluster is upper bounded by the optimum diameter $D_{k,\delta}^*$, and the largest cluster has enough vertices to shortcut (dashed red edges) to the centers (green) of the other clusters.

Proof: The average number of vertices per cluster is $\frac{n}{k+1}$. So the largest cluster has the capacity to shortcut to at least $\delta \frac{n}{k+1} \geq k$ other vertices. Thus, Algorithm 2 (line 3) shortcuts every center from the k other clusters to an arbitrary vertex in the largest cluster, while respecting the degree constraints of all the vertices in the largest cluster. In previous work [15], [17] it was proven that the heuristic [20] computes a set of centers C such that for all $v \in V$ it holds $d_G(v, C) \leq D_k^*$. Since $D_k^* \leq D_{k,\delta}^*$, it holds that the radius of each cluster is also upper bounded by $D_{k,\delta}^*$. So the distance to travel the largest cluster is at most $2D_{k,\delta}^*$, and the diameter of the shortcutted graph is at most $4D_{k,\delta}^* + 2$. ■

Running time. The running time of Algorithm 2 is $\mathcal{O}(km)$, since the bottleneck is the k -center heuristic from [20].

Extending to larger depths. We can strengthen the idea behind Algorithm 2, by relaxing the requirement that the largest cluster needs to connect to all the other clusters. Instead, one can allow more than one level of the tree. For simplicity, we discuss the case of a matching augmentation ($\delta = 1$). We discuss how to build a tree when $k = \mathcal{O}(n^{1-\epsilon})$, for some $0 < \epsilon < 1/2$. First run the clustering heuristic (line 1), and then sort the clusters by cluster size (number of vertices). The largest cluster is the root of the tree, and is connected to the second largest cluster, third largest cluster etc., until all vertices in the largest cluster have been shortcut. Then we repeat the process with the second largest cluster, and connect its vertices to the remaining largest clusters, placing these clusters one level below. One might wonder if it is always possible to connect all the clusters into one tree. For example, if all the clusters are singleton vertices, then this is not possible. Or if we have one cluster of four vertices, and five remaining singleton clusters then this is also not possible.

However, such cases are always avoided. To see this, we use the fact that any nonnegative integer sequence $d_1, \dots, d_{k+1} \geq 1$ is the degree sequence of a tree with k edges if and only if $\sum d_i = 2k$. In our case, every cluster C_i can be seen as a supernode with a maximum degree capacity that is equal to the cluster size $|C_i|$ (every vertex in a cluster can be incident to at most one shortcut edge). Since $\sum |C_i| = n \geq 2k$, there is in fact always a tree with at most k edges that connects

Algorithm 3 Greedy 2-Sweep heuristic BCMD- δ .

Input: graph G , $k \geq 1$, $\delta \geq 1$.

- 1: $G' \leftarrow G$
 - 2: $\forall v \in V : \delta(v) = 0$.
 - 3: **repeat** k **times**
 - 4: pick uniform random $u \in \{v \in V : \delta(v) < \delta\}$.
 - 5: $v \leftarrow \arg \max_{\{v \in V : \delta(v) < \delta\}} d_{G'}(u, v)$
 - 6: $G' \leftarrow G' \cup \{u, v\}$.
 - 7: $\delta(v) \leftarrow \delta(v) + 1$.
 - 8: $\delta(u) \leftarrow \delta(u) + 1$.
-

the $k+1$ clusters. It is also not hard to see that our specific approach (largest clusters first) always works.

The height of this tree will be largest when all the clusters have the same size $\frac{n}{k+1}$, i.e., when branching uniformly. Assuming $\frac{n}{k+1} \geq 3$, the diameter of the shortcutted graph is at most

$$(4D_k^M + 2) \log_{\frac{n}{k+1}-1}(k+1),$$

since it takes at most $2D_k^M$ steps to transverse each cluster. If $k = \mathcal{O}(n^{1-\epsilon})$ with $0 < \epsilon < 1/2$, then for n large enough we have $\frac{n}{k+1} \geq 3$, so the diameter is at most $(4D_k^M + 2)\mathcal{O}(\frac{1}{\epsilon})$.

C. Greedy 2-Sweep heuristic

Lastly, we propose a third intuitive heuristic that works well in practice, but comes without any approximation guarantees. It is inspired by the fast heuristic lower bound called 2-Sweep [22], that is used to estimate the diameter in large graphs. Algorithm 3 picks a vertex u that is furthest away from a randomly chosen vertex, such that u has less than δ shortcut edges incident to it. Then it picks a vertex v that is furthest away from u , also incident to less than δ shortcut edges. Add the shortcut edge $\{u, v\}$. Repeat k times. The Greedy 2-Sweep heuristic attempts to shortcut the two furthest vertices in the graph, with respecting budget constraints. Since determining the two furthest vertices is not feasible for large graphs, this heuristic approximately tries to find the two furthest vertices. Running time of this heuristic is $\mathcal{O}(km)$, similar to the previous algorithms.

V. VARIANTS

We briefly discuss two variants of the BCMD- δ problem, and show that any approximation algorithm for BCMD- δ can be used as an approximation algorithm for these variants with a loss of a factor two.

Single-source. In the single-source variant of BCMD- δ , we optimize the eccentricity of a designated source vertex instead of the diameter of the entire graph.

Lemma 3. *An α -approximation for BCMD- δ is a 2α -approximation for the single-source variant.*

Proof: The proof is similar to [3, Section 4]. ■

Colored diameter. Suppose we have a disjoint partition of the vertices $V = V_1 \cup V_2$, where $V_1, V_2 \neq \emptyset$ and $V_1 \cap V_2 =$

$\emptyset$. Now define the *colored diameter* as the longest shortest path length between a vertex from V_1 and a vertex V_2 . In several scenarios, it might be the case that one only cares about minimizing the colored diameter instead of the actual diameter. For example, [14] used the colored diameter as a measure of polarization between two opposing groups. So in this variant of the BCMD- δ problem we aim to minimize the colored diameter, by shortcutting the graph without exceeding a degree budget for each vertex. It is not hard to see that our algorithms can be used for this task as well:

Lemma 4. *An α -approximation for BCMD- δ is a 2α -approximation for the colored variant.*

Proof: Let D^* (resp. D_{col}^*) be the optimum (resp. colored) diameter of the graph after adding k shortcut edges to the graph, while respecting the degree constraints. Adding k edges that minimize the diameter to D^* gives a graph with colored diameter at most D^* , so we have $D_{\text{col}}^* \leq D^*$. On the other hand, adding k edges that minimize the colored diameter to D_{col}^* gives a graph with diameter at most $2D_{\text{col}}^*$ (triangle inequality). This implies that $D^* \leq 2D_{\text{col}}^*$. So using an α -approximation for BCMD- δ , we get a graph with diameter at most αD^* . The colored diameter of this augmented graph is also at most αD^* , which is at most $2\alpha D_{\text{col}}^*$. ■

VI. INAPPROXIMABILITY OF BCMD-M

We start our analysis by reducing the NP-complete SetCover problem [23] to BCMD-M to show that we cannot get an approximation ratio better than $4/3$. The reduction is reminiscent of a reduction proposed by Demaine and Zadimoghaddam [3] to show an inapproximability result for the single-source version of BCMD, but the analysis is more involved.

An instance of the SetCover problem consists of p sets $S_1, \dots, S_p$ whose union consists of l items. The goal is to find the minimum number of sets whose union contains all l items. We construct a graph H as follows: for every set S_i we introduce a vertex s_i and for every item j we introduce a vertex u_j . If an item j is in a set S_i we add an edge from u_j to s_i . All vertices s_i are connected to each other forming a p -clique. We add two more vertices a and b . Vertex a is connected to all the set vertices s_i and to b . Finally, we add another clique of $k+1$ vertices $x_1, \dots, x_{k+1}$, and connect them to vertex b . Fig. 5 shows a schematic example of this construction.

The diameter of graph H is equal to four. Indeed, the longest shortest paths are between the vertices $u_1, \dots, u_l$ and the vertices $x_1, \dots, x_{k+1}$, and these are the only shortest paths of length four. The distance between two vertices u_i and u_j is at most three, since we can assume that every item is part of some set and all the set vertices $s_1, \dots, s_p$ form a p -clique. The task of the BCMD-M problem is now to add k matching shortcut edges to H such that its diameter is minimized. We first prove the following:

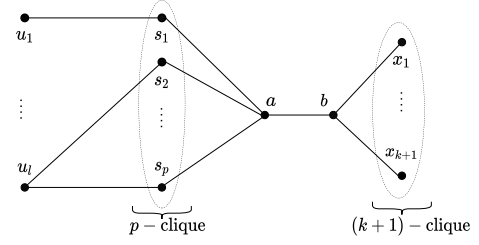


Fig. 5. Construction of the graph H used in the reduction from SetCover to BCMD-M (Section VI).

Proposition 3. *There exists a set of k matching shortcut edges that reduce the diameter of H to at most three if and only if there exists a set-cover solution with size at most k .*

Proof: If there exists a set-cover solution with size at most k , then we can add at most k matching edges between the vertices $x_1, \dots, x_k$ and the k set vertices that correspond to the set-cover solution. The exact manner in which they are connected does not matter, the resulting graph will have diameter at most three. Indeed, between any two vertices u_i and x_j , there is an edge from u_i to the chosen set which covers u_i , then there is a shortcut edge to the x -clique, from where we need at most one step to reach x_j .

Reversely, we show that if there exists a set of k shortcut matching edges that reduce the diameter to at most three, then there exists a set-cover solution with size at most k . To see this, we prove the existence of a solution that only uses shortcut edges between the s -vertices and the x -vertices. We require that $n \geq 2$ and $l, p > k$. Consider a solution for BCMD-M that reduces the diameter of H to three and uses a different shortcut edge e . We first examine the easy cases regarding e :

(ii) Edge e is between some x_j and a . Because of the matching constraint, any shortest path from a u -vertex to a still needs two steps. Thus, the only purpose of this edge is to reduce the distance between x_j and all the u -vertices to three, since any shortest path between $x_{j'}$ ($j' \neq j$) and some u_i that uses this edge still has length four. We can replace this edge by an edge between x_j and any set vertex, the distance between x_j and all the u -vertices is still at most three.

(iii) Edge e is between some u_i and a . The only purpose of this edge is to reduce the distance between u_i and the x -vertices to three. One can replace this edge with an edge between a set vertex that is connected to u_i and some x_j . The distance between u_i and the x -vertices is still at most three.

(iv) Edge e is between some u_i and b . The only purpose of this edge is to reduce the distance between u_i and all the x_j to two. One can replace this edge with an edge between a set vertex that is connected to u_i and some x_j . The distance between u_i and the x -vertices is still at most three.

(v) Edge e is between some s_i and b . The only purpose of this edge is to reduce the distance between the item vertices connected to s_i and all the x_j to three. One can replace this edge with an edge between s_i and some x_j . The distance

between all the item vertices connected to s_i and the x -vertices is still at most three.

(vi) Edge e is between two u -vertices. The only possible purpose of this edge would be to reduce the distance between one of the two u vertices and one specific x_i vertex to three, since both endpoints of e have already been shortcut. Replacing this edge by an edge between a corresponding set vertex and any x vertex results in a graph where these shortest paths are still at most three.

(vii) Edge e is between some u_i and s_j . The only purpose of this edge would be to reduce the distance between u_i and one specific x_k to three (by shortcutting a), since s_j has already been shortcut. Replacing this edge by an edge between a s_j and any x vertex results in a graph where these shortest paths are still at most three.

After rewiring edges according to the previous cases, we end up with a solution where all of the shortcut edges are either between a u -vertex and an x -vertex, or an s -vertex and an x -vertex. Suppose a vertex u_i does not have a shortcut edge to any of the x -vertices. We can prove that there must exist a set vertex that covers u_i and is shortcut to one of the x -vertices.

Suppose, by contradiction, that u_i is not shortcut to the x -vertices, and does not have a covering set vertex that is shortcut to the x -vertices. There are two cases. First, consider the case when u_i has a shortest path that first visits another u_j vertex, and then a shortcut edge from u_j to one of the x -vertices. This would take at least three steps, since it takes at least two steps to move from u_i to u_j . Moreover, it would only reduce the distance from u_i to one specific x -vertex to three (since we need an extra step to reach the other x -vertices). Secondly, suppose u_i follows a shortest path that first visits a set vertex containing u_i , and then to another set vertex (which does not contain u_i) that is shortcut to the x -vertices. This also requires three steps, and again it would only reduce the distance from u_i to one specific x -vertex to three. Since there are $k + 1$ x -vertices, but only k shortcut edges which reduce the distance to three for only one specific x -vertex, there is always one x -vertex for which the distance to u_i is four, which contradicts the optimality.

Hence, every u_i that is not shortcut to the x -vertices is connected to some set vertex that is shortcut to the x -vertices. Additionally, if u_i is shortcut to an x_j vertex, we can replace that edge by an edge between the corresponding set vertex and x_j . So we have constructed a set-cover of size at most k . ■

We are ready to prove the inapproximability result for BCMD-M. Clearly the result also holds for the BCMD- δ problem, as it includes BCMD-M as a special instance.

Lemma 5. *There exists no polynomial-time $(\frac{4}{3} - \epsilon)$ -approximation algorithm for the BCMD-M problem, assuming $P \neq NP$.*

Proof: Assume that there exists a $(\frac{4}{3} - \epsilon)$ -approximation algorithm A for BCMD-M. We can use algorithm A to decide SetCover, i.e., decide if there exists a set cover of size at

TABLE I
OVERVIEW OF THE REAL-LIFE DATASETS USED IN THE EXPERIMENTS.
FOR EACH NETWORK, WE EXTRACTED THE LARGEST CONNECTED COMPONENT (LCC). D DENOTES THE DIAMETER.

Data (LCC)	Type	$ V $	$ E $	D
Brightkite [9], [25]	social	56 739	212 945	18
Reactome [9], [26]	protein	5 973	145 778	24
Power grid [9], [27]	infrastructure	4 941	6 594	46
Amazon [28], [29]	co-purchasing	334 863	925 872	47
roadNet-PA [28], [30]	road	1 088 092	1 541 898	794

most k to a SetCover instance. If there is a set cover of size at most k , according to Proposition 3 the optimum of BCMD-M in graph H is at most three. Hence, algorithm A will return a solution with cost at most $(\frac{4}{3} - \epsilon)3 < 4$. Because the diameter only takes integer values, the diameter of the augmented graph is at most three. On the other hand, if there does not exist a set cover of size at most k , according to Proposition 3 again there is no k -augmentation that reduces the diameter of H , and thus, algorithm A will not reduce the diameter. So we can use algorithm A to decide the SetCover problem, and the solution returned by algorithm A can be used to recover a solution for SetCover, in case of a yes-instance. ■


VII. EXPERIMENTAL EVALUATION

In this section we compare and evaluate the practical performance of our three main algorithms from Section IV. For our first two algorithms, the initial center vertex (resp., segment) is chosen randomly. We use five real-life networks, shown in Table I, of varying types, and all with a reasonably large diameter of their largest connected component.


Since computing the diameter is not feasible for large graphs ($\mathcal{O}(nm)$ time using BFS or $\mathcal{O}(n^{2.372} \cdot \text{polylog}(n))$ time using matrix multiplication), we will use the fast heuristic lower bound called 2-Sweep [22], which has been reported to work very accurately for numerous real-life networks [22], [24]. The main idea is to pick the farthest vertex from a random vertex, and return its eccentricity. This heuristic lower bound needs $\mathcal{O}(m)$ time for connected graphs. The main goal is to compare our three algorithms against each other, but we also compare with a straightforward baseline: uniformly at random. This might seem simple, but it has been reported that random augmentations often perform quite well for diameter reduction problems [18]. The random algorithm selects uniformly at random k shortcut non-edges, while respecting a degree increase of at most δ per vertex. All experiments are performed on an Intel core i5 machine at 1.8 GHz with 16 GB RAM. All methods are implemented in Python 3.8 and are publicly available.¹

Influence of k and δ . We test the influence of the number of shortcut edges k and the degree budget parameter δ on the performance of the proposed algorithms. We let


¹<https://www.dropbox.com/sh/w9h1g2js54rjiy4/AADSsJwIOicUgC2tVkgdr7Rya?dl=0>

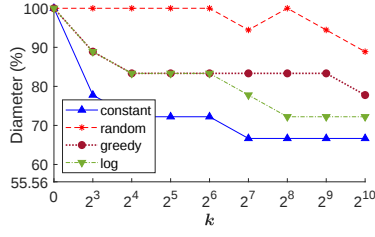


(a) Brightkite ($\delta = 1$)

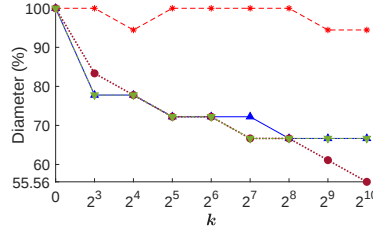


(b) Brightkite ($\delta = 25$)

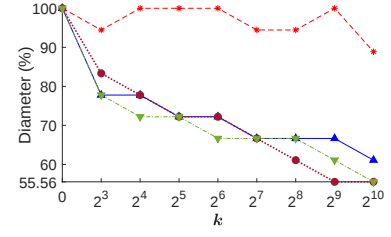


(c) Brightkite ($\delta = 2^{10}$)

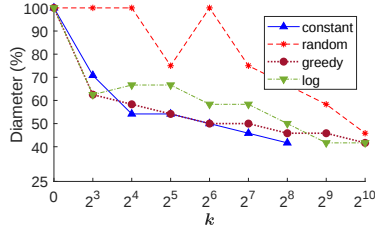


(d) Reactome ($\delta = 1$)

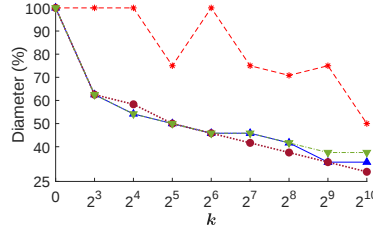


(e) Reactome ($\delta = 25$)

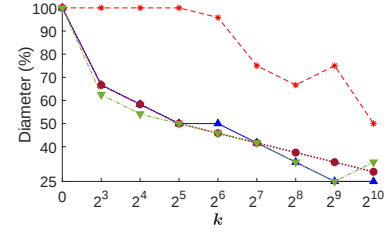


(f) Reactome ($\delta = 2^{10}$)

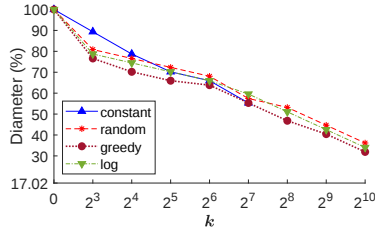


(g) Power ($\delta = 1$)

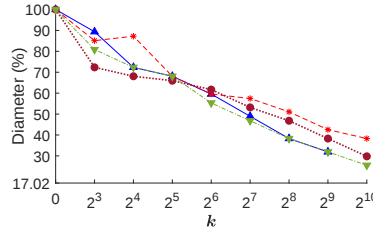


(h) Power ($\delta = 25$)

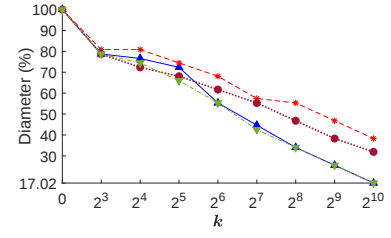


(i) Power ($\delta = 2^{10}$)

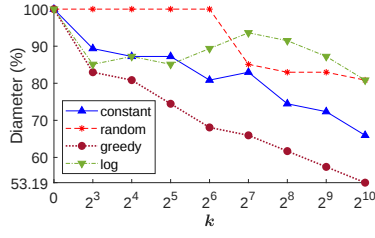


(j) Amazon ($\delta = 1$)

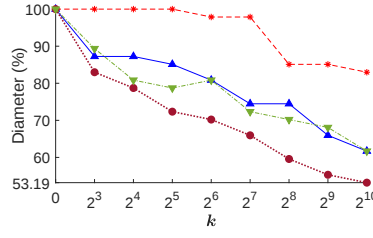


(k) Amazon ($\delta = 25$)

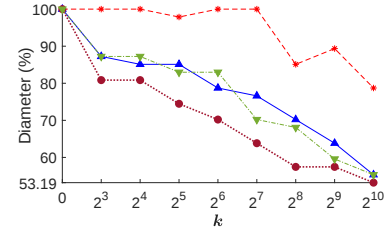


(l) Amazon ($\delta = 2^{10}$)

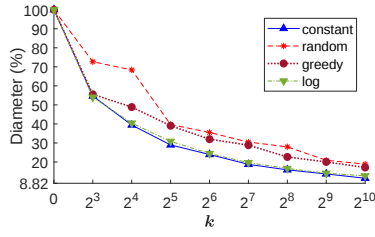

(m) roadNet-PA ($\delta = 1$)

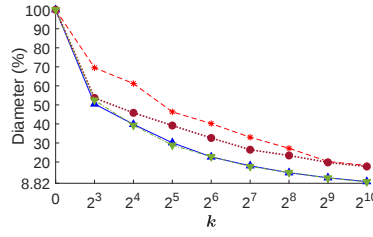

(n) roadNet-PA ($\delta = 25$)

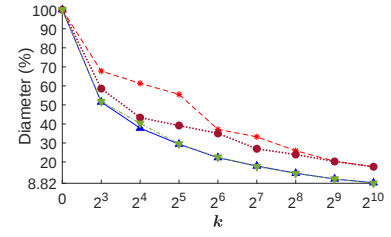

(o) roadNet-PA ($\delta = 2^{10}$)

Fig. 6. The performance of the proposed algorithms for various settings of k and δ . The interruption of the blue colored plot (constant-factor approximation algorithm) indicates that the criterion for the algorithm to run is not fulfilled, as discussed in Section IV-B.

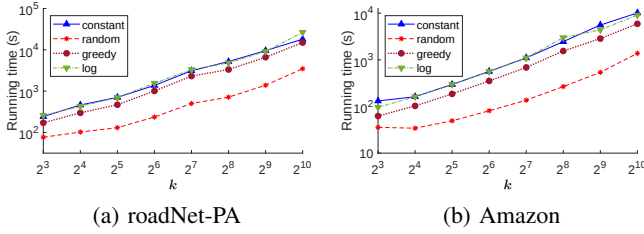


Fig. 7. Running time as a function of the number of shortcut edges k , on the Amazon and roadNet-PA datasets.

$k \in \{8, 16, \dots, 1024\}$ and $\delta \in \{1, 25, 1024\}$, where $\delta = 1024$ corresponds to an unlimited degree increase budget (given our range for k). For every k and δ , we repeat each algorithm five times and return the minimum diameter. Results are shown in Fig. 6. The Greedy 2-Sweep heuristic, the log-approximation and the constant-factor approximation all significantly perform better than randomly adding edges. Interestingly, for the Power and roadNet-PA datasets adding random edges can work well to reduce the diameter, even with a matching constraint. Another interesting observation is that one does not need a high degree budget δ to obtain good diameter reduction. Even with matching shortcut edges ($\delta = 1$), a decent reduction in diameter is often possible. The difference in results between $\delta = 25$ and $\delta = 1024$ does not seem to be that large, but is more noticeable for larger values of k . The interruption of the blue colored plot means that the constant-factor approximation does not meet the criteria to run. This happens whenever the largest cluster does not have enough vertices (with enough budget) to shortcut to the remaining clusters. In Section IV-B we showed that the algorithm is guaranteed to work if $k \leq \sqrt{\delta n} - 1$, but in practice the algorithm did run for larger values of k .

Running time. Fig. 7 shows the running time as a function of k on the two largest datasets. Doubling the number of edges k roughly leads to doubling the running time. This corresponds to the $\mathcal{O}(km)$ time complexity of our methods and the baseline. The influence of δ on the running time is negligible.

VIII. CONCLUSION AND FUTURE WORK

We study the problem of adding k new edges to a graph in order to minimize its diameter and while respecting degree constraints on the number of edges added at each vertex. We present three algorithms for this task, and show the hardness of approximating the problem with ratio better than 4/3. Our paper opens up several directions for future work. First, an important challenge is to close the approximability gap between lower and upper bound. A problem variant, motivated by real-world applications, is to consider non-unit costs for the new edges to be added.

ACKNOWLEDGMENT

Both authors are supported by the ERC Advanced Grant REBOUND (834862), the EC H2020 RIA project SoBigData

(871042), and the Wallenberg AI, Autonomous Systems and Software Program (WASP) funded by the Knut and Alice Wallenberg Foundation

REFERENCES

- [1] L. Benini and G. De Micheli, "Networks on chips: A new SoC paradigm," *Computer*, vol. 35, no. 1, pp. 70–78, 2002.
- [2] N. Laoutaris, L. J. Poplawski, R. Rajaraman, R. Sundaram, and S.-H. Teng, "Bounded budget connection (BBC) games or how to make friends and influence people, on a budget," in *Proceedings of the 27th ACM symposium on Principles of distributed computing (PODC)*, 2008.
- [3] E. Demaine and M. Zadimoghaddam, "Minimizing the diameter of a network using shortcut edges," in *SWoAT*, 2010.
- [4] A. Meyerson and B. Tagiku, "Minimizing average shortest path distances via shortcut edge addition," in *Approximation, Randomization, and Comb. Optimization. Algorithms and Techniques*, 2009, pp. 272–285.
- [5] R. B. Tan, E. J. Van Leeuwen, and J. Van Leeuwen, "Shortcutting directed and undirected networks with a degree constraint," *Discrete Applied Mathematics*, vol. 220, pp. 91–117, 2017.
- [6] V. Chepoi and Y. Vaxes, "Augmenting trees to meet biconnectivity and diameter constraints," *Algorithmica*, vol. 33, no. 2, pp. 243–262, 2002.
- [7] C. Li, S. McCormick, and D. Simchi-Levi, "On the minimum-cardinality-bounded-diameter and the bounded-cardinality-minimum-diameter edge addition problems," *Operations Research Letters*, 1992.
- [8] D. M. A., W. W. D., H. W. J., and J. W. C., "Cluster of cases of the acquired immune deficiency syndrome. patients linked by sexual contact," *The American journal of medicine*, 1984.
- [9] J. Kunegis, "Konec: The koblenz network collection," in *22nd Int. Conf World Wide Web*, 2013, pp. 1343–1350.
- [10] F. R. K. Chung and M. R. Garey, "Diameter bounds for altered graphs," *Journal of Graph Theory*, vol. 8, no. 4, pp. 511–534, 1984.
- [11] S. H. Bokhari and A. D. Raza, "Reducing the diameters of computer networks," *IEEE Trans. Comput.*, vol. 35, no. 8, pp. 757–761, 1986.
- [12] K. Garimella, G. De Francisci Morales, A. Gionis, and M. Mathioudakis, "Reducing controversy by connecting opposing views," in *Web Search and Data Mining*, 2017, pp. 81–90.
- [13] S. Haddadan, C. Menghini, M. Riondato, and E. Upfal, "Republik: Reducing polarized bubble radius with link insertions," in *14th ACM International Conference on Web Search and Data Mining*, 2021.
- [14] R. Interian, J. Moreno, and C. Ribeiro, "Polarization reduction by minimum-cardinality edge additions: Complexity and integer programming approaches," *International Transactions in Operational Research*, vol. 28, 2020.
- [15] D. Bilò, L. Gualà, and G. Proietti, "Improved approximability and non-approximability results for graph diameter decreasing problems," *Theoretical Computer Science*, vol. 417, pp. 12–22, 2012.
- [16] Y. Dodis and S. Khanna, "Design networks with bounded pairwise distance," in *31st annual ACM STOC*, 1999, pp. 750–759.
- [17] F. Frati, S. Gaspers, J. Gudmundsson, and L. Mathieson, "Augmenting graphs to minimize the diameter," *Algorithmica*, 2015.
- [18] B. Bollobás and F. R. K. Chung, "The diameter of a cycle plus a random matching," *SIAM Journal on Discrete Mathematics*, 1988.
- [19] Y. Gao, D. R. Hare, and J. Nastos, "The parametric complexity of graph diameter augmentation," *Discrete Applied Mathematics*, vol. 161, no. 10, pp. 1626–1631, 2013.
- [20] M. Dyer and A. Frieze, "A simple heuristic for the p-centre problem," *Operations Research Letters*, vol. 3, no. 6, pp. 285–288, 1985. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/0167637785900021>
- [21] T. F. Gonzalez, "Clustering to minimize the maximum intercluster distance," *Theoretical Computer Science*, vol. 38, pp. 293–306, 1985.
- [22] C. Magnien, M. Latapy, and M. Habib, "Fast computation of empirically tight bounds for the diameter of massive graphs," *Journal of Experimental Algorithmics*, vol. 13, pp. 1–10, 2009.
- [23] R. M. Karp, *Reducibility among Combinatorial Problems*. Boston, MA: Springer US, 1972, pp. 85–103.
- [24] P. Crescenzi, R. Grossi, L. LANZI, and A. Marino, "On computing the diameter of real-world directed (weighted) graphs," in *International Symposium on Experimental Algorithms*, 2012, pp. 99–110.
- [25] E. Cho, S. A. Myers, and J. Leskovec, "Friendship and mobility: User movement in location-based social networks," in *Proceedings of the 17th ACM SIGKDD KDD*, 2011.

- [26] G. Joshi-Tope, M. Gillespie, I. Vastrik, P. D'Eustachio, E. Schmidt, B. de Bono, B. Jassal, G. Gopinath, G. Wu, L. Matthews *et al.*, "Reactome: a knowledgebase of biological pathways," *Nucleic Acids Research*, vol. 33, pp. D428–D432, 2005.
- [27] D. J. Watts and S. H. Strogatz, "Collective dynamics of small-world networks," *Nature*, vol. 393, no. 6684, pp. 440–442, 1998.
- [28] J. Leskovec and A. Krevl, "SNAP Datasets," <http://snap.stanford.edu/data>, Jun. 2014.
- [29] J. Yang and J. Leskovec, "Defining and evaluating network communities based on ground-truth," *Knowledge and Information Systems*, vol. 42, no. 1, pp. 181–213, 2015.
- [30] J. Leskovec, K. J. Lang, A. Dasgupta, and M. W. Mahoney, "Community structure in large networks: Natural cluster sizes and the absence of large well-defined clusters," *Internet Mathematics*, 2009.