

On the Complexity of the Storyplan Problem^{*}

Carla Binucci¹, Emilio Di Giacomo¹, William J. Lenhart²,
Giuseppe Liotta¹, Fabrizio Montecchiani¹, Martin Nöllenburg³, and
Antonios Symvonis⁴

¹ Department of Engineering, University of Perugia, Italy
`name.surname@unipg.it`

² Department of Computer Science, Williams College, USA
`wlenhart@williams.edu`

³ Algorithms and Complexity Group, TU Wien, Vienna, Austria
`noellenburg@ac.tuwien.ac.at`

⁴ School of Applied Mathematical & Physical Sciences, NTUA, Greece
`symvonis@math.ntua.gr`

Abstract. Motivated by dynamic graph visualization, we study the problem of representing a graph G in the form of a *storyplan*, that is, a sequence of frames with the following properties. Each frame is a planar drawing of the subgraph of G induced by a suitably defined subset of its vertices. Between two consecutive frames, a new vertex appears while some other vertices may disappear, namely those whose incident edges have already been drawn in at least one frame. In a storyplan, each vertex appears and disappears exactly once. For a vertex (edge) visible in a sequence of consecutive frames, the point (curve) representing it does not change throughout the sequence.

Note that the order in which the vertices of G appear in the sequence of frames is a total order. In the STORYPLAN problem, we are given a graph and we want to decide whether there exists a total order of its vertices for which a storyplan exists. We prove that the problem is NP-complete, and complement this hardness with two parameterized algorithms, one in the vertex cover number and one in the feedback edge set number of G . Also, we prove that partial 3-trees always admit a storyplan, which can be computed in linear time. Finally, we show that the problem remains NP-complete in the case in which the total order of the vertices is given as part of the input and we have to choose how to draw the frames.

Keywords: Dynamic Graph Drawing · NP-hardness · Parameterized Analysis · Pathwidth

1 Introduction

Let $G = (V, E)$ be a graph with n vertices. We write $[n]$ as shorthand for the set $\{1, 2, \dots, n\}$. A *storyplan* $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$ of G is a pair defined as follows.

^{*} Research partially supported by MIUR grant 20174LF3T8 “AHeAD: efficient Algorithms for HARnessing networked Data”, Progetto RICBA21LG “Algoritmi, modelli e sistemi per la rappresentazione visuale di reti”, and the Vienna Science and Technology Fund (WWTF) grant ICT19-035.

The first element is a bijection $\tau : V \rightarrow [n]$ that represents a total order of the vertices of G . For a vertex $v \in V$, let $i_v = \tau(v)$ and let $j_v = \max_{u \in N[v]} \tau(u)$, where $N[v]$ is the set containing v and its neighbors. The *lifespan* of v is the interval $[i_v, j_v]$. We say that v *appears* at step i_v , is *visible* at step i for each $i \in [i_v, j_v]$, and *disappears* at step $j_v + 1$. Note that a vertex does not disappear until all its neighbors have appeared. The second element of $\mathcal{S}$ is a sequence of drawings $\{D_i\}_{i \in [n]}$, such that: (i) each drawing D_i contains all vertices visible at step i , (ii) each drawing D_i is planar, (iii) the point representing a vertex v is the same over all drawings that contain v (i.e., it does not change during the lifespan of v), and (iv) the curve representing an edge e is the same over all drawings that contain e . We introduce the STORYPLAN problem.

STORYPLAN

Input: Graph $G = (V, E)$

Question: Does G admit a storyplan?

In what follows, each drawing D_i of a storyplan $\mathcal{S}$ is called a *frame* of $\mathcal{S}$. Also, we denote by $|D_i|$ the number of vertices of D_i , while the *width* of $\mathcal{S}$ is $w(\mathcal{S}) = \max_{i \in [n]} |D_i| - 1$ (we subtract one to align the definition with other width parameters). If G admits a storyplan, then the *framewidth* of G , denoted by $\text{fw}(G)$, is the minimum width over all its storyplans; otherwise the framewidth of G is conventionally set to $+\infty$. We will observe that the framewidth of G upper bounds its pathwidth [17], since each frame can be interpreted as a bag of a path decomposition with the addition of conditions (ii)–(iv).

Motivation and related work. Testing for the existence of a storyplan of a graph generalizes planarity and it is of theoretical interest as it combines classical width parameters of graphs with topological properties. From a more practical perspective, computing a storyplan (if any) of a graph G is a natural way to gradually visualize G in a story-like or small-multiples fashion, such that each single drawing is planar and the reader’s mental map is preserved throughout the sequence of drawings (see, e.g., [9] for a similar approach). More in general, the problem of visualizing graphs that change over time has motivated a notable amount of literature in graph drawing and network visualization (see, e.g., [2, 3, 5, 8, 22, 23]). While numerous dynamic graph visualization models have been proposed, two works are of particular interest for our research. The first one is the work by Borrazzo et al. [5], in which the following problem is introduced. A *graph story* is formed by a graph G , a total order of its vertices τ , and a positive integer W . The problem is to find a sequence of drawings $\{D_i\}_{i \in [n]}$ in which each D_i contains all vertices v such that $i - W < \tau(v) \leq i$, and the position of a vertex is the same over all drawings it belongs to. Borrazzo et al. prove that any story of a path or a tree can be drawn on a $2W \times 2W$ and on an $(8W + 1) \times (8W + 1)$ grid, respectively, so that all the drawings of the story are straight-line and planar. Note that having a fixed window of size W implies that at most $O(W \cdot n)$ edges of G can be represented, in particular, any edge whose endpoints are at distance larger than W in τ does not appear in any drawing. Having both a fixed order and a fixed lifespan are the key differences with our

setting. In particular, unconstrained lifespans allow us to find stories in which all edges are drawn in at least one step, while planarity still guarantees that even large frames are readable. Besides such differences in the models, our focus is on the complexity of the decision problem, rather than on area bounds for specific graph families. The second work is by Da Lozzo and Rutter [8], who introduce *stream planarity*. Given a graph G , a total order τ of the *edges* of G , and a positive integer W , stream planarity asks for a sequence of drawings $\{D_i\}_{i \in [n]}$ in which each D_i contains all edges e such that $i - W < \tau(e) \leq i$, and the subdrawing of the vertices and edges shared by D_i and D_{i-1} is the same in both drawings. Da Lozzo and Rutter prove that there exists a constant value for W for which the stream planarity problem is **NP**-complete. They also study a variant where a backbone graph is given whose edges must stay in the drawing at each time step; for this variant they prove that the problem is **NP**-complete for all $W \geq 2$ and can be solved in polynomial time when $W = 1$ or when the backbone graph is biconnected. The difference of stream planarity with our problem, besides the fact that edges are streamed rather than vertices, is again having a fixed order and a fixed lifespan.

Contribution. The main results in this paper can be summarized as follows.

- We show that **STORYPLAN** is **NP**-complete (Section 3.1). As we reduce from **ONE-IN-THREE 3SAT** and we blow up the instance by a linear factor, it follows that there is no algorithm that solves **STORYPLAN** in $2^{o(n)}$ time unless **ETH** fails. On the other hand, such a lower bound can be complemented with a simple algorithm running in $2^{O(n \log n)}$ time.
- Motivated by the above hardness, we study the parameterized complexity of **STORYPLAN** and describe two fixed-parameter tractable algorithms. We first show that **STORYPLAN** belongs to **FPT** when parameterized by the vertex cover number via the existence of a kernel, whose size is however super-polynomial (Section 3.2). We then prove that **STORYPLAN** parameterized by the feedback edge set number (i.e., the minimum number of edges whose removal makes the graph acyclic) admits a kernel of linear size (Section 3.3).
- In parameterized analysis, a central parameter to consider is treewidth. In this direction, finding a parameterized algorithm for **STORYPLAN** appears to be an elusive task. However, we show that for partial 3-trees, a storyplan always exists and can be computed in linear time (Section 3.4).
- Finally, we initiate the study of the complexity of a variant of **STORYPLAN** in which the total order of the vertices is fixed in advance (but the vertex lifespan remains unconstrained). We prove **NP**-completeness for this problem via a reduction from **SUNFLOWER SEFE** [20] (Section 4).

Some proofs are in the appendix and the corresponding statements are marked ($\star$).

2 Preliminaries and Basic Results

A *drawing* Γ of a graph $G = (V, E)$ is a mapping of the vertices of V to points in the plane $\mathbb{R}^2$, and of the edges of E to Jordan arcs connecting their corresponding

endpoints but not passing through any other vertex. Drawing Γ is *planar* if no edge is crossed. A graph is *planar* if it admits a planar drawing. A planar drawing of a planar graph G subdivides the plane into topologically connected regions, called *faces*. The infinite region is the *outer face*. A *planar embedding* $\mathcal{E}$ of G is an equivalence class of planar drawings that define the same set of faces and the same outer face. For any $V' \subseteq V$, we denote by $G[V']$ the subgraph of G induced by the vertices of V' and by $\Gamma[V']$ the subdrawing of Γ representing $G[V']$.

Connection with pathwidth. The next properties show some simple connections between storyplans and path decompositions [17].

Theorem 1 ($\star$). *Let $G = (V, E)$ be a graph, then $\text{pw}(G) \leq \text{fw}(G)$. Also, if G is planar then it always admits a storyplan, and in particular $\text{pw}(G) = \text{fw}(G)$.*

Since computing the pathwidth is NP-hard already for planar graphs of bounded degree [16], the next corollary immediately follows from Theorem 1.

Corollary 1. *Computing the framewidth of a graph is NP-hard for planar graphs of bounded degree.*

Analogously, computing the pathwidth of a graph is FPT in the pathwidth [4], hence computing the framewidth of a planar graph is also FPT in the framewidth.

Complete bipartite graphs. It is not difficult to verify that if a graph admits a storyplan, then it does not contain K_5 as a subgraph. However, complete bipartite graphs always admit a storyplan and such storyplans have important properties. The next statement plays a central role in most of our proofs.

Lemma 1 ($\star$). *Let $K_{a,b} = (A \cup B, E)$ be a complete bipartite graph with $a = |A|$, $b = |B|$, and $3 \leq b \leq a$. Let $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [a+b]} \rangle$ be a storyplan of $K_{a,b}$. Exactly one of A and B is such that all its vertices are visible at some $i \in [a+b]$.*

In view of Lemma 1, we have the following definition.

Definition 1. *For a complete bipartite graph $K_{a,b}$ with $3 \leq b \leq a$ and a storyplan $\mathcal{S}$ of $K_{a,b}$, we call fixed the partite set of $K_{a,b}$ whose vertices are all visible at some step of $\mathcal{S}$, and flexible the other partite set.*

3 Complexity of StoryPlan

In this section we prove that: STORYPLAN is NP-complete and cannot be solved in $2^{o(n)}$ time unless ETH fails, but there is an algorithm running in $2^{O(n \log n)}$ time (Section 3.1); STORYPLAN is in FPT parameterized by vertex cover number or feedback edge set number (Sections 3.2 and 3.3); graphs of treewidth at most 3 always admit a storyplan, which can be computed in linear time (Section 3.4).

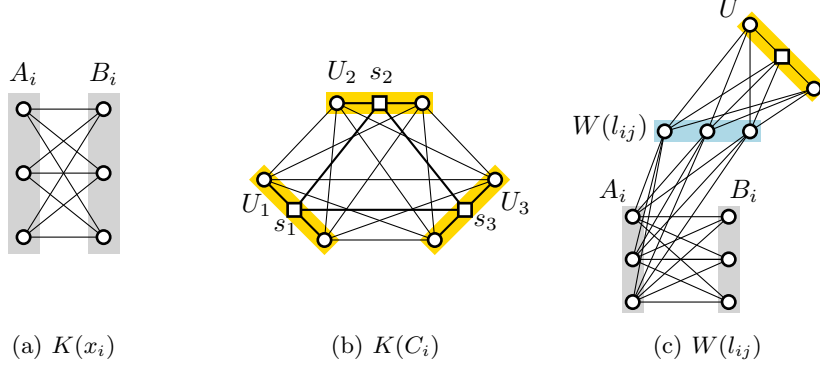


Fig. 1. Illustration for the reduction of Theorem 2.

3.1 Hardness

We reduce from ONE-IN-THREE 3SAT, a variant of 3SAT which asks whether there is a satisfying assignment in which *exactly* one literal in each clause is true. Let φ be a 3SAT formula over N variables $\{x_i\}_{i \in [N]}$ and M clauses $\{C_i\}_{i \in [M]}$. We construct an instance of STORYPLAN, i.e., a graph $G = (V, E)$, as follows; refer to Fig. 1 for an illustration.

Variable gadget. Each variable x_i is represented in G by a copy $K(x_i)$ of $K_{3,3}$ (see Fig. 1(a)). Let A_i and B_i be the two partite sets of $K(x_i)$, which we call the *v-sides* of $K(x_i)$. A true (false) assignment of x_i will correspond to set A_i being flexible (fixed) in a putative storyplan of G (see Definition 1).

Clause gadget. Consider a copy of $K_{2,2,2} = (U_1 \cup U_2 \cup U_3, F)$. An *extended* $K_{2,2,2}$ is the graph obtained from any such a copy by adding three vertices s_1, s_2, s_3 , such that these three vertices are pairwise adjacent, and each s_j is adjacent to both vertices in U_j , for $j \in \{1, 2, 3\}$. In the following, s_1, s_2, s_3 are the *special vertices* of the extended $K_{2,2,2}$, while the other vertices are the *simple vertices*. A clause C_i is represented in G by an extended $K_{2,2,2}$, denoted by $K(C_i)$ (see Fig. 1(b)). In particular, we call each of the three sets of vertices $U_j \cup \{s_j\}$ a *c-side* of $K(C_i)$. The idea is that $K(C_i)$ admits a storyplan if and only if exactly one c-side is flexible (each c-side will be part of a $K_{3,3}$, see the wire gadget below).

Wire gadget. Refer to Fig. 1(c). Let x_i be a variable having a literal l_{ij} in a clause C_j . Any such variable-clause incidence is represented in G by a set of three vertices, which we call the *w-side* $W(l_{ij})$. All vertices of $W(l_{ij})$ are connected to all vertices of one of the three c-sides of $K(C_j)$, which we call U , such that the graph induced by $W(l_{ij}) \cup U$ in G contains a copy of $K_{3,3}$. Also, each vertex of $W(l_{ij})$ is connected to all vertices of the v-side A_i (B_i) if the literal is positive (negative), such that the graph induced by $W(l_{ij}) \cup A$ ($W(l_{ij}) \cup B$) in G is a copy of $K_{3,3}$. Also, note that each c-side of $K(C_j)$ is adjacent to exactly one w-side.

Lemma 2 (*). *If graph G admits a storyplan then φ admits a satisfying assignment with exactly one true literal in each clause.*

Proof (Sketch). Let $\mathcal{S}$ be a storyplan of G . For each variable gadget $K(x_i)$ we assign the value *true* to x_i if the v-side A_i is flexible in $\mathcal{S}$. Consider any literal l_{ij} and the wire gadget W_{ij} . If l_{ij} is positive (negative), then A_i (B_i) and W_{ij} form a $K_{3,3}$, hence by Lemma 1 the w-side W_{ij} is fixed (flexible). Analogously, if we consider the clause gadget $K(C_j)$, the c-side connected with W_{ij} is flexible (fixed). Symmetrically, we assign the value *false* to x_i if the v-side B_i is instead flexible in $\mathcal{S}$, and for any positive (negative) literal l_{ij} , the w-side W_{ij} is flexible (fixed), while the corresponding c-side of $K(C_j)$ is fixed (flexible). In other words, the value of x_i propagates consistently throughout all its literals. It remains to prove that, for any clause C_j of φ , precisely one literal is true. Namely, we claim that exactly one c-side of $K(C_j)$ is flexible, while the other two are fixed. At high level, we rely on the fact that an extended $K_{2,2,2}$ wants at least two c-sides to be fixed, while the special vertices force at least one c-side to be flexible.

Lemma 3 (*). *If the formula φ admits a satisfying assignment with exactly one true literal in each clause, then graph G admits a storyplan.*

Proof (Sketch). Given a satisfying assignment of φ with one true literal per clause, we can compute a storyplan $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$ of G . In what follows, when the order of a group of vertices is not specified, any relative order is valid.

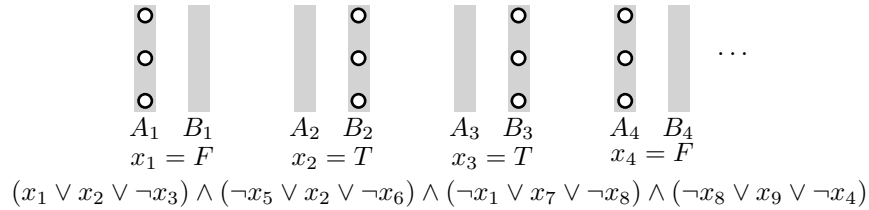


Fig. 2. Proof of Lemma 3: drawing the vertices of the fixed v-sides.

Consider a single variable gadget $K(x_i)$. If x_i is true in the satisfying assignment, then we let appear the three vertices of the v-side B_i of $K(x_i)$, that is, B_i is the fixed side of $K(x_i)$. If x_i is false, we do the opposite, namely we let appear the three vertices of the v-side A_i of $K(x_i)$. This procedure is repeated for all variables in any order. For ease of presentation, we can imagine that all the drawn v-sides are horizontally aligned, as shown in Fig. 2. Thus, for the variable gadgets, it remains to draw their flexible v-sides.

Consider now a wire gadget $W(l_{ij})$. If x_i is true and l_{ij} is positive, then $W(l_{ij})$ must be fixed because it forms a $K_{3,3}$ with the v-side A_i of $K(x_i)$, which is flexible. Therefore we let appear the three vertices of $W(l_{ij})$. Similarly, if x_i is false and l_{ij} is negative, then $W(l_{ij})$ must be fixed, and we let appear the three

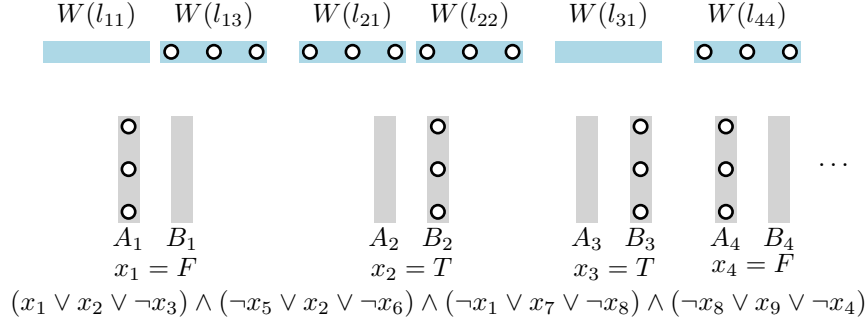


Fig. 3. Proof of Lemma 3: drawing the vertices of the fixed w-sides.

vertices of $W(l_{ij})$. Again, this procedure is repeated for all wires in any order. For ease of presentation, we can imagine that all the drawn w-sides are arranged along a horizontal line slightly above the variable gadgets, as shown in Fig. 3. Thus, also for the wire gadgets, it remains to draw the flexible w-sides.

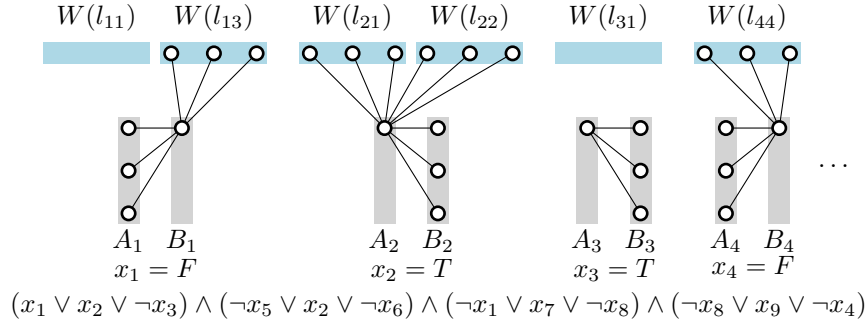


Fig. 4. Proof of Lemma 3: drawing the vertices of the flexible v-sides.

We sketch the remaining part of the proof (see Appendix B.1). Flexible v-sides can be drawn as in Fig. 4. Fig. 5 shows how to draw a clause gadget, ignoring the connections with the linked wire gadgets. Finally, in order to draw the flexible w-sides and their edges, and the edges between the fixed w-sides and the corresponding c-sides, we enclose all the wire and variable gadgets in a face of the current clause gadget where all vertices of the linked c-side are visible.

Theorem 2 (★). *The STORYPLAN problem is NP-hard and it has no $2^{o(n)}$ time algorithm unless ETH fails.*

The above lower bound for the running time of an algorithm solving STORYPLAN can be easily complemented with a nearly tight upper bound. The proof

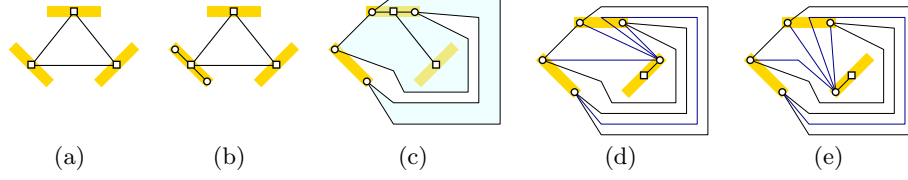


Fig. 5. Proof of Lemma 3: drawing a clause gadget.

of the next theorem also shows that STORYPLAN belongs to NP. Namely, it gives a nondeterministic scheme to generate a set of candidate solutions, and then it shows how to check, in polynomial time, if a candidate solution is valid. However, it intertwines such process in order to obtain a lower time complexity.

Theorem 3 (★). *The STORYPLAN problem is in NP. Also, given an n -vertex graph G , there is an algorithm that solves STORYPLAN on G in $2^{O(n \log n)}$ time.*

Proof (Sketch). We first guess a total order of the vertices of G . This fixes for each $i \in [n]$ the visible vertices. Next, for each $i \in [n]$, we generate the possible planar embeddings (rather than planar drawings) of the graph induced by the vertices visible at step i , and discard any embedding $\mathcal{E}$ for which there is no planar embedding $\mathcal{E}'$ generated at step $i-1$ (if $i > 1$) such that the restrictions of $\mathcal{E}$ and $\mathcal{E}'$ to the common subgraph coincide. If the algorithm returns at least one planar embedding at step n , there is a sequence of planar embeddings in which common subgraphs share the same embedding, hence G admits a storyplan.

3.2 Parameterization by Vertex Cover Number

A *vertex cover* of a graph $G = (V, E)$ is a set $C \subseteq V$ such that every edge of E is incident to a vertex in C , and the *vertex cover number* of G is the minimum size of a vertex cover of G . We prove the following by means of kernelization.

Theorem 4 (★). *Let $G = (V, E)$ be a graph with n vertices and vertex cover number $\kappa = \kappa(G)$. Deciding whether G admits a storyplan, and computing one if any, can be done in $O(2^{2^{O(\kappa)}} + n^2)$ time.*

Algorithm Description. Without loss of generality, we assume that the input graph G does not contain isolated vertices, as they do not affect the existence of a storyplan. Let C be a vertex cover of size $\kappa = \kappa(G)$ of graph G . For $U \subseteq C$, a vertex $v \in V \setminus C$ is of *type* U if $N(v) = U$, where $N(v)$ denotes the set of neighbors of v in G . This defines an equivalence relation on $V \setminus C$ and in particular partitions $V \setminus C$ into at most $\sum_{i=1}^{\kappa} \binom{\kappa}{i} = 2^{\kappa} - 1 < 2^{\kappa}$ distinct types. Denote by V_U the set of vertices of type U . We define three reduction rules.

R.1: *If there exists a type U such that $|U| = 1$, then pick an arbitrary vertex $x \in V_U$ and remove it from G .*

R.2: If there exists a type U such that $|U| = 2$ and $|V_U| > 1$, then pick an arbitrary vertex $x \in V_U$ and remove it from G .

R.3: If there exists a type U such that $|U| \geq 3$ and $|V_U| > 3$, then pick an arbitrary vertex $x \in V_U$ and remove it from G .

Lemma 4 ($\star$). Let G' be the graph obtained from G by applying one of the reduction rules **R.1**–**R.3**. Then G admits a storyplan if and only if G' does.

Proof (Sketch). For the nontrivial direction, suppose that G' admits a storyplan $\mathcal{S}' = \langle \tau', \{D'\}_{i \in [n']}\rangle$, where $n' = n - 1$. We can distinguish three cases based on

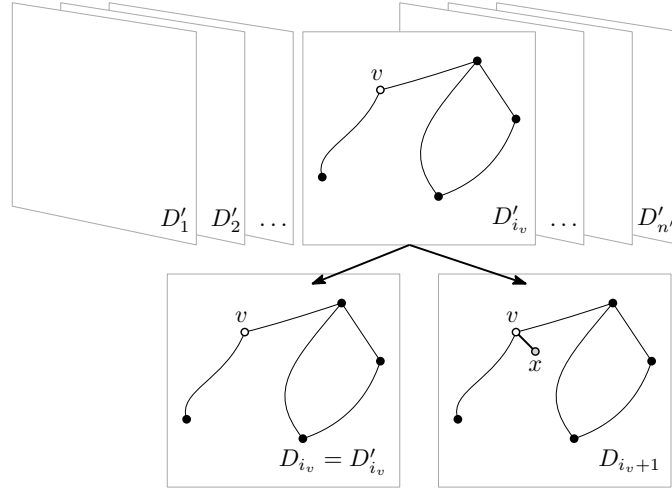


Fig. 6. Illustration for **Case A** of the proof of Lemma 4.

the reduction rule applied to G . Here we only prove the simplest of the three cases, namely the case in which **R.1** is applied. See Fig. 6 for an illustration. Let x be the vertex removed from G to obtain G' and let v be its neighbor, whose lifespan according to τ' is $[i_v, j_v]$. We compute τ from τ' by inserting x right after v , thus the lifespan of x in τ is $[i_v + 1, i_v + 1]$. Similarly, we compute $\{D_i\}_{i \in [n]}$ from $\{D'\}_{i \in [n']}$ as follows. For each $i \leq i_v$, we set $D_i = D'_i$. For $i = i_v + 1$, we draw x in D'_{i_v} sufficiently close to v such that edge xv can be drawn as a straight-line segment that does not intersect any other edge. We then set D_i to be equal to the resulting drawing. For each $i > i_v + 1$, we set $D_i = D'_{i-1}$.

Based on Lemma 4, we can construct an equivalent instance of G of size $O(2^\kappa)$ and use it to conclude the proof of Theorem 4 (see Appendix B.2).

3.3 Parameterization by Feedback Edge Set

A *feedback edge set* of a graph $G = (V, E)$ is a set $F \subseteq E$ whose removal results in an acyclic graph, and the *feedback edge set number* of G is the minimum size of a feedback edge set of G . We prove the following.

Theorem 5. *Let G be a graph with n vertices and feedback edge set of size $\psi = \psi(G)$. Deciding whether G admits a storyplan, and computing one if any, can be done in $O(2^{O(\psi \log \psi)} + n^2)$ time.*

Algorithm Description. A k -chain of G is a path with $k+2$ vertices and such that its k inner vertices all have degree two. We define two reduction rules.

R.A: *If there exists a vertex of degree one, then remove it from G .*

R.B: *If there exists a k -chain with $k \geq 3$, then remove its inner vertices from G .*

Based on the above reduction rules we can prove the following.

Lemma 5 (*). *STORYPLAN parameterized by feedback edge set number admits a kernel of linear size.*

To conclude the proof of Theorem 5, observe that computing a linear kernel G^* of G , i.e., applying exhaustively the reduction rules **R.A** and **R.B**, can be done in $O(n + \psi)$ time. Afterwards, following the lines of the proof of Theorem 4, we can brute-force a solution for G^* (if any) in $2^{O(\psi \log \psi)}$ time, and reinsert the missing $O(n)$ vertices each in $O(n)$ time (as detailed Lemma 9 of Appendix B.3).

3.4 Partial 3-trees

A k -tree has a recursive definition: A complete graph with k vertices is a k -tree; for any k -tree H , the graph obtained from H by adding a new vertex v connected to a clique C of H of size k is a k -tree; C is the *parent clique* of v . A *partial k -tree* is a subgraph of a k -tree and partial k -trees are exactly the graphs of treewidth at most k . Since 2-trees are planar, they admit a storyplan by Theorem 1. We prove that the same holds for partial 3-trees (which may be not planar).

Theorem 6 (*). *Every partial 3-tree G with n vertices admits a storyplan, which can be computed in $O(n)$ time.*

Proof (Sketch). We shall assume that G is a (non-partial) 3-tree. Indeed, if G is a partial 3-tree, a supergraph of G that is a 3-tree always exists by definition. We now construct a specific tree decomposition $\mathcal{T}$ of G that will be used to compute its storyplan; refer to Fig. 7. For a definition of tree decomposition see [18]. The subgraph C_μ induced by the vertices of each bag μ of $\mathcal{T}$ is the *subgraph associated with μ* and it is a 4-clique for each bag μ of $\mathcal{T}$, except for the root ρ of $\mathcal{T}$ for which C_ρ is the initial 3-cycle. The subgraph C_μ contains four 3-cliques, three of them are *active* (this means that they can appear in some subgraph C_ν associated with a child ν of μ) and one is *non-active*. The unique 3-clique in C_ρ is active. Each bag μ of $\mathcal{T}$ has one child ν for each vertex v whose parent clique

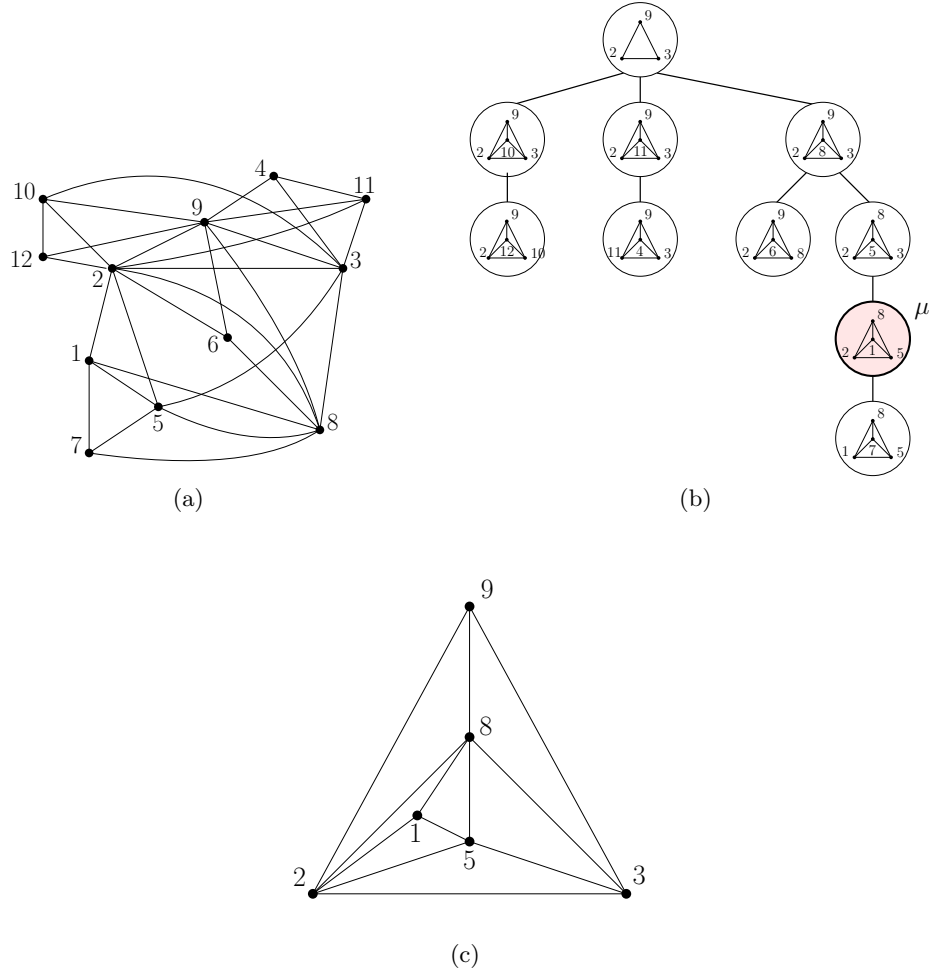


Fig. 7. (a) A 3-tree G . (b) The decomposition tree $\mathcal{T}$ of G . (c) The subgraph G_μ of G associated with bag μ , highlighted in (b).

is an active 3-clique of μ . The 4-clique C_ν consists of the parent clique C of v , vertex v , and the edges connecting v to C ; C is non-active in ν , while the other three 3-cliques are active. For each bag μ distinct from ρ , we denote by v_μ the vertex shared by the three active 3-cliques of C_μ . We say that v_μ is *associated with μ* . One easily verifies that $\mathcal{T}$ is a tree decomposition. Also, $\mathcal{T}$ has $n - 2$ bags: the root and a bag for each vertex of G that is not in the initial 3-cycle.

We now associate to each bag μ a subgraph G_μ of G . For the root ρ , the subgraph G_ρ is the initial 3-cycle. For a bag μ with parent λ , the subgraph G_μ is obtained from G_λ by connecting v_μ to the vertices of its parent clique.

Property 1. Every graph G_μ is an embedded planar 3-tree such that the active 3-cliques of C_μ are internal faces of G_μ .

The proof of Property 1 is by induction on the length of the path from the root ρ to μ in $\mathcal{T}$. The graph G_ρ consists of a 3-cycle, which is the unique active 3-clique and which is both an internal and an external face. The graph G_μ is obtained by adding the vertex v_μ to G_λ and connecting it to its parent clique C , which is active in C_λ . By induction, C is an internal face of G_λ and therefore, by placing v_μ inside this face, we obtain an embedded planar 3-tree such that the active faces of C_μ are the three faces created by the addition of v_μ inside C .

Let $\mu \neq \rho$ be a bag of $\mathcal{T}$; the next property follows from the definition of $\mathcal{T}$.

Property 2. The neighbors of v_μ distinct from those of its parent clique are all vertices associated with bags of the subtree of $\mathcal{T}$ rooted at μ .

Let $\rho = \mu_1, \mu_2, \dots, \mu_{n-2}$ be an order of the bags of $\mathcal{T}$ according to a preorder visit of $\mathcal{T}$. To create a storyplan of G , we define an ordering $\tau : v_1, v_2, \dots, v_n$ of the vertices of G such that v_1, v_2 , and v_3 are the vertices of the initial 3-cycle, and each v_i with $i > 3$ is the vertex associated with μ_{i-2} .

Let G_i be the graph induced by the vertices that are visible at step i , for $i \geq 3$; by Property 2 the graph G_i is a subgraph of G_{μ_i} which, by Property 1 is an embedded planar 3-tree such that the three active 3-cliques of C_{μ_i} are faces of G_{μ_i} . To simplify the description we prove that there exists a storyplan $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$, where each D_i is a drawing of G_{μ_i} . This implies that there exists a storyplan where each D_i is a drawing of G_i . Let μ_j be the parent of μ_i in $\mathcal{T}$; since the order τ corresponds to a preorder of the bags of $\mathcal{T}$, we have $j < i$. Moreover, all bags μ_k with $j < k < i$, if any, belong to the subtrees of μ_j visited before μ_i and for each such subtree $\mathcal{T}'$ no other bag of $\mathcal{T}'$ exists before μ_j or after μ_i . By Property 2 all the vertices associated with the bags μ_k that belong to $G_{\mu_{i-1}}$ do not have any neighbor after v_{μ_i} and therefore they can be removed. The removal of these vertices transforms $G_{\mu_{i-1}}$ into G_{μ_j} (all the vertices associated with the bags μ_k for $j < k < i$ had been added to G_{μ_j} that had never been changed). By Property 1 the active 3-cliques of G_{μ_j} are faces of G_{μ_j} . It follows that there exists a storyplan $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$ whose frames D_i are as follows. D_1 is a planar drawing of a 3-cycle; given D_{i-1} of $G_{\mu_{i-1}}$, a drawing D_i of G_{μ_i} can be computed by removing all vertices associated with the bags μ_k for $j < k < i$, and adding v_{μ_i} inside a face of D_j .

The above storyplan can be computed in $O(n)$ time, see Appendix B.4.

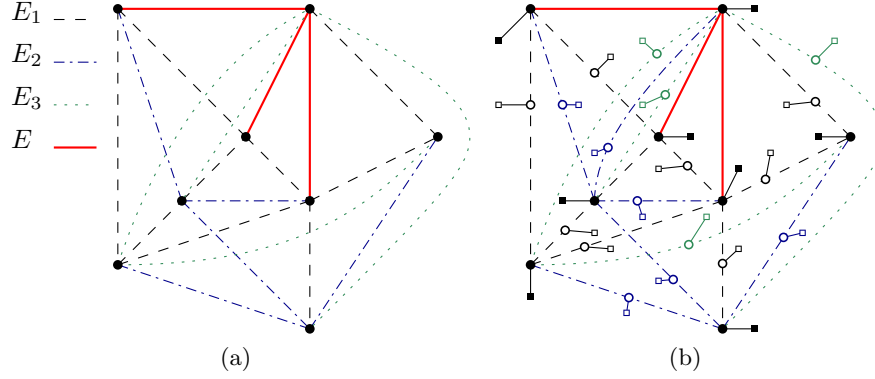


Fig. 8. Illustration for Theorem 7. (a) An instance G_1, G_2, G_3 of SUNFLOWER SEFE; (b) The instance G constructed from G_1, G_2, G_3 ; the subdivision vertices are circles with a white fill while the spectators are squares.

4 Complexity with Fixed Order

In this section we study the STORYPLANFIXEDORDER variant of STORYPLAN, defined below. This variant is closer to the setting studied in [5] and it models the case in which the way the graph changes over time is prescribed.

STORYPLANFIXEDORDER

Input: Graph $G = (V, E)$ with n vertices, total order $\tau : V \rightarrow [n]$

Question: Does G admit a storyplan $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$?

We prove that STORYPLANFIXEDORDER is NP-complete by reducing from SUNFLOWER SEFE. Let $G_1, \dots, G_k$ be k graphs on the same set V of vertices. A *simultaneous embedding with fixed edges (SEFE)* of $G_1, \dots, G_k$ consists of k planar drawings $\Gamma_1, \dots, \Gamma_k$ of $G_1, \dots, G_k$, respectively, such that each vertex is mapped to the same point in every drawing and each shared edge is represented by the same simple curve in all drawings sharing it. The SEFE problem asks whether k input graphs on the same set of vertices admit a SEFE, and it is NP-complete even when the pairwise intersection between any two input graphs is the same over all pairs of graphs [1, 20]. This variant is called SUNFLOWER SEFE, and the result in [1, 20] proves NP-completeness already when $k = 3$.

Construction. Refer to Fig. 8 for an example. Let G_1, G_2, G_3 be an instance of SUNFLOWER SEFE. Let V be the common vertex set of the three graphs, let E be the common edge set, and let E_i be the exclusive edge set of G_i for $i = 1, 2, 3$. We construct an instance $\langle G, \tau \rangle$ of STORYPLANFIXEDORDER as follows. Graph G contains all vertices in V and all edges in E . Also, for each edge $e = uv$ in E_i , it contains a vertex w_e^i , called a *subdivision vertex* of E_i , and the edges uw_e^i and vw_e^i (i.e., it contains the edge e subdivided once). Moreover, for each vertex z , either a vertex in V or a subdivision vertex of an edge, G contains an additional

vertex s_z , called the *spectator of z* , and the edge zs_z . To obtain the total order τ we group the vertices of G in a set of blocks $B_1, \dots, B_8$, and we order the blocks by increasing index, while vertices within the same block can be ordered arbitrarily. We denote by τ_i^- and τ_i^+ the position in τ of the first and of the last vertex of B_i , respectively, for each $i = 1, \dots, 8$. Block B_1 contains all vertices in V ; for $i \in \{2, 4, 6\}$, block B_i contains all subdivision vertices of $E_{\frac{i}{2}}$, while block B_{i+1} contains all spectators of the vertices in B_i ; finally B_8 contains all spectators of the vertices in B_1 .

Theorem 7 ($\star$). *The STORYPLANFIXEDORDER problem is NP-complete.*

Proof (Sketch). At a high level, the total order τ is designed to show the three graphs one by one while keeping the common edge set visible. In particular, a spectator vertex s_v forces vertex v to stay visible until s_v appears, while a subdivision vertex w_e^i makes edge e visible only when G_i must be drawn.

5 Discussion and Open Problems

Our work can stimulate further research based on several possible directions.

- It would be interesting to study further parameterizations of STORYPLAN. Is STORYPLAN parameterized by treewidth (pathwidth) in XP? In addition, we note that if the total order is fixed, then an FPT algorithm in the size of the largest frame (or the length of the longest lifespan) readily follows from the proof of Theorem 3.
- Conditions (iii) and (iv) of the definition of a storyplan can be replaced by the existence of a sequence of planar embeddings in which common subgraphs keep the same embedding. This is not true if we study more geometric versions of the problem, in which for instance edges are straight-line segments and/or vertices are restricted on an integer grid of fixed size (as in [5]).
- Condition (ii) of storyplan can be relaxed so to only allow specific crossing patterns [10, 11], e.g., right-angle crossings or few crossings per edge.

References

1. Angelini, P., Da Lozzo, G., Neuwirth, D.: Advancements on SEFE and partitioned book embedding problems. *Theoretical Computer Science* **575**, 71–89 (2015). <https://doi.org/10.1016/j.tcs.2014.11.016>
2. Beck, F., Burch, M., Diehl, S., Weiskopf, D.: The state of the art in visualizing dynamic graphs. In: Borgo, R., Maciejewski, R., Viola, I. (eds.) *EuroVis 2014*. Eurographics Association (2014). <https://doi.org/10.2312/eurovisstar.20141174>
3. Binucci, C., Brandes, U., Di Battista, G., Didimo, W., Gaertler, M., Palladino, P., Patrignani, M., Symvonis, A., Zweig, K.A.: Drawing trees in a streaming model. *Inf. Process. Lett.* **112**(11), 418–422 (2012). <https://doi.org/10.1016/j.ipl.2012.02.011>
4. Bodlaender, H.L., Kloks, T.: Efficient and constructive algorithms for the pathwidth and treewidth of graphs. *J. Algorithms* **21**(2), 358–402 (1996). <https://doi.org/10.1006/jagm.1996.0049>

5. Borrazzo, M., Da Lozzo, G., Di Battista, G., Frati, F., Patrignani, M.: Graph stories in small area. *J. Graph Algorithms Appl.* **24**(3), 269–292 (2020). <https://doi.org/10.7155/jgaa.00530>
6. Chen, J., Kanj, I.A., Xia, G.: Improved upper bounds for vertex cover. *Theor. Comput. Sci.* **411**(40–42), 3736–3756 (2010). <https://doi.org/10.1016/j.tcs.2010.06.026>
7. Chrobak, M., Payne, T.: A linear-time algorithm for drawing a planar graph on a grid. *Information Processing Letters* **54**(4), 241–246 (1995). [https://doi.org/10.1016/0020-0190\(95\)00020-D](https://doi.org/10.1016/0020-0190(95)00020-D)
8. Da Lozzo, G., Rutter, I.: Planarity of streamed graphs. *Theoretical Computer Science* **799**, 1–21 (2019). <https://doi.org/10.1016/j.tcs.2019.09.029>
9. Di Giacomo, E., Didimo, W., Liotta, G., Montecchiani, F., Tollis, I.G.: Techniques for edge stratification of complex graph drawings. *J. Vis. Lang. Comput.* **25**(4), 533–543 (2014). <https://doi.org/10.1016/j.jvlc.2014.05.001>
10. Didimo, W., Liotta, G., Montecchiani, F.: A survey on graph drawing beyond planarity. *ACM Comput. Surv.* **52**(1), 4:1–4:37 (2019). <https://doi.org/10.1145/3301281>
11. Hong, S., Tokuyama, T. (eds.): *Beyond Planar Graphs*, Communications of NII Shonan Meetings. Springer (2020). <https://doi.org/10.1007/978-981-15-6533-5>
12. Impagliazzo, R., Paturi, R.: On the complexity of k-SAT. *J. Comput. Syst. Sci.* **62**(2), 367–375 (2001). <https://doi.org/10.1006/jcss.2000.1727>
13. Impagliazzo, R., Paturi, R., Zane, F.: Which problems have strongly exponential complexity? *J. Comput. Syst. Sci.* **63**(4), 512–530 (2001). <https://doi.org/10.1006/jcss.2001.1774>
14. Kinnersley, N.G.: The vertex separation number of a graph equals its path-width. *Inf. Process. Lett.* **42**(6), 345–350 (1992). [https://doi.org/10.1016/0020-0190\(92\)90234-M](https://doi.org/10.1016/0020-0190(92)90234-M), [https://doi.org/10.1016/0020-0190\(92\)90234-M](https://doi.org/10.1016/0020-0190(92)90234-M)
15. Matoušek, J., Thomas, R.: Algorithms finding tree-decompositions of graphs. *Journal of Algorithms* **12**(1), 1–22 (1991). [https://doi.org/10.1016/0196-6774\(91\)90020-Y](https://doi.org/10.1016/0196-6774(91)90020-Y)
16. Monien, B., Sudborough, I.H.: Min Cut is NP-complete for edge weighted trees. *Theor. Comput. Sci.* **58**, 209–229 (1988). [https://doi.org/10.1016/0304-3975\(88\)90028-X](https://doi.org/10.1016/0304-3975(88)90028-X)
17. Robertson, N., Seymour, P.D.: Graph minors. I. Excluding a forest. *J. Comb. Theory, Ser. B* **35**(1), 39–61 (1983). [https://doi.org/10.1016/0095-8956\(83\)90079-5](https://doi.org/10.1016/0095-8956(83)90079-5)
18. Robertson, N., Seymour, P.: Graph minors. II. Algorithmic aspects of tree-width. *J. Algorithms* **7**(3), 309–322 (1986). [https://doi.org/10.1016/0196-6774\(86\)90023-4](https://doi.org/10.1016/0196-6774(86)90023-4)
19. Rose, D.J., Tarjan, R.E., Lueker, G.S.: Algorithmic aspects of vertex elimination on graphs. *SIAM Journal on Computing* **5**(2), 266–283 (1976). <https://doi.org/10.1137/0205021>
20. Schaefer, M.: Toward a theory of planarity: Hanani-Tutte and planarity variants. *J. Graph Algorithms Appl.* **17**(4), 367–440 (2013). <https://doi.org/10.7155/jgaa.00298>
21. Schaefer, T.J.: The complexity of satisfiability problems. In: Lipton, R.J., Burkhard, W.A., Savitch, W.J., Friedman, E.P., Aho, A.V. (eds.) *STOC 1978*. pp. 216–226. ACM (1978). <https://doi.org/10.1145/800133.804350>
22. Skambath, M., Tantau, T.: Offline drawing of dynamic trees: Algorithmics and document integration. In: Hu, Y., Nöllenburg, M. (eds.) *Graph Drawing and Network Visualization (GD’16)*. LNCS, vol. 9801, pp. 572–586. Springer (2016). https://doi.org/10.1007/978-3-319-50106-2_44

23. Vehlow, C., Beck, F., Weiskopf, D.: Visualizing dynamic hierarchies in graph sequences. *IEEE Trans. Vis. Comput. Graph.* **22**(10), 2343–2357 (2016). <https://doi.org/10.1109/TVCG.2015.2507595>

Appendix

A Missing Proofs of Section 2

A *path decomposition* of a graph $G = (V, E)$ is a sequence $\{X_i\}_{i \in [h]}$ of subsets of V , called *bags*, for some integer h , such that: (1) for each edge $e = uv \in E$, there exists a bag X_i containing both u and v , and (2) for every three indices $i \leq j \leq k$, $X_i \cap X_k \subseteq X_j$. The *width* of $\{X_i\}_{i \in [h]}$ is equal to $\max_{i \in [h]} |X_i| - 1$, and the *pathwidth* of G is the minimum width over all its path decompositions.

In order to prove Theorem 1, we begin with the following lemma.

Lemma 6. *Let $G = (V, E)$ be a graph. If G admits a storyplan $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$ of width $\omega = w(\mathcal{S})$, then it admits a path decomposition of width at most ω .*

Proof. It is easily seen that ω equals the vertex separation number of the total order τ . Namely, suppose for a contradiction that there exists an index $i \in [n]$ such that there are at least $\omega + 1$ vertices v with $\tau(v) \leq i$ having a neighbor u such that $\tau(u) > i$. Let u_1 be the one of such neighbors that appears first. All the at least $\omega + 1$ vertices are still visible at step $\tau(u_1)$ and therefore the size of the frame at step $\tau(u_1)$ is at least $\omega + 2$, thus contradicting the fact that $\mathcal{S}$ has width ω . On the other hand, a total order τ with vertex separation number ω implies the existence of a path decomposition of width at most ω [14].

Theorem 1 ($\star$). *Let $G = (V, E)$ be a graph, then $\text{pw}(G) \leq \text{fw}(G)$. Also, if G is planar then it always admits a storyplan, and in particular $\text{pw}(G) = \text{fw}(G)$.*

Proof. If G does not admit a storyplan, for any total order of its vertices, then $\text{pw}(G) < \text{fw}(G) = +\infty$. Otherwise, $\text{pw}(G) \leq \text{fw}(G)$ by Lemma 6.

If G is planar, we show that $\text{fw}(G) \leq \text{pw}(G)$. Namely, let $\{X_i\}_{i \in [h]}$ be a path decomposition of G . Without loss of generality, we can assume that this path decomposition is *nice* (or *normalized*), i.e., X_1 contains exactly one vertex, and, for each bag X_i with $1 < i \leq h$, there is a vertex v such that either $X_i = X_{i-1} \cup \{v\}$ or $X_i = X_{i-1} \setminus \{v\}$. Then we have that at each step at most one vertex is introduced in the decomposition, and hence we can associate each vertex v with an index l_v such that $l_v = 1$ if v is the first introduced vertex, and $l_v = l_u + 1$, where l_u is the last vertex introduced before v , otherwise. We define a total order τ of V by setting $\tau(v) = l_v$. Let Γ be a planar drawing of G . Consider the set of n drawings such that D_i corresponds to the subdrawing of Γ induced by the vertices that are visible at step i , for each $i \in [n]$. One immediately verifies that $\langle \tau, \{D_i\}_{i \in [n]} \rangle$ is a storyplan of G of width $\text{pw}(G)$.

In order to prove Lemma 1, we first prove a few auxiliary lemmas.

Lemma 7. *Let $K_{a,b} = (A \cup B, E)$ be a complete bipartite graph with $a = |A|$ and $b = |B|$. Let $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [a+b]} \rangle$ be a storyplan of $K_{a,b}$. There exists $i \in [a+b]$ such that all vertices of A or B are visible.*

Proof. Let i be such that D_i contains the largest number t of vertices of A over all frames of $\mathcal{S}$. If $t = a$, we are done. If $t < a$, there exist two vertices u, v of A such that $j_u < i_v$. Note that all vertices in B are adjacent to u , and hence they all appear at some step smaller than or equal to j_u . On the other hand, since all vertices in B are adjacent to v as well, they cannot disappear before $i_v + 1$. It follows that all vertices of B are visible at step j_u .

Lemma 8. *Let $K_{a,b} = (A \cup B, E)$ be a complete bipartite graph with $a = |A|$ and $b = |B|$. Let $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [a+b]} \rangle$ be a storyplan of $K_{a,b}$. If a step $i \in [a+b]$ contains at least three vertices of A (resp. B), then it contains at most two vertices of B (resp. A).*

Proof. The statement immediately follows from the fact any frame of $\mathcal{S}$ is planar and hence cannot contain $K_{3,3}$ as a subgraph.

We are now ready to prove Lemma 1.

Lemma 1 (*). *Let $K_{a,b} = (A \cup B, E)$ be a complete bipartite graph with $a = |A|$, $b = |B|$, and $3 \leq b \leq a$. Let $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [a+b]} \rangle$ be a storyplan of $K_{a,b}$. Exactly one of A and B is such that all its vertices are visible at some $i \in [a+b]$.*

Proof. Consider the interval $I = [s, t] \subseteq [a+b]$ of maximal length such that the vertices of A or B , say A , are all visible. By Lemma 7, I is not empty. Let j be one of the steps that contain the largest number h of vertices of B . Observe that, since I is maximal, one vertex of A appears at s . Therefore, any vertex of B visible at a step smaller than s is visible also at step s . Similarly, by the maximality of I , one vertex of A disappears at step $t+1$, therefore any vertex of B visible at a step greater than t is visible also at step t . Consequently, we can assume that $j \in I$, and we can conclude $h \leq 2$ by Lemma 8.

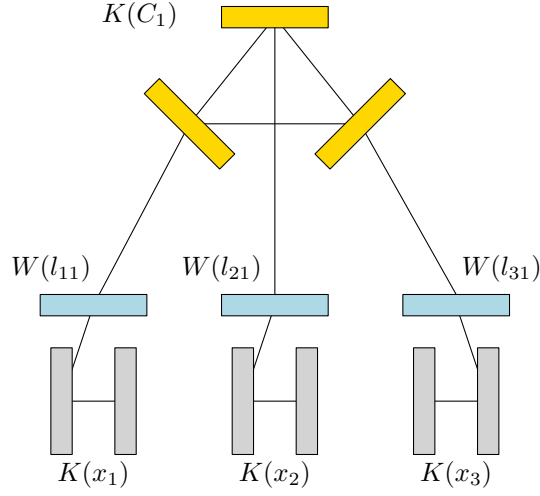


Fig. 9. Illustration for Theorem 2. Schematization of $(x_1 \vee x_2 \vee \neg x_3)$.

B Missing Proofs of Section 3

B.1 Missing proof of Section 3.1

Lemma 2 ($\star$). *If graph G admits a storyplan then φ admits a satisfying assignment with exactly one true literal in each clause.*

Proof. Let $\mathcal{S} = \langle \tau, \{D_i\}_{i \in [n]} \rangle$ be a storyplan of G . For each variable gadget $K(x_i)$ we assign the value *true* to x_i if the v-side A_i is flexible in $\mathcal{S}$. Consider any literal l_{ij} and the wire gadget W_{ij} . If l_{ij} is a positive (negative) literal, then A_i (B_i) and W_{ij} form a $K_{3,3}$, hence by Lemma 1 the w-side W_{ij} is fixed (flexible). Analogously, if we consider the clause gadget $K(C_j)$, the c-side connected with W_{ij} is flexible (fixed). Symmetrically, we assign the value *false* to x_i if the v-side B_i is instead flexible in $\mathcal{S}$, and for any positive (negative) literal l_{ij} , the w-side W_{ij} is flexible (fixed), while the corresponding c-side of $K(C_j)$ is fixed (flexible). In other words, the value of x_i propagates consistently throughout all its literals. It remains to prove that, for any clause C_j of φ , precisely one literal is true for the constructed truth value assignment of $\{x_i\}_{i \in [N]}$. Namely, we claim that exactly one c-side of $K(C_j)$ is flexible, while the other two are fixed.

We first argue that not all c-sides can be fixed in $\mathcal{S}$. Assume, for a contradiction, that they are. Let D_h be the frame of $\mathcal{S}$ in which the last simple vertex v of $K(C_j)$ appears. Observe that all other simple vertices are also visible at step h . Namely, let $u \neq v$ be a simple vertex of $K(C_j)$. Either u is adjacent to v or in the same c-side as v . Hence, since $i_u < h$ by assumption and since u cannot disappear until $h+1$, it follows that u is visible at step h . It follows that D_h contains a drawing of $K_{2,2,2}$, which is a maximal planar graph and hence has a unique planar embedding up to the choice of the outer face. In particular,

vertex v and the other vertex on the same c-side as v , which we call v' , do not belong to the same face. Consider now the special vertex s adjacent to both v and v' . Vertex s cannot be visible at step h , else D_h would not be planar, as it would contain $K_{2,2,2}$ plus a subdivided edge between v and v' . On the other hand, it cannot have disappeared already, since s and v are adjacent. Hence, s has not appeared yet. Similarly, no other special vertex is visible at step h , and since the special vertices are pairwise adjacent, it follows that none of them has appeared yet. Consequently, no vertex of $K_{2,2,2}$ can disappear until the first special vertex has appeared, which implies the existence of a frame that contains a planar drawing of $K_{2,2,2}$ plus a subdivided edge between two vertices in the same c-side, which contradicts the fact that the considered frame is planar.

We now rule out the case in which more than one c-side is flexible, which corresponds to a clause with more than one true literal. If a c-side is flexible, there can be no frame containing both its simple vertices. This follows from the fact that the special vertex is adjacent to both simple vertices, and hence there would be a frame containing all three vertices together, which is not possible since the c-side is flexible. On the other hand, when the last simple vertex appears, its four neighbors in $K_{2,2,2}$ are all visible, and hence at least two c-sides must be fixed.

Altogether, we have proved that at least two c-sides are fixed and that at least one c-side is flexible. Therefore, in each clause gadget, exactly one c-side is flexible, which corresponds to having exactly one true literal, as desired.

Lemma 3 (★). *If the formula φ admits a satisfying assignment with exactly one true literal in each clause, then graph G admits a storyplan.*

Proof. We avoid repeating the initial part of the proof, which is reported in the main body of the paper. Observe that, after having drawn the fixed v-sides and w-sides, each flexible v-side can be drawn independently, by letting appear and disappear its three vertices one by one. When a vertex appears, its edges towards the fixed w-sides of its wire gadgets and the fixed v-side of its variable gadget form a star; see Fig. 4. To conclude the proof, we first draw the clause gadgets alone, and then we show how to integrate in the storyplan the flexible w-sides and their connections, as well as the connections of the fixed w-sides with the corresponding c-sides.

We now draw the clauses one by one. We begin by showing how to draw a single clause gadget $K(C_j)$, ignoring the connections with the linked wire gadgets. Refer to Fig. 5 for an illustration. We first let appear the three special vertices of $K(C_j)$ (Fig. 5(a)). Now we let appear the two simple vertices of a false literal, which we denote by l_1 for convenience (Fig. 5(b)). Note that the whole c-side representing l_1 is visible. Right after, the special vertex connected to the two simple vertices can disappear. Next, we let appear the two simple vertices of the remaining false literal, called l_2 , hence again this c-side is entirely visible (Fig. 5(c)). Again this can be done without crossings, and the corresponding special vertex can disappear right after. Now we have a 4-cycle (with a light blue background in Fig. 5(c)) formed by the edges connecting the simple vertices

drawn so far, and the special vertex of the missing literal lying in one of the two faces made by the cycle. We let one of the two simple vertices of the true literal appear (Fig. 5(d)), we draw its edges planarly, and afterwards we let it disappear and replace it with the last simple vertex (Fig. 5(e)). Once the last simple vertex has appeared, all vertices of the clause can disappear. Hence, the last c-side hasn't appeared together but instead acted as a flexible c-side.

Consider a wire gadget $W(l_{ij})$. Suppose first that l_{ij} is false. Then we have seen that its c-side in $K(C_j)$, say U , is fixed and hence $W(l_{ij})$ must be flexible. Note that both if $l_{ij} = l_1$ (Fig. 10(a)) or $l_{ij} = l_2$ (Fig. 10(b)), in the frame in which the three vertices of U are visible there is a face whose boundary contains the three vertices of the corresponding c-side. We can assume that this face encloses the drawings of all the w-sides and v-sides that are currently visible. Hence the vertices of $W(l_{ij})$ can be drawn one by one in this face. If l_{ij} is true, then its c-side U is flexible and hence $W(l_{ij})$ must be fixed. Again in the two frames in which the vertices of U appear (see Figs. 5(d) and 5(e)), the drawing of the clause has a face whose boundary contains the vertex of U visible in that frame. Again we can assume that this face encloses the drawings of all the w-sides and v-sides that are currently visible, and therefore the vertices of U can be connected planarly both to its neighbors in $K(C_j)$ and to its neighbors in $W(l_{ij})$ (see Fig. 11). By repeating this procedure for each clause we complete the storyplan.

Theorem 2 (★). *The STORYPLAN problem is NP-hard and it has no $2^{o(n)}$ time algorithm unless ETH fails.*

Proof. Constructing the graph G from the formula φ clearly takes polynomial time, and the correctness of the reduction follows from Lemmas 2 and 3. This proves that STORYPLAN is NP-hard.

For the second part of the statement, observe that the *Exponential Time Hypothesis* (ETH), combined with the Sparsification Lemma, states that 3SAT formulas on N variables and M clauses cannot be solved in $2^{o(N+M)}$ time, see [12, 13]. On the other hand, there exists a polynomial-time reduction from 3SAT to ONE-IN-THREE 3SAT that transforms 3SAT instances with $N + M$ variables and clauses into equivalent ONE-IN-THREE 3SAT instances with $O(N + M)$ variables and clauses [21]. Finally, starting from an instance of ONE-IN-THREE 3SAT, our reduction constructs a graph with n vertices and m edges such that $m = O(n)$ and $n + m = O(N + M)$. Therefore, an algorithm solving STORYPLAN in $2^{o(n)}$ time would contradict ETH.

Theorem 3 (★). *The STORYPLAN problem is in NP. Also, given an n -vertex graph G , there is an algorithm that solves STORYPLAN on G in $2^{O(n \log n)}$ time.*

Proof. The key observation to claim that the problem belongs to NP lies in the fact that, since we consider topological drawings in which edges are Jordan arcs, once a total order of the vertices is fixed, the existence of a storyplan is equivalent to the existence of a sequence of planar embeddings that are “consistent”. Namely, for any two such planar embeddings, if they share a common subgraph,

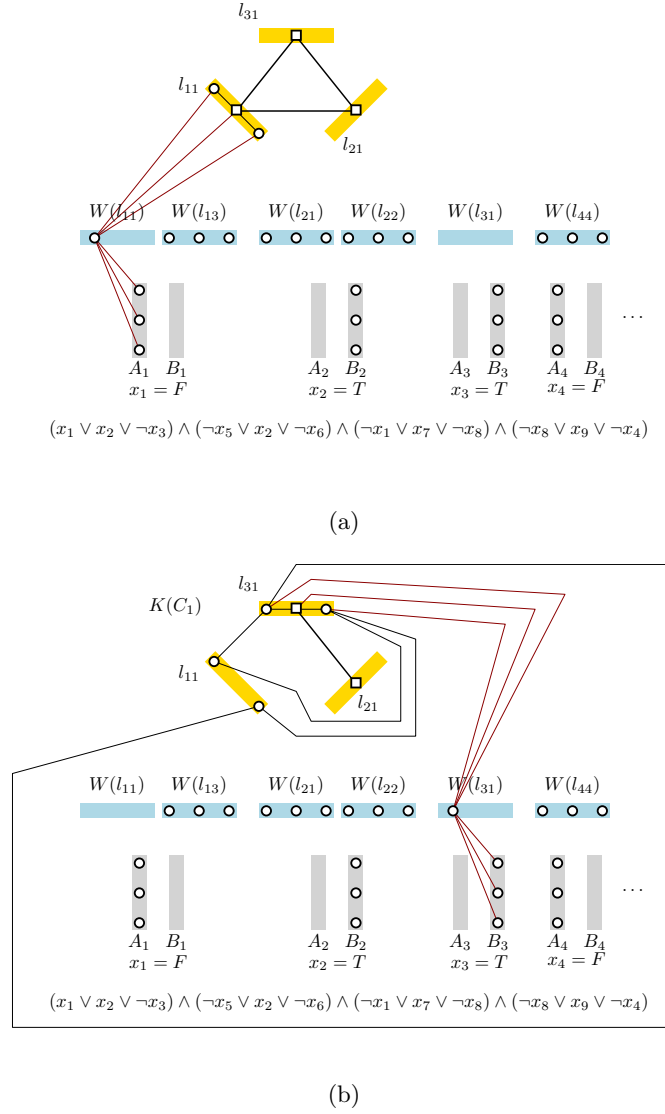


Fig. 10. Proof of Lemma 3: drawing the false literals.

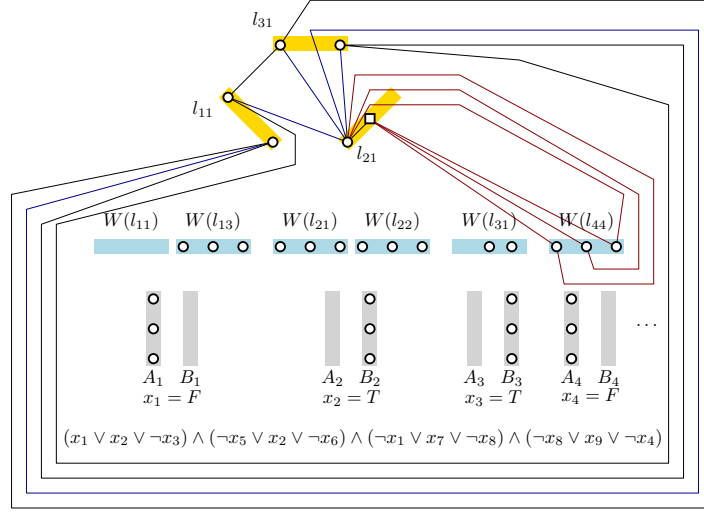


Fig. 11. Proof of Lemma 3: drawing the true literal.

then their restrictions to this subgraph must coincide. With this observation, we can guess a candidate solution and verify, in polynomial time, if it is valid. However, we intertwine the generation process of the solutions and their validity check in order to obtain a more efficient time complexity.

More formally, we proceed as follows. We first guess a linear order of the vertices of G . Note that there are $n! \in 2^{O(n \log n)}$ such orders. For each $i \in [n]$, we identify the set of vertices V_i visible at step i and the corresponding set of edges E_i . By planarity, it must be $|E_i| \leq 3|V_i| - 6$, else we can immediately reject the instance. As already observed, we do not guess a drawing D_i , but instead a planar embedding $\mathcal{E}_i$ for graph $G_i = (V_i, E_i)$.

If G_i is connected, the planar embedding $\mathcal{E}_i$ can be described by the circular order of the edges around each vertex, called *rotation system*, and by the choice of the outer face. Indeed, with this information, one can reconstruct the boundary of each face of G_i (in linear time). If G is not connected, we also need the pairwise relative positions of distinct connected components (if more than one). Let $C_1, \dots, C_q$ be the connected components of G_i and let $\mathcal{E}_i(C_j)$ be the restriction of $\mathcal{E}_i$ to C_j for each $j \in [q]$. The *position system* is a rooted tree whose vertices are the faces of the embeddings $\mathcal{E}_i(C_j)$ for each $j \in [q]$, and a node ν has a parent μ in this tree if and only if the face corresponding to ν contains the face corresponding to μ in its interior and μ is the outer face of its connected component.

The number of possible rotation systems of G_i , denoted by n_{rot} , is upper bounded by the number of possible permutations of edges around each vertex. Thus we have

$$n_{\text{rot}} \leq \prod_{v \in V_i} \deg(v)! < \prod_{v \in V_i} \deg(v)^{\deg(v)} \in n^{O(\sum_{v \in V_i} \deg(v))} \subseteq n^{O(n)}.$$

Each rotation system of G_i fixes the boundary of each face of each connected component of G_i . Hence we can verify (in linear time) whether the rotation system yields a planar combinatorial (up to the choice of the outer face) embedding of each connected component of G_i . If this is the case, there are $O(n)$ possible outer faces for each connected component, we have $O(n^2)$ possible choices over all connected components. Once both the rotation system and the outer face of each connected component have been fixed, the number n_{pos} of possible position systems is $n_{\text{pos}} \leq n^{O(n)}$, since it suffices to guess the parent of each node of the tree. Therefore, for each step $i > 1$, there are $O(n^2) \cdot n_{\text{rot}} \cdot n_{\text{pos}} \subseteq n^{O(n)} \subseteq 2^{O(n \log n)}$ distinct embeddings that we can guess.

Once we have generated all planar embeddings for each $i \in [n]$, we aim at finding a sequence (if any) of planar embeddings, one for each step i , in which common subgraphs have the same embedding throughout the sequence. Namely, for each $i > 1$ and for each planar embedding $\mathcal{E}_i$, we verify whether there is at least one planar embedding $\mathcal{E}_{i-1}$ such that the restrictions of $\mathcal{E}_i$ and $\mathcal{E}_{i-1}$ to the common graph $G_{i-1} \cap G_i$ are the same. If this is the case, we keep $\mathcal{E}_i$, else we discard it. The algorithm halts if the set of planar embeddings becomes empty, else it outputs at least one valid sequence. Overall, the procedure takes $2^{O(n \log n)} \cdot 2^{O(n \log n)} = 2^{O(n \log n)}$ time.

B.2 Missing proofs of Section 3.2

Lemma 4 (*). *Let G' be the graph obtained from G by applying one of the reduction rules **R.1**–**R.3**. Then G admits a storyplan if and only if G' does.*

Proof. One direction is trivial, since it is easily seen that admitting a storyplan is a hereditary property. Suppose now that G' admits a storyplan $\mathcal{S}' = \langle \tau', \{D'\}_{i \in [n']}\rangle$, where $n' = n - 1$. We distinguish three cases based on the reduction rule applied to G . In each case, we denote by x the vertex removed from G to obtain G' .

Case A (R.1). See Fig. 6 for an illustration. Let v be the neighbor of x in G , whose lifespan according to τ' is $[i_v, j_v]$. We compute τ from τ' by inserting x right after v , consequently the lifespan of x in τ is $[i_v + 1, i_v + 1]$. Similarly, compute $\{D_i\}_{i \in [n]}$ from $\{D'\}_{i \in [n']}$ as follows. For each $i \leq i_v$, we set $D_i = D'_i$. For $i = i_v + 1$, we draw x in D'_{i_v} sufficiently close to v such that xv can be drawn as a straight-line segment that does not intersect any other edge. We then set D_i to be equal to the resulting drawing. Finally, for each $i > i_v + 1$, we set $D_i = D'_{i-1}$.

Case B (R.2). See Fig. 12 for an illustration. By assumption, G' contains at least one vertex $v \neq x$ of type U , whose lifespan according to τ' is $[i_v, j_v]$. We compute τ from τ' by inserting x right after v ; consequently, the lifespan

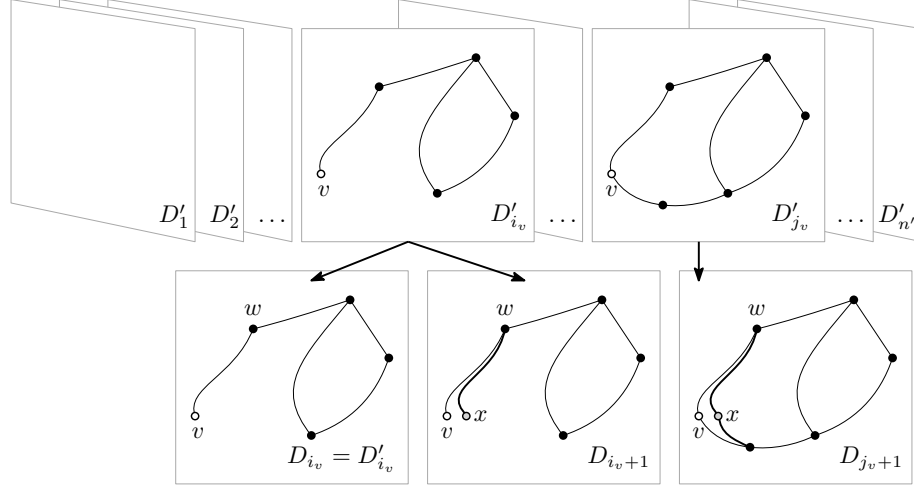


Fig. 12. Illustration for **Case B** of the proof of Lemma 4.

of v in τ is $[i_v + 1, j_v]$. For each $i \leq i_v$, we set $D_i = D'_i$. For $i = i_v + 1$, we extend D'_i by drawing x sufficiently close to v and by drawing, for each neighbor w of x , the edge xw such that it follows the curve representing the edge vw . Since vw does not cross any other edge and v has degree two, the same holds for xw . We then set D_i to be equal to the resulting drawing. Similarly, for each $i \leq [i_v + 2, j_v + 1]$, we extend (if needed) the frame D'_{i-1} by drawing any edge xw such that it follows the corresponding curve vw . Finally, for each $i > j_v + 1$, we set $D_i = D'_{i-1}$.

Case C (R.3). Observe that, by assumption, the graph induced by the vertices of $U \cup V_U$ contains a complete bipartite graph $K_{a,b}$ with $a \geq 3$ and $b \geq 3$, whose partite sets are U and V_U . We distinguish two subcases based on whether U is the fixed set or the flexible set of $K_{a,b}$.

Suppose first that U is the fixed set; see Fig. 13 for an illustration. Let $I \in [n']$ be the interval in which all vertices of U are visible. By assumption, G' contains at least three vertices $v_j \neq x$ of V_U , with $j = 1, 2, 3$. Observe that the lifespan of each vertex v_j intersects I , therefore there are at least two vertices, say v_1 and v_2 , whose lifespans do not intersect, otherwise there would be a frame containing $K_{3,3}$. Let $[i_1, j_1]$ and $[i_2, j_2]$ be the lifespan of v_1 and v_2 , respectively, and suppose (without loss of generality) that $j_1 < i_2$. Observe that both j_1 and i_2 are in I . We compute τ from τ' by inserting x right after v_1 disappears, such that its lifespan in τ is $[j_1 + 1, j_1 + 1]$. For each $i \leq j_1$, we set $D_i = D'_i$. For $i = j_1 + 1$, we take D'_{j_1} and replace the drawing of v_1 with the drawing of x . Namely, we place x on the same point of v_1 and we draw each curve xw by following the curve v_1w . Since v_1w does not cross any other edge, the same holds for xw . The resulting drawing is D_i . Finally, for each $i > j_1 + 1$, we set $D_i = D'_{i-1}$.

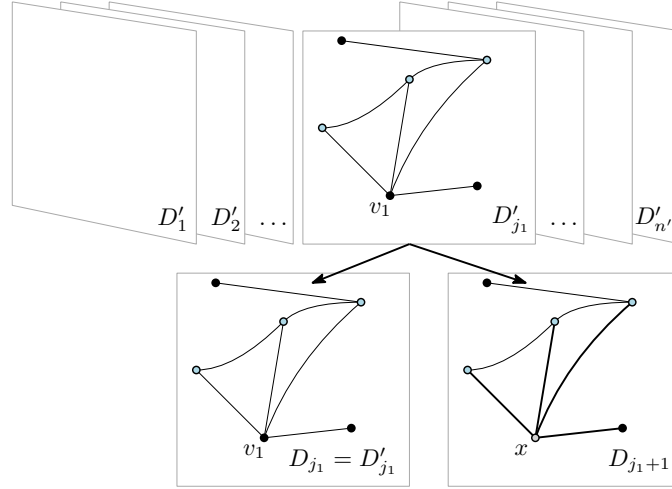


Fig. 13. Illustration for **Case C** of the proof of Lemma 4, when U is the fixed set.

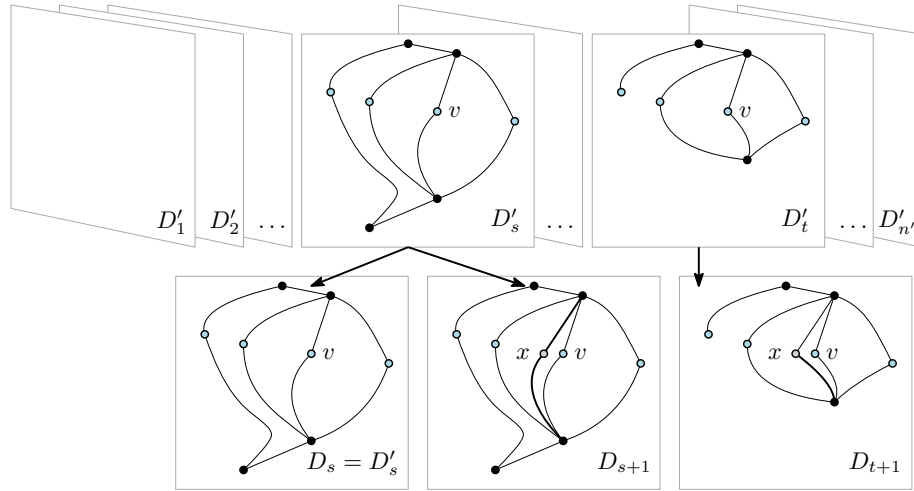


Fig. 14. Illustration for **Case C** of the proof of Lemma 4, when V_U is the fixed set.

Suppose now that V_U is the fixed set; see Fig. 14 for an illustration. Let $[s, t] \in [n']$ be the maximal interval in which all vertices of V_U in G' are visible. Let $v \neq x$ be the vertex of V_U such that $\tau'(v) = s$. We compute τ from τ' by inserting x right next v such that its lifespan in τ is $[s+1, t+1]$. For each $i \leq s$, we set $D_i = D'_i$. For $i = s+1$, we extend D'_i by drawing x sufficiently close to v and by drawing, for each neighbor w of x , the edge xw such that it follows the curve representing the edge vw . Note that in each frame D'_i with $i \in [s, t]$ there are at most two vertices of U , and that there are no edges between vertices of V_U . Hence, similarly as in **Case B**, vertex v has degree two and the curve xw does not cross any other edge. We then set D_i to be equal to the resulting drawing. Similarly, for each $i \leq [s+2, t+1]$, we extend (if needed) the frame D'_{i-1} by drawing any edge xw such that it follows the corresponding curve vw . Finally, for each $i > t+1$, we set $D_i = D'_{i-1}$.

Theorem 4 ($\star$). *Let $G = (V, E)$ be a graph with n vertices and vertex cover number $\kappa = \kappa(G)$. Deciding whether G admits a storyplan, and computing one if any, can be done in $O(2^{2^{O(\kappa)}} + n^2)$ time.*

Proof. By [6], we can determine the vertex cover number $\kappa = \kappa(G)$ of G and compute a vertex cover C of size κ in time $O(2^\kappa + \kappa \cdot n)$. We construct a kernel G^* from G of size $O(2^\kappa)$ as follows. We first classify each vertex of G based on its type. We then apply reduction rules **R1**, **R2**, and **R3** exhaustively. Thus, constructing G^* can be done in $O(2^\kappa + \kappa \cdot n)$ time, since $O(2^\kappa)$ is the number of types and $\kappa \cdot n$ is the maximum number of edges of G . Also, G^* contains $n^* \leq 3 \cdot 2^\kappa < 2^{\kappa+2}$ vertices.

From Lemma 4 we conclude that G admits a storyplan if and only if G^* does. To establish whether G^* admits a storyplan we proceed as follows: (1) We guess a total order τ^* of G^* ; (2) For $i = 1$, we guess all planar embeddings of the graph induced by the vertices visible at step i ; (3) For each $i > 1$, we consider the embeddings computed at the previous step $i-1$, we remove from them the vertices (if any) that disappear at step i , we remove possible duplicates, and we try to exhaustively extend each of the resulting planar embeddings by inserting the vertex that appears at step i . The algorithm halts if the set of planar embeddings becomes empty. It is readily seen that G^* admits a storyplan if and only if the algorithm terminates at step n^* with at least one planar embedding. Concerning the time complexity, step (1) takes $O(2^{\kappa+2}!)$ time. Since G^* contains $O(2^{O(\kappa)})$ vertices and edges, the number of possible planar embeddings are $O((2^{O(\kappa)})^{(2^{O(\kappa)})}) = O((2^{O(\log \kappa) \cdot 2^{O(\kappa)}})^{2^{O(\kappa)}}) = O(2^{2^{O(\kappa)}})$. Hence step (2) takes $O(2^{2^{O(\kappa)}})$ time and step (3) takes $O(2^{2^{O(\kappa)}}) \cdot O(2^{2^{O(\kappa)}}) = O(2^{2^{O(\kappa)}})$ time. Starting from a storyplan of G^* , we can reinsert the missing $O(n)$ vertices each in $O(n)$ time, as detailed in Lemma 4.

B.3 Missing proofs of Section 3.3

In order to prove Lemma 5, we first show that **R.A** and **R.B** are safe rules.

Lemma 9. *Let G' be the graph obtained from G by applying one of the reduction rules **R.A** and **R.B**. Then G admits a storyplan if and only if G' does.*

Proof. One direction is again trivial, since admitting a storyplan is a hereditary property. Suppose now that G' admits a storyplan $\mathcal{S}' = \langle \tau', \{D'\}_{i \in [n']}\rangle$, where $n' < n$. We distinguish two cases based on the reduction rule applied to G .

Case 1 (R.A). The argument is analogous as for rule **R.1**. Let u be the removed vertex and let v be its neighbor in G , whose lifespan according to τ' is $[i_v, j_v]$. We compute τ from τ' by inserting u right after v , consequently the lifespan of v in τ is $[i_v + 1, i_v + 1]$. Similarly, compute $\{D_i\}_{i \in [n]}$ from $\{D'\}_{i \in [n']}$ as follows. For each $i \leq i_v$, we set $D_i = D'_i$. For $i = i_v + 1$, we draw u in D'_{i_v} sufficiently close to v such that uv can be drawn as a straight-line segment that does not intersect any other edge. We then set D_i to be equal to the resulting drawing. Finally, for each $i > i_v + 1$, we set $D_i = D'_{i-1}$.

Case 2 (R.B). Let $\langle s, u_1, \dots, u_k, t \rangle$ be the k -chain whose inner vertices, $u_1, \dots, u_k$, have been removed. Let $[i_s, j_s]$ and $[i_t, j_t]$ be the lifespans of s and t according to τ' , respectively. Without loss of generality, we assume $i_s < i_t$. We compute τ from τ' as follows. We insert u_1 right after s and u_k right after t . Now the order has length $n' + 2$. For each $i \in \{2, \dots, k-1\}$ (recall that $k \geq 3$), we insert u_i at step $[n' + i + 1]$. Consequently, the lifespans of u_1 and u_k in τ are $[i_s + 1, n' + 3]$ and $[i_t + 1, n' + k]$, respectively, the lifespan of u_i is $[n' + i + 1, n' + i + 2]$, for each $i \in \{2, \dots, k-2\}$, and the lifespan of u_{k-1} is $[n' + k, n' + k]$. For each $i \leq i_s$, we set $D_i = D'_i$. For $i = i_s + 1$, we draw u_1 in D'_{i_s} sufficiently close to s such that su_1 can be drawn as a straight-line segment that does not intersect any other edge. Analogously, for $i = i_t + 1$, we draw u_k in D'_{i_t} sufficiently close to t such that $u_k t$ can be drawn as a straight-line segment that does not intersect any other edge. Recall that $k \geq 3$ and hence edge $u_1 u_k$ does not exist, which implies that all frames up to $D_{n'+2}$ are planar. For each $i \in \{n' + 3, n' + k\}$ we have that vertex u_j , with $j = i - n' - 1$ appears, and the only visible vertices are u_{j-1} , u_j , and u_k . In particular, the only edges to be drawn are $u_{j-1}u_j$ and $u_j u_k$ if $j = k - 1$ (i.e., if $i = n' + k$), hence they can be realized as crossing-free straight-line segments for any position of u_j (avoiding the three vertices being collinear).

Lemma 5 ($\star$). *STORYPLAN parameterized by feedback edge set number admits a kernel of linear size.*

Proof. Let G be a graph with n vertices and let F be a feedback edge set of G of size $\psi = \psi(G)$. Let G^* be the graph obtained after applying exhaustively the reduction rules **R.A** and **R.B**. Graph G^* is a kernel of G by Lemma 9. Let $F^* \subseteq F$ be the edges of F that belong to G^* . Observe that removing the edges of F^* from G^* yields a forest H^* with at most 2ψ leaves in total. Indeed, any leaf of H^* is an endpoint of some edge in F^* , as otherwise it would not be part of G^* by **R.A**. Moreover, by **R.B**, G^* (and hence H^*) contains a k -chain only if $k < 3$. Consequently, H^* contains at most $16\psi - 4$ vertices, namely at most 2ψ leaves, $(2\psi - 1)$ vertices of degree larger than two, and $3(4\psi - 1)$ vertices of degree two. Therefore, G^* has $O(\psi)$ vertices and edges.

B.4 Missing Proofs for Section 3.4

Theorem 6 ($\star$). *Every partial 3-tree G with n vertices admits a storyplan, which can be computed in $O(n)$ time.*

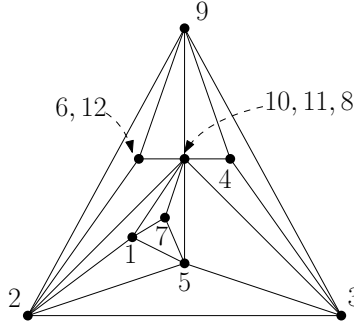


Fig. 15. The graph G^* of the 3-tree G of Figure 7; each vertex v of G^* is labeled with the vertices of G whose representative vertex is v .

Proof. We avoid repeating the part of the proof described in the main body of the paper. We only prove that the described storyplan can be computed in linear time. If G is a partial 3-tree it can be augmented to a (non-partial) 3-tree in $O(n)$ time [15]. The reverse of the order in which the vertices are added to construct G is called a *perfect elimination ordering* and can be computed in $O(n)$ time [19]. Starting from this order we can compute $\mathcal{T}$ in $O(n)$ time. The order τ can be computed in $O(n)$ time by performing a preorder visit of $\mathcal{T}$. During this visit we also compute some information that are useful to compute efficiently all the drawings $\{D_i\}_{i \in [n]}$. First, we compute an embedded planar 3-tree G^* that is a supergraph of each G_i (refer to Figure 15). The idea to construct G^* is to keep only one representative, for each set of vertices whose parent cliques have the same set of representatives. We construct G^* starting with the initial 3-cycle (which is associated with the root); each vertex of this 3-cycle is its own representative. When we visit a bag μ , we consider the three representatives of the vertices of the parent clique C of v_μ ; these three vertices can be obtained in $O(1)$ time by storing for each vertex its representative. If a vertex v connected to the representative vertices of C already exists, we do not modify G^* and store v as the representative vertex of v_μ ; if no vertex has already been connected to the representative vertices of C , we add a new vertex v to G^* connecting it to the representative vertices of C and, also in this case, we store v as the representative vertex of v_μ . Since both cases can be handled in $O(1)$ time, the overall construction of G^* can be executed in $O(n)$ time. Also, G^* has $O(n)$ vertices and edges. Second, we store for each i (with $i = 1, 2, \dots, n$) the list

ℓ_i of vertices that have to be removed when constructing D_i from D_{i-1} . These vertices are all the vertices associated with the bags of $\mathcal{T}$ that are visited before μ_i and after its parent μ_j (this set of vertices may be empty) and they can be stored, in the reverse order of addition, while backtracking from μ_{i-1} during the preorder visit.

Once we have G^* we can use any existing $O(n)$ -time algorithm to compute a planar straight-line grid drawing D^* of G^* (for example the shift algorithm [7]). By the construction of G^* , each drawing $\{D_i\}_{i \in [n]}$ is a sub-drawing of D^* and therefore we can compute each D_i by removing from D^* the vertices and edges that do not belong to G_i . In particular at each step i we can use the list ℓ_i to find the vertices to be removed from D_{i-1} ; these vertices are removed in reverse order of addition and when a vertex is removed we also remove the three edges that connect it to its parent clique. Since each vertex and each edge is added once and removed once, the set $\{D_i\}_{i \in [n]}$ can be computed in $O(n)$ time.

C Missing Proofs for Section 4

Theorem 7 ($\star$). *The STORYPLANFIXEDORDER problem is NP-complete.*

Proof. Suppose first that G_1, G_2, G_3 admit a SEFE $\Gamma_1, \Gamma_2, \Gamma_3$. Let Γ be the drawing obtained as follows: (i) let Γ' be the union of $\Gamma_1, \Gamma_2, \Gamma_3$; (ii) let Γ'' be the drawing obtained from Γ' by subdividing all exclusive edges in E_i for each $i = 1, 2, 3$ (the subdivision vertex can be placed at any point along the curve representing the edge); (iii) finally, let Γ be the drawing obtained from Γ'' by drawing for each vertex v its spectator s_v sufficiently close such that the edge vs_v can be realized as a straight-line segment that does not intersect any other edge. Then a storyplan $\langle \tau, \{D_i\}_{i \in [n]} \rangle$ can be obtained by setting each drawing D_i equal to the subdrawing of Γ induced by the vertices visible at step i . By construction, the position of a vertex is the same over all frames that contain it. It remains to prove that each frame is planar.

- Each frame D_i with $i \in [\tau_1^-, \tau_1^+]$ is a subdrawing of $\Gamma[V]$, which is planar because it contains only the edges that are part of the common intersection of G_1, G_2, G_3 .
- Each frame D_i with $i \in [\tau_2^-, \tau_3^+]$ is planar because it is a subdrawing of Γ_1 in which each edge has been subdivided and the spectators of such subdivision vertices have been drawn without introducing crossings.
- Observe that in τ_4^- , all spectators of the subdivision vertices of E_1 disappear and hence the same holds for the subdivision vertices of E_1 . It follows that each frame D_i with $i \in [\tau_4^-, \tau_5^+]$ is planar because it is a subdrawing of Γ_2 in which each edge has been subdivided and the spectators of such subdivision vertices have been drawn without introducing crossings. The same argument (with respect to E_3) can be used to prove the planarity of each frame D_i with $i \in [\tau_6^-, \tau_7^+]$.
- In τ_8^- all subdivision vertices of E_3 disappear and again each frame D_i with $i \in [\tau_8^-, \tau_8^+]$ is a subdrawing of $\Gamma[V]$ where some spectators of the vertices in V have been drawn without introducing crossings.

Suppose now that $\langle G, \tau \rangle$ admits a storyplan $\langle \tau, \{D_i\}_{i \in [n]} \rangle$. Then a SEFE $\Gamma_1, \Gamma_2, \Gamma_3$ of $\langle G_1, G_2, G_3 \rangle$ can be obtained as follows. Let $\Gamma_1^* = \bigcup_{i=\tau_1^-}^{\tau_1^+} D_i$, let $\Gamma_2^* = \bigcup_{i=\tau_4^-}^{\tau_4^+} D_i$, and let $\Gamma_3^* = \bigcup_{i=\tau_6^-}^{\tau_6^+} D_i$. Observe that, for each $i = 1, 2, 3$, Γ_i^* is a planar drawing of G_i in which the exclusive edges of E_i are subdivided. Moreover, by construction it holds $\Gamma_1^*[V] = \Gamma_2^*[V] = \Gamma_3^*[V]$. It follows that Γ_i can be obtained by viewing each subdivision vertex as an inner point of the corresponding edge.

The membership to NP follows the lines of Theorem 3, simply ignoring the initial guess of a total order, which is instead given as part of the input.