Induced Cycles and Paths Are Harder Than You Think

Mina Dalirrooyfard, Virginia Vassilevska Williams

Abstract

The goal of the paper is to give fine-grained hardness results for the Subgraph Isomorphism (SI) problem for fixed size induced patterns H, based on the k-Clique hypothesis that the current best algorithms for Clique are optimal.

Our first main result is that for any pattern graph H that is a *core*, the SI problem for H is at least as hard as t-Clique, where t is the size of the largest clique minor of H. This improves (for cores) the previous known results [Dalirrooyfard-Vassilevska W. STOC'20] that the SI for H is at least as hard as k-clique where k is the size of the largest clique subgraph in H, or the chromatic number of H (under the Hadwiger conjecture). For detecting any graph pattern H, we further remove the dependency of the result of [Dalirrooyfard-Vassilevska W. STOC'20] on the Hadwiger conjecture at the cost of a sub-polynomial decrease in the lower bound.

The result for cores allows us to prove that the SI problem for induced k-Path and k-Cycle is harder than previously known. Previously [Floderus et al. Theor. CS 2015] had shown that k-Path and k-Cycle are at least as hard to detect as a $\lfloor k/2 \rfloor$ -Clique. We show that they are in fact at least as hard as 3k/4 - O(1)-Clique, improving the conditional lower bound exponent by a factor of 3/2. This shows for instance that the known $O(n^5)$ combinatorial algorithm for 7-cycle detection is conditionally tight.

Finally, we provide a new conditional lower bound for detecting induced 4-cycles: $n^{2-o(1)}$ time is necessary even in graphs with n nodes and $O(n^{1.5})$ edges. The 4-cycle is the smallest induced pattern whose running time is not well-understood. It can be solved in matrix multiplication, $O(n^{\omega})$ time, but no conditional lower bounds were known until ours. We provide evidence that certain types of reductions from triangle detection to 4-Cycle would not be possible. We do this by studying a new problem called Paired Pattern Detection.

^{*}Department of Electrical Engineering and Computer Science and CSAIL, MIT, minad@mit.edu

[†]Department of Electrical Engineering and Computer Science and CSAIL, MIT. virgi@mit.edu

1 Introduction

A fundamental problem in graph algorithms, Subgraph Isomorphism (SI) asks, given two graphs G and H, does G contain a subgraph isomorphic to H? While the problem is easily NP-complete, many applications only need to solve the poly-time solvable version in which the pattern H has constant size; this version of SI is often called Graph Pattern Detection and is the topic of this paper.

There are two versions of SI: *induced* and not necessarily induced, *non-induced* for short. In the induced version, the copy of H in G must have both edges and non-edges preserved, whereas in the non-induced version only edges need to carry over, and the copy of H in G can be an arbitrary supergraph of H. It is well-known that the induced version of H-pattern detection for any H of constant size is at least as hard as the non-induced version (see e.g. [15]), and that often the non-induced version of SI has faster algorithms (e.g. the non-induced k-independent set problem is solvable in constant time).

It is well-known that the SI problem for any k-node pattern H in n-node graphs for constant k, can be reduced in linear time to detecting a k-clique in an O(n) node graph (see [30]). Thus the hardest pattern to detect is k-clique. A natural question is:

How does the complexity of detecting a particular fixed size pattern H compare to that of k-clique?

Let us denote by C(n,k) the best running time for k-clique detection in an n node graph. When k is divisible by 3, Nešetril and Poljak [30] showed that $C(n,k) \leq O(n^{\omega k/3})$ time, where $\omega < 2.37286$ [2] is the matrix multiplication exponent. For k not divisible by 3, $C(n,k) \leq O(n^{\omega(\lfloor k/3 \rfloor, \lceil k/3 \rceil, \lceil (k-1)/3 \rceil)})$ time, where $\omega(a,b,c)$ is the exponent of multiplying an $n^a \times n^b$ by an $n^b \times n^c$ matrix.

This k-clique running time has remained unchallenged since the 1980s, and a natural hardness hypothesis has emerged (see e.g. [33]):

Hypothesis 1 (k-clique Hypothesis). On a word-RAM with $O(\log n)$ bit words, for every constant $k \geq 3$, k-clique requires $n^{\omega(\lfloor k/3 \rfloor, \lceil k/3 \rceil, \lceil (k-1)/3 \rceil) - o(1)}$ time.

A "combinatorial" version of the hypothesis states that the best combinatorial algorithm for k-clique runs in $n^{k-o(1)}$ time. Other hypotheses such as the Exponential Time Hypothesis for SAT [22, 10] imply weaker versions of the k-Clique Hypothesis, namely that k-clique requires $n^{\Omega(k)}$ time [11]. We will focus on the *fine-grained* k-Clique Hypothesis as we are after fine-grained lower bounds that focus on fixed exponents.

Our **goal** is now, for every k-vertex pattern H, determine a function f(H) such that detecting H in an n-vertex graph is at least as hard (in a fine-grained sense, see [33]) as detecting an f(H)-clique in an n-vertex graph. We then say that H is "at least as hard as f(H)-clique".

Obtaining such results is interesting for several reasons.

- First, under the k-clique Hypothesis, we would get *fine-grained* lower bounds for detecting H. This would give us a much tighter handle on the complexity of H-detection than, say, results (such as results based on ETH, or [28]) that merely provide an $n^{\Omega(k)}$ lower bound which only talks about the *growth* of the exponent.
- Second, knowing the largest size clique that limits the complexity of H-pattern detection can allow us to compare between different patterns. The goal is to get to something like: the complexity of k-node H_1 is like the complexity of k/10-clique, whereas the complexity of k-node H_2 is like the complexity of k/2-clique, so H_2 seems harder.

¹"Combinatorial" is not well-defined, but it is a commonly used term to denote potentially practical algorithms that avoid the generally impractical Strassen-like methods for matrix multiplication.

• Third, this more structural approach uncovers interesting combinatorial and graph theoretic results. For instance, in [15] it was uncovered that the colorability of a pattern, and the Hadwiger conjecture can explain the hardness of pattern detection. This is not obvious at all apriori.

This approach has been taken by prior work (e.g. [15, 5, 19]); see the related work section for more background.

2 Our results

Our contributions are as follows:

- 1. First, we obtain a strengthening of a recent result of [15] that implies that the hardness of certain patterns called "cores" relates to the size of their maximum *clique minor*. This hardness is stronger than what was previously known, as previously only the chromatic number, or the maximum size of a clique *subgraph* were known to imply limitations, and both of these parameters are upper-bounded by the clique minor size (under the Hadwiger conjecture, for chromatic number).
- 2. We then apply the result above to obtain much higher hardness for induced Path and Cycle detection in graphs: a k-path or k-cycle contains an independent set of size roughly k/2. Thus both k-Cycle and k-Path were shown [19] to be at least as hard as \[\left[k/2 \right] Clique. We raise the hardness to that of \[3k/4 O(1) \] clique, thus raising the exponent of the lower bound running time by a factor of \[3/2. \] This allows us for instance to obtain a tight conditional lower bound of \[n^{5-o(1)} \] for the running time of combinatorial algorithms for 7-Clique; an \[O(n^5) \] algorithm was obtained by Bläser et al. [6].
- 3. Finally, we consider the smallest known case of induced k-Cycle whose complexity is not well-understood: induced 4-Cycle. We provide a new conditional lower bound for the problem in sparser graphs based on a popular fine-grained hypothesis, and also provide some explanation for why reductions from triangle detection to 4-Cycle have failed so far.

We now elaborate on our results.

New results for core graphs. Dalirrooyfard, Vuong and Vassilevska W. [15] related the hardness of subgraph pattern detection to the size of the maximum clique or the chromatic number of the pattern. In particular, they showed that if H has chromatic number t, then under the Hadwiger conjecture, H is at least as hard to detect as a t-clique.

The Hadwiger conjecture basically states that the chromatic number of a graph is always at most the largest size of a clique minor of the graph. As the result of [15] was already assuming the Hadwiger conjecture, one might wonder if it can be extended to show that every pattern H is at least as hard to detect as an η -clique, where η is the size of the largest *clique minor* of H.

We first note that such an extension is highly unlikely to work for non-induced patterns: the four-cycle C_4 has a K_3 (triangle) minor, but a non-induced C_4 has an $O(n^2)$ time detection algorithm that does not use matrix multiplication, whereas any subcubic triangle detection algorithm must use (Boolean) matrix multiplication [35]. Thus any extension of the result that shows clique-minor-sized clique hardness would either only work for certain types of non-induced graphs, or will need to only work in the induced case.

Here we are able to show that H-subgraph pattern detection, even in the non-induced case, is at least as hard as η -clique, where η is the largest clique minor size of H, as long as H is a special type of pattern called a *core*. Cores include many patterns of interest, including the complements of cycles of odd length.

We also give several other hardness results, such as removing the dependence on the Hadwiger conjecture from some of the results of [15] with only a slight loss in the lower bound.

We call a subgraph C of a graph H a *core* of H if there is a homomorphism $H \to C$ but there is no homomorphism $H \to C'$ for any proper subgraph C' of C. Hell and Nešetřil [21] showed that every graph has a unique core (up to isomorphism), and the core of a graph is an *induced* subgraph. We denote the core of a graph H by core(H). A graph which is its own core is called simply a core.

We prove strong hardness results for cores, relating the hardness of detecting the pattern to the size of its maximum clique minor. We then relate the hardness of detecting arbitrary patterns to the hardness of detecting their cores.

We begin with a theorem that shows hardness for detecting a "partitioned" copy of a pattern H. Here the vertex set of the host graph G^* is partitioned into k parts, and one is required to detect an induced copy of a k-node H so that the image of the ith node of H is in the ith part of the vertex set of G^* . This version of SI is often called Partitioned Subgraph Isomorphism (PSI). Marx [29] showed that under ETH, PSI for a pattern H requires at least $n^{\Omega(tw(H)/\log tw(H))}$ time where tw(H) is the treewidth of H. We give a more fine-grained lower bound for PSI. We provide a reduction from η -clique detection in an n node graph to PSI for a graph H in an O(n) node host graph, for any H with maximum clique minor of size η .

Theorem 2.1. (Hardness of PSI) Let H be a k-node pattern with maximum clique minor of size $\eta(H)$, and let G be an n-node graph. Then one can construct a k-partite O(n)-node graph G^* in $O(n^2)$ time such that G^* has a colorful copy of H if and only if G has a clique of size $\eta(H)$.

Thus the hardness of Partitioned SI is related to the size of the largest clique minor. To obtain a bound on the size of the maximum clique minor of any graph we use a result of Thomason [32] as follows: Let c(t) be the minimum number such that every graph H with $|E(H)| \ge c(t)|V(H)|$ has a K_t minor. Then $c(t) = (\alpha + o(1))t\sqrt{\log t}$, where $\alpha \le 0.32$ is an explicit constant. Since for $t = \frac{|E(H)|/|V(H)|}{\sqrt{\log(|E(H)|/|V(H)|)}}$ the above inequality is true, we have the following corollary.

Corollary 2.1. Let H be a k-node m-edge pattern. Then the problem of finding a partitioned copy of H in an n-node k-partite graph is at least as hard as finding a clique of size $\frac{m/k}{\sqrt{\log m/k}}$ in an O(n)-node graph.

Hence, for example if $m = ck^2$ for some constant c, then the PSI problem for H cannot be solved in $n^{o\left(\frac{k}{\sqrt{\log k}}\right)}$ time. Thus, for dense enough graphs, we improve the lower bound of $n^{\Omega(tw(H)/\log tw(H))}$ due to Marx [29], since tw(H) < k.

While Theorem 2.1 only applies to PSI, one can use it to obtain hardness for SI as well, as long as H is a core. In particular, Marx [29] showed that PSI and SI are equivalent on cores. Thus we obtain:

Corollary 2.2. (Hardness of cores in SI) Let G be an n-node m-edge graph and let H be a k-node pattern with maximum clique minor of size $\eta(H)$. If H is a core, then one can construct a graph G^* with at most O(n) vertices in O(m+n) time such that G^* has a subgraph isomorphic to H if and only if G has a $\eta(H)$ -clique as a subgraph.

As the complements of odd cycles are cores with a clique minor of size at least $\lfloor 3k/4 \rfloor$, for C_k when k is odd, we immediately obtain a lower bound of $C(n, \lfloor 3k/4 \rfloor)$ for C_k detection. When k is even, more work is needed.

Corollary 2.2 applies to the non-induced version of SI. We obtain a stronger result for the induced version in terms of the k and the size of the largest clique subgraph.

Corollary 2.3. (Hardness for induced-SI for cores) Let H be a k-node pattern which is a core. Suppose that w(H) is the size of the maximum clique in H. Then detecting H in an n-node graph as an induced subgraph is at least as hard as detecting a clique of size $\max\{\lceil \sqrt{(k+2w(H))/2}\rceil, \lceil \sqrt{k/1.95} \rceil\}$.

For comparison, the result of [15] shows that non-induced SI for any k-node H is at least as hard as detecting a clique of size \sqrt{k} , but the result is conditioned on the Hadwiger conjecture. Corollary 2.3 is the strongest known clique-based lower bound result for k-node $core\ H$ that is not conditioned on the Hadwiger conjecture.

Our next theorem relates the hardness of detecting a pattern to the hardness of detecting its core.

Theorem 2.2. Let G be an n-node m-edge graph and let H be a k-node pattern. Let C be the core of H. Then one can construct a graph G^* with at most O(n) vertices in $O(n^2)$ time such that G^* has a subgraph isomorphic to H if and only if G has a subgraph isomorphic to G, with high probability².

One consequence of Theorem 2.2 and Corollary 2.3 is that induced-SI for *any* pattern H of size k is at least as hard as detecting a clique of size $\lceil k^{1/4}/1.39 \rceil$. Note that this is the first lower bound for induced SI that is **only** under the k-clique hypothesis.

Corollary 2.4. (Hardness of Induced-SI) For any k-node pattern H, detecting an induced copy of H in an n-node graph is at least as hard as detecting a clique of size $\lceil k^{1/4}/1.39 \rceil$ in an O(n) graph.

Hardness for induced cycles and paths. We now focus on k-paths P_k and k-cycles C_k for fixed k and provide highly improved fine-grained lower bounds for their detection under the K-clique Hypothesis (for k larger than some constant). The results can be viewed as relating how close induced paths and cycles are to cliques. Our techniques for proving our results can be of independent interest and can potentially be implemented to get stronger hardness results for other classes of graphs.

Table 1: Known upper and lower bounds for paths and cycles. The algorithms for P_3 and C_3 are folklore, for P_4 from [12], for C_4 from [34], and for C_k and P_k for $k \ge 5$ from [5]. The old lower bounds are all from [19]; our new lower bounds appear in Theorem 2.3.

Pattern	Runtime	Lower Bound	Comb. Runtime	Comb. Lower Bound
P_3, P_4	O(m+n)		O(m+n)	
C_4	$\tilde{O}(n^{\omega})$		$O(n^3)$	
C_3, C_5, P_5	$\tilde{O}(n^{\omega})$	$n^{\omega-o(1)}$	$O(n^3)$	$n^{3-o(1)}$
C_{6}, P_{6}	C(n,4)	$n^{\omega-o(1)}$	$O(n^4)$	$n^{3-o(1)}$
	$=O(n^{\omega(2,1,1)})$			
P_7	C(n,6)	$n^{\omega-o(1)}$	$O(n^5)$	$n^{3-o(1)}$
	$=O(n^{2\omega})$			
C_7	C(n,6)	C(n,5) [new]	$O(n^5)$	$n^{5-o(1)}$ [new]
	$=O(n^{2\omega})$	$n^{\omega-o(1)}$ [old]		$n^{3-o(1)}$ [old]
$C_k, P_k, k \geq 8$	C(n,k)	$C(n, \lfloor 3k/4 \rfloor - 2)$ [new]	$O(n^{k-2})$	$n^{\lfloor 3k/4 \rfloor - 2 - o(1)}$ [new]
C_k , odd k	C(n,k)	$C(n, \lfloor 3k/4 \rfloor)$ [new]	$O(n^{k-2})$	$n^{\lfloor 3k/4 \rfloor - o(1)}$ [new]
		$C(n, \lceil k/2 \rceil)$ [old]		$n^{\lceil k/2 \rceil - o(1)}$ [old]

 $^{^{2}}$ with probability 1/poly n

The fastest known algorithms for finding induced cycles or paths on k nodes can be found in Table 1. For larger k, the best known algorithms are either the k-clique running time C(n,k), or an $O(n^{k-2})$ time combinatorial algorithm by [5]. For $k \le 7$, slightly faster algorithms are known.

The best known conditional lower bounds so far [19] under the k-clique hypothesis stem from the fact that the complement of C_k contains a $\lfloor k/2 \rfloor$ -clique, and the complement of P_k contains a $\lceil k/2 \rceil$ -clique. These lower bounds show that the best known running time of $O(n^\omega)$ for C_5 and P_5 are likely optimal. Unfortunately, for larger k, these lower bounds are far from the best known running times.

We obtain polynomially higher lower bounds, raising the lower bound exponent from roughly k/2 to roughly 3k/4.

Theorem 2.3. (Hardness of P_k and C_k) Let H be the complement of a P_k or the complement of a C_k . Suppose that t is the size of the maximum clique minor of H. Then the problem of detecting H in an O(n)-node graph is at least as hard as finding a (t-2)-clique in an n-node graph. If k is odd, then detecting an induced C_k is at least as hard as finding a t-clique.

The largest *clique minor*³ of the complement of C_k has size $\lfloor 3k/4 \rfloor$ and of the complement of P_k has size at least $\lfloor (3k+1)/4 \rfloor$.

Table 1 summarizes our new lower bounds. Aside from obtaining a much higher conditional lower bound, our result shows that the best known combinatorial algorithm for C_7 detection is tight, unless there is a faster combinatorial algorithm for 5-clique detection. For algorithms that may be non-combinatorial, our lower bound for C_7 is at least $\Omega(n^{4.08})$ assuming that the current bound for 5-clique is optimal.

The curious case of Four-Cycle. The complexity of SI for all patterns on at most 3 nodes in n-node graphs is well-understood, both in the induced and non-induced case: all patterns except the triangle and (in the induced case) the independent set can be detected in $O(n^2)$ time, whereas the triangle (and independent set in the induced case) can be detected in $O(n^\omega)$ time where $\omega < 2.373$ is the exponent of matrix multiplication [2]. The dependence on (Boolean) matrix multiplication for triangle detection was proven to be necessary [35].

Table 1 gives the best known algorithms and conditional lower bounds for induced SI for all 4-node patterns. In the non-induced case, the change is that, except for the 4-clique K_4 , the diamond, co-claw and the paw whose runtimes and conditional lower bounds stay the same, all other patterns can be solved in $O(n^2)$ time.

All conditional lower bounds in Table 1 are tight, except for the curious case of the induced 4-Cycle C_4 . Non-induced C_4 can famously be detected in $O(n^2)$ time (see e.g. [31]). Meanwhile, the fastest algorithm for induced C_4 runs in $O(n^\omega)$ time (see e.g. [34]). There is no non-trivial lower bound known for C_4 detection (except that one needs to read the graph), and obtaining a higher lower bound or a faster algorithm for C_4 has been stated as an open problem several times (see e.g. [18]).

The induced 4-cycle is the smallest pattern H whose complexity is not tightly known, under any plausible hardness hypothesis.

We make partial progress under the popular 3-Uniform 4-Hyperclique Hypothesis (see e.g. [27, 1]) that postulates that hyperclique on 4 nodes in an n vertex 3-uniform hypergraph cannot be detected in $O(n^{4-\varepsilon})$ time for any $\varepsilon > 0$, in the word-RAM model of computation with $O(\log n)$ bit words. The believability of this hyperclique hypothesis is discussed at length in [27] (see also [1]); one reason to believe it is that refuting it would imply improved algorithms for many widely-studied problems such as Max-3-SAT [36].

 $^{^{3}}$ A t-clique minor of a graph H is a decomposition of H into t connected subgraphs such that there is at least one edge between any two subgraphs.

	running time	lower bound
I_4 K_4 \circ \circ \circ \circ	$n^{\omega(2,1,1)}$	$n^{\omega(2,1,1)}$
co-diamond diamond	n^{ω}	n^{ω}
co-paw paw	n^{ω}	n^{ω}
$\begin{array}{cccc} 2K_2 & C_4 \\ & & & \\ & & & \\ & & & \\ & & & \\ \end{array}$	n^{ω}	$m+n$ $m^{4/3}$ or n^2 [new for C_4]
claw co-claw	n^{ω}	n^{ω}
P_4	$m+n \le n^2$	m+n

Best known

Best known

Figure 1: A list of all induced 4-node patterns with their best known algorithms and conditional lower bounds. All runtime bounds are within polylogarithmic factors, and can be found in [34] and [16]. All lower bounds except for the new one in red are under the k-clique hypothesis for k = 3 or 4, and every lower bound l as a function of m or n should be interpreted as $l^{1-o(1)}$. The new lower bound is under the 3-uniform 4-hyperclique hypothesis, only holds for C_4 and is in Theorem 2.4. All upper and lower bounds are tight except that for C_4 and its complement.

Theorem 2.4. Under the 3-Uniform 4-Hyperclique Hypothesis, there is no $O(m^{4/3-\varepsilon})$ time or $O(n^{2-\varepsilon})$ time algorithm for $\varepsilon > 0$ that can detect an induced 4-cycle in an n-node, m-edge undirected graph.

While our result conditionally rules out, for instance, a linear time (in the number of edges) algorithm for induced C_4 , it does not rule out an $O(n^2)$ time algorithm for induced C_4 in dense graphs since the number of edges in the reduction instance is $\Theta(n^{3/2})$ in terms of the number of nodes n. Ideally, we would like to have a reduction from triangle detection to induced C_4 -detection, giving evidence that $n^{\omega-o(1)}$ time is needed. Our Theorem does show this if $\omega=2$, but we would like the reduction to hold for any value of ω , and for it to be meaningful in dense graphs. Note that even if $\omega=2$, a reduction from triangle detection would be meaningful, as it would say that a practical, combinatorial algorithm would be extremely difficult to obtain (or may not even exist).

All known reductions from k-clique to SI for other patterns H (e.g. [19, 15, 26]) work equally well for non-induced SI. In particular, in the special case when H is bipartite, such as when $H = C_4$, the host graph also ends up being bipartite (e.g. [26] for bicliques, and [19, 15] more generally).

Unfortunately such reductions are doomed to fail for C_4 . In bipartite graphs and more generally in triangle-free graphs, any non-induced C_4 is an induced C_4 . Of course, any hypothetical fine-grained reduction from triangle detection to non-induced C_4 detection in triangle-free graphs, combined with the known $O(n^2)$ time algorithm for non-induced C_4 would solve triangle detection too fast.

The difference between induced C_4 and non-induced C_4 is that the latter calls for detecting *one* of the three patterns: C_4 , diamond or K_4 . Could we have a reduction from triangle detection to induced C_4 -detection in a graph that is *not* triangle-free, but is maybe K_4 -free? In order for such a reduction to work, it

must be that detecting one of $\{C_4, K_4\}$ is computationally hard.

We show that such reductions are also doomed. We provide a fast combinatorial algorithm that detects one of $\{C_4, H\}$ for any H that contains a triangle. The algorithm in fact runs faster than the current matrix multiplication time, which (under the k-clique Hypothesis) is required for detecting any H containing a triangle. Thus, any tight reduction from triangle detection to induced C_4 must create instances that contain every induced 4-node H that has a triangle.

Theorem 2.5. For any 4-node graph H that contains a triangle, detecting one of $\{C_4, H\}$ as an induced subgraph of a given n-node host graph can be done in $O(n^{7/3})$ time. If H is not a diamond or K_4 , then H or C_4 can be detected $O(n^2)$ time.

The only case of Theorem 2.5 that was known is that for $\{C_4, \text{ diamond }\}$. Eschen et al. [18] considered the recognition of $\{C_4, \text{ diamond }\}$ -free graphs and gave a combinatorial $O(n^{7/3})$ time algorithm for the problem. We show a similar result for every H that contains a triangle.

The C_4 OR H problem solved by our theorem above is a special case of the subgraph isomorphism problem in which we are allowed to return one of a *set of possible patterns*. This version of SI is a natural generalization of non-induced subgraph isomorphism in which the set of patterns are all supergraphs of a pattern. This generalized version of SI has practical applications as well. Often computational problems needed to be solved in practice are not that well-defined, so that for instance you might be looking for something like a matching or a clique, but maybe you are okay with extra edges or some edges missing. In graph theory applications related to graph coloring, one is often concerned with $\{H, F\}$ -free graphs for various patterns H and F (e.g. [23, 14, 13]). Recognizing such graphs is thus of interest there as well. We call the problem of detecting one of two given induced patterns, "Paired Pattern Detection".

Intuitively, if a set of patterns all contain a k-clique, then returning at least one of them should be at least as hard as k-clique. While this is intuitively true, proving it is not obvious at all. In fact, until recently [15], it wasn't even known that if a single pattern H contains a k-clique, then detecting an induced H is at least as hard as k-clique detection. We are able to reduce k-clique in a fine-grained way to "Subset Pattern Detection" for any subset of patterns that all contain the k-clique as a subgraph⁴.

Theorem 2.6. Let S be a set of patterns such that every $H \in S$ contains a k-clique. Then detecting whether a given graph contains some pattern in S is at least as hard as k-clique detection.

While having a clique in common makes a subset of patterns hard to detect, intuitively, if several patterns are very different from each other, then detecting one of them should be easier than detecting each individually. We make this formal for Paired Pattern Detection in n node graphs for $k \le 4$ as follows:

- Paired Pattern Detection is in $O(n^2)$ time for *every pair* of 3 node patterns. Moreover, for all but two pairs of patterns, it is actually in linear time.
- Paired Pattern Detection for any pair of 4-node patterns is in $\tilde{O}(n^{\omega})$ time, whereas the fastest known algorithm for 4-clique runs in supercubic, $O(n^{\omega(1,2,1)})$ time where $\omega(1,2,1) \leq 3.252$ [25] is the exponent of multiplying an $n \times n^2$ by an $n^2 \times n$ matrix.
- There is an $O(n^2)$ time algorithm that solves Paired Pattern Detection for $\{H, \bar{H}\}$ for any 4-node H, where \bar{H} is the complement of H.

⁴Our reduction works in the weaker non-induced version and so it works for the induced version as well.

The last bullet is a generalization of an old Ramsey theoretic result of Erdös and Szekeres [17] made algorithmic by Boppana and Halldórsson [7]. The latter shows that in linear time for any n-node graph, one can find either a $\log(n)$ size independent set or a $\log(n)$ size clique. Thus, for every constant k and large enough n, there is a linear time algorithm that either returns a k-clique or an I_k .

We note that our generalization for $\{H, \bar{H}\}$ cannot be true in general for $k \geq 5$: both H and its complement 5 can contain a clique of size $\lceil k/2 \rceil \geq 3$, and thus by our Theorem 2.6, their Paired Pattern Detection is at least as hard as $\lceil k/2 \rceil$ -clique, and thus is highly unlikely to have an $O(n^2)$ -time algorithm.

2.1 Related work

There is much related work on the complexity of graph pattern detection in terms of the *treewidth* of the pattern. Due to the Color-Coding method of Alon, Yuster and Zwick [3], it is known that if a pattern H has treewidth t, then detecting H as a *non-induced* pattern can be done in $O(n^{t+1})$ time. This implies for instance that non-induced k-paths and k-cycles can be found in $2^{O(k)}$ poly(n) time.

Marx [29] showed that there is an infinite family of graphs of unbounded treewidth so that under ETH, (non-induced) SI on these graphs requires $n^{\Omega(t/\log t)}$ time where t is the treewidth of the graph. Recently, Bringmann and Slusallek [8] showed that under the Strong ETH, for every $\varepsilon > 0$, there is a t and a pattern H of treewidth t so that detecting H cannot be done in $O(n^{t+1-\varepsilon})$ time. That is, for some non-induced patterns, n^{t+1} is essentially optimal.

In the induced case, many patterns are also easier than k-clique, e.g. for k=3,4,5,6, any H that is not the k-independent set or the k-clique can be found in the current best running time C(n,k-1) for (k-1)-clique [34, 5, 15]. For $k \geq 7$, Bläser et al. [5] showed the weaker result that all k-node H that are not the clique or independent set can be detected in $O(n^{k-1})$ time combinatorially, whereas the best known combinatorial algorithms for k-clique run in $n^{k-o(1)}$ time.

For induced pattern detection for patterns of size $k \ge 8$, the best algorithm for almost all of the patterns has the same running time as k-clique detection. If we only resort to combinatorial algorithms there is a slight improvement: any pattern that is not a clique or independent set can be detected in $O(n^{k-1})$ time [5].

Manurangsi, Rubinstein and Schramm [28] formulated a brand new hypothesis on the hardness of planted clique. This new hypothesis implies many results that are not known to hold under standard hypotheses such as ETH or Strong ETH, including that for every k-node H, its induced pattern detection problem requires $n^{\Omega(k)}$ time. While identifying new plausible hypotheses is sometimes worthwhile, our work strives to get results under standard widely-believed hypotheses, and to uncover combinatorial relationships between H-pattern detection and clique-detection, as cliques are the hardest patterns to detect.

Note that the results of Marx [29] and Bringmann and Slusallek [9] show hardness for specific classes of patterns, whereas the the results of Dalirrooyfard et al. [15], Manurangsi et al. [28] and this paper aim to determine hardness for *any* k-node pattern. Our paper primarily focuses on giving lower bounds for fixed patterns such as C_4 , C_7 etc., whereas the focus of [28] is more asymptotic.

2.2 Organization of the paper

In Section 3 we give a high level overview of our techniques, and a comparison to the past techniques. In Section 2.2 we give the necessary definitions. In Section 4 we first state our hardness result for PSI (Theorem 2.1) in subsection 4.1, and then in subsection 4.2 we state our hardness result for SI (Theorem 2.2). Finally, in subsection 4.3 we show hardness for paths and cycles (Theorem 2.3). We state our results on Paired Pattern Detection in Section 5 by first showing hardness for Subset Pattern Detection (Theorem

⁵For k=5, consider H to be a triangle and two independent nodes. Both H and its complement contain a triangle.

5.1) and then we state our algorithmic results. In section 6 we state our lower bound for induced four cycle detection from 3-Uniform 4-Hyperclique Hypothesis.

For an integer k, let P_k , C_k , K_k and I_k be the path, cycle, clique and independent set on k nodes.

Let G be a graph and $S \subseteq V(G)$ be a subgraph of it. For every node $v \in V(G)$, define $N_S(v)$ to be the neighbors of v in S. Define $d_S(v) = |N_S(v)|$.

A k-partite graph G can be decomposed into k partitions G_1, \ldots, G_k where each G_i is an independent set. For a pattern H of size k with vertices v_1, \ldots, v_k , we say that a graph G is H-partite if it is a k-partite graph with G_1, \ldots, G_k as its partitions such that there is no edge between G_i and G_j if v_iv_j is not an edge in H

Let G be an H-partite subgraph for a pattern H. We say that subgraph H' of G is a *colorful* copy of H if H' has exactly one node in each partition of G. Note that if the vertices of H' are u_1, \ldots, u_k where u_i is a copy of v_i for all i, then u_i must be in G_i for all i^6 . This is because for every i, j where $v_i v_j$ is an edge, there must be an edge between the vertex of H' that is in G_i and the vertex of H' that is in G_j . Otherwise, the number of edges of H' is going to be smaller than the number of edges of H.

For a set of patterns S, by (induced) S-detection we mean finding a (induced) copy of one of the patterns in S, or indicating that there is no copy of any of the patterns in S.

Let $f:\{1,\ldots,c\}\to V(H)$ be a *proper* coloring of the graph H if the color of any two adjacent nodes is different. Let the *chromatic number* of a graph H be the smallest number c such that there exists a proper coloring of H with c colors. We say that a graph H is *color critical* if the chromatic number of H decreases if we remove any of its nodes.

We call the subgraph C of a graph H a core of H if there is a homomorphism $H \to C$ but there is no homomorphism $H \to C'$ for any proper subgraph C' of C. Recall that a graph which is its own core is called simply a core. Moreover, any graph has a unique core up to isomorphisms, and the core of a graph is an induced subgraph of it [21].

3 Technical Overview

Here we give high level overview of our techniques. To understand our lower bounds for k-node patterns, we should first give an overview of the techniques used in [15]. In their first result [15] shows that if H is t-chromatic and has a t-clique, then it is at least as hard to detect as a t-clique.

Reduction (1) [15]. To prove the result of [15], suppose that we want to reduce detecting a t-clique in a host graph G = (V, E) to detecting H in a graph G^* built from G and H. We build G^* by making a copy G_h^* of the vertices of G for each node $h \in H$ as an independent set. Then if $hh' \in E(H)$, we put edges between G_h^* and $G_{h'}^*$ using E: if $uw \in E$, then we connect the copy of u in G_h^* to the copy of w in $G_{h'}^*$. Note that we have edges between G_h^* and $G_{h'}^*$ if and only if hh' is an edge and this enforces an encoding of H in G^* (we refer to G^* as being H-partite).

To show that this reduction works, first suppose that there is a t-clique $\{v_1, \ldots, v_t\}$ in G. To prove that there is a H in G^* , we consider a t coloring of the vertices of H, and then we pick a copy of v_i from G_h^* if h has color i. Using the structure of G^* and the fact that no two adjacent nodes in H have the same color, one can show these |H| nodes form a copy of H. For the other direction, suppose that there is a copy of H inside G^* . This copy contains a t-clique $\{w_1, \ldots, w_t\}$. Since each G_h^* is an independent set, no two nodes of the t-clique are in the same G_h^* . Moreover, the edges in G^* mimic the edges in G and this is sufficient to conclude that no two nodes of the t-clique are copies of the same node in G, and the original nodes in G

⁶Note that this statement and many more in the paper are true up to automorphisms

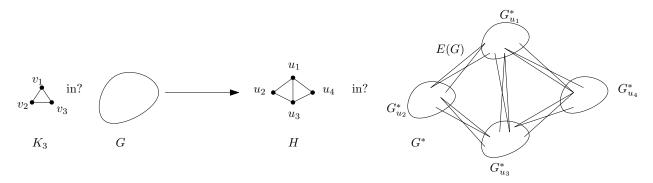


Figure 2: Reduction (1) construction: Reducing K_3 -detection in G to H-detection in G^* for H being the Diamond. The pattern H is 3 colorable and has a 3-clique.

that the nodes w_i are the copies of, form a t-clique. See Figure 2.

Now we show how we modify this reduction to prove our first result, Theorem 2.1.

Reduction (2). We prove that if the size of the largest clique minor of a pattern H is $\mu(H)$, then detecting a $\mu(H)$ -clique in a graph G can be reduced to detecting a colorful copy of H in a graph G^* that is constructed from G and H (Theorem 2.1). Reduction (1) above is good at catching cliques that are in the pattern H, but H might not have a clique of size $\mu(H)$ in it, so we need a way to encode the clique minor of H in G^* so that it translates to a clique in G. To do that, we use a second method to put edges between G_h^* and $G_{h'}^*$ when hh' is an edge. We consider a clique minor of H of size $\mu(H)$. Note that the clique minor partitions the vertices of H into connected subgraphs with at least one edge between every two partition. Now if hh'is an edge in H and h and h' are in the same partition in the clique minor, we want to treat them as one node. So we put a "matching" between G_h^* and $G_{h'}^*$: for any node $v \in V(G)$, we put an edge between the copy of v in G_h^* and the copy of v in $G_{h'}^*$. This way we show that whenever there is a colorful copy of H in G^* , if h and h' are in the same partition of the clique minor of H, the vertices that are selected from G_h^* and $G_{h'}^*$ must be copies of the same node in G. This means that each clique minor partition of H represents one node in G. For h and h' that are not in the same clique minor partition, we put edges between G_h^* and $G_{h'}^*$ the same as Reduction (1) (mimicking E). Using the rest of the properties of the construction, we show that the set of nodes that each clique minor partition represents are all distinct, and they form a $\mu(H)$ -clique in G.

Note that [15] uses the idea in Reduction 2 (a second method to define the edges of G^*) in a separate result. However the use of clique minors in [15] is indirect; it is coupled with the chromatic number and proper colorings of H, and in our results we directly use clique minors without using any other properties, thus avoiding the Hadwiger conjecture.

Another thing to note about Reduction (2) is that we are reducing a clique detection problem to a "partitioned" subgraph isomorphism (PSI) problem. The reduction immediately fails if one removes the partitioned constraint. The reason is that we no longer can assume that if the reduction graph G^* has a copy of H, then the nodes are in different vertex subsets G_h^* . If G^* has a copy of H and two nodes v, u of this copy are in one vertex subset G_h^* , then we don't know if v and u are adjacent in G or not. This can get in the way of finding a clique of the needed size in G. So if we want to get any result stronger than Reduction (1) for SI (and not PSI), we need to add new ideas. We introduce some of these new ideas below.

Reduction (3): paths and cycles. In Theorem 2.3 we show that if H is the complement of a cycle or a path, then we can reduce detecting a $(\mu(H) - 2)$ -clique in a graph G to detecting a copy of H in a graph G^*

constructed from G and H.

As mentioned above, removing the partitioned constraint from reduction (2) doesn't directly work. However, when the graph is a core, it does work, and that is because PSI and SI are equivalent for cores [29]. When H is a core, there is only one homomorphism from H to itself, which means that there is only one type of "embedding" of H in the reduction graph G^* , and it is the embedding with exactly one vertex in each vertex subset G_h^* of G^* . However, when H is not a core, there can be multiple embeddings of H in G^* , and these embeddings do not necessarily result in finding a copy of a t-clique in H, for $t \approx \mu(H)$.

In order to solve this issue of multiple embeddings, we "shrink" some of the vertex subsets (G_h^*s) of the reduction graph G^* . More formally, we replace some of these subsets in G^* by a single vertex. We do it in such a way that the only embedding of H in G^* is the one with exactly one vertex in each subset. This way, the rest of the argument of Reduction (2) goes through. There is a cost to shrinking these subsets: shrinking more subsets results in reducing the size of the clique that we reduce from. So the harder part of this idea is to carefully decide which partitions to shrink, so that we only lose a small constant in the size of the clique detection problem that we are reducing from.

Recall that in Reduction (2) we consider a $\mu(H)$ clique minor of H which partitions the vertex set of H into $\mu(H)$ connected subgraphs. Here we observe that for H that is the complement of a path or a cycle, we can select two particular partitions of the clique minor, and shrink vertex subsets G_h^* for vertices h that belong to one of these two partitions. This way we eliminate all the unwanted embeddings of the pattern H in G^* , and reduce $(\mu(H)-2)$ -clique detection in G to H detection in G^* . We note that the techniques in Reduction (3) are of independent interest and can be potentially used for other graph classes.

We now move on to our next reduction.

Reduction (4). Our next main result is Theorem 2.2, which states that if C is the core of the pattern H, then detecting C in a graph G = (V, H) can be reduced to detecting H in a graph G^* which is constructed from G and H.

First note that Reduction (1) doesn't directly work here. This is because if G has a copy of C, we have no immediate way of finding a copy of H in G^* . Recall that in Reduction (1) we used a coloring property of H to do this.

As a first attempt to such a reduction, one might use the following idea of Floderus et al. [19]. They showed that any pattern that has a t-clique that is disjoint from all the other t-cliques in the pattern is at least as hard as t-clique to detect. Here we explain their idea in the context of reducing core(H)-detection to H detection. Let C' be a copy of C in H. The idea is to build the reduction graph of Reduction (1) using C' as the pattern, and to add the rest of the pattern H to it. More formally, for any node h in C', let G_h^* be a copy of V, the set of vertices of G. Put edges between G_h^* and $G_{h'}^*$ same as before if hh' is an edge. Call this graph $G_{C'}^*$. To complete the construction of G^* , add a copy of the subgraph $H \setminus C'$ to $G_{C'}^*$, and connect a vertex h' in this copy to all the nodes in G_h^* for $h \in C'$ if hh' is an edge in H.

The reason we construct the Reduction (1) graph on C' is that if G has a copy of C, then we can find a copy of C in $G^*_{C'}$ using the arguments in Reduction (1). This copy of C and all the vertices in $G^* \setminus G^*_{C'} = H \setminus C'$ form a copy of H. For the other direction, suppose that there is a copy H^* of H in G^* . We hope that this copy contains a subgraph C'' that is completely inside $G^*_{C'}$, so that then this leads us to a copy of C in G using the properties of $G^*_{C'}$ and the fact that C is a core. However, such a construction cannot guarantee this, and in fact there might be no copies of C in H^* that are completely in $G^*_{C'}$.

So we need to find a subgraph H' of H, so that if we build the reduction graph $G_{H'}^*$ of Reduction (1) on it, it has the property that if G has a copy of C, then we can find a copy of H' in $G_{H'}^*$.

To do this, we simplify and use an idea of [15]. In particular, [15] introduces the notion of (K_t, F) minor colorability of a pattern B, which is a coloring of B with t colors such that the coloring imposes a




Figure 3: Example of the Reduction of Theorem 2.1 for pattern C_4 with a K_3 -minor. From left to right: The pattern H with with a K_3 minor function shown as a coloring, the host graph G in which we want to find a triangle and the reduction graph G^* built from G and H. The bold edges represent the edges in G, whereas the double edge represents a perfect matching. Each of the four colored parts in G^* are a copy of G.

t-clique minor on any copy of F in B. Then using this definition, one finds a minimal covering of the graph H with (K_t, F) -minor colorable subsets and one argues that one can take one of these subsets as H'.

We notice that the properties that [15] uses relating the chromatic number and the clique minor of a pattern in this construction can be summarized into the core of patterns. We introduce the notion of F-coloring, which simply says that if B is F-colorable then there is a coloring such that any copy of F in B is a colorful copy under this coloring. Then we cover H with minimal number of C-colorable subsets. We show that we can take one of these subsets as H'.

Finally, we generalize Theorem 2.2 to the problem of detecting a pattern from a set S of patterns in Theorem 5.1. We show that if S is a set of patterns, there is a pattern $H \in S$, such that detecting the core of H, C, in a graph G can be reduced to detecting any pattern from S in a graph G^* constructed from G and S. In fact, G^* is the reduction graph of Reduction (4) on H as the pattern. The main part of Theorem 5.1 is to find the appropriate H in S. In order to find this pattern H, we look at homomorphisms between the patterns in S. In particular, we form a graph with nodes representing patterns in S and directed edges representing homomorphisms. We look at a strongly connected component of this graph that has no edges from other components to it, so there is no homomorphism from any pattern outside this component to any pattern inside the component. We show that all the patterns in this component have the same core and we show that the pattern H can be any of the patterns in this component.

4 Lower bounds

4.1 Hardness of PSI

In this section we prove Theorem 2.1, which reduces a $\eta(H)$ -clique detection to H-detection, where $\eta(H)$ is the size of the largest clique minor of H.

We can represent a clique minor of H of size t by a function in the following definition.

Definition 4.1. Let $f: V(H) \to \{1, ..., t\}$ be a function such that for any $i \in \{1, ..., t\}$, the preimage of i, $f^{-1}(i)$, induces a connected subgraph of H and for every $i, j \in \{1, ..., t\}$, there is at least one edge between the preimages $f^{-1}(i)$ and $f^{-1}(j)$. We call such f a K_t -minor function of H.

One can think of f as a coloring on vertices of H that imposes a clique minor on H. Figure 3 shows an example of a K_3 -minor function of C_4 as a coloring. In the reduction we are going to consider a K_t -minor function f for $t = \eta(H)$. We can find a maximum clique minor of H and its associated function in $O_k(1)^7$

⁷Any function that has dependency on k and no other parameter is of $O_k(1)$

as follows: Check for all functions $f:V(H)\to\{1,\ldots,k\}$ if f is a K_t -minor function for some t, and then take the f that creates a maximum K_t -minor.

Theorem 2.1. (Hardness of PSI) Let H be a k-node pattern with maximum clique minor of size $\eta(H)$, and let G be an n-node graph. Then one can construct a k-partite O(n)-node graph G^* in $O(n^2)$ time such that G^* has a colorful copy of H if and only if G has a clique of size $\eta(H)$.

Proof. Let the size of the maximum clique minor of H be t, i.e. $\eta(H) = t$ and let $f: V(H) \to \{1, \ldots, t\}$ be a K_t -minor function of the pattern H. Using the function f and the graph G, we construct the reduction graph G^* as follows:

The vertex set of G^* consists of partitions G_v^* for each $v \in V(H)$, where the partition G_v^* is a copy of the vertices of G as an independent set for all $v \in V(H)$

The edge set of G^* is defined as follows. For every two vertices v and u in the pattern H where vu is an edge and $f(v) \neq f(u)$, we add the following edges between G^*_v and G^*_u : for each w_1 and w_2 in G, add an edge between the copy of w_1 in G_v and the copy of w_2 in G_u if and only if w_1w_2 is an edge in G. In other words, we put the same edges as E(G) between G^*_u and G^*_v in this case. For any two vertices v and v in v where v is an edge and v and v in the following edges between v and v and v in the two copies of v in v in the case. This completes the definition of v in the following edges between v and v in this case. This completes the definition of v is v and v in this case. This completes the definition of v is v and v in the case.

Note that G^* is an H-partite graph with nk vertices and since for each pair of vertices $u, v \in H$ we have at most m edges between G_u^* and G_v^* , the construction time is at most $O(k^2m + kn) \leq O(k^2n^2)$.

Now to prove the correctness of the reduction, first we show that the reduction graph G^* has a subgraph isomorphic to H if G has a t-clique. Suppose that the vertices $w_1,\ldots,w_t\in V(G)$ form a t-clique. Let H^* be the subgraph induced on the following vertices in the reduction graph G^* : For each $v\in H$, pick $w_{f(v)}$ from G^*_v . We need to show that if $vu\in E(H)$, then there is an edge between the vertices picked from G^*_v and G^*_u . This is because if f(v)=f(u)=i, then we picked w_i from both G^*_v and G^*_u and hence they are connected. If $f(v)\neq f(u)$, then since $w_{f(v)}$ is connected to $w_{f(u)}$ in G, we have that their copies in G^*_v and G^*_u are connected as well. So H^* is isomorphic to H.

Now we show that G has a t-clique if G^* has a colorful subgraph H^* isomorphic to H. Let $v^* \in V(H^*)$ be the vertex picked from G_v^* , for $v \in V(H)$. Since there is no edge between G_v^* and G_u^* if uv is not an edge in H, we have that there must be an edge between v^* and u^* if uv is an edge in H, so that the number of edges of H^* matches that of H. So if $uv \in E(H)$ and f(u) = f(v), then u^* and v^* must be the copies of the same vertex in G. Since the vertices with the same value of f are connected, the vertices of H^* are the copies of exactly t vertices in G, say $\{w_1, \ldots, w_t\}$, where v^* is the copy of w_i if f(v) = i. For each $i, j \in \{1, \ldots, t\}$, there are two vertices $u, v \in V(H)$ such that f(u) = i, f(v) = j and $uv \in E(H)$. So $u^*v^* \in E(H^*)$, and hence $w_iw_j \in E(G)$. So the set $\{w_1, \ldots, w_t\}$ induces a t-clique in G.

Recall that Corollary 2.2 gives a hardness result for cores in SI. This Corollary comes from the result of Marx [29] that PSI and SI are equivalent when the pattern is a core.

Corollary 2.2. (Hardness of cores in SI) Let G be an n-node m-edge graph and let H be a k-node pattern with maximum clique minor of size $\eta(H)$. If H is a core, then one can construct a graph G^* with at most O(n) vertices in O(m+n) time such that G^* has a subgraph isomorphic to H if and only if G has a $\eta(H)$ -clique as a subgraph.

We are going to use this result later for proving tighter hardness results for paths and cycles. Now we prove Corollary 2.3 that gives a lower bound for induced SI when the pattern is a core.



Figure 4: C-coloring with C being the 5-cycle. The pattern has 2 copies of C_5 , and each copy is colorful with respect to the coloring given.

Corollary 2.3. (Hardness for induced-SI for cores) Let H be a k-node pattern which is a core. Suppose that w(H) is the size of the maximum clique in H. Then detecting H in an n-node graph as an induced subgraph is at least as hard as detecting a clique of size $\max\{\lceil \sqrt{(k+2w(H))/2}\rceil, \lceil \sqrt{k/1.95} \rceil\}$.

Proof. To get a lower bound for induced SI when the pattern is a core, we use two results on the connection of the maximum independent set $\alpha(H)$, maximum clique size w(H) and the size of the maximum clique minor $\eta(H)$ of a pattern H. Kawarabayashi [24] showed $(2\alpha(H)-1)\cdot \eta(H)\geq |V(H)|+w(H)$, and Balogh and Kostochka [4] showed that $\alpha(H)\eta(H)\geq |V(H)|/(2-c)$ for a constant c>1/19.5. Since $\eta(H)\geq w(H)$, these results imply that $\alpha(H)\eta(H)\geq \max\{(|V(H)|+2w(H))/2,|V(H)|/1.95\}$. Since $\eta(\bar{H})\geq w(\bar{H})=\alpha(H)$ and all these numbers are integers, we get Corollary 2.3 from Corollary 2.2.

4.2 Patterns are at least as hard to detect as their core

In this section we prove that detecting a pattern is at least as hard as detecting its core. In order to do so we define the notions of C-coloring and C-covering for a core subgraph C.

Definition 4.2. Let F be a graph and let C be a c-node subgraph of it. We say that the function $f: V(F) \to \{1, \ldots, c\}$ is a C-coloring of F if for any copy of C in F, the vertices of this copy receive distinct colors. We say that a graph is C-colorable if it has a C-coloring.

Note that a C-coloring of F partitions F into c sections such that any copy of C in F is a colorful copy, i.e. it has exactly one vertex in each partitions⁸. See figure 4 for an example of C-coloring for C being the 5-cycle.

Definition 4.3. Let H be a graph and C be a core of H. We say that a collection $C = \{C_1, \ldots, C_r\}$, $C_i \subseteq V(H)$ is a C-covering for H of size r, if the following hold.

- 1. For every copy of C in H there is an i such that this copy is in the subgraph induced by C_i .
- 2. For every i the subgraph induced by C_i is C-colorable.

For any pattern H with core C there is a simple C-covering: Let the sets in the collection be the copies of C in H. However, we are interested in the "smallest" C-covering.

Definition 4.4. Define the C-covering number of H as the minimim integer r such that there is a C-covering for H of size r.

One can find a C-covering of minimum size in $O_k(1)$ by first enumerating all copies of C in H, and then considering all ways of partitioning the copies into sets, and testing if these sets are C-colorable. Before proving Theorem 2.2, we prove the following simple but useful lemma.

⁸Note that this is different than F being a C-partite graph. The colors are not assigned to any node of C, and there is no constraints on the edges of F with respect to the partitions.

Lemma 4.1. Let G be an H-partite graph where for each $v \in V(H)$, $G_v \subseteq G$ is the partition of G associated to v. Let F be a subgraph in G. Then there is a homomorphism g from F to H, defined as $g:V(F) \to V(H)$ where g(u) = v if $u \in G_v$, for every $u \in V(F)$.

Proof. To prove that g is a homomorphism, we need to show that if $v_1v_2 \in E(F)$, then $g(v_1)g(v_2) \in E(H)$. This is true because the edge v_1v_2 is between $G_{g(v_1)}$ and $G_{g(v_2)}$, and from the definition of H-partite graphs this means that $g(v_1)g(v_2) \in E(H)$.

Theorem 2.2. Let G be an n-node m-edge graph and let H be a k-node pattern. Let C be the core of H. Then one can construct a graph G^* with at most O(n) vertices in $O(n^2)$ time such that G^* has a subgraph isomorphic to H if and only if G has a subgraph isomorphic to C, with high probability G.

Proof. We use the color-coding trick of Alon, Yuster and Zwick [3]: Consider a random assignment of colors $\{1, \ldots, c\}$ to the vertices of the host graph G, and a random assignment of numbers $\{1, \ldots, c\}$ to the vertices of C. We can assume that if G has a copy of C, then the copy of vertex i has color i with high probability (we can repeat this reduction to produce $O(\log n)$ instances to achieve this high probability). Let the partition $G^{(i)}$ be the vertices with color i.

Let the C-covering number of the pattern H be r, and let $C = \{C_1, \ldots, C_r\}$ be a C-covering of size r. Note that as explained before, we can find r and C in $O_k(1)$ time. Let $f: C_1 \to \{1, \ldots, c\}$ be a C-coloring of C_1 , where c = |V(C)| is the size of the core C.

We define the vertex set of the H-partite reduction graph G^* by adding a subset of vertices of G for each vertex $v \in C_1$ as the partition associated to v, and then simply adding a copy of the rest of the vertices of H to G^* . More formally, for each vertex $v \in C_1$, let G^*_v be a copy of the partition $G^{(f(v))}$ as an independent set. For each vertex $v \in V(H) \setminus C_1$, let $G^*_v = \{v^*\}$ include a copy of v in G^* . This finishes the vertex set definition.

We define the edge set of the reduction graph G^* as follows: For each pair of vertices $u,v\in C_1$, if uv is an edge and f(u)=f(v), then we add a perfect matching between G^*_u and G^*_v as follows: For each $w\in G$, we add an edge between the copy of w in G^*_u and the copy of w in G^*_v . If uv is an edge and $f(u)\neq f(v)$, then we add all the edges in $G^{(f(u))}\times G^{(f(v))}$ to $G^*_u\times G^*_v$ as follows: for each w_1 and w_2 in G, we add an edge between the copy of w_1 in G^*_u and the copy of w_2 in G^*_v if and only if w_1w_2 is an edge in G. For each pair of vertices $u\in C_1$ and $v\in V(H)\setminus C_1$ such that uv is an edge in H, we add an edge between $v^*\in G^*_v$ and all vertices in G^*_u . For each pair of vertices $u,v\in V(H)\setminus C_1$ such that uv is an edge in H, we add an edge between $u^*\in G^*_v$ and $v^*\in G^*_v$.

Note that the number of edges of G^* is at most $O(mk^2)$ where m is the number of edges of G. This is because for every $v \in V(H) \setminus C_1$, the number of edges attached to $G_v^* = \{v^*\}$ is at most O(nk), and for every $u, v \in C_1$, there are at most m edges between G_u^* and G_v^* . So the construction time is $O(mk^2) \leq O(n^2)$.

Before proceeding to the proof of the reduction, note that if $uv \notin E(H)$, there is no edge between G_u^* and G_v^* . So we have the following observation.

Observation 4.1. G^* is H-partite.

Now we prove that the reduction works. First suppose that G has a colorful copy $C' = \{v_1, \ldots, v_c\}$ of C, such that v_i has color i. We are going to pick k vertices in the reduction graph G^* , one from each partition, and prove that they induce a copy of H in G^* . For every $v \in C_1$, we pick the copy of v_i in the

⁹with probability 1/poly n

partition G_v^* , where i is the color of v in the C-coloring f of C_1 , i.e. f(v) = i. For $u \in V(H) \setminus C_1$ we pick the only vertex in $G_u^* = \{u^*\}$.

To prove that these k nodes induce a copy of H, consider $u, w \in V(H)$ where $uw \in E(H)$. We show that the vertices picked from G_u^* and G_w^* are connected. If one of u and w is not in C_1 , then all nodes in G_u^* is connected to all nodes in G_w^* . If both u, w are in C_1 , we have two cases. If u and w have the same color, i.e. f(u) = f(w) = i, then we have picked copies of v_i from both G_u^* and G_w^* , and from the definition of G^* they are connected. If u and w don't have the same color, i.e. $f(u) \neq f(w)$, then we have picked $v_{f(u)}$ from G_u^* and $v_{f(w)}$ from G_w^* . Since $v_{f(u)}$ and $v_{f(w)}$ are connected in G, from the definition of G^* they are also connected in G^* . So the vertices we picked from G^* induce a copy of H.

Now we are going to show that if there is a copy of H in the reduction graph G^* , then there is a copy of C in G. For $i \in \{1, \ldots, r\}$, let $S_i = \bigcup_{v \in C_i} G_v^*$. Suppose that G^* has a subgraph H^* isomorphic to H. To show that G has a copy of C, we prove that H^* has a copy of C with all its vertices in S_1 , and then we show that this subgraph leads us to a copy of C in G.

First, consider a copy C^* of C in H^* . By observation 4.1, we can consider the homomorphism that Lemma 4.1 defines from C^* to H: $u \in V(C^*) \to v \in H$ if $u \in G_v^*$. Since C is the core, the image of C^* defined by the homomorphism must be isomorphic to C. So this copy of C in H^* is mapped to a copy of C in H.

Thus each copy of C in H^* maps to a copy of C in H. Note that this copy is in C_i if and only if the copy of C in H^* is in S_i . Now suppose that there is no copy of C in $H^* \cap S_1$. Then each copy of C in H^* is mapped to a copy of C in H that is not in C_1 , and thus it is in C_i for $i \geq 2$. So the copies of C in H^* are covered by $S = \{S_2 \cap H^*, \ldots, S_r \cap H^*\}$. If we show that for all $i, S_i \cap H^*$ is C-colorable, then S is a C-covering of size r-1 for H^* and since H^* is a copy of H, this is a contradiction to the C-covering number of H.

To see that $S_i \cap H^*$ is C-colorable, let $f_i: C_i \to \{1,\ldots,c\}$ be the C-coloring of C_i , for $i=2,\ldots,r$. We color each node $v \in H^*$ as follows. There is $u \in V(H)$ such that $v \in G_u^*$. We color v the same as u, with $f_i(u)$. Now we show that each copy C^* of C in $S_i \cap H^*$ has distinct colors. Consider the mapping of Lemma 4.1 from C^* in the H-partite graph G^* to H: for $v \in V(C^*)$, we let g(v) = u if $v \in G_u^*$. Note that if $C^* \subseteq H^* \cap S_i$, the map g preserves colors. Since the image of C^* in H is also a copy of C (because C is a core) and f_i is a C-coloring, this image is a colorful copy of C. So C^* is also a colorful copy of C with the coloring defined. Thus $S_i \cap H^*$ is C-colorable.

So from above we conclude that H^* must have a copy $C^* = \{w_1, \ldots, w_c\}$ of C in S_1 , such that $w_i \in G_{v_i}$ for some $v_i \in C_1$ and $v_i \neq v_j$ for each $i \neq j$. Moreover, the mapping $w_i \to v_i$ is a homomorphism from C^* to H and since C is a core, we have that v_1, \ldots, v_c form a a copy of C in H. Now since f is a C-coloring, $f(v_i) \neq f(v_j)$ for all $i \neq j$. This means that w_1, \ldots, w_c are copies of distinct vertices in G, and hence they are attached in G^* if and only if they are attached in G. So they form a subgraph isomorphic to C in G.

Now we prove Corollary 4.1 and 2.4 on induced subgraph isomorphism of *all* patterns.

Corollary 2.4. (Hardness of Induced-SI) For any k-node pattern H, detecting an induced copy of H in an n-node graph is at least as hard as detecting a clique of size $\lceil k^{1/4}/1.39 \rceil$ in an O(n) graph.

Proof. Denote the chromatic number of a graph F by X(F). We know that for a k node pattern H, the chromatic number of either H or its complement is at least \sqrt{k} . WLOG assume that $X(H) \geq \sqrt{k}$. Lemma 4.2 proven below states that a color critical graph is a core. Since the core of H is its largest subgraph that is a core, we have that $X(core(H)) \geq \sqrt{k}$, and so in particular the size of the core of H is at least $\lceil \sqrt{k} \rceil$.

By Theorem 2.2 we have that detecting H is at least as hard as detecting core(H), and by Corollary 2.3 we have that detecting core(H) is at least $\lceil \sqrt{\sqrt{k}/1.95} \rceil$ hard. This gives the result that we want.

Corollary 4.1. (Hardness of Induced-SI) For any k-node pattern H, the problem of detecting an induced copy of H in an n-node graph requires $n^{\Omega(\sqrt{k}/\log k)}$ time under ETH.

Proof. Similar to the proof of Corollary 2.4, we have that $X(core(H)) \ge \sqrt{k}$. Now since by inductive coloring we have that for any graph F, $tw(F)+1 \ge X(F)$, then $tw(core(H)) \ge \sqrt{k}-1$. Recall that Marx [29] shows that under ETH, for any pattern F partitioned subgraph isomorphism of F in an n node graph requires $n^{\Omega(\frac{tw(F)}{\log tw(F)})}$ time. Since for cores PSI and SI are equivalent [29], we get Corollary 4.1.

Lemma 4.2. Color critical graphs are cores.

Proof. Let H be a color critical graph, and suppose that there is a homomorphism f from H to H' where H' is a proper subgraph of H. Let $c_{H'}: V(H') \to \{1, 2, \dots, X(H')\}$ be a coloring of H'. Then let c_H be the following coloring for H. For each $v \in H'$, color all vertices of $f^{-1}(v)$ the same as v. This means that for any $u \in V(H)$, $c_H(u) = c_{H'}(f(u))$. Since $f^{-1}(v)$ is an independent set and $c_{H'}$ is a proper coloring, $c_H^{-1}(i) = f^{-1}(c_{H'}^{-1}(i))$ is an independent set for any color i. So c_H is a proper coloring for H of size X(H'). This is a contradiction because H is color critical and we have that X(H') < X(H).

4.3 Hardness of Paths and Cycles

In this section, we prove a stronger lower bound for induced path and cycle detection than what the previous results give us. More precisely, we show that a cycle or path of length k is at least as hard to detect as an induced subgraph as a clique of size roughly 3k/4. This number comes from the largest clique minor of the complement of paths and cycles. This is formalized in the next lemma which is proved in the appendix.

Lemma 4.3. Let H be a k-node pattern that is the complement of a path or a cycle. Then $\eta(H) = \lfloor \frac{k+\omega(H)}{2} \rfloor$, where $\omega(H)$ is the size of the maximum clique of H. Table 2 shows the value of $\eta(H)$.

number of vertices (k)	$\eta(ar{C}_k)$	$\eta(ar{P_k})$
4t	3t*	3t*
4t+1	3t	3t + 1*
4t+2	3t+1	3t + 1
4t+3	3t+2	3t + 2

Table 2: Maximum clique minors. (*) For t=1, the maximum minor of $\bar{P}_4, \bar{C}_4, \bar{P}_5$ is 2,2,3 respectively.

Recall the main result of this section below.

Theorem 2.3. (Hardness of P_k and C_k) Let H be the complement of a P_k or the complement of a C_k . Suppose that t is the size of the maximum clique minor of H. Then the problem of detecting H in an O(n)-node graph is at least as hard as finding a (t-2)-clique in an n-node graph. If k is odd, then detecting an induced C_k is at least as hard as finding a t-clique.

First, we show the easier case of odd cycles which was also mentioned in Section 4.1. With a simple argument we can show that the complement of an odd cycle is a color critical graph. We prove this in the appendix for completeness.

Lemma 4.4. The complement of an odd cycle is color-critical.

Lemma 4.4 together with Lemma 4.2 show that the complement of an odd cycle is a core. Using Corollary 2.2 and Lemma 4.3, we have that detecting a \bar{C}_k for odd k is at least as hard as detecting a $\lfloor 3k/4 \rfloor$ -clique. Since induced detection of a pattern H is at least as hard as not-necessarily-induced detection of H, we have the following Theorem.

Theorem 4.1. For odd k, Induced- C_k detection is at least as hard as |3k/4|-clique detection.

Now we move to the harder case of even cycles and odd and even paths. We would like to get a hardness as strong as the one offered by Theorem 2.1 and Corollary 2.2, but we can't use these results directly since paths and even cycles (and their complements) are not cores.

As mentioned in the section 3, we are going to use the construction of Theorem 2.1 and shrink a few partitions of the reduction graph G^* , i.e. replacing each of these partitions with a single vertex. The next lemma helps us characterize automorphisms of paths and cycles, and so it helps us find the appropriate partitions of G^* to shrink.

Lemma 4.5. Any automorphism of paths or cycles that has a **proper** subset of vertices as its image has the following properties:

- Let $C_k = v_1 \dots v_k v_1$ be a k-cycle for even k. Then any homomorphism from \bar{C}_k to a proper subgraph of \bar{C}_k has two vertices both being mapped to either v_1 or v_k .
- Let $P_k = v_1 \dots v_k$ be a k-path. Then any homomorphism from \bar{P}_k to a proper subgraph of \bar{P}_k has two vertices both being mapped to either v_1 or v_k .

Proof. We first consider even cycles, then odd paths and finally even paths.

First consider the pattern \bar{C}_k with an automorphism to a proper subset of it, for even k. This graph has exactly two k/2-cliques: K_1 with $V(K_1) = \{v_1, v_3, \ldots, v_{k-1}\}$ and K_2 with $V(K_2) = \{v_2, v_4, \ldots, v_k\}$ (this can be seen by the fact that no two vertices of a k/2 clique in \bar{C}_k can be adjacent in C_k). Since the only automorphism of a clique is a clique, K_1 and K_2 should be mapped to K_1 or K_2 . Since this automorphism of \bar{C}_k is to a proper subset of it, both K_1 and K_2 are mapped to K_1 , or both of them are mapped to K_2 . In either case, two vertices of \bar{C}_k are mapped to either v_1 or v_k .

Now consider \bar{P}_k where $P_k = v_1 \dots v_k$ is an odd path. The graph \bar{P}_k has exactly one $\frac{k+1}{2}$ -clique K_1 with $V(K_1) = \{v_1, v_3, \dots, v_k\}$. So this clique should be mapped to itself. Now the rest of the graph is a $\frac{k-1}{2}$ -clique K_2 with $V(K_2) = \{v_2, v_4, \dots, v_{k-1}\}$. There are a lot of $(\frac{k-1}{2})$ -cliques in \bar{P}_k that K_2 can be mapped to, however all of them contain either v_1 or v_k . This is because $\bar{P}_k \setminus \{v_1, v_k\}$ has exactly one $(\frac{k-1}{2})$ -clique which is K_2 , and since this automorphism is to a proper subset of \bar{P}_k , K_2 cannot be mapped to itself. So it is mapped to a $(\frac{k-1}{2})$ -clique that has either v_1 or v_k in its vertex set, and since K_1 is mapped to itself, there are two vertices that are both mapped to either v_1 or v_k .

Finally, consider the complement of an even path \bar{P}_k as our graph. Consider these two k/2-cliques K_1 and K_2 in this graph: $V(K_1) = \{v_1, v_3, \ldots, v_{k-1}\}$ and $V(K_2) = \{v_2, v_4, \ldots, v_k\}$. First we observe that the only k/2-clique in $\bar{P}_k \setminus v_k$ is K_1 and the only k/2-clique in $\bar{P}_k \setminus v_1$ is K_2 . Moreover, $\bar{P}_k \setminus \{v_1, v_k\}$ does not have any k/2-cliques. So the mappings of K_1 and K_2 must use at least one of v_1 or v_k . If none of v_1

and v_k have two vertices mapped to them, then it must be that the mapping of K_1 is using exactly one vertex in $\{v_1, v_k\}$, and so by the observation above it must be mapped to either K_1 or K_2 . The same goes for K_2 . But since this automorphism of \bar{P}_k is to a proper subset of the vertices, it must be that both K_1 and K_2 are mapped to either K_1 or K_2 . So there are two vertices both mapped to either v_1 or v_k

Now we are ready to prove Theorem 2.3.

Proof of Theorem 2.3. The idea is to make a small change to the construction of Theorem 2.1 so that if the pattern H has a copy in G^* , then all vertex sets G_v^* s have exactly one vertex of the copy. We explain the construction of Theorem 2.1 here again for completeness. If \bar{H} is a path, let its vertices be in the order $v_1 \dots v_k$, and if it is an even cycle, let the cycle be $v_1 \dots v_k v_1$. We prove a slightly more general statement. We show that for $t' \in \{t-1,t\}$ which depends on the K_t minor function of H, detecting H is at least as hard as detecting a t'-clique. Since detecting (t-2)-clique reduces to detecting (t-1)-clique, this proves the theorem. Given a graph G in which we want to find a t'-clique we construct the H-partite reduction graph G^* of Theorem 2.1 as follows.

Let $f:V(H)\to\{1,\ldots,t\}$ be a K_t -minor function of the pattern H (see Definition 4.1). Let t'=t-1 if $f(v_1)=f(v_k)$, and let t'=t-2 otherwise. We can also assume that $f(v_1)=t'+1$ and $f(v_k)=t$. Construct the reduction graph G^* as follows: For each vertex $v_i\in H$, let $G^*_{v_i}$ be a copy of the vertices of G as an independent set. For every two vertices v_i and v_j in the pattern H where v_iv_j is an edge and $f(v_i)\neq f(v_j)$, add the following edges between partitions $G^*_{v_i}$ and $G^*_{v_j}$: For each w_1 and w_2 in G, add an edge between the copy of w_1 in partition $G^*_{v_i}$ and the copy of w_2 in partition $G^*_{v_j}$ if and only if w_1w_2 is an edge in G. For any two vertices v_i and v_j in H where v_iv_j is an edge and $f(v_i)=f(v_j)$, add the following edges between partitions $G^*_{v_i}$ and $G^*_{v_j}$: For every $w\in G$, connect the copy of w in partition $G^*_{v_i}$ and the copy of w in partition $G^*_{v_j}$. This completes the definition of the reduction graph G^* , before we make modifications to it. Note that G^* is an H-partite graph with nk vertices and since for each pair of vertices $v_i, v_j \in H$ we have at most $m \in O(n^2)$ edges between $G^*_{v_i}$ and $G^*_{v_j}$, the construction time is at most $O(k^2n^2)$.

Now we do the following modifications to this construction: For each v_i with $f(v_i) \in \{f(v_1), f(v_k)\}$, remove the vertices in the sets $G^*_{v_i}$ and add a single vertex instead so that $G^*_{v_i} = \{v_i^*\}$. Note that we also have $G^*_{v_1} = \{v_1^*\}$ and $G^*_{v_k} = \{v_k^*\}$. For $j = 1, \ldots, k$, add edges between v_i^* and all vertices of $G^*_{v_j}$ if there is an edge between v_i and v_j in H. Note that after these modifications, G^* stays H-partite.

Now we show that the reduction works. First suppose that G has a t'-clique $\{u_1, \ldots, u_{t'}\}$. We pick k vertices in the reduction graph G^* and show that they form a copy of H. For each $v_i \in V(H)$ where $f(v_i) \notin \{f(v_1), f(v_k)\}$, pick the copy of $u_{f(v_i)}$ from partition $G^*_{v_i}$. Recall that $f(v_i) \leq t'$ in this case. For each $v_i \in V(H)$ where $f(v_i) \in \{f(v_1), f(v_k)\}$, pick v_i^* from $G^*_{v_i}$, so that we have k vertices in total.

We need to show that if v_iv_j is an edge in H, then there is an edge between the vertices picked from $G^*_{v_i}$ and $G^*_{v_j}$. If $f(v_i) \in \{f(v_1), f(v_k)\}$, then since v_i^* is attached to all nodes in $G^*_{v_j}$ if $v_iv_j \in E(H)$, then v_i^* is attached to the vertex chosen from $G^*_{v_j}$. So assume that $f(v_i), f(v_j) \notin \{f(v_1), f(v_k)\}$. If $f(v_i) = f(v_j) = \ell$, then we picked copies of u_ℓ from both partitions $G^*_{v_i}$ and $G^*_{v_j}$ and so they are connected. If $f(v_i) \neq f(v_j)$, then since $u_{f(v_i)}$ is connected to $u_{f(v_j)}$ in G, we have that their copies in $G^*_{v_i}$ and $G^*_{v_j}$ are connected in G^* as well. So H^* is isomorphic to H.

Now if G^* has a copy H^* of H, let g be the following function from H^* to H: for every $w \in V(H^*)$, let g(w) = v if $w \in G_v^*$. In fact g is a homomorphism by the way G^* is constructed. The image of g is the set $A = \{v \in V(H) | \exists w \in V(H^*) \text{ such that } w \in G_v^*\}$. If A is a proper subset of H, then by Lemma 4.5, g maps two vertices of H^* to either v_1 or v_k . This means that H^* has two vertices in either $G_{v_1}^*$ or $G_{v_k}^*$. However, these sets only have one vertex. So the subgraph that A induces in H is a copy of H and H^* has exactly one vertex w_i in each $G_{v_i}^*$. We show that the vertices w_i help us find a t'-clique in G.

First note that for each i,j with $v_iv_j \in E(H)$, we have $w_iw_j \in E(G^*)$. This is because there is no edge between $G^*_{v_i}$ and $G^*_{v_j}$ if v_iv_j is not an edge in H, and so there *must* be an edge between w_i and w_j if v_iv_j is an edge in H, so that the number of edges of H^* matches that of H. Consider the K_t -minor function $f:V(H) \to \{1,\ldots,t\}$ of H with which the reduction graph G^* is constructed. Recall that $f(v_1), f(v_k) \in \{t'+1,t\}$. Now for each i,j where $f(v_i) = f(v_j) \notin \{f(v_1), f(v_k)\}$ and $v_iv_j \in E(H)$, we have that $w_iw_j \in E(H^*)$ and so w_i and w_j are copies of the same vertex in G. So for each $\ell = 1,\ldots,t'$, since the preimage $f(\ell)^{-1}$ is connected, we have that there is some $z_\ell \in G$ such that for all $v_i \in f(\ell)^{-1}$, w_i is a copy of z_ℓ . For each $\ell,\ell' \in \{1,\ldots,t'\}$, there are $v_i \in f(\ell)^{-1}$ and $v_j \in f(\ell')^{-1}$ such that $v_iv_j \in E(H)$. So $w_iw_j \in E(G^*)$, and thus $z_\ell z_{\ell'} \in E(G)$. So $z_1,\ldots,z_{t'}$ form a t'-clique.

Using Lemma 4.3 and Theorem 2.3 we have the following Corollary.

Corollary 4.2. Detecting C_k or P_k as an induced subgraph is at least as hard as detecting a $(\lfloor 3k/4 \rfloor - 2)$ -clique.

5 Paired Pattern Detection

In this section we look at hardness results as well as algorithms for Paired Pattern Detection (and more generally Subset Pattern Detection). Recall that for a set of patterns S, by (induced) S-detection we mean finding a (induced) copy of one of the patterns in S, or indicating that there is no copy of any of the patterns in S.

5.1 Hardness for Subset Pattern Detection

Suppose that we want to prove hardness for detecting $S = \{H_1, \ldots, H_s\}$ in a host graph G. Let C_i be the core of H_i for all $i = 1, \ldots, s$. We first prove a series of lemmas about the relations between the cores C_i , and then use these lemmas to prove Theorem 5.1 below whose corollary was stated in the introduction.

Theorem 5.1. Let G be an n-node host graph and let S be a set of patterns. There is a pattern $H \in S$, with core C such that one can construct an O(n)-node graph G^* in $O(n^2|V(H)|^2)$ time where G has a copy of C as a subgraph if and only if G^* has a copy of a pattern in S as a subgraph.

Let G_i^* be the reduction graph of Theorem 2.2 for pattern H_i : detecting C_i in a host graph G reduces to detecting H_i in G_i^* . We are going to state a few lemmas that help us prove Theorem 5.1.

Lemma 5.1. Let H_1 and H_2 be two patterns. If there is no homomorphism from H_1 to H_2 , then there is no copy of H_1 in G_2^* .

Proof. Since by Observation 4.1 G_2^* is a H_2 -partite graph, if there is a copy of H_1 in G_2^* , then by Lemma 4.1 H_1 has a homomorphism to H_2 , which is a contradiction.

Corollary 5.1. Let $S = \{H_1, \ldots, H_s\}$ be a set of patterns such that C_j is the core of H_j for all $j = 1, \ldots, s$. Then if there is H_i such that for all $j \neq i$ there is no homomorphism from H_j to H_i , there is no copy of H_j in G_i^* for all $j \neq i$.

Lemma 5.2. Let H_1 , H_2 be two patterns with isomorphic cores C such that there is a homomorphism from H_1 to H_2 . Then the C-covering number of H_1 is at most as big as the C-covering number of H_2 .

Proof. Let $g:V(H_1)\to V(H_2)$ be a homomorphism from H_1 to H_2 . First note that from the definition of core, g takes any copy of C in H_1 to a copy of C in H_2 . Let $C=\{C_1,\ldots,C_r\}$ be a C-covering of H_2 .

Then $\{g^{-1}(C_1), \ldots, g^{-1}(C_r)\}$ is a C-covering of H_1 : First, suppose C' is a copy of C in H_1 , and suppose that g takes C' to g(C') which is a copy of C in H_2 (copies of C in H_1 must be take to copies of C in H_2 since C is a core). So there is $1 \le i \le r$ such that $g(C') \subseteq C_i$. Hence $C' \subseteq g^{-1}(C_i)$.

Now we show that $g^{-1}(C_i)$ is C-colorable for all i. Note that $g^{-1}(v)$ is an independent set for any $v \in V(H_2)$. So if $f_i : V(H_2) \to \{1, \ldots, |C|\}$ is a C-coloring for C_i , then color $u \in g^{-1}(C_i)$ with f(g(u)). Now if C' is a copy of C in H_1 , all vertices of C' have different colors. This is because all vertices of g(C') have different colors by the definition of f.

So we found a C-covering of H_1 with r sets, where r is the C-covering number of H_2 . Since the C-covering number is the size of the smallest C-covering, we proved the lemma.

Lemma 5.3. Let $S = \{H_1, \ldots, H_s\}$ be a set of patterns such that C_j is the core of H_j for all $j = 1, \ldots, s$. Suppose that there is a homomorphism from H_j to H_{j+1} for all $j = 1, \ldots, s$, where j is taken mod s. Then all C_i s are isomorphic. Moreover, if all C_i s are isomorphic to C, the C-covering number of all of the patterns is the same.

Proof. Note that since H_j has a homomorphism to H_{j+1} , C_j is a subgraph of H_j and H_{j+1} has a homomorphism to C_{j+1} , we have that C_j has a homomorphism to C_{j+1} . WLOG suppose that C_1 has the highest number of edges among C_j s for $j=1,\ldots,s$. Let $g_j:V(C_j)\to V(C_{j+1})$ be a homomorphism from C_j to C_{j+1} , for all $j=1,\ldots,s$. So $g=g_1\circ\ldots\circ g_s$ is a homomorphism from C_1 to C_1 . Since C_1 is a core, the image $g(C_1)$ must be isomorphic to C_1 . This in particular means that the size of the image $g_1(C_1)$ is the same as C_1 and C_1 in an injection. So no two edges are mapped to one edge, and so $|E(C_2)| \geq |E(C_1)|$. So the number of edges of C_1 and C_2 is the same and all the edges of C_2 are in the image of G_1 . Moreover, since G_2 is a core, it has no single vertex. So all nodes of G_2 are in the image of G_1 . Hence, G_2 and G_1 are isomorphic. Similarly we can reason about G_2 next, and we can say that all cores are isomorphic.

Now by Lemma 5.2 the C-covering number of all H_i s are equal.

Lemma 5.4. Let $S = \{H_1, \ldots, H_s\}$ be a set of patterns and let C be a core graph and suppose that C is the core of all patterns in S. Let G be a host graph, and suppose that H_1 has the minimum C-Covering number among all patterns in S (there might be other patterns in S with the same C-covering number). Then if there is a copy of H_i in G_1^* , H_i must have the same C-covering number as H_1 , and there is a copy of C in G with high probability.

Proof. Since we are going to use the reduction graph G_1^* , for the sake of completeness we are going to explain the construction of this graph. We denote G_1^* by G^* for simplicity. Let $\mathcal{C} = \{C_1, \ldots, C_r\}$ be a minimum C-covering of H_1 , where $n_1 = r$ is the C-covering number of H_1 . We color-code G with |C| = c colors $\{1, \ldots, c\}$ and assume that if G has a copy of C in it, it is a colorful copy with high probability.

The reduction graph G^* is a H_1 -partite graph, with partitions G_v^* for $v \in H_1$, such that if $v \notin C_1$ then the partition G_v^* has only a copy of v and if $v \in C_1$, the partition G_v^* has a copy of a subset of G. Particularly if $f_1:C_1\to\{1,\ldots,c\}$ is a C-coloring of the subgraph $C_1\subseteq H$, then the partition G_v^* is the set of nodes in G with color $f_1(v)$. To define the edges of G^* , for any $uv\in E(H)$, if one of u and v is not in C_1 , all the nodes in G_u^* is attached to all the nodes in G_v^* . If both u and v are in C_1 , then if they are of the same color $(f_1(v)=f_1(u))$ we put a complete matching between G_u^* and G_v^* : for any $v\in V(G)$ with color $v\in C_1$, we put an edge between the copies of $v\in C_1$ in partitions $v\in C_1$. If $v\in C_1$ and $v\in C_2$ are of different colors, we connect a node in $v\in C_1$ to a node in $v\in C_2$ if and only if they are connected in $v\in C_2$.

Let the C-covering number of H_i be n_i . By Lemma 4.1, there is a homomorphism from H_i to H_1 , and by Lemma 5.2, $n_1 \ge n_i$. By minimality of n_1 , we have that $n_1 = n_i = r$.

Now we prove that there is a copy of C in G. The proof is similar to Theorem 2.2 (but due to small technicalities we can't use Theorem 2.2 directly). Let the copy of H_i in G^* be H_i^* . By Lemma 4.1 and the fact that C is a core, any copy of C in H_i^* maps to a copy of C in H_1 . Let $S_j = \bigcup_{v \in C_j} G_v^*$ for $j = 1, \ldots, r$. We also know that if there is a copy of C in H_i^* that is in S_j , then this copy is mapped to a copy of C in C_j .

Now suppose that there is no copy of C in $H_i^* \cap S_1$. Then each copy of C in H_i^* is mapped to a copy of C in H_1 that is not in C_1 . So the copies of C in H_i^* are covered by $S = \{S_2 \cap H_i^*, \ldots, S_r \cap H_i^*\}$. If we show that $S_j \cap H_i^*$ is C-colorable for all j, then S is a C-covering of size r-1 for H_i^* and since H_i^* is a copy of H_i , this is a contradiction to the C-covering number of H_i .

To see that $S_j \cap H_i^*$ is C-colorable, let $f_j : C_j \to \{1, \ldots, c\}$ be a C-coloring of C_j . For $v \in S_j \cap H_i^*$, color v the same as $f_j(w)$ if $v \in G_w^*$. Now we see that each copy of C in S_j has distinct colors because it is mapped to a copy of C in C_j with the coloring preserved by the mapping. Since f_j is a C-coloring, this copy has distinct colors.

So H_i^* has a copy $C^* = \{w_1, \dots, w_c\}$ of C in S_1 , such that $w_i \in G_{v_i}$ for some $v_i \in C_1$ and $v_i \neq v_j$ for each $i \neq j$. Moreover, by Lemma 4.1, we have that v_1, \dots, v_c form a subgraph isomorphic to C in H_1 . So these nodes must have different colors with respect to the coloring f_1 , so $f_1(v_i) \neq f_1(v_j)$ for all $i \neq j$. This means that w_1, \dots, w_c are copies of distinct vertices in G, and hence they are attached in G^* if and only if they are attached in G. So they form a subgraph isomorphic to G in G.

Proof of Theorem 5.1. To help us find the pattern H, we create a directed graph F as follows. The vertices of F are patterns in S, and we add an edge from the vertex assigned to $H \in S$ to $H' \in S$ if there is a homomorphism from H to H'. Consider the strongly connected components of F. These components form a DAG. Consider the strongly connected component F_1 that doesn't have any incoming edge from other components to it. Note that by Lemma 5.3 all patterns in F_1 have isomorphic cores, since any two patterns in F_1 are in a cycle. Let this shared core be C, and let $H \in F_1$ be a pattern with the minimum C-covering number among all patterns in F_1 .

We show that detecting C in G reduces to detecting S in G^* , where G^* is the graph created in Theorem 2.2 for pattern H, core C and host graph G. First, suppose that there is a copy of C in G. Then by the proof of Theorem 2.2, there is a copy of H in G^* .

Now suppose that there is a copy of $H' \in S$ in G^* . If $H' \notin F_1$, there is no homomorphism from H' to H. By Lemma 5.1, this is a contradiction. So $H' \in F_1$. By Lemma 5.4, there is a copy of C in G.

Assume all patterns in S have a k-clique. Since there is a homomorphism from a pattern to its core, the core of any pattern must have a k-clique. So detecting the core of any pattern in S is at least as hard to detect as a k-clique. Thus we obtain Theorem 2.6 from Theorem 5.1.

Theorem 2.6. Let S be a set of patterns such that every $H \in S$ contains a k-clique. Then detecting whether a given graph contains some pattern in S is at least as hard as k-clique detection.

5.2 Algorithms

In this section we focus on algorithms for induced Pair Pattern Detection. Since we are only working on induced detection, we might refer to induced S-detection as S-detection for any pair S. First we give algorithms for detecting sets of 3-node patterns which are proved in the Appendix. We show that we can detect any pair of 3-node patterns in $O(n^2)$ time. Next we show that we can detect any pair of 4-node patterns in $O(n^\omega)$ time. Afterwards we focus on specific pairs, in particular the case where one of the patterns is C_4 , and try to decrease this running time.

Theorem 5.2. Let H_1 and H_2 be two 3-node patterns. If $\{H_1, H_2\} \neq \{K_3, P_2 \cup I_1\}$ and $\{H_1, H_2\} \neq \{I_3, P_3\}$, then there is an algorithm for induced $\{H_1, H_2\}$ detection that runs in O(m+n) time in an m-edge n-node host graph. For the cases $\{K_3, P_2 \cup I_1\}$ and $\{I_3, P_3\}$, there is an algorithm running in $O(n^2)$ time.

Theorem 5.3. Let H_1 and H_2 be 4-node patterns. There is a (randomized) algorithm that detects induced $\{H_1, H_2\}$ in an n-node graph in $\tilde{O}(n^{\omega})$ time.

Proof. If $n \le 31$, then we check all subgraphs of size 4 in the host graph to see if they are isomorphic to H_1 or H_2 . So suppose that n > 31.

First we show how to detect whether a host graph G has an induced copy of H_1 or H_2 . Then using a standard self-reduction technique, if H_1 or H_2 exist in G, we can find a copy of them. An informal description of this approach is the following: We divide the graph into 5 sections of size roughly n/5, and run the detection algorithm on the union of every 4 sections. If one of these runs outputs YES (that there is a H_1 or H_2), we recurse on this subgraph of size roughly 4n/5. Note that if G has a H_1 or H_2 , one of these subgraphs must contain H_1 or H_2 . Our recursion depth is $O(\log n)$ and so we can find a pattern in the same running time as the detection algorithm with a $O(\log n)$ overhead 10 .

Now we give the detection algorithm. By [34], every 4-node pattern that is not K_4 or I_4 can be detected in $O(n^{\omega})$ time. So if $\{H_1, H_2\} \cap \{I_4, K_4\} = \emptyset$, then we run the detection algorithms for H_1 and H_2 . So assume that one of the patterns is I_4 or K_4 .

If $\{H_1, H_2\} = \{K_4, I_4\}$, then since n > 31, in Lemma 5.8 we show that we can detect induced $\{H_1, H_2\}$ in linear time. So WLOG suppose $H_1 \in \{K_4, I_4\}$ and $H_2 \notin \{K_4, I_4\}$.

Let $F \neq I_4$ be a 4-node pattern and let $g(F) = n_F \cdot aut(F)$ where n_F is the number of occurrences of F in the host graph G, and aut(F) is the number of automorphisms of F. From [15] we know that for any edge e in F, we can compute g(F) + g(F - e) in $O(n^{\omega})$ time.

Now if H_1 is an arbitrary graph (with at least 2 edges) and $H_2 = H_1 - e_1 - e_2$ where e_1 and e_2 are two edges in H_1 , we can compute $g(H_1) + g(H_1 - e_1)$ and $g(H_1 - e_1) - g(H_1 - e_1 - e_2)$, and by subtracting these values we get $g(H_1) - g(H_2)$.

In general, for any two arbitrary graphs H_1 and H_2 , we can compute $g(H_1) + (-1)^r g(H_2)$ where r is a function of the number of edges of H_1 and H_2 . We can do this by considering a set of graphs $H_1 = F_0, F_1, \ldots, F_t = H_2$, where for each i, F_i and F_{i+1} only differ in one edge, and hence we can compute $g(F_i) + g(F_{i+1})$. Then by combining these values by adding or subtracting each one, we can compute $g(H_1) + (-1)^r g(H_2)$.

This means that for any two 4-node patterns H_1 and H_2 , we can compute the quantity $Q_{H_1,H_2} := aut(H_1)n_{H_1} + (-1)^r aut(H_2)n_{H_2}$ in $O(n^\omega)$ time for some r that is dependent on H_1 and H_2 . Now since $H_2 \notin \{K_4, I_4\}$ we first run the H_2 detection algorithm. If it outputs YES we are done. If it outputs NO, then we know that $n_{H_2} = 0$, so $Q_{H_1,H_2} = aut(H_1)n_{H_1}$, and so it is non-zero if and only if G has a copy of H_1 .

We prove the following two theorems in the next subsections. The first Theorem is also proven in [18], but we include our proof for completeness.

Theorem 5.4. Let G be an n-node host graph. Let H be the diamond. Then there is an algorithm for induced detection of $\{C_4, H\}$ in G that runs in $O(n^{7/3})$ time.

Theorem 5.5. Let G be an n-node host graph. Then there is an algorithm for induced detection of $\{C_4, K_4\}$ in G that runs in $O(n^{7/3})$ time.

¹⁰see [15] Section 3 for a more formal explanation.

Patterns of size 4 that contain a triangle are the clique, diamond, the paw and co-claw. We show in the appendix that there is a $O(n^2)$ algorithms for induced detection of $\{C_4, co-claw\}$ and $\{C_4, paw\}$. This together with Theorem 5.4 and 5.5 prove Theorem 2.5.

Theorem 2.5. For any 4-node graph H that contains a triangle, detecting one of $\{C_4, H\}$ as an induced subgraph of a given n-node host graph can be done in $O(n^{7/3})$ time. If H is not a diamond or K_4 , then H or C_4 can be detected $O(n^2)$ time.

5.2.1 Proof of Theorem **5.4:** Detecting $\{diamond, C_4\}$ in $O(n^{7/3})$ time.

We first prove the following useful lemmas.

Lemma 5.5. If a graph doesn't have an induced P_3 , then it is a disjoint union of cliques. If it doesn't have an induced \bar{P}_3 , then it is a complete t-partite graph for some t. Additionally, we can detect a P_3 (\bar{P}_3) or determine that the graph doesn't have a P_3 (\bar{P}_3) in $O(n^2)$ time.

Proof. We prove the lemma for P_3 . The proof for \bar{P}_3 is similar: Take the complement of the host graph and search for P_3 .

To prove the lemma for P_3 , take a vertex with maximum degree, say v, and consider the set of its neighbors N(v), and let $N[v] = N(v) \cup \{v\}$. Scan all pairs in N(v), if there are two nodes without an edge between them, we have a P_3 . Otherwise, N[v] is a complete graph. Since v has the maximum degree, no vertex in N[v] is attached to a vertex outside N[v]. So this clique is disconnected from the rest of the graph, and we have spent $O(|N[v]|^2)$ time. We do the same procedure for the rest of the graph. By induction, we spend $|N[v]|^2 + (n - |N[v]|)^2 \le n^2$. If we don't find a P_3 , $G \setminus N[v]$ is a collection of disjoint cliques by induction, and so is G.

Lemma 5.6. There is an algorithm for induced detection of $\{C_4, K_3\}$ that runs in $O(n^2)$ time. Moreover, a $\{C_4, K_3\}$ -free graph has at most $O(n^{1.5})$ edges.

Proof. Run the non-induced 4-cycle detection algorithm of Richards and Liestman [31] which takes $O(n^2)$ time. If it outputs Yes, then we either have an induced 4-cycle, or a non-induced diamond, in either case we have a triangle or an induced 4-cycle.

So suppose that it outputs No. This means that the number of nodes with degree at least $3\sqrt{n}$ is less than \sqrt{n} : For the sake of contradiction, let $v_1,\ldots,v_{\sqrt{n}}$ be some of the nodes with degree at least $3\sqrt{n}$. We know that the graph doesn't have a 4-cycle, so any two nodes have at most 1 neighbor in common. So each v_i has at least $2\sqrt{n}$ neighbors that are not attached to any v_j for $j\neq i$. This means that the graph has at least 2n nodes, a contradiction. So the number of these high degree nodes is at most \sqrt{n} , and the graph has $O(n^{1.5})$ edges.

We need to check if the graph has a triangle, and we do it as follows: for each edge, check in $O(\sqrt{n})$ time if both of its endpoints are attached to any of the high degree nodes. Then for each low degree node, go through every pair of its neighbors and check if they are connected. Since we have O(n) pair of neighbors, this takes $O(n^2)$ time in total.

Now we prove Theorem 5.4. Starting from two nodes that are not attached, we can find a maximal independent set in O(nt) time where t is the size of this set: $I = \{v_1, \dots, v_t\}$.

step 1 Let $N(v_j) = N_j$, and note that $\cup_{j=1}^t N_j = V(G) \setminus I$ because of the maximality of I. For each vertex $v_i \in I$, we first check if v_i has at most one common neighbor with any of v_1, \ldots, v_{i-1} . We can do this in $O(\sum_i deg(v_i)) = O(n^2)$ in total. Suppose some v_i violates this: so there is j < i, such that $N_i \cap N_j$ has size at least 2. So v_i, v_j and two of the nodes in $N_i \cap N_j$ form an induced 4-cycle or diamond. So $|N_i \cap N_j| \le 1$ for all $1 \le i < j \le t$. Now using lemma 5.5 we check if the subgraph induced on N_i has an induced P_3 in $O(|N(v_i)|^2)$ time. If some N_i has an induced P_3 , then this P_3 with v_i forms a diamond. If N_i doesn't have an induced P_3 , then the subgraph on N_i should be a collection of disconnected cliques. Now because $N_i \cap N_j$ has at most one vertex, every edge that we we encounter in $N(v_i)$ subgraphs is visited only once, so the this step takes $O(n^2)$ time in total.

step 2 For each $v \in N_i$, we check if it has at most one edge to each N_j where $v \notin N_j$ and $j \neq i$. This concluded step 2.

If some $v \in N_i$ violates this for some N_j , v together with v_j and its two neighbors in N_j form a 4-cycle or diamond. This part takes $O(t + \sum_v deg(v)) = O(n^2)$ time as we visit each edge at most twice.

By the end of these two steps, we know that none of the v_i s is in a 4-cycle or diamond. If t > T for some T that we set later, then we remove this independent set and recurs. We can do this at most n/T times, and in that case we spend $O(n^3/T)$ time.

Suppose that t < T. Note that $V(G) \setminus I$ can be written as a union of cliques where every two cliques have at most one node in common. We are going to explain the reasoning behind step 3 here, before we go into details of the algorithm. We are going to check if any two cliques contain a 4-cycle or diamond. Consider two cliques C and C'. If they share a node, there must be $i \neq j$ where $C \subseteq N_i$ and $C' \subseteq N_j$ and $C \cap C' = \{u\}$, where u is the common neighbor of v_i and v_j . If there is an edge between $v \in C$ and $v \in C'$, $v, v \neq v$, then $v_i v w v$ forms a diamond. So unless there is a diamond in the graph, there are no edges between $v \in C'$ and $v \in C'$

step 3 We check if there is more than one edge between any two cliques. We can do this by having a table T with rows and columns indexed by the cliques, and we scan edges one by one and mark the entry corresponding to cliques C and C' if this edge is between C and C'. If we find two edges between two cliques, we have a diamond or a 4-cycle. This step takes $O(n^2)$ time, as we visit each edge at most once. In addition, we know the edge between any two cliques (if it exists). Note that by the end of this step we know that there is no diamond or 4-cycle in the union of exactly 2 cliques. This concludes step 3.

As mentioned before, for any two non-intersecting cliques we can have at most one edge between them. Call these edges non-clique edges. The rest of the edges are in cliques. Also since each node has at most 1 common neighbor with each v_i , each node has at most t-1 non-clique edges attached to it.

step 4 First for each node u that is a common neighbor of v_i and v_j for some i,j do the following: Let $C \in N_i$ and $C' \in N_j$ be the cliques that have u. For each $C'' \notin \{C, C'\}$, check in constant time if there is $w \in C''$ which has an edge to $C \setminus u$ and $C' \setminus u$, using the table T. If such w exists, then we have a 4-cycle using those edges and u. This takes linear time for each u, and hence $O(n^2)$ in total. Note that by the end of this step, we know that there is no 4-cycle or diamond is any 3 cliques with at least two of them having an intersection. This is because if there is a pattern in $C \cup C' \cup C''$ where $C \cap C' = u$, then there must be a node v in C'' that has a neighbor in C and a neighbor in C', and so u, v and the two neighbors form a 4-cycle or diamond, and that's what we detect in this step.

- step 5 We are going to detect 4-cycle or diamonds that are in exactly 3 non intersecting cliques. Note that diamond has a (non-induced) 4-cycle as its subgraph, and since there is at most one edge between any two cliques, we must have exactly one clique edge in the not-necessarily-induced 4-cycle contained in the pattern (4-cycle or diamond). Now it is easy to see that we can't have a diamond in the union of three non-intersecting cliques if each two has at most one edge between them. For each non-clique edge e = uv, do the following: In O(t) time, find all cliques that u and v both have neighbors in it and check if their neighbors are different in that clique. If they are, we have a 4-cycle. This takes $O(nt^2)$ time.
- step 6 Now the only possibility for a 4-cycle or diamond is that each of its vertices are in a different clique. So we can delete all the clique edges, and we end-up with a graph with nodes of degree at most t. Moreover, since there is at most one edge between any two cliques, in this graph we have at most t^2 edges. First, for every pair of nodes u, w such that u and w belong to different cliques, we define L(u, w) be the list of their common neighbors through non-clique edges. We can compute all the L(u, w)s as follows: for every node z and for every two neighbors u, w of z through non-clique edges, put z in L(u, w). This takes $O(nt^2)$ time. Now for every non-clique edge e = uw, and for every node z, see if z is adjacent to exactly one of u and w through non-clique edges. Suppose it is attached to u. Then see if |L(z, w)| > 1. If so, take a node $u \neq z' \in L(z, w)$, and zwuz' form a C_4 or diamond since zw is not an edge. This takes $O(nt^2)$ time. Since in this case $t \leq T$, we spend $O(n^3/T + nT^2)$ time in total, and if we set $T = n^{2/3}$, we get $O(n^{7/3})$ running time.

5.2.2 Proof of Theorem 5.5: Detecting $\{C_4, K_4\}$ in $O(n^{7/3})$ time.

Suppose we want to find an induced C_4 or K_4 in the host graph G. Let $I = \{v_1, \dots, v_t\}$ be a maximal independent set. Note that we can find such I in $O(n^2)$ time. For each i, Let $N_i = N(v_i)$. Note that $I \cup (\cup_{i=1}^t N_i) = V(G)$ because of the maximality of I. For each $u \notin I$, recall that $N_I(u) = \{v_i | u \in N_i\}$ is the set of nodes in I adjacent to u.

For each vertex u we define a set $N_{ext}(u)$ as follows: $v \in N_{ext}(u)$ if uv is an edge and there exists i, such that $u \in N_i$ and $v \notin N_i$. We call the edge uv an external edge (since v is an external neighbor of u with respect to the set N_i). If $v \in N_{ext}(u)$ and $u \in N_{ext}(v)$, we call the edge uv a fully external edge. We have the following simple observation from these definitions.

Observation 5.1. If uv is not a fully external edge, then there is i such that $u, v \in N_i$.

Before proceeding to the algorithm, we prove the following lemma which helps us categorize the patterns $(K_4 \text{ or } C_4)$ in G.

Lemma 5.7. If H is an induced C_4 or K_4 that does not have any vertex in I, then it is of one of the following types.

- 1. There are two indices i and j such that $V(H) \subseteq N_i \cup N_j$.
- 2. H is isomorphic to K_4 , and there is a node $a \in V(H)$, such that $V(H) \setminus \{a\} \subseteq N_{ext}(a)$.
- 3. $V(H) = \{a, b, c, d\}$ and H is isomorphic to C_4 , with $ab, bc, cd, da \in E(H)$ such that $d, b \in N_{ext}(a)$ and $a, c \in N_{ext}(b)$.
- 4. $V(H) = \{a, b, c, d\}$ and H is isomorphic to C_4 , with $ab, bc, cd, da \in E(H)$ such that $a, c \in N_{ext}(b) \cap N_{ext}(d)$.

Proof. Suppose $V(H) = \{a, b, c, d\}$ where $ab, bc, cd, da \in E(H)$. So we have that either $ac, bd \in E(H)$ or $ac, bd \notin E(H)$. If none of ab, cd are fully external, by Observation 5.1 there are i and j such that $a, b \in N_i$, $c, d \in N_j$ and so H is of type 1. Similarly, if none of bc, da are fully external, H is of type 1.

So WLOG we can assume that ab, ad are fully external. First suppose that H is isomorphic to K_4 . If $c \in N_{ext}(a)$, then H is of type 2. Otherwise $N_I(a) \subseteq N_I(c)$. Moreover, similar to above, if both of ac, bd are fully external, H is of type 1. Otherwise, since ac is not fully external, bd is. Now if $c \in N_I(b)$ or $c \in N_I(d)$, H is of type 2. Otherwise $N_I(b) \subseteq N_I(c)$ and $N_I(d) \subseteq N_I(c)$. If two of the sets $N_I(a), N_I(b), N_I(d)$ intersect, then H is of type 1. Otherwise, these sets are disjoint, so $N_I(c)$ is not equal to any of them. So $a, b, d \in N_{ext}(c)$, and H is of type 2.

Now suppose that H is an induced C_4 , and recall that ab, ad are fully external. If dc and cb are both fully external, then H is of type 4 by the definition of fully external edges. If bc is fully external and dc is not fully external, then H is of type 3, since by fully externality of ab and ad we have that $b, d \in N_{ext}(a)$, and by fully externality of ab, bc we have that $a, c \in N_{ext}(b)$. Similarly if dc is fully external and bc is not fully external, then H is of type 3.

So assume that none of bc and dc are fully external. If $N_I(d) = N_I(c)$, then since bc is not fully external, $N_I(c) \cap N_I(b) \neq \emptyset$, so there is i such that $b, c, d \in N_i$ and so H is of type 1. So we can assume that $N_I(d) \neq N_I(c)$ and $N_I(c) \neq N_I(b)$.

Now if $c \in N_{ext}(d)$, H is of type 3: $c, a \in N_{ext}(d)$ and $b, d \in N_{ext}(a)$. Otherwise we must have $d \in N_{ext}(c)$ since $N_I(c) \neq N_I(d)$. Similarly, if $c \in N_{ext}(b)$, H is of type 3. So we can assume that $b \in N_{ext}(c)$ since $N_I(c) \neq N_I(b)$. So H is of type 4.

Now we describe the algorithm. We first look for a C_4 or K_4 that has a vertex in I, and then give an algorithm for detecting the patterns of Lemma 5.7 which are patterns with no vertex from I.

Step 1. Let L(u,w) be a table initialized empty, which is going to stay empty for some pairs u,w, or contain the common neighbors of u,w. At this step, we are going to fill $L(v_i,v_j)$ for all $i,j\in [t]$. To do so, we first make a pruned adjacency list for every node to only contain the vertices in I. Then for each $x\notin I$, we put x in $L(v_i,v_j)$ if x is a common neighbor of v_i and v_j . If by doing that $|L(v_i,v_j)|=2$, we check if x is adjacent to the other member y of $L(v_i,v_j)$, because otherwise v_ixv_jy forms an induced C_4 . Moreover, if at some point for some $i,j,L(v_i,v_j)\geq 3$, we have an induced C_4 or K_4 : if there is a non-edge in $L(v_i,v_j)$ like xy, then v_ixv_jy forms an induced C_4 . Otherwise there is a triangle in $L(v_i,v_j)$, and so this triangle with v_i forms a K_4 . So either we find a K_4 or C_4 , or for all i,j we have $|L(v_i,v_j)|\leq 2$, and if $|L(v_i,v_j)|=2$, the two common neighbors of v_i and v_j are adjacent. Note that the total running time is $\sum_x N_I(x)^2 = \sum_{i,j} |L(v_i,v_j)| \leq O(n^2)$.

Step 2. For every $i \in [t]$, we run the algorithm of Lemma 5.6 on the subgraph induced by N_i for detecting a triangle or induced C_4 . Note that if the algorithm returns one of these patterns, we are done. Otherwise, we have that $|E(G[N_i])| \leq |N_i|^{1.5}$. This step takes $\sum_i O(|N_i|^2)$ time.

Claim 1.
$$\sum_{i} |N_{i}|^{2} \leq O(n^{2}).$$

Proof. Let $l(u,w) = |N_I(u) \cap N_I(w)|$ be the number of $i \in [t]$ such that $u,w \in N_i$. Then by a double counting argument we have that $\sum_i |N_i|^2 = \sum_{u,w} l(u,w)$. Now by Step 1, for any pair $i,j \in [t]$, we have $|L(v_i,v_j)| \leq 2$, so there is at most one pair (u,w) such that $u,w \in N_i \cap N_j$. So $l(u,w)^2$ pairs in $I \times I$ are assigned to (u,w) this way, and are not assigned to any other pair. So $\sum_{l(u,w)>1} l(u,w) \leq \sum_{l(u,w)>1} l(u,w) \leq 2n^2$. \square

Step 3. In this step, we fill $L(v_i, w)$ for $i \in [t]$ and $w \notin N_i$. For each $i \in [t]$, for every $x \in N_i$, we scan all neighbors of x, and if w is a neighbor of x outside N_i , we add x to $L(v_i, w)$. If at some point $L(v_i, w)$ has exactly two nodes in it, we check if they are connected. If they are not connected, they form an induced C_4 with v_i and w. If at some point $L(v_i, w) > 2$, we stop since we have an induced C_4 or K_4 : if there is

a non-edge in $L(v_i, w)$, this non-edge with v_i and w form an induced C_4 . Otherwise there is a triangle in $L(v_i, w)$, and it forms a K_4 with v_i .

We claim that the running time of this step is at most $O(tn+\sum_i |N_i|^{1.5}) \leq O(tn+\sum_i |N_i|^2) \leq O(n^2)$ where for the second inequality we use Claim 1. First note that we don't update $L(v_i,w)$ if $w \in N_i \cap N(x)$. So the number of times that we don't update the table in our search is the number of internal edges in N_i s for all i, which is $O(\sum_i |N_i|^{1.5})$ by step 2. The rest of the running time is $\sum_{w,i,w\notin N_i} |L(v_i,w)|$, and since $|L(v_i,w)|$ never reaches 4 (we stop before it happens) this sum is O(tn).

If at the end of this step we don't find an induced C_4 or K_4 , then for every $w \notin N_i$ we have $|L(v_i, w)| \le 2$.

Note that after steps 1, 2 and 3, if we find no induced C_4 or K_4 , it means that there is no induced C_4 or K_4 that has at least one vertex in I. If $|I| \ge T$, where we define T later, then we remove I from the graph and recurse. We can do this at most n/T times. Note that the running time of steps 1, 2 and 3 is $O(n^2)$, so the running time is at most $O(n^3/T)$ in this case.

Now suppose that |I| < T. From step 3 we know that $|N_{ext}(w)| \le 2t$ for all $w \notin I$. Moreover, in step 3 we go over all of the neighbors of all nodes outside I, so we can assume that we have the set $N_{ext}(w)$ for all $w \notin I$. In the following steps, we are going to detect patterns of Lemma 5.7.

Step 4-1: Type 1. First we detect K_4 s of this type. Note that N_i doesn't have a triangle, so if there is a K_4 in $N_i \cup N_j$, it must have exactly two nodes in each set. So for each pair i, j, for each node $a \in N_i \setminus N_j$, we check if a has two neighbors in N_j by checking if $|L(a, v_j)| = 2$. If so, then let these neighbors be b and c. We check if $b, c \notin N_i$, and if so, we check if they have a common neighbor in N_i other than a, by checking if $|L(b, v_i) \cap L(c, v_i)| \ge 2$. If they do have a common neighbor d, we check if abcd form a K_4 .

The process for each i, j, a takes O(1) time, so in total this takes $O(nt^2)$ time.

Now we look for induced C_4 s of this type. First note that there is no induced C_4 with exactly one node in N_i . To see this, suppose this is true, and a is the node in the induced C_4 in N_i and not in N_j , and b, c are its neighbors in N_j . Then since $a \notin N_j$ and has two neighbors in N_j ($|L(a,v_j)|=2$), they must be adjacent (we checked this in step 3) which is a contradiction. So any induced C_4 has exactly two nodes in N_i and two nodes in N_j . The edges of the C_4 are either all between N_i and N_j , or exactly two of them are between N_i and N_j . The first case cannot happen, because if $a, d \in N_i$ and $b, c \in N_j$, then since b, c are a's neighbor in N_j , they must be adjacent. So the only case is that ab, bc, cd, ad are edges. To detect these types of patterns, we do the following.

For every $i \in [t]$, for every edge $e = ad \in N_i$, and for every $i \neq j \in [t]$, we check if a and d make an induced C_4 with any two of the vertices in $L(v_j,a) \cup L(v_j,d)$ which is a set of size at most 4. This takes $\sum_i t |N_i|^{1.5} \leq t \sqrt{(\sum_i |N_i|)(\sum_i |N_i|^2)} \leq t \sqrt{(n+t^2)n^2} \leq t n^{1.5} + t^2 n$. Note that we use the inequality $\sum_i |N_i| \leq t^2 + n$ which is true since $|N_i \cap N_j| \leq 2$ for all i,j.

Step 4-2: **Type** 2. For every node u, we run the algorithm of Lemma 5.6 on the subgraph induced by $N_{ext}(u)$.

Since $|N_{ext}(u)| \le 2t$, this takes $O(t^2)$ time for every v, and so this step takes $O(nt^2)$ time. Note that if we don't find any patterns in this step, there is no pattern of type 2 in the graph.

Step 4-3: **Type** 3. For each fully external edge e=ab, we do the following: for each $i\in [t]$ that $a,b\notin N_i$, we look at the set of neighbors of a and b in N_i (i.e. $L(v_i,a)\cup L(v_i,b)$), and see if they form an induced C_4 with a and b. Note that these neighbors are at most 4 in total. So this step takes $O(nt^2)$ time, because the number of fully external edges is $\sum_{u\in V(G)}|N_{ext}(u)|\leq O(tn)$.

Step 4-4: **Type** 4. We fill a table similar to L. We want $L_{ext}(w,u)$ include all nodes z, such that $w,u\in N_{ext}(z)$. To do this, for every node $z\in V(G)$, we put z in $L_{ext}(w,u)$, for all $w,u\in N_{ext}(z)$. This




Figure 5: 4-node patterns paired with their complement.

takes $O(t^2)$ per z, and so $O(nt^2)$ time in total.

Now for every pair (w, u) such that $wu \notin E(G)$ and $|L_{ext}(w, u)| \leq 4$, we check if there is a non-edge or a triangle in $L_{ext}(w, u)$. If there is a non-edge in $L_{ext}(w, u)$, then this non-edge with (w, u) form an induced C_4 of type 4. If there is a triangle in $L_{ext}(w, u)$, then this triangle with w forms a K_4 .

Afterwards, if there is a pair (u, w) such that $uw \notin E(G)$ and $|L_{ext}(w, u)| \ge 4$, then $L_{ext}(u, w)$ either contains a K_4 , or a non-edge, and in either case, we find a K_4 or C_4 . This processing takes $O(n^2)$ time.

Running time. Note that in step 4, we have $t \le T$. So the running time of the algorithm is $O(n^3/T + nT^2 + n^{1.5}T)$. Setting $T = n^{2/3}$, the running time is equal to $O(n^{7/3})$.

5.2.3 $\{H, \bar{H}\}$ **Detection**

In this section we prove Theorem 5.6.

Theorem 5.6. There is an $O(n^2)$ time algorithm that solves Paired Pattern Detection for $\{H, \bar{H}\}$ for any 4-node H.

There are 6 cases for the set $\{H, \bar{H}\}$ that are depicted in Figure 5. From Ramsey theory results we know that a graph of size n has an independent set or a clique of size $O(\log n)$. So if a graph is large enough, it has a 4-clique or a 4-independent set. For $H=P_4=\bar{H}$, Corneil et al [12] proved that induced P_4 can be detected in linear time. So we are left with 4 cases, and we prove these 4 cases separately. Even though each case has different techniques, for most of them we start by detecting a clique (or independent set), trying to find an H or \bar{H} that intersects with the clique and then if we find no such pattern, we prove the graph has a specific structure. Our algorithms are technically involved similar to that of [12]. We leave it as an open problem that whether there is a general algorithm that can be used for all 4-node patterns H.

We denote our n-node host graph by G. Note that finding $\{H, \bar{H}\}$ in G is equivalent to finding $\{H, \bar{H}\}$ in \bar{G} . Throughout the rest of this section, we assume that G has at least 31 nodes. We prove the two cases of $\{diamond, co-diamond\}$ and $\{paw, co-paw\}$ here and prove the other two cases in the appendix. We first state the proof of the following known lemma.

Lemma 5.8. There is an algorithm that detects a K_4 or I_4 in an $n \ge 31$ node graph in O(n) time.

Proof. Consider a node v in the graph G. If $d_G(v) < (n-1)/2$, we consider \bar{G} . So WLOG we assume that $d_G(v) \ge (n-1)/2 \ge 15$. So by Theorem 5.2 in $O(d_G(v))$ time we can find a triangle or I_3 . If we find a triangle, this triangle with v forms a K_4 . Otherwise we have an independent set u, w, z. Check if a node in N(v) is not attached to any of these three nodes in O(3d(v)) time. If such node exists, we have a I_4 . So assume that for any node $x \in N(v) \setminus \{u, w, z\}$, x is attached to at least one of u, w, z. So WLOG we can assume that z is attached to at least $(d(v)-3)/3 \ge 4$ nodes in N(v). If there is an edge among these 4 nodes, the edge with v and z form a K_4 . Otherwise, these 4 nodes form a I_4 . The runtime is O(d(v)) = O(n). \square

Diamond and co-diamond We want to detect diamond or co-diamond in the graph G. We run the algorithm of Lemma 5.8 on G. WLOG, we can assume that the algorithm finds a K_4 (If it finds a I_4 in G, we consider \bar{G} in which we will have a K_4). In $O(n^2)$ time, we can turn this K_4 into a maximal clique C: For every node, we check if it is attached to all the nodes in the clique and if it is, we add it to the clique.

Now since C is a maximal clique, for every node $u \notin C$ we know that u is not adjacent to at least one node u' in C. If u is adjacent to at least two nodes v, w in C, then u, v, u', w form a diamond. So we check if $d_C(u)$ is at most 1 for every u, and if for some u it is not, we find a diamond. This takes $O(n^2)$ time.

Now we show that either we can find a co-diamond or $G \setminus C$ is a clique. Let u_1, u_2 be two nodes outside C that are not adjacent. Since they are adjacent to at most one node in C and $|C| \ge 4$, there are two nodes v, w in C such that u_1, u_2 are not adjacent to either. So u_1, u_2, v, w form a co-diamond.

So we can assume that there is no non-edge in $G \setminus C$, hence $G \setminus C$ is a clique. This means that there is no co-diamond in G since the subgraph induced on any 4 nodes has at least 2 edges. Now if there is a diamond in G, it must have 3 nodes in $G \setminus C$ and one node in G. This is because if it has two nodes in G, one of the two nodes in $G \setminus C$ is adjacent to both of the nodes in G, And if it has three nodes in G, the node in $G \setminus C$ is adjacent to two of the nodes in G. So in any case, there is a node in $G \setminus C$ that has two neighbors in G, which contradict our earlier assumption.

Now to look for diamonds with three nodes in $G \setminus C$, we check the number of neighbors of every node in C. If a node in C has at least 2 neighbors in $G \setminus C$ and it is not adjacent to all the nodes in $G \setminus C$, then we have a diamond. This step takes $O(|C| \cdot |G \setminus C|) = O(n^2)$, and overall the algorithm runs in $O(n^2)$ time.

Paw and co-paw First suppose that G is not connected, and suppose G_1, \ldots, G_t are its connected components. Since the paw is a connected pattern, if G has a paw, it is in one of the connected components. To detect any co-paws that might have vertices in different connected components, we look for a P_3 in each component using Lemma 5.5 in total time of $\sum_i O(|V(G_i)|)^2$. If we find a P_3 in G_i for some i, then we take a node from G_j for some $j \neq i$, and they form a co-paw. Otherwise, if G has a paw or co-paw, it is completely contained in a connected component. We recurse on each component, and by induction, the total running time will be $\sum_i O(|V(G_i)|)^2 = O(n^2)$.

If \bar{G} is not connected, we can do the same. So we suppose that both G and \bar{G} are connected.

We run the algorithm of Lemma 5.8 on G. WLOG, we can assume that the algorithm finds a K_4 . In $O(n^2)$ time, we can turn this K_4 into a maximal clique $C = \{v_1, \ldots, v_t\}$ for $t \ge 4$. If there exists $u \notin C$ that has at least one neighbor $v_i \in C$ and that there are at least two nodes $w_1, w_2 \in C$ that are not adjacent to u, then u, v_i, w_1, w_2 form a paw. So we can check the neighbors of each $u \notin C$ in total time of $O(n^2)$, and if we don't find a paw, then any $u \notin C$ is either adjacent to none of the vertices in C, or is not adjacent to exactly 1 node in C (i.e. $d_C(u)$ is either 0 or |C| - 1).

Let $S = \{u \in V(G) \setminus C | d_C(u) = 0\}$ and $T = \{u \in V(G) \setminus C | d_C(u) = |C| - 1\}$. If |V(G)| > |C|, since G is connected we have that $|T| \ge 1$. If $|S| \ge 1$, we show that we find a paw in $S \cup T$: Since G is connected, there is at least one edge between S and T. Suppose $s \in S$ and $t \in T$ are adjacent. Let $v_i, v_j \in C$ be two nodes that are adjacent to t. Then s, t, v_i, v_j form a paw.

So assume that $S = \emptyset$. Since vertices in T are adjacent to all but one node in C, we can decompose T as follows. Let T_i be the set of nodes in T that are not adjacent to v_i . First check in $O(\sum_i |T_i|^2) = O(n^2)$ time if there is an edge in one of T_i s. Suppose T_i has an edge uw. Then for some $j \neq i$, u, w, v_i, v_j form a paw.

So we can assume each T_i is an independent set for all i. Now check the edges between these independent sets. Suppose that there is an edge between $u \in T_i$ and $w \in T_j$. Let $z \neq i, j$. Then v_i, v_z, u, w form a paw.

So we can assume that for any $i, j, T_i \cup T_j$ is a complete bipartite graph. This defines all the edges of

the graph. Now note that G is a complete t-partite graph: partition i is $T_i \cup v_i$. A complete t-partite graph doesn't have induced P_3 which is a subgraph of both paw and co-paw, and hence G has no paw or co-paw. The total running time is $O(n^2)$.

6 Lower bound for induced C_4 : proof of Theorem 2.4

Here we reduce 4-hyperclique in 3-uniform hypergraphs to detecting an induced C_4 in an m-edge graph.

Claim 2. Under the 3-uniform 4-hyperclique hypothesis, induced C_4 -detection in n-node graphs with $O(n^{3/2})$ edges requires $n^{2-o(1)}$ time on the word-RAM model with $O(\log n)$ bit words.

Proof. Without loss of generality, we are given a 4-partite 3-uniform hypergraph G with parts V_0, V_1, V_2, V_3 , and we want to determine if there exist $v_i \in V_i$ for each $i \in \{0, 1, 2, 3\}$ so that every triple (v_i, v_j, v_k) for $i \neq j, i \neq k, j \neq k$ is a hyperedge in G.

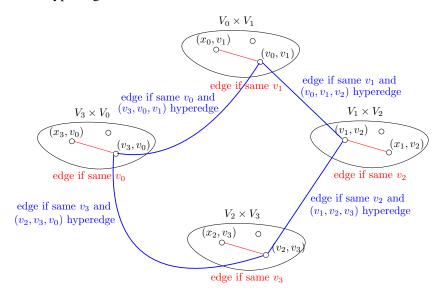


Figure 6: A depiction of the lower bound construction for induced C_4 .

We create an undirected graph G' as follows. See Figure 6. The vertices of G' are all pairs (x, y) such that $x \in V_i$, $y \in V_{i+1}$ for $i \in \{0, 1, 2, 3\}$ where all indices are taken modulo 4.

The edges are as follows:

- For every $i \in \{0, 1, 2, 3\}$ and any two nodes $(x, y), (x', y') \in V_i \times V_{i+1}$, there is an edge between them if y = y'.
- For every $i \in \{0,1,2,3\}$ and any two nodes $(x,y) \in V_i \times V_{i+1}$ and $(x',y') \in V_{i+1} \times V_{i+2}$, there is an edge between them if y = x' and (x,y,y') is a hyperedge in G.

First suppose that $v_0 \in V_0, v_1 \in V_1, v_2 \in V_2, v_3 \in V_3$ form a 4-hyperclique in G. Then since $(v_0, v_1, v_2), (v_1, v_2, v_3), (v_2, v_3, v_0), (v_3, v_0, v_1)$ are all hyperedges in G, the following is an induced C_4 in G': $(v_0, v_1), (v_1, v_2), (v_2, v_3), (v_3, v_0)$.

Now suppose that there is an induced C_4 , H in G'. If for each $i \in \{0, 1, 2, 3\}$, H has a vertex in $(v_i, v_{i+1}) \in V_i \times V_{i+1}$, then for each i, (v_i, v_{i+1}, v_{i+2}) is a hyperedge, so that H corresponds to a 4-hyperclique.

Suppose now that H doesn't have a node in every single one of the four $V_i \times V_{i+1}$. Then for some i, H contains at least two nodes.

If H contains three nodes $(v_i, v_{i+1}), (v_i', v_{i+1}'), (v_i'', v_{i+1}'')$ in $V_i \times V_{i+1}$, then these three nodes have two edges between them (since H is a C_4). W.l.o.g. (v_i, v_{i+1}) has edges to (v_i', v_{i+1}') and (v_i'', v_{i+1}'') . However, by the construction of G', this means that $v_{i+1} = v_{i+1}'' = v_{i+1}''$, and hence H has a triangle, so it cannot be an induced C_4 .

Suppose that H contains exactly two nodes $(v_i, v_{i+1}), (v'_i, v'_{i+1}) \in V_i \times V_{i+1}$.

If these two nodes are connected by an edge, then $v_{i+1} = v'_{i+1}$. The two nodes $(v_i, v_{i+1}), (v'_i, v_{i+1})$ can only have edges to $V_{i+1} \times V_{i+2}$ and to $V_{i-1} \times V_i$, and those two partitions have no edges between them. Thus the only way (v_i, v_{i+1}) and (v'_i, v_{i+1}) can be part of a C_4 is if they are connected to two nodes in the same part, that are also connected to each other. If the edges of H out of (v_i, v_{i+1}) and (v'_i, v_{i+1}) are to $V_{i-1} \times V_i$, then they are to nodes (v_{i-1}, v_i) and (v'_{i-1}, v'_i) that are supposed to have an edge between them. However then $v_i = v'_i$, so that (v_i, v_{i+1}) and (v'_i, v_{i+1}) are the same node, so this cannot happen. On the other hand, if the edges of H out of (v_i, v_{i+1}) and (v'_i, v_{i+1}) are to $V_{i+1} \times V_{i+2}$, then they are two some nodes (v_{i+1}, v_{i+2}) and (v_{i+1}, v'_{i+2}) that supposedly have an edge between them. But then $v_{i+2} = v'_{i+2}$ and these two are the same node, so that can't happen.

Thus it must be that (v_i, v_{i+1}) and (v_i', v_{i+1}') are not connected by an edge. Then they have a common neighbor in $V_{i-1} \times V_i$ or $V_{i+1} \times V_{i+2}$ or both. If there is a common neighbor (v_{i+1}'', v_{i+2}) in $V_{i+1} \times V_{i+2}$, then by construction, it must be that $v_{i+1}'' = v_{i+1}' = v_{i+1}$, but then there would be an edge between (v_i, v_{i+1}) and (v_i', v_{i+1}') , and that cannot happen. Thus both common neighbors must be in $V_{i-1} \times V_i$. But then $v_i = v_i'$, and the common neighbors in $V_{i-1} \times V_i$ must look like (v_{i-1}, v_i) and (v_{i-1}', v_i) , and thus must be connected by an edge, and hence H is not an induced C_4 but a diamond.

Hence any induced C_4 must have a node in each $V_i \times V_{i+1}$ and thus corresponds to a 4-hyperclique.

If G had n nodes, then G' has $N=O(n^2)$ nodes and $M=O(n^3)$ edges. Any $O(M^{4/3-\varepsilon})$ time algorithm for $\varepsilon>0$ for induced C_4 would imply an $O(n^{4-3\varepsilon})$ time algorithm for 4-hyperclique and would refute the 3-uniform 4-hyperclique hypothesis. The same holds for an $O(N^{2-\varepsilon'})$ time induced C_4 algorithm for $\varepsilon'=1.5\varepsilon>0$.

Open Problems

Considering the hardness results based on the k-clique hypothesis, there is still a gap between lower and upper bounds for Induced Subgraph Isomorphism, where the best algorithm for detecting a k-node pattern H runs in k-clique detection time and the best lower bound states that detecting H requires the time needed to detect a $\sqrt{k}/\log k$ -clique. The result of Manurangsi et al. [28] suggests that the true running time should be closer to the current upper bound, and so it would be interesting to obtain a similar lower bound to [28], conditioned on k-clique hypothesis.

For non-induced Subgraph Isomorphism, we show that cores as well as complements of paths and cycles are at least as hard to detect as a t-clique where t is roughly the size of the maximum clique minor of the pattern. It is an interesting open problem to extend this result to more pattern classes.

Finally, the true time complexity of induced 4-cycle detection remains open. While resolving the gap for (induced) Subgraph Isomorphism might seem hard, Paired Pattern Detection can be a good guide on what properties future reductions must posses. Having a general framework for obtaining algorithms for Paired Pattern Detection would be a good step forward for this goal.

References

- [1] Amir Abboud, Karl Bringmann, Holger Dell, and Jesper Nederlof. More consequences of falsifying SETH and the orthogonal vectors conjecture. In *Proceedings of the 50th Annual ACM SIGACT Symposium on Theory of Computing, STOC 2018, Los Angeles, CA, USA, June 25-29, 2018*, pages 253–266. ACM, 2018.
- [2] Josh Alman and Virginia Vassilevska Williams. A refined laser method and faster matrix multiplication. In Dániel Marx, editor, *Proceedings of the 2021 ACM-SIAM Symposium on Discrete Algorithms, SODA 2021, Virtual Conference, January 10 13, 2021*, pages 522–539. SIAM, 2021.
- [3] Noga Alon, Raphael Yuster, and Uri Zwick. Color-coding. J. ACM, 42(4):844–856, 1995.
- [4] József Balogh and Alexandr V Kostochka. Large minors in graphs with given independence number. *Discrete mathematics*, 311(20):2203–2215, 2011.
- [5] Markus Bläser, Balagopal Komarath, and Karteek Sreenivasaiah. Graph pattern polynomials. In Sumit Ganguly and Paritosh K. Pandya, editors, 38th IARCS Annual Conference on Foundations of Software Technology and Theoretical Computer Science, FSTTCS 2018, December 11-13, 2018, Ahmedabad, India, volume 122 of LIPIcs, pages 18:1–18:13. Schloss Dagstuhl - Leibniz-Zentrum für Informatik, 2018.
- [6] Markus Bläser, Balagopal Komarath, and Karteek Sreenivasaiah. Graph pattern polynomials. *arXiv* preprint arXiv:1809.08858, 2018.
- [7] Ravi B. Boppana and Magnús M. Halldórsson. Approximating maximum independent sets by excluding subgraphs. *BIT*, 32(2):180–196, 1992.
- [8] Karl Bringmann and Jasper Slusallek. Current algorithms for detecting subgraphs of bounded treewidth are probably optimal. In 48th International Colloquium on Automata, Languages, and Programming, ICALP 2021, July 12-16, 2021, Glasgow, Scotland (Virtual Conference), volume 198 of LIPIcs, pages 40:1–40:16. Schloss Dagstuhl Leibniz-Zentrum für Informatik, 2021.
- [9] Karl Bringmann and Jasper Slusallek. Current algorithms for detecting subgraphs of bounded treewidth are probably optimal. *arXiv preprint arXiv:2105.05062*, 2021.
- [10] Chris Calabro, Russell Impagliazzo, and Ramamohan Paturi. A duality between clause width and clause density for SAT. In 21st Annual IEEE Conference on Computational Complexity (CCC 2006), 16-20 July 2006, Prague, Czech Republic, pages 252–260. IEEE Computer Society, 2006.
- [11] Jianer Chen, Benny Chor, Mike Fellows, Xiuzhen Huang, David W. Juedes, Iyad A. Kanj, and Ge Xia. Tight lower bounds for certain parameterized np-hard problems. In 19th Annual IEEE Conference on Computational Complexity (CCC 2004), 21-24 June 2004, Amherst, MA, USA, pages 150–160. IEEE Computer Society, 2004.
- [12] Derek G. Corneil, Yehoshua Perl, and Lorna K Stewart. A linear recognition algorithm for cographs. *SIAM Journal on Computing*, 14(4):926–934, 1985.
- [13] Konrad K. Dabrowski, François Dross, and Daniël Paulusma. Colouring diamond-free graphs. *J. Comput. Syst. Sci.*, 89:410–431, 2017.

- [14] Konrad K. Dabrowski and Daniël Paulusma. On colouring (2*P*₂, *H*)-free and (*P*₅, *H*)-free graphs. *Inf. Process. Lett.*, 134:35–41, 2018.
- [15] Mina Dalirrooyfard, Thuy Duong Vuong, and Virginia Vassilevska Williams. Graph pattern detection: hardness for all induced patterns and faster non-induced cycles. In Moses Charikar and Edith Cohen, editors, *Proceedings of the 51st Annual ACM SIGACT Symposium on Theory of Computing, STOC 2019, Phoenix, AZ, USA, June 23-26, 2019*, pages 1167–1178. ACM, 2019.
- [16] Friedrich Eisenbrand and Fabrizio Grandoni. On the complexity of fixed parameter clique and dominating set. *Theor. Comput. Sci.*, 326(1-3):57–67, 2004.
- [17] Paul Erdös and George Szekeres. A combinatorial problem in geometry. *Compositio Mathematica*, 2:463—-470, 1935.
- [18] Elaine M. Eschen, Chính T. Hoàng, Jeremy P. Spinrad, and R. Sritharan. On graphs without a c₄ or a diamond. *Discret. Appl. Math.*, 159(7):581–587, 2011.
- [19] Peter Floderus, Miroslaw Kowaluk, Andrzej Lingas, and Eva-Marta Lundell. Induced subgraph isomorphism: Are some patterns substantially easier than others? *Theor. Comput. Sci.*, 605:119–128, 2015.
- [20] Stéphane Foldes and Peter L Hammer. Split graphs having dilworth number two. *Canadian Journal of Mathematics*, 29(3):666–672, 1977.
- [21] Pavol Hell and Jaroslav Nešetřil. The core of a graph. Discrete Mathematics, 109(1-3):117–126, 1992.
- [22] Russell Impagliazzo, Ramamohan Paturi, and Francis Zane. Which problems have strongly exponential complexity? In 39th Annual Symposium on Foundations of Computer Science, FOCS '98, November 8-11, 1998, Palo Alto, California, USA, pages 653–663. IEEE Computer Society, 1998.
- [23] T. Karthick and Suchismita Mishra. On the chromatic number of (p₆, diamond)-free graphs. *Graphs Comb.*, 34(4):677–692, 2018.
- [24] Ken-ichi Kawarabayashi, Michael D Plummer, and Bjarne Toft. Improvements of the theorem of duchet and meyniel on hadwiger's conjecture. *Journal of Combinatorial Theory, Series B*, 95(1):152–167, 2005.
- [25] Francois Le Gall and Florent Urrutia. Improved rectangular matrix multiplication using powers of the coppersmith-winograd tensor. In *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium* on Discrete Algorithms, SODA 2018, New Orleans, LA, USA, January 7-10, 2018, pages 1029–1046. SIAM, 2018.
- [26] Bingkai Lin. The parameterized complexity of k-biclique. In *Proceedings of the Twenty-Sixth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2015, San Diego, CA, USA, January 4-6, 2015*, pages 605–615. SIAM, 2015.
- [27] Andrea Lincoln, Virginia Vassilevska Williams, and R. Ryan Williams. Tight hardness for shortest cycles and paths in sparse graphs. In Artur Czumaj, editor, *Proceedings of the Twenty-Ninth Annual ACM-SIAM Symposium on Discrete Algorithms, SODA 2018, New Orleans, LA, USA, January 7-10, 2018*, pages 1236–1252. SIAM, 2018.

- [28] Pasin Manurangsi, Aviad Rubinstein, and Tselil Schramm. The strongish planted clique hypothesis and its consequences. In James R. Lee, editor, *12th Innovations in Theoretical Computer Science Conference, ITCS 2021, January 6-8, 2021, Virtual Conference*, volume 185 of *LIPIcs*, pages 10:1–10:21. Schloss Dagstuhl Leibniz-Zentrum für Informatik, 2021.
- [29] Dániel Marx. Can you beat treewidth? In 48th Annual IEEE Symposium on Foundations of Computer Science (FOCS'07), pages 169–179. IEEE, 2007.
- [30] Jaroslav Nešetřil and Svatopluk Poljak. On the complexity of the subgraph problem. *Commentationes Mathematicae Universitatis Carolinae*, 26(2):415–419, 1985.
- [31] Dana Richards and Arthur L Liestman. Finding cycles of a given length. In *North-Holland Mathematics Studies*, volume 115, pages 249–255. Elsevier, 1985.
- [32] Andrew Thomason. The extremal function for complete minors. *Journal of Combinatorial Theory*, *Series B*, 81(2):318–338, 2001.
- [33] Virginia Vassilevska Williams. On Some Fine-Grained Questions in Algorithms and Complexity. In *Proceedings of the International Congress of Mathematicians ICM 2018*, volume 3, pages 3447–3487, 2019.
- [34] Virginia Vassilevska Williams, Joshua R Wang, Ryan Williams, and Huacheng Yu. Finding four-node subgraphs in triangle time. In *Proceedings of the twenty-sixth annual ACM-SIAM symposium on discrete algorithms*, pages 1671–1680. SIAM, 2014.
- [35] Virginia Vassilevska Williams and R. Ryan Williams. Subcubic equivalences between path, matrix, and triangle problems. *J. ACM*, 65(5), August 2018.
- [36] Ryan Williams. A new algorithm for optimal 2-constraint satisfaction and its implications. *Theor. Comput. Sci.*, 348(2-3):357–365, 2005.

Appendix

6.1 Lower Bounds

Proof of Lemma 4.3. First we show that the maximum clique minor of any k-node pattern H is a at most $\lfloor \frac{k+\omega(H)}{2} \rfloor$, where $\omega(H)$ is the size of the maximum clique subgraph of H. Consider any clique minor of H, it partitions the pattern into connected groups, such that there is at least one edge between each two groups. Let the number of groups with exactly one node be α . Note that $\alpha \leq w(H)$, since these single nodes must form a clique. Moreover, the $k-\alpha$ nodes remaining must be in groups of size bigger than one, so they create at most $\lfloor \frac{k-\alpha}{2} \rfloor$ groups. So in total, we have $\lfloor \frac{k+\alpha(H)}{2} \rfloor$ groups. Note that the values of Table 2 match $\lfloor \frac{k+\omega(H)}{2} \rfloor$.

To give clique minors of size $\lfloor \frac{k+\omega(H)}{2} \rfloor$ for complements of paths and cycles, we do the following. If \bar{H} is a path, let $\bar{H} = v_1 v_2 \dots v_k$ and if it is a cycle let $\bar{H} = v_1 v_2 \dots v_k v_1$. First we consider the maximum clique of H: if k is even, it is $\{v_1, v_3, \dots, v_{k-1}\}$, if $\bar{H} = C_k$ for odd k it is $\{v_1, v_3, \dots, v_{k-2}\}$ and if $\bar{H} = P_k$ for odd k it is $\{v_1, v_3, \dots, v_{k-2}, v_k\}$. We have to pair the remaining $k - \omega(H)$ (with possibly one group containing three nodes if $k - \omega(H)$ is odd), such that each group is connected and each two groups have an edge between them. To do so, we need to group them in a way that if the size of a group is 2, then the two

nodes are not of the form v_i, v_{i+2} for some $i \mod k$, because then none of them are adjacent to v_{i+1} which is in the maximum clique and is the only member of its group. Pairing vertices with this restriction can be easily done except for when the pattern is \bar{P}_4, \bar{C}_4 and \bar{P}_5 .

Proof of Lemma 4.4. Let \bar{C}_k be the complement of the cycle $C_k = v_1 v_2 \dots v_k v_1$ for odd integer k > 3. First we show that the chromatic number of \bar{C}_k is $\frac{k+1}{2}$. This is because C_k doesn't have a triangle, so at most 2 nodes can be of the same color in \bar{C}_k . This means that the chromatic number of \bar{C}_k is at least $\frac{k+1}{2}$, and the following proper coloring has exactly $\frac{k+1}{2}$ colors: Color v_1 with 1, and for $i=1,\dots,\frac{k-1}{2}$, v_{2i} and v_{2i+1} with color i.

To show that \bar{C}_k is color critical, it suffices to prove that the chromatic number of $\bar{C}_k \setminus v_1$ is strictly less than $\frac{k+1}{2}$, which can be easily seen by the coloring given above.

6.2 Algorithms

Proof of Theorem 5.2. If $n \le 7$, we look at any subgraph of size 3 in the graph, and check if it is isomorphic to H_1 or H_2 . So suppose n > 7.

First suppose that $H_2 = H_1 \setminus e$ for some edge e = uw in H_1 . Let $v \neq u, w$ be the node in H_1 that is not the endpoint of e. Let v', u' and w' be the corresponding nodes in H_2 , so the edges u'v' and v'w' exist if and only if uv and vw exist. There are three cases for the edge pairs vu and vw: (1) $vu, vw \in E(H_1)$, (2) $\{vu, vw\} \cap E(H_1) = 1$, (3) $vu, vw \notin E(H_1)$. For case (1), look for a node z in the host graph that has degree at least 2. If such z exists, pick two of its neighbors and the two neighbors and z form H_1 or H_2 . If no such z exists, then the graph doesn't have either of H_1 and H_2 . The other cases are similar. For case (2), the host graph has H_1 or H_2 if and only if it has a node z with degree at least 1 and at most v = 1. For case (3) the host graph has v = 1 and only if it has a node v = 1 with degree at most v = 1. The node v = 1 in all the cases can be found in linear time by checking the degree of each node.

The cases that are not covered by the argument above are $\{K_3, I_3\}$, $\{K_3, P_2 \cup I_1\}$ and $\{I_3, P_3\}$. The last two cases are complements of each other, so we prove one of them.

First we show that we can fine induced $\{K_3, I_3\}$ in linear time. WLOG suppose that there is a node v in the host graph with $d(v) \geq 3$ (if no such vertex exists, consider the complement of the host graph). Consider three of the neighbors of v, if two of them are attached, we have a triangle. If there is no edge among them, we have a I_3 .

Finally, we prove that we can detect induced $\{K_3, P_2 \cup I_1\}$ in $O(n^2)$ time. First run the induced $\{K_3, I_3\}$ detection algorithm in linear time. If it finds no pattern, then run the induced $\{I_3, P_2 \cup I_1\}$ detection algorithm and we show that we are done: If it also finds no pattern, then there is no K_3 or $P_2 \cup I_1$ in the graph. If it finds a pattern, since the host graph has no I_3 , it must be $P_2 \cup I_1$. So we are done.

So suppose that the $\{K_3, I_3\}$ detection algorithm finds a pattern. If it is K_3 , then we are done. So suppose it is I_3 . In O(nt) time we can make this independent set into a maximal independent set S, where t is the size of S. For each $v \notin S$ in the host graph, v is attached to at least one node in S. If it is not attached to all the nodes in S, then v with a neighbor and a non-neighbor in S form a $P_2 \cup I_1$. Let S' be the set of all nodes in the host graph that are not in S. We can check the S neighbors of all $v \in S'$ in O(nt) time, and if we don't find any $P_2 \cup I_1$, there is no $P_2 \cup I_1$ or K_3 that contains a vertex in S. So we can recurse on S'. Note that we spent O(nt) time, and if the algorithm on S' takes $O((n-t)^2)$, then the algorithm takes $O(n^2)$ in total.

Proof of Theorem 2.5. We are going to prove the theorem for H being the paw and co-claw.

The paw We first prove two claims.

Claim 3. If N(v) is a clique for some v, then we can determine whether the graph has a 4-cycle or paw in $O(n^2)$ time.

Proof. First note that we can assume that the graph is connected since both patterns are connected. For each $u \notin N[v]$, if the graph has no paws, we have that either u is attached to all vertices in N(v), or it is attached to none. This is because if it is attached to $w \in N(v)$ and not attached to $z \in N(v)$, then $\{v,u,w,z\}$ induces a paw. So let S be the set of vertices attached to all N(v), and let T be the rest. There is no edge between T and S: if $w \in S$ is attached to $u \in T$, then for some $z \in N(v)$, $\{u,v,w,z\}$ induces a paw. Since the graph is connected, this means that $T = \emptyset$. Now if there is an edge zw in S, then for some $u \in N(u)$, $\{u,v,w,z\}$ induces a paw. So there is no edge in S. So the graph consists of a clique, N(v), and an independent set, $G \setminus N(v)$, with all the edges between them present, and it doesn't have a paw or a 4-clique. We visited each edge at most once, so we spent $O(n^2)$ time.

Claim 4. If N(v) has an edge, then we can determine whether the graph has a 4-cycle or paw in $O(n^2)$ time.

Proof. The proof is similar to Claim 3. Check if N(v) has an induced $\bar{p_3}$ by Lemma 5.5. If it does, then there is a paw in the graph, otherwise, N(v) is a complete c-partite graph for some c. Now if two parts of this c-partite graph has size at least 2, we have a 4-cycle. So at most one of them has size at least 2, and the rest have size 1. If all parts have size 1, then N(v) is a clique and by Claim 3 we are done. So let the part with size bigger than 1 be I. Let $J = N(v) \setminus I$. Note that since N(v) has an edge, $J \neq \emptyset$. Let $w \in I$.

For each $u \notin N[v]$, if there is an edge and a non edge in $J \cup w \times u$, then we have a paw since $J \cup w$ is a clique. So u is attached to all vertices in $J \cup w$ or it is adjacent to none. Similar argument works for $J \cup z$ for any $z \in I$. So either u is in a paw and we detect it, u is attached to all N(v), or u is attached to none in N(v). Now if u is attached to $z, w \in I$, then u, v, z, w induce a 4-cycle. So u is attached to none of the vertices in N[u]. We check this for every u. If we don't find any pattern, then N[v] is disconnected from the rest of the graph, and hence G = N[v] and we output that we found no patterns. \square

We run the algorithm of [31] on the host graph to find a non-induced 4-cycle. If it outputs a pattern, then we either have an induced 4-cycle, or a triangle, so we can use Claim 4. If it outputs that there is no 4-cycle, then it means that for every pair of nodes u,v, there is at most one node attached to both u and v, so $\sum_w N(w)^2 = O(n^2)$. So for each node w in the host graph, we check if there is an edge in N(w), and if there is such w, we apply Claim 4. Note that in finding such w we spend $\sum_w N(w)^2 = O(n^2)$ time.

Co-claw First, we remove any vertices with degree n-1 as they cannot be in any of the two patterns. So we can assume that the degree of every vertex is less than n-1. Now run the algorithm of Lemma 5.6 to detect a triangle or a 4-cycle. If it outputs no pattern, then there is no 4-cycle or co-claw in the graph. If it outputs a 4-cycle, we are done as well. So suppose that it outputs a triangle.

Next, we expand the triangle into a maximal clique, by visiting each vertex and seeing if it is adjacent to all the vertices in the clique. Let this maximal clique be C. Suppose that there is a vertex $v \in C$ with no neighbor in $G \setminus C$. Run the algorithm of Lemma 5.6 on $G \setminus C$ to find a triangle or a 4-clique. If the algorithm outputs a triangle, then this triangle with v forms a co-claw. If the algorithm outputs a 4-cycle we are done. If it outputs no pattern, then there is no 4-cycle or co-claw containing v, so we can remove v from the graph. So we can assume that for every $v \in C$, v has at least one neighbor in $G \setminus C$. We have spent $O(n^2)$ time so far.

Now we show that if there is an edge in $G \setminus C$, then we have a 4-cycle or a co-claw. First we check if there is a node $u \in G \setminus C$ that is not attached to at least three nodes in C. If such u exists, then we have a co-claw. So suppose that for each $u \in G \setminus C$, there are at most two nodes in C which are not attached

to u. Let the set of nodes in C not attached to u be S(u). We compute S(u) for every u, in total time of $O(n^2)$. Let e = uw be an edge in $G \setminus C$. If $S(u) \not\subseteq S(w)$ and $S(w) \not\subseteq S(v)$, then there is $v_1, v_2 \in C$ where $v_1 \in S(u) \setminus S(w)$ and $v_2 \in S(w) \setminus S(u)$, and so v_1, v_2, u, w induce a 4-cycle. So WLOG assume that $S(u) \subseteq S(w)$. There are three cases:

(case 1) $S(u) = S(w) = \{v\}$: Since v has a neighbor in $G \setminus C$, there is $z \in C$, $z \neq u, w$, where $zv \in E$. Since C is a maximal clique, there is $v' \in C$, $v' \neq v$, where $v'z \notin E$. Note that $uv', wv' \in E$. If $zu \in E$, then v, v', z, u is a 4-cycle. If $zw \in E$, then v, v', z, w is a 4-cycle. If neither happens, then v', u, w, z induce a co-claw.

(case 2) $S(u) = S(w) = \{v_1, v_2\}$: Let $v_3 \neq v_1, v_2$ be some vertex in C. Since v_3 has degree at most n-2, there is $z \in G \setminus C$ where $zv_3 \notin E$. We know that $uv_3, wv_3 \in E$, and either $zv_1 \in E$, or $zv_2 \in E$, since $|S(z)| \leq 2$. Wlog assume that $zv_1 \in E$. Then either v_1v_3zu is a 4-cycle, v_1v_3wz is a 4-cycle, or uwv_3z is a co-claw.

(case 3) $S(u) = \{v_1\}$, $S(w) = \{v_1, v_2\}$. Let z be a neighbor of v_1 in $G \setminus C$. Suppose z is not adjacent to some $v_3 \in C$, $v_3 \neq v_2$. Then since $uv_3, wv_3 \in E$ either wzv_3v_1 is a 4-clique, zuv_1v_3 is a 4-cycle, or wuv_3z is a co-claw. We can check if such z exists in $O(d(v_1)n)$ time. So assume that there is no such z. This means that for each $z \in G \setminus C$, either $v_1 \in S(z)$, or $S(z) = \{v_2\}$. Since $d(v_1) < n-1$, there exists some $z_1 \in N(v_1)$, and so we have that $S(z_1) = \{v_2\}$. Let $v_3 \in C$, $v_3 \neq v_1, v_2$. Since $d(v_3) \neq n-1$, there is $z_2 \in G \setminus C$, where $v_3 \in S(z_2)$. So $S(z_2) = \{v_1, v_3\}$, and hence $z_2v_2 \in E$. Now if $z_1z_2 \in E$, then $z_1z_2v_1v_2$ is a 4-cycle. Otherwise, $z_1z_2v_1v_3$ is a co-claw.

So if we find no pattern, we can assume that there is no edge in $G \setminus C$. Since $|S(v)| \le 2$ for all $v \in G \setminus C$, this means that there is no co-claw or 4-cycle in G.

6.3 proof of Theorem 5.6

Claw and co-claw First we prove the following claim.

Claim 5. Let $n \ge 11$. If there is a vertex $v \in V(G)$ such that $3 \le d_G(v) \le n-4$, then G has a claw or co-claw and we can find it in $O(n^2)$ time.

Proof. WLOG we can assume that $d_G(v) \geq \frac{n-1}{2}$ (otherwise consider \bar{G}). Let N_v be the set of neighbors of v, and let M_v be the rest of the nodes. We know that $|N_v| \geq 5$ and $|M_v| \geq 3$. Suppose that there is a non-edge uw in M_v . If there is a node $z \in N_v$ that is attached to both u and w, then z, u, w, v form a claw. So we check all node in N_v in O(n) total time, and if we don't find a claw, for all $z \in N_v$, z is not attached to at least one of u and w. Since $|N_v| \geq 5$, there is one of u and w that is not attached to at least 3 nodes in N_v . Suppose u is not attached to $z_1, z_2, z_3 \in N_v$. If there is an edge between z_1, z_2, z_3 , that edge with v and v form a co-claw. Otherwise, there is no edge between v0, v1, v2, v3, v3, v4 form a claw. We can check neighbors of v4 and v6 in v9. The proof of v9 and v9 in v9, v9 form and v9 in v9, v9 form a claw. We can check neighbors of v9 and v9 in v9.

So if there is no non-edge in M_v , there is a triangle in M_v and this triangle with v forms a co-claw.

If n < 11, we check all subgraphs of size 4 for a claw or co-claw. Otherwise, we check the degree of all nodes and if there is a node v such that $3 \le d_G(v) \le n - 4$, by Claim 5 we can find a claw or co-claw in $O(n^2)$ time.

So suppose that there is no such vertex v. So for each $v \in V(G)$, v is either low degree and $d_G(v) \leq 2$ or v is high degree and $d_G(v) \geq n-3$. Suppose that we have both kind of nodes in the graph. WLOG suppose that we have more low degree nodes. Let v be a high degree node. Let N_v be the set of neighbors of v. Since most nodes are low degree, there is a low degree node u in N_v and we can find it in $O(|N_v|)$ time. So there are $z_1, z_2, z_3 \in N_v$ that are not attached to u and we can find them in O(n) time. If there

is a non-edge among z_1, z_2, z_3 , then this non-edge with u and v form a claw. Otherwise z_1, z_2, z_3 form a triangle, and so they form a co-claw with u.

So suppose that all nodes are low degree or all nodes are high degree. WLOG suppose the former happens. Since the degree of all nodes is less than 3, there is no claw in the graph. To look for a co-claw, for every node v we check if it is in a triangle in O(1) time. If it is, then since all nodes are low degree there is a node in the graph that has no neighbors in the triangle, and hence we have a co-claw. This take O(n) time, and overall the algorithm takes $O(n^2)$.

 C_4 and $2k_2$ First we have the following observation that is easily verifiable.

Observation 6.1. [20] If G is decomposed into a clique and an independent set (i.e G is a split graph), it doesn't have a C_4 or $2k_2$.

Now we explain the algorithm. If the size of the graph is at most 31, we check all subgraphs of size 4 to find a C_4 or $2k_2$. So assume that n > 31.

- **Step 1.** Run the algorithm of Lemma 5.8 on G to find a K_4 or a I_4 . WLOG suppose we find a K_4 . In $O(n^2)$, we can turn this 4-clique into a maximal clique C. Let T_C be the set of nodes that are attached to all but exactly one node of the clique: $d_C(v) = |C| 1$ for $v \in T_C$. Let S_T be the rest of the vertices. So for each $v \in S$, we have $d_C(v) \le |C| 2$.
- **Step 2.** Scan S_C for edges in $O(|S_C|^2)$ time. Suppose there is an edge $uv \in S_C$. If there are two nodes $c_1, c_2 \in C$ such that u and v are not attached to c_1 and c_2 , then u, v, c_1, c_2 form a $2k_2$. If such c_1, c_2 don't exist, then there exists $c'_1, c'_2 \in C$ such that $uc'_1, vc'_2 \in E(G)$ and $uc'_2, vc'_1 \notin E(G)$, and so u, v, c_1, c'_2 form a C_4 . So we scan S_T for edges and if we find an edge, in O(n) time we can find either a C_4 or a $2k_2$.

So we can assume that S_T is an independent set.

Step 3. Compute $E^* = E_{T_C}$ which is the set of edges with both endpoints in T_C . If $E^* = \emptyset$, then we can apply Lemma 6.1 below. Otherwise, suppose there is an edge $e = uv \in E(T^*)$ such that $N_C(v) \neq N_C(u)$. Then there are nodes $c_1, c_2 \in C$, such that $uc_1, vc_2 \in E(G)$ and $uc_2, vc_1 \notin E(G)$. So u, v, c_1, c_2 form a 4-cycle.

Now suppose that there is an edge $e = uv \in E(T^*)$ such that $N_C(v) = N_C(u)$. Let $z \in C$ be the vertex u and v are not attached to. Suppose that there is $w \in T_C$ that is attached to z, and let $z' \in N_C(w)$. So $uz', vz' \in E(G)$. If $wu \in E(G)$, then z', z, w, u form a 4-cycle. Similarly if $wv \in E(G)$, then z', z', w, v form a 4-cycle. Otherwise, z, w, u, v form a $2k_2$. So if we haven't found a 4-cycle of $2k_2$ so far, we know that all nodes in T_C have the same neighbors in C, i.e. they are not attached to the same node $z \in C$.

Step 4. Let C' be the clique formed as follows: Remove z from C, add u and v and then make the clique maximal by looking for nodes to add from T_C . This can be done in $O(n \cdot (|C'| - |C|))$ time. We can also compute $T_{C'}$ from $T_C \cup S_C$ in $O(n \cdot (|C'| - |C|))$ time. Note that $z \in S_{C'}$, as it is not attached to $u, v \in C'$. If $T_C \cap T_{C'} = \emptyset$, then $T_{C'} \subseteq S_C$, so $T_{C'}$ is an independent set and we can use Lemma 6.1.

Suppose $x \in T_C \cap T_{C'}$. Suppose $T_{C'} \cap S_C \neq \emptyset$, and $y \in T_{C'} \cap S_C$. Then y and x have different neighborhood sets in C'. So we can repeat steps 2 and 3 and find a pattern.

Now suppose that $T_{C'} \cap S_C = \emptyset$. Then $T_{C'} \subseteq T_C$. We repeat the steps 2,3 and 4 again for C'. Note that step 2 can now be done in $O(n \cdot (|S_{C'}| - |S_C|))$, since $S_C \subseteq S_{C'}$. Step 3 can be done in $O(|E_{T_C}| - |E_{T_{C'}}|)$ and step 4 can be done in O(n + n(|C'| - |C|)). Moreover, the size of the clique is growing, so we repeat at most O(n) times, and thus we spend $O(|E_{T_C}| + n^2)$, until we find a maximal clique C^* that satisfies Lemma 6.1.

Lemma 6.1. Let G be a n-node graph. Let C be a maximal clique in G, let T be the set of nodes v where $d_C(v) = |C| - 1$ and let S be the rest of the nodes, i.e for every node $v \in S$ we have $d_C(v) \leq |C| - 2$. Then if S and T are independent sets, in $O(n^2)$ we can either find a C_4 or a $2k_2$ or show that G doesn't have either of these patterns.

Proof. Suppose there is $v \in S$ such that $d_T(v) \ge 3$, i.e. v has at least three neighbors in T. Let $c_1, c_2 \in C$ be two nodes in C that are not attached to v. Since each node in T is attached to all but exactly one node in C, there is $i \in \{1, 2\}$ such that c_i is attached to at least two nodes in $N_T(v)$, say w_1, w_2 . So v, c_i, w_1, w_2 form a C_4 , and we can find it in O(n) time once we have v.

So we can assume that $d_T(v) \leq 2$ for all $v \in S$. Suppose there is a v with $d_T(v) = 2$ such that v is not attached to at least three nodes c_1, c_2, c_3 in C. Then again since every node in T is attached to all but exactly one node in C, there is $i \in \{1, 2, 3\}$ such that c_i is attached to both nodes in $N_T(v)$. So $N_T(v), c_i, v$ form a C_4 , and we can find it in O(n) time once we have v.

So we can assume that for all $v \in S$ with $d_T(v) = 2$, v is attached to all but exactly two nodes in C. First suppose that $|T| \geq 3$. If there is a node $v \in S$ with $d_T(v) = 2$, let $u \in T \setminus N_T(v)$. Suppose v is not attached to $c_1, c_2 \in C$. If both nodes in $N_T(v)$ are not attached to c_1 , then both are attached to c_2 and $v, N_v(T), c_2$ form a C_4 . Similarly if both nodes in $N_T(v)$ are not attached to c_2 , we have a C_4 . So suppose one is not attached to c_1 and the other is not attached to c_2 . WLOG suppose v is attached to v in v is attached to v in v is attached to v in v i

So we can suppose that either there is a node $v \in S$ with $d_T(v) = 2$ and $|T| \le 2$, or for all $v \in S$, $d_T(v) \le 1$.

First suppose that $d_T(v) \leq 1$ for all $v \in S$. If $d_T(v) = 0$ for all $v \in S$, then $S \cup T$ is an independent set and by Observation 6.1 there is no C_4 or $2k_2$ in G. So suppose that there is $v \in S$ with $d_T(v) = 1$. Let $w \in T$ be the neighbor of v. Suppose that w is not attached to $v \in S$. If $v \in S$ is an independent $v \in S$ that is not attached to v. Then $v \in S$ must be attached to $v \in S$ is attached to all but one node in $v \in S$ of $v \in S$. If there is $v \in S$ is attached to $v \in S$, then since $v \in S$ is not attached to $v \in S$, when $v \in S$ is attached to $v \in S$. If there is $v \in S$ is attached to $v \in S$, then since $v \in S$ is not attached to $v \in S$, when $v \in S$ is attached to $v \in S$. If there is $v \in S$ is not attached to $v \in S$ is attached to $v \in S$.

So suppose that for all nodes $t \in T$, t is not attached to c, and is attached to all nodes $C \setminus c$. Now if there is $v' \in S$, such that $d_T(v') = 1$ and v' is attached to $w' \neq w$, then v, v', w, w' form a $2k_2$ and we can find it in $O(n^2)$ time. So suppose that for all $v' \in S$ with $d_T(v') = 1$, v' is attached to w in T, and is attached to no other nodes in T. Similar to v, we can assume that for any $v' \in S$ with $d_T(v') = 1$, v' is not attached to c (otherwise we find a C_4 in O(n) time). So this means that $\tilde{C} = C \cup \{w\} \setminus \{c\}$ is a clique and $\tilde{T} = T \cup S \cup \{c\} \setminus \{w\}$ is an independent set and $\tilde{C} \cup \tilde{T} = V(G)$. So by observation 6.1, G has no G or G.

Now it suffices to solve the problem for the case where $|T| \leq 2$ and there is $v \in S$ where $d_T(v) = 2$. So |T| = 2. If there is another node $v' \in S$, $v' \neq v$, such that $d_T(v) = 2$, then v, v', T form a C_4 . So for all $v \neq v' \in S$, $d_T(v') \leq 1$. Let $T = \{t_1, t_2\}$. If there is a $c \in C$, such that both t_1 and t_2 are not attached to c, then there is $c \neq c' \in C$, such that v is not attached to c' and c' is attached to both t_1, t_2 , and thus c', v, t_1, t_2 form a C_4 .

So suppose that there are $c_1, c_2 \in C$, such that $t_1c_1 \notin E(G)$ and $t_2c_2 \notin E(G)$. Note that from above we know that if v has at most |C|-3 neighbors in C we can find a C_4 or $2k_2$. So we can assume that v is attached to all but exactly two nodes in C. If v is attached to c_1 , then v, c_1, c_2, t_1 form a C_4 . If v is attached to c_2 , then v, c_2, c_1, t_2 form a C_4 . So we can assume that v is not attached to c_1, c_2 , and is attached to all other nodes in C.

Now we are going to see if we find any C_4 or $2k_2$ containing v. First suppose that v is in a C_4 and u, w

are its neighbors. Both w, u cannot be in C, since C is a clique. If $w \in C_4$ and $u \in T$, then $w \notin \{c_1, c_2\}$, so w is attached to u. So this is not possible either. If $w, u \in T$, then the forth node must be in C, and since it cannot be c_1 or c_2 , it is attached to v, which is again not possible. So there is no C_4 having v as a node.

Now suppose that there is a $2k_2$ containing v. Let the k_2 containing v be vu. If $u \in T$, WLOG suppose $u = t_1$. Since v is adjacent to t_2 , the other k_2 must be fully in C or have one node in C and one node in S. If it is fully in C, then it must be c_1c_2 . But t_1 is attached to c_2 . So the other k_2 has one node in C one node in S. In this case, the node in C must be c_1 since t_1 is not attached to it. So we look at all the neighbors of c_1 in S, and see if they make a $2k_2$ with c_1, t_2, v , in O(n) time.

Now suppose that $u \in C$. This is not possible since all nodes in T are adjacent to v, and all nodes in C are adjacent to u, and so the other k_2 must be fully in S which is an independent set.

So we can remove v from the graph, and now we don't have any node in S that has two neighbors in T, and we can proceed as the case where all nodes in S have at most one neighbor in T.