

Software Resurrection: Discovering Programming Pearls by Showing Modernity to Historical Software

Abhishek Dutta

<https://abhishekdutta.org/sr/>

Abstract—Reading computer program code and documentation written by others is, we are told, one of the best ways to learn the art of writing intelligible and maintainable code and documentation. The software resurrection exercise, introduced in this paper, requires a motivated learner to compile and test a historical release (e.g. 20 years old) version of a well maintained and widely adopted open source software on a modern hardware and software platform. This exercise concludes by writing a critique based on issues encountered while compiling and testing a historical software release on a hardware and software platform that could not have been foreseen at the time of release. The learner is also required to fix the issues as a part of the software resurrection exercise. The seemingly pointless exercise of resurrecting a historical software allows motivated learners to experience the pain and joy of software maintenance which is essential for understanding the factors that contribute to intelligibility and maintainability of program code and documentation. The concept of software resurrection exercise is illustrated using a version of the SQLite database engine that was released 20 years ago. This illustration shows that software engineering principles (or programming pearls) emerge when a historical software release is adapted to run successfully on a modern platform. The software resurrection exercise also has the potential to lay foundations for a lifelong willingness to explore and learn from existing program code.

Index Terms—software resurrection, programming pearls, programming wisdom, intelligible code and documentation, software maintenance

I. INTRODUCTION

This paper introduces the concept of *software resurrection* as an exercise for discovering software engineering principles that helps create intelligible and maintainable program code and documentation. The exercise is pursued by a motivated learner who is already familiar with computer programming and wishes to learn the art of writing program code and documentation that is easy to understand and requires less maintenance. The exercise is carried out on a historical release (e.g. released 20 years ago) of a well maintained and widely adopted software. The selected historical software release should include a self contained suite of tests as well as be written in a programming language that is familiar to the learner.

The software resurrection exercise consists of three stages as shown in Fig. 1. The exercise begins with the compile stage which requires the learner to compile the historical software release on a modern platform. The modern platform, for example, can be a 64 bit multiple core x86 machine running a latest version of Debian Linux with a latest version of a compiler like GCC or Clang. The compilation process

may requiring building the dependency libraries. After the compilation succeeds, the next stage requires the learner to test the compiled software by executing the self contained tests on the same modern platform. The software resurrection exercise concludes with a critique written by the learner which is similar in spirit to the practice of literary criticism in English literature. The critique contains a brief description of the issues encountered during the compilation and the test stages and a detailed description of the fix developed by the learner. The critique allows the learner to reflect and explore if the issues identified during the software resurrection exercise points towards some underlying software engineering principles.

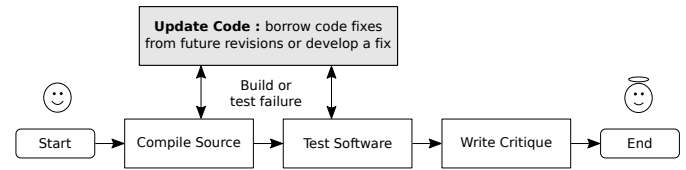


Fig. 1. Software resurrection exercise begins with compilation of an old release of a well maintained and widely used software in a modern hardware and software platform. After successful compilation, the software’s functionality is verified using automated suite of tests included with the release. Learning opportunities are provided by failure in compilation and testing processes. Learners engage with the program code and documentation to develop a fix for these issues. Finally, the exercise concludes by writing a critique of the software code and documentation which provides the opportunity to reflect on the experiences of compiling and testing the software in a modern platform.

How can, one may wonder, the seemingly pointless activity of compiling, testing and critiquing an old software on a modern platform lead to discovery of software engineering principles? The compile and test activities are likely to fail because the developers of the historical software release could not have foreseen the features and constraints of a modern hardware and software platform. These failures reveals some important facet of software engineering and provides a thread of investigation to the learner. For example, if the modern compilers have dropped support for a non-standard feature that was widely used and supported 20 years ago then a historical software relying on such non-standard feature would not compile on a modern platform thereby revealing the cost of relying on non-standard features of a compiler. The software resurrection exercise also requires the learner to develop a fix for any issues encountered during the exercise. To fix an issue, the learner must read and understand the program code and documentation contained in the historical software

release. This provides the learner with a first hand experience of software maintenance. For example, if the program code is well structured and clearly documented, it will simplify the process of fixing the issue caused by compilers dropping support for a non-standard feature. On the other hand, a convoluted code structure, missing documentation, unintelligible identifier names, *etc.* will puzzle the learner and demand more time and require significant effort to develop a fix. Such joys and frustrations are essential to learn the aspects of program code and documentation that survives the test of time and remains intelligible even after many years. Such experiences encourages a motivated learner to adopt best practices in software engineering that brings joy to a maintainer and avoid the aspects of program code and documentation that are difficult to understand or maintain.

The software resurrection exercise also requires the learner to write a critique of the software which provides an opportunity to reflect on the experiences gathered during the compilation and testing stages. Every issue encountered by the learner points to an assumption or a decision made by the developers of the historical software release several years ago. The critique activity encourages the learner to not only identify those assumptions and decisions but also develop an understanding of the circumstances under which those assumptions and decisions were made. For example, the decision to rely on a non-standard feature of a compiler was, most likely, based on the assumption that such features will always be supported by the compilers. However, such assumptions may not hold after 20 years and therefore would result in compilation or testing failure. To understand the circumstances under which this decision was made, the learner has to investigate about the alternative options that were available at that time and if choosing one of the alternative options would have avoided the failure. Furthermore, the learner could also investigate if it would have been wiser to not have a software feature that is based on a non-standard feature of the compilers of that age. Such reasoning and reflections allows the learner to truly understand the factors that contributed to the failure. This helps develop an impartial view towards a software engineering practice.

There is no quantitative experimental data yet to support the claim that the proposed software resurrection exercise allows a learner to discover software engineering principles behind intelligible and maintainable program code and documentation. Readers are encouraged to pursue the software resurrection exercise and self evaluate their learning experience. Philosophy provides some insights into the effectiveness of the software resurrection exercise which allows modern day developers to break free “from the tyranny of the here and the now” [1, p.162] by introducing them to program code and documentation that are remote in time. Such forays into historical software releases enables a learner to view things (*e.g.* software engineering practices) from different perspectives. The learner is no longer captive of their personal viewpoints and becomes capable of surveying a wider horizon of ideas thereby contributing to growth in their wisdom. It is this wisdom that

emerges as programming pearls that are commonly shared by experienced programmers who get to know about many things that are remote in time or space by the virtue of their long careers spanning various application domains. Bertrand Russel, a 20th century philosopher, remarked that wisdom can be learned by such excursions into “things that are somewhat remote in time or space”.

Section II shows an example of the software resurrection exercise pursued on a version of the SQLite database engine that was released 20 years ago. The compile and test stages are described in Section II-A and II-B respectively. The critique stage is described in Section III. Additional examples of software resurrection exercise are available online¹. Section IV discusses other work that are related to the concept of software resurrection. The conclusions from this research is presented in Section VI.

II. SOFTWARE RESURRECTION OF SQLITE-2002

SQLite is a light weight and portable database engine that has been actively developed since the year 2000 and has seen wide adoption by users. Its program source code is dedicated to the public domain which entails complete freedom to use the program code for any purpose; this paper uses it for learning. The version 2.2.1 of SQLite released in the year 2002 – henceforth referred as *sqlite-2002* – has been selected as the historical release for the software resurrection exercise because it

- is sufficiently remote in time (i.e. 20 years old),
- has a publicly accessible version controlled history of all code revisions, and
- includes self contained suite of tests to verify its functionality.

The *sqlite-2002* is compiled and tested on the following hardware and software platform as described in Section II-A and Section II-B respectively.

- *Hardware* : Dell XPS 15 laptop purchased in 2019 containing Intel i9-9980HK CPU @ 2.40GHz (x86_64, Little Endian) with address sizes of 39 bits physical(48 bits virtual) and 16 CPUs.
- *Software* : Debian GNU/Linux 11.4 (bullseye) operating system released on 9th July 2022 with Linux Kernel 5.10.0-16-amd64 and a build system comprising of gcc-10.2.1, GNU Make 4.3 and GNU Autoconf 2.69.

The software resurrection of *sqlite-2002* concludes with a critique, an example of which is presented in Section III. Some of the details have been omitted from the description of compilation and testing stages in order to improve the readability of this paper; full details are included in the online version.

A. Compile Source

The *sqlite-2002* (i.e. *sqlite-2.2.1* release) is downloaded and compiled using the standard autoconf based `./configure`

¹<https://abhishekdua.org/sr/>

and make commands. The first build issue is related to a breaking change introduced by the GCC compiler.

```
varargs.h:4:2: error:
#error "GCC no longer implements ."
varargs.h:5:2: error:
#error "Revise your code to use ."
...
sqlite/tool/lemon.c:1096:1: error:
expected declaration specifiers before
'va_dcl'
```

1) *Compiler Drops Support:* The sqlite-2002 does not compile in gcc-10.2.1 (2021) and autoconf 2.69 (2012) because the SQL statement parser defined in `tool/lemon.c` uses `varargs.h` header file which was deprecated by the gcc compiler since 4.0 (2005) release. The gcc compiler dropped support for `varargs.h` since April 2004 and switched to supporting `stdarg.h` header file to provide the same functionality. The sqlite developers must have adapted their code before the compilers implemented this breaking change. Therefore, version control history of sqlite should contain a fix in one of the future revisions. The vararg issue was fixed only in sqlite-2.8.1 release by replacing dependence on `varargs.h` with `stdarg.h`. Unfortunately, a fix for this issue did not appear in a single version control revision (or commit) and the code updates have to be selectively borrowed from the sqlite-2.8.1 release.

2) *Name Conflict with Standard Library:* After resolving the `varargs.h` issue, the compilation proceeds ahead and reveals the second issue caused by naming conflict with the standard library.

```
../sqlite/src/shell.c:50:14: error:
conflicting types for 'getline'
| static char *getline(char *zPrompt, ...) {

/usr/include/stdio.h:616:18: note:
previous declaration of 'getline' was here
| extern __ssize_t getline (char ** ...)
```

The error message informs that the `getline()` method has been declared by the standard library as well as the `src/shell.c` sqlite source. If the `getline()` method were a part of the standard library at the time of release, the authors would have renamed their version of `getline()` before the release to avoid such conflicts. Therefore, the standard library must have been updated after the release of sqlite-2002. It is highly likely that one of the code revisions (or checkout) in the version control history of SQLite may contain a fix for this issue as the SQLite software would have adapted to this change in the standard library. A search of the version control system of sqlite for the keyword “`getline()`” returns only one result which corresponds to the revision that resolved the name conflict. The conflict resolution involved renaming the method to `local_getline()`. This wise decision has ensured that the renamed method has not required such changes in more than 20 years since the change. The sqlite-2002 source compiles successfully after applying the patch generated from the sqlite public version control repository.

B. Run Tests

The sqlite-2002 is tested using the standard autoconf based `make test` command. An output like “All tests passed” generated by the test command provides assurances that the software behaves in an expected way. However, the test command fails to compile because the Tcl library required to build the tests is missing. The autoconf’s configure script – created in 2002 – is responsible for locating all the dependencies required to compile the tests. This script is unable to recognise the more recent version of Tcl library that is installed using the operating system’s package manager. Therefore, the script that compiles all the tests (*i.e.* Makefile which gets generated by the configure script) is manually updated such that the `TCL_FLAGS` and `LIBTCL` variables point to the Tcl library installed by the operating system.

1) *Breaking Changes Introduced by a Dependency:* The build system is able to locate the Tcl library. However, the latest version of Tcl library appears to be incompatible as revealed by the following compilation error.

```
sqlite/src/tclsqlite.c:622:36: error:
" Tcl_Interp" has no member named "result"
| if( zInfo==0 ) zInfo = interp->result;
```

The error message indicates that the Tcl library has introduced a breaking change because of which the `result` field is not available in the `Tcl_Interp` data structure. The `Tcl_Interp` API documentation describes this breaking change and requires users of this legacy feature to define the `USE_INTERP_RESULT` macro in order to enable access to the `result` field. This issue gets resolved by defining the required macros as advised by the API documentation. The tests compile successfully after an `extern` qualifier is added to the declaration of a variable flagged as undefined by the compiler.

2) *A 32 Bit Software in a 64 Bit System:* Tests compile successfully but the tests fail to execute on a modern platform due to a `SEGFAULT` error.

```
./testfixture ../sqlite/test/quick.test
bigrow-1.0... Ok
bigrow-1.1... Ok
...
btree-1.4.1... Ok
btree-1.5...
make: [Makefile:232: test] Segmentation fault
```

The `SEGFAULT` errors are caused by programs trying to access a memory location that it is not allowed to access. The program code that is causing this error can be located using the GNU Debugger (gdb) backtrace functionality.

```
$ gdb --args .libs/lt-testfixture ...quick.test
(gdb) run
...
btree-1.4.1... Ok
btree-1.5...
Program received signal SIGSEGV
(gdb) backtrace
#0  sqliteBtreeCursor (pBt=0x555e3db0, ...)
    at ../sqlite/src/btree.c:823
```

```
#1 btree_cursor (argv=0x555555588a80, ...)
  at ../sqlite/src/test3.c:527
#2 btree_cursor (argv=0x555555588a80, ...)
  at ../sqlite/src/test3.c:506
...
#8 main (argv=0x7fffffffdf8, ...)
  at ../sqlite/src/tclsqlite.c:620
```

The backtrace output shows that the pointer address for argv variable is 64 bit long (*i.e.* 0x555555588a80) while the pointer address pBt is only 32 bits long (*i.e.* 0x555e3db0). An arduous debugging session reveals that the SEGVFAULT is caused by the program code that incorrectly converts the btree pointer address to string representation by wrongly assuming that memory addresses are 32 bits long. This assumption was true in the year 2002 when the memory could conveniently be represented by only 32 bits. In a modern 64 bit platforms, memory addresses are represented by 64 bits (*i.e.* 8 bytes). This issue requires fix in two places: first when a pointer address is converted to string representation and second when the string representation is converted back to pointer address. The string representations are used by the Tcl script to operate on a test database. To address the first issue, the %p format specifier (instead of %x which assumes 32 bit argument) is used to represent the 64 bit pointer address as string. The second issue is addressed by using strtol() function to convert back the string representation to the pointer address as shown below. Such fixes have to be applied at multiple places in the following source files: src/{test1.c, test2.c, test3.c}.

```
static int btree_open(...)
{
    ...
    //sprintf(zBuf, "0x%
    sprintf(zBuf, "%
    ...
}
...
static int btree_pager_stats(...)
{
    ...
    //if(Tcl_GetInt(interp, argv[1], (int*)&pBt))
    // return TCL_ERROR;
    pBt = strtol(argv[1], NULL, 16);
    if(!pBt) return TCL_ERROR;
    ...
}
```

The SEGVFAULT error continues to show up during the testing process. Further gdb traces reveal that the src/sqliteInt.c source code also assumes that pointer variable can be represented by an int variable which does not hold true in 64 bit systems. Therefore, code is updated as follows.

```
//# define INTPTR_TYPE int
# define INTPTR_TYPE long

/* Big enough to hold a pointer */
typedef INTPTR_TYPE ptr;
typedef unsigned INTPTR_TYPE uptr;
```

All the tests runs successfully to completion after applying

these fixes.

III. CRITIQUE OF SQLITE-2002

A version of the SQLite database engine that was released 20 years ago was compiled and tested on a modern hardware and software platform. Several issues were encountered during this exercise. Developing a fix for those issues provided valuable insight into the factors that contribute to intelligibility and maintainability of a program code and its documentation. This section shows some of the key ideas in software engineering that emerges from the software resurrection exercise.

A. Change is the only constant in a software.

A software tool operates in an ecosystem created by hardware (e.g. CPU, memory, etc.), operating system and software libraries. This ecosystem is continually changing in order to address the requirements of the changing world. Therefore, change is the only constant also in the life of a software. It is wiser to accept and embrace the fact that changes to a software will be necessary as it moves forward in time.

“Everything changes and nothing stands still.” –
Heraclitus (a Greek philosopher)

A class of updates to a software that will prevent normal operation of other software tools or services that depends on the software is called a *breaking change*. While a breaking change is undesirable, it is often essential. The Issue II-A1 has revealed that it is important to have flags or markers that caution the users of such breaking changes at the point of usage. The GCC compiler developers have wisely chosen to include a varargs.h file in all GCC compiler distributions – since 2004 – which produces an informative error message when the compiler attempts to use the unsupported varargs.h header file.

```
$ cat /usr/lib/gcc/.../include/varargs.h
#ifdef _VARARGS_H
#define _VARARGS_H

#error "GCC no longer implements ."
#error "Revise your code to use ."

#endif
```

Posting critical information at the point of usage is an important construct for introducing a breaking change. In the case of compilers, this involves showing an informative error message when a user tries to access an unsupported feature. Further details about a breaking change can also be disseminated through other forms of communication like mailing list, software release document, etc. For example, the GCC compiler release document contains a clear and concise notice about this breaking change.

“GCC no longer ships <varargs.h>. Use
<stdarg.h> instead.” – GCC 3.4 Release Series

The developers of the Tcl library could not provide information about a breaking change at the point of usage. To find a fix for Issue II-B1, a maintainer has to explore the software documentation. A more intelligible compiler error message

suggesting a corrective action would have been more useful. For example, a software trying to access the `result` field of the `Tcl_Interp` data structure should be informed with an error message that this feature is no longer available without defining the macro `USE_INTERP_RESULT`. The GCC compiler permits, for example, the `deprecated` attribute for a function to show a warning if the an unsupported function gets used. However, such a feature is not available for data member access and is the reason, most likely, why such informative warnings were not generated when the `result` field of the `Tcl_Interp` data structure was accessed.

B. To depend or not to depend, is a profound question that the wise can answer.

The SQLite developers chose to rely on a non-standard feature (i.e. `vararg.h`) provided by the compilers of their time (i.e. year 2002). The Issue II-A1 revealed that dependence on non-standard features makes the software vulnerable to changes in ecosystem thereby increasing maintenance costs.

Issue II-B1 revealed another fact about software dependencies; if software A depends on a software library B then it implies that A has accepted that its fate is tied with the fate of B. The SQLite software uses the TCL library to implement its test suite. One can understand the benefit of this dependence; it allows the SQLite developers to easily write tests in the Tcl scripting language which is more concise, clear and easier to maintain. The cost of such dependence is often overshadowed by the benefits. All dependencies have a cost and understanding the cost is the first step in taking a wise decision on whether to depend on a third party library or to develop your own functionality. “To depend or not to depend is the question my dear developers”, would have asked Shakespeare if he were reflecting on the pros and cons of software dependencies. A wise developer will look at the benefits and costs of a software dependency with certain degree of impartiality in order to truly evaluate the impact of such dependencies.

C. Unitary (or atomic) revisions to a version control system are more useful.

Software developers often use a Version Control System (VCS) to keep a historical record of changes (or, revisions) being made to a software. Such historical record of revisions not only helps understand the growth of a software and its structure but also allows changes to be removed with surgical precision when the software behaves in undesirable ways. It is easier to understand and reason about a revision that introduces only one conceptual change (e.g. a feature, a bug fix, a new test case, etc.) in a software. Such revisions can be said to be unitary (or atomic) as they reflect a unit of change in the software.

The value of unitary revisions were realised while fixing the Issue II-A2. The `getline()` identifier name conflict with the standard library was fixed as a single revision in the version control history of the SQLite. This revision contained relevant keywords (e.g. `getline`) in the revision log message that

made it easier to locate. Such a unitary revision was not available for Issue II-A1 whose fix was more difficult to develop as the fix required manually selecting code updates from one of the future revisions. Therefore, unitary (or atomic) revisions with a revision log containing all the relevant keywords are useful. When deciding about the keywords relevant for a revision, it helps to think about a learner who is allowed to search the revision log history using only one or two keywords.

D. Global Identifier Names Should be both Unique and Intelligent

The developers of `sqlite-2002` came up with the `getline()` method name well before the method was defined in the standard library through the `<stdio.h>` header file. They fixed this name conflict by renaming the method to `local_getline()` which not only avoided conflict with the `getline()` method in the standard library but also avoided any future conflicts with other software. This was a wise decision because the updated method name has survived more than 20 years of change in compilers and standard libraries.

In some programming languages, like the C programming language, the identifier names (e.g. function names, variable names, etc.) are stored in either global or local scope. Names stored in the global scope (e.g. function names such as `getline()`) are accessible to all parts of the program and therefore have greater chance of conflicting with other parts of the software (e.g. standard library). Identifiers in the local scope (e.g. variable names defined within a function) are only accessible in that local scope and therefore has smaller chance of conflict with other identifiers defined in that scope. Here is an example, taken from the SQLite code, showing identifiers in both global and local scope.

```
static char *getline(char *zPrompt, FILE *in){
    char *zLine;
    int nLine;
    ...
}
```

In the above code snippet, the function name `getline()` is stored in the global scope and therefore it can be invoked from any part of the program including the local scope of any other function. On the other hand, the variable `zPrompt`, `in`, `zLine`, `nLine` are stored in the local scope of the `getline()` function and therefore these variables are only accessible from within the `getline()` function.

Programmers have to deal with the following two conflicting requirements when crafting the identifier names that have to live in the global scope.

- *Uniqueness* : The identifier names must to be unique so that it does not conflict with identifiers that are currently defined and the identifiers that will get defined in the future in other parts of the software (e.g. standard library, dependent libraries, etc.). So the challenge for the programmer is to think of an identifier name that cannot be possibly thought by anyone else.

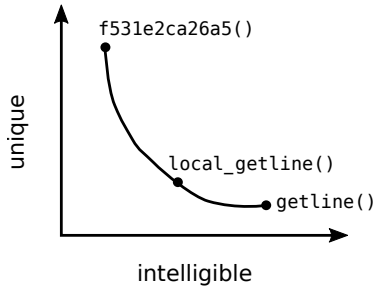


Fig. 2. Identifier names (e.g. function name, variable name, etc.) in the global scope should be both unique and intelligible. Only unique or only intelligible identifier names are less useful.

- *Intelligible* : The identifier names should be intelligible in order to convey the purpose of that identifier to the reader. The more informative an identifier name is, the more useful it is to the reader.

If one chooses a fairly unique name (e.g. `f531e2ca26a5()`) then it is unlikely that this identifier name will ever conflict with any other identifiers. However, such identifier names will not be intelligible to the readers as it does not convey any meaning. On the other hand, one can choose a highly intelligible identifier name (e.g. `getline()`) that fully conveys the purpose of the method. However, such an intelligible name would also invite conflict as it is highly likely that others will also want to use such an intelligible name for a function that has a similar purpose. Therefore, one has to choose an identifier name that lives in the global scope by carefully balancing the uniqueness and intelligibility requirements. The developers of SQLite chose such a balance by adding the prefix `local` to the method name.

Many programming languages have introduced the concept of namespace to compartmentalise global identifier names into buckets (or, namespace) such that these identifiers can only be accessed using the name of the bucket. For example, in the C++ programming language the `getline()` method defined by the standard library would be placed in the `std` namespace and be accessed using `std::getline()` identifier name. The `getline()` function defined by the SQLite database engine would be placed in the `sqlite` namespace, for example, and would be accessed using `sqlite::getline()` identifier name. One could argue that this is similar to the practice of adding a prefix (or suffix) to an identifier name in order to avoid conflicts. This is a valid argument. However, a feature provided by the compiler makes the concept of namespace more useful in reducing conflict and improving intelligibility. Namespaces have a scope and if an identifier is used within a namespace, then one can remove namespace name prefix from the identifier name. The default compiler behaviour is to assume that all identifier names without the namespace prefix correspond to the current namespace. This feature helps to improve intelligibility while maintaining uniqueness. However, the reader is required to be aware of the current namespace in order to correctly resolve an identifier name.

E. Tests build trust

The SQLite database engine was ready to use after the successful compilation of the `sqlite-2002` as described in Section II-A. One could create some tables, insert some sample data, search for an entry and delete those entries to confirm that the database engine is functioning properly even after 20 years of its release. While these mock tests allow verification of the basic functionality of the software, it is not sufficient to build trust in the software. In other words, the ad hoc and mock tests cannot convince someone to use this software for storing and managing critical information like financial or medical data. One requires more stronger guarantees which can only be provided by automated and self contained tests that can be run by the users in their own machines. The developers of the `sqlite-2002` are best placed to build such automated tests because they can reasonably be expected to quantify the desired behaviour of the software. Such suite of software tests are essential to build trust between the user and the software. The `sqlite-2002` software contains such a self contained suite of tests and therefore allows its users to build such a trust even after 20 years of its release.

F. Tests define the expected behaviour of a software.

Successful compilation of a 20 year old software (*i.e.* `sqlite-2002`) on a modern platform brought happiness and a sense of achievement. However, these feelings were quickly overshadowed by doubts as it became clear that the `sqlite-2002` software was not designed to run on future platforms; the developers of SQLite could not be foreseen how the hardware and software would change in 20 years. Therefore, although the software compiled successfully in a modern platform, it was not known if the software can function in the way that its developers had expected during its release in the year 2002. Is it possible to concretely define the behaviour of a software as it was desired in the year 2002?

The `sqlite-2002` documentation states that this version of `sqlite`, “implements a large subset of SQL92.” and allows “atomic commit and rollback protect data integrity”. It is possible to prepare some SQL query statements based on the SQL92 standard and prepare some SQL tables to test atomic commits. However, will these be sufficient to confirm that the software is truly behaving in the way it was designed to operate before its release in the year 2002? The developers of `sqlite-2002` were best placed to know the desired and expected behaviour of this version of SQLite. One could write hundreds of pages of documents to describe the expected behaviour of a software. However, the only quick and easy way to verify the functionality of a software is to define the expected behaviour of the software in the form of automated and self contained tests. These tests not only verify functionality of a software on a new platform but also acts as a concrete specification of the correct behaviour of a software. Such tests are also useful for developing an understanding of the input and output characteristics of a software.

G. Who tests the Test?

An automated and self contained test suite is a program code that has been designed to test a software. The test suite invokes various features of the software with a set of test inputs and compares it against a set of corresponding test outputs. If the test suite has a complex logic and involves substantial amount of program code then the test suite merits a testing process for itself to ensure that the test code does not have any flaws. This leads to a recursive testing dependency in which a tests suites is developed to test another test suite. Such a never ending scenario can only be avoided by a test suite that is so simple that it does not demand a test for itself. A simple test suite has minimal code and has minimal chances of failure. Only such a simple test suite is capable of assuring that a failed test case points to a failure in the software being tested and does not correspond to a flaw in the test code itself.

The test cases (e.g. `btree-1.1`) in `sqlite-2002` are defined using the Tcl programming language (e.g. `test/btree.test`). The core SQLite database engine is defined using the C programming language (e.g. `src/btree.c`). A test driver layer contains a set of functions (e.g. `btree_open` defined in `src/test{1,2,3}.c`) that allows the Tcl based test specifications to access functionality of the core SQLite database engine. Fig. 3 illustrates the control and data flow for the test case `btree-1.1` which verifies the ability of the sqlite engine to create a new database and represent it using a btree data structure stored in a disk file.

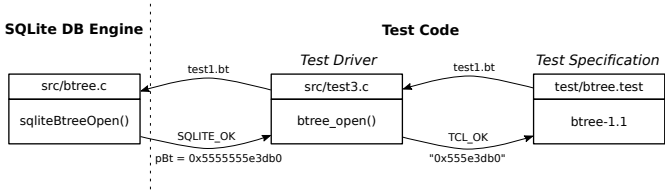


Fig. 3. Illustration of control and data flow for test executions in `sqlite-2002`. The test specifications are defined in the Tcl scripting language. The sqlite core database engine uses the C programming language. A driver layer exposes the functionality of the sqlite core database engine library which exposes different functionality of the core sqlite database engine as Tcl commands.

The `sqlite-2002` tests failed to run on a modern 64 bit platform because the test driver layer assumed that memory addresses were 32 bits long. Such an assumption broke most of the test code because the driver layer wrongly translated 64 bit pointer addresses (e.g. `0x5555555e3db0`) to 32 bit pointer addresses (e.g. `0x555e3db0`) by dropping the higher 32 bits portion of the address. The test code did not operate properly and therefore failed to properly test the software. The test control and data flow shown in Fig. 3 must have its merits and therefore was chosen by the `sqlite-2002` developers. However, this failure forces one to rethink about introducing any complexity in test suites and aim for tests that are based on the most fundamental and stable features of a compiler.

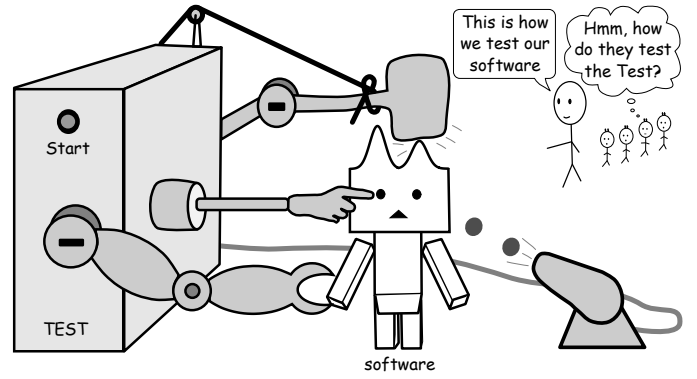


Fig. 4. If the program code for testing a software is complex, then it demands a test for itself. A test suite is useful only when it is simple to operate and therefore does not merit a test for itself.

H. SQLite-2002 is an intelligible and maintainable software

The SQLite database engine that was released 20 years ago can be compiled in a modern hardware and software platform. It also delivers all the features included in the original software release as evidenced by successful execution of the regression tests. The program code and regression tests required corrective software maintenance in order to address the changes in the hardware and software libraries. These maintenance activities could be performed by a modern day developer because the program code is well documented. A README text file provides an inviting introduction to the software. Every function definition in the source code includes a clear and concise description of its purpose. The user defined data types are intelligible because of their identifier names as well as the comments accompanying them. The software's architecture and purpose of its various components are also well documented in a set of self contained and static and offline HTML files that are generated by the `autoconf's` `make doc` command. These documents and comments, written 20 years ago, communicates to a modern day developer with remarkable effectiveness and clarity. The `sqlite-2002` software is therefore an intelligible and maintainable software that is equally valuable for learning some of the software engineering principles.

IV. RELATED WORK

The software resurrection exercise provides an opportunity to engage with historical program code and documentation. Such engagements with things that are remote in time or space has been recognised by many as a valuable learning experience. Harry R. Lewis [2] has compiled a book containing research papers from Computer Science that have shaped the modern age. The goal of this book is to relieve modern day readers of the "misimpression that the established conventions of the [Computer Science] field were handed down to contemporary culture in finished form" [2].

Reading program code and documentation is an integral part of the software resurrection exercise. The compilation and testing stages requires a learner to read the program

code and documentation in order to understand the issues that prevents the software from operating in a modern hardware and software platform. Such active engagement with program code written by others has been recommended by many as a method to improve one's ability to write maintainable and intelligible software. For example, [3] have designed a course for a professional Master program in Software Engineering that teaches students "how to read the code of an existing, large-scale system to become an effective contributing member of its community".

The software resurrection exercise also facilitates the discovery of programming pearls (or wisdom) by allowing learners to engage with historical program code and documentation. Such active engagements naturally evokes, in one's mind, the words of programming wisdom that are often shared by experienced programmers. By virtue of their long programming careers and their engagement with program code and documents from a wide variety of application, experienced programmers are able to come up with the programming wisdom that helps learners understand the practice of computer programming. Jon Bentley collected a set of such programming wisdom in a book titled "Programming Pearls" and remarked that "these programming pearls have grown from real problems that have irritated real programmers" [4]. Kernighan and Plauger advised programmers to "Write clearly – don't be too clever" [5] possibly because they had gone through the challenges of understanding a cleverly optimised code and endured the cost of maintaining such unintelligible code. Donald E. Knuth reflected similar sentiments by warning programmers that "premature optimisation is the root of all evil (or at least most of it) in programming" [6]. The software resurrection exercise provides experiences and context that allows a learner to truly understand the meaning of these programming pearls.

V. DISCUSSION

This paper has introduced the concept of software resurrection as a learning exercise. Historical release of the SQLite database engine, released 20 years ago, was compiled and tested in a modern hardware and software platform as a part of the software resurrection exercise. Some of the issues (*e.g.* issues II-A1 and II-A2) encountered during this exercise were easy to fix particularly because it was possible to borrow code from future version control revisions of the SQLite code repository. These issues requires few hours of exploration and learning. The Issue II-B2 has been presented in this paper in a condensed form but required many hours (at least 3 weekends) to fix and was indeed a frustrating experience as the explorations often led to a dead end. The software resurrection exercise does require a motivated learner who has the perseverance to systematically investigate an issue and logically reason about possible solutions. The frustrating experiences contribute to learnings that will potentially stay for a life long. Well written code and documentation provides the joy that is similar to the emotions evoked by a good novel, poem or an essay. The true value of self contained

and automated tests is realised when a 20 year old code says "All tests passed" on a modern hardware and software platform that could not have been foreseen by the past. The software resurrection exercise has already helped at least one programmer but has the potential to enlighten many more programmers.

VI. CONCLUSION

The software resurrection exercise requires a learner to compile, test and critique a historical released of a well maintained and widely adopted software on a modern hardware and software platform. The learner is required to fix issues encountered during the compilation and testing process. These activities simulates the software maintenance process and allows the learner to engage with program code and documentation written by others. An example of the software resurrection exercise provides early indications that it is a valuable tool for learning the art of writing intelligible and maintainable program code and documents. Further examples and experience reports from prospective learners are required to scientifically validate this claim.

REFERENCES

- [1] B. Russell, *Portraits from Memory and other Essays*. George Allen and Unwin Ltd, 1956.
- [2] H. R. Lewis, *Ideas that Created the Future: Classic Papers of Computer Science*. MIT Press, 2021.
- [3] B. Ryan, A. M. Soria, K. Dreef, and A. van der Hoek, "Reading to write code: An experience report of a reverse engineering and modeling course," in *2022 IEEE/ACM 44th International Conference on Software Engineering: Software Engineering Education and Training (ICSE-SEET)*, 2022, pp. 223–234.
- [4] J. Bentley, *Programming pearls*. Addison-Wesley Professional, 2016.
- [5] B. W. Kernighan and P. J. Plauger, *Elements of programming style*. McGraw-Hill, Inc., 1974.
- [6] D. E. Knuth, "Computer programming as an art," *Commun. ACM*, vol. 17, no. 12, p. 667–673, dec 1974.