

# The Complexity Classes of Hamming Distance Recoverable Robust Problems

Christoph Grüne

Department of Computer Science, RWTH Aachen University, Germany  
gruene@algo.rwth-aachen.de

## Abstract

In the well-known complexity class  $NP$  are combinatorial problems, whose optimization counterparts are important for many practical settings. These problems typically consider full knowledge about the input. In practical settings, however, uncertainty in the input data is a usual phenomenon, whereby this is normally not covered in optimization versions of  $NP$  problems.

One concept to model the uncertainty in the input data, is *recoverable robustness*. The instance of the recoverable robust version of a combinatorial problem  $P$  is split into a base scenario  $\sigma_0$  and an uncertainty scenario set  $S$ . The base scenario and all members of the uncertainty scenario set are instances of the original combinatorial problem  $P$ . The task is to calculate a solution  $s_0$  for the base scenario  $\sigma_0$  and solutions  $s$  for all uncertainty scenarios  $\sigma \in S$  such that  $s_0$  and  $s$  are not too far away from each other according to a distance measure, so  $s_0$  can be easily adapted to  $s$ . This paper introduces *Hamming Distance Recoverable Robustness*, in which solutions  $s_0$  and  $s$  have to be calculated, such that  $s_0$  and  $s$  may only differ in at most  $\kappa$  elements.

We survey the complexity of Hamming distance recoverable robust versions of optimization problems, typically found in  $NP$  for different scenario encodings. The complexity is primarily situated in the lower levels of the polynomial hierarchy. The main contribution of the paper is a gadget reduction framework that shows that the recoverable robust versions of problems in a large class of combinatorial problems is  $\Sigma_3^P$ -complete. This class includes problems such as VERTEX COVER, SUBSET SUM or HAMILTONIAN CYCLE. Additionally, we expand the results to  $\Sigma_{2m+1}^P$ -completeness of recoverable robust problems for  $m \in \mathbb{N}$  recoveries.

# 1 Introduction

The concept of *robustness* in the field of optimization problems is a collection of models that consider uncertainties in the input. These uncertainties may for example arise from faulty or inaccurate sensors or from a lack of knowledge. Robustness measures can model these types of uncertainty that occur in practical optimization instances into an *uncertainty set*. The goal is to find solutions that are stable over all possible uncertainties in the uncertainty set. That is, these solutions remain good but not necessarily optimal regardless what the uncertainties turn out to be in reality.

One specific robustness concept is *recoverable robustness*, which is a recently introduced concept [1]. The input of a recoverable robust version of a problem  $P$  is a *base scenario*  $\sigma_0$ , which is an instance of problem  $P$ , as well as a set of *uncertainty scenarios*  $S$ , whose members are again instances of  $P$ . The set of uncertainty scenarios  $S$  is the uncertainty set of the problem. We are asked to compute a solution  $s_0$  to the base scenario  $\sigma_0$  and to compute solutions  $s$  to all members of the uncertainty scenarios  $\sigma \in S$  such that  $s_0$  and all  $s$  are not too far away from each other corresponding to a distance measure. The solution on the base scenario does not directly include the uncertainties but needs to include the potential to adapt the base solution  $s_0$  to solutions  $s$ . Thus, the base solution  $s_0$  may be restricted by these possibly harmful scenarios. The optimization function is usually but not necessarily the sum over the cost of the base solution and the recovery solution.

The scenarios may be encoded in many different ways. The most intuitive encoding are *explicit encodings*, in which the base scenario and all other scenarios are encoded completely as an instance of the base problem. A more efficient encoding is an *implicit encoding*, which stores the elements which are different from the base scenario for the uncertainty scenarios. From this, the explicit encoding can be calculated in polynomial time. At last, we take *compression encodings* into account, which store the elements together with logical operators. One possibility of formalization are *xor-dependencies* on elements. A *xor-dependency* on two combinatorial elements means that either the one element or the other are in a scenario but not both.

From a worst-case-analysis point of view, the uncertainty scenarios are chosen by an adversary. The algorithm computes a base solution with the potential to adapt to all scenarios. Then, the adversary chooses the most harmful scenario based on the base solution. Finally, the algorithm computes a recovery solution to adapt to the chosen scenario.

A more general concept is *multiple recoverable robustness*, in which not only one set of scenarios is provided but  $k$  sets of uncertainty scenarios are provided. The *k-multiple recoverable robust problem* asks to solve the recoverable robust problem on the individual sets of scenarios inductively. That is, a base solution  $s_0$  has to be found such that one can recover from  $s_0$  for the first set of scenarios  $S_1$  to a solution  $s_1$  such that one can recover from  $s_1$  for the second set of scenarios  $S_2$  and so forth such that one can recover from  $s_{k-1}$  for the  $k$ -th set of scenarios  $S_k$  to a solution  $s_k$ .

## 1.1 Related Work

In the recent years many publications of different problems in the area of recoverable robustness were made. One of the first introductory papers to the recoverable robustness concept were written by Liebchen et al. [1] in 2009. Büsing [2] applied this concept on the problem S-T-PATH and other standard combinatorial problems to gather algorithmical and complexity results in the area of *NP*. In 2012, Cicerone et al. [3] introduced the concept of multi-stage recoverable robustness. This was also introduced by Cicerone et al. [4] as dynamic recoverable robustness.

Especially, in railway planning recoverable robustness is a popular and important concept. A survey on recoverable robust railway problems were made by Lusby et al. [5] in 2018. Many results were published on recoverable robust railway optimization, for all parts of the railway planning process since 2008. Cacchiani et al. [6] surveyed the rolling stock planning problem. For train shunting problems, Cicerone et al. [7] introduced algorithms and for timetabling, Cicerone et al. [8] developed algorithms for uncertainty based on single

delay. Furthermore, Cadarso and Marin [9] analyzed the recoverable robustness concept in the realm of rapid transit network design.

Exact and approximation algorithms were researched for other optimization problems besides railway planning as well. For example, Goerigk et al. [10] published a paper on an 4-approximation of the recoverable robust travelling salesman problem in 2021 and Bouman et al. [11] introduced a column generation framework for solving recoverable robust problem types in 2011.

## 1.2 Contribution

To the best of the author’s knowledge, recoverable robustness optimization was primarily studied on algorithms for special problems. Corresponding complexity results mainly consider only *NP*-hardness results. However, the complexity of problems based on this concept are typically not only *NP*-hard but are situated higher in the polynomial hierarchy. We study this on the concept of Hamming Distance Recoverable Robustness, which is adapted from Büsing’s *k*-Dist Recoverable Robustness [2] concept.

For the complexity analysis, different forms of encodings are of interest. If the scenarios are explicitly encoded or implicitly encoded, the problem stays *NP*-complete. The compression encoding with *xor*-dependencies induces a combinatorial explosion because with  $n$  *xor*-dependencies  $2^n$  scenarios can be encoded. This combinatorial explosion leads to a complexity which lies higher in the polynomial hierarchy. In the following, scenarios that are compression encoded with *xor*-dependencies are called *xor*-dependency scenarios.

The main contribution is a gadget reduction framework. Gadget reduction concepts were studied for example by Agrawal et al. [12], who defined gadget reductions under  $AC^0$  for *NP*-completeness, and Trevisan et al. [13], who formalized constraints of a linear program to be a gadget in the reduction between linear programs. Our gadget reduction framework is based on combinatorial problems and preserves the scenarios independent of the encoding. Thus, this gadget reduction framework allows for reduction between Hamming distance recoverable robust problems, whereby the transitivity of the reductions is preserved. First of all, we establish the *NP*-completeness for the recoverable robust versions of typical *NP*-complete optimization problems, if the scenarios are encoded explicitly or implicitly, what means that the individual scenarios can be computed in polynomial time. Secondly, the recoverable robust versions of typical *NP*-complete combinatorial problems with *xor*-dependency scenarios are  $\Sigma_3^P$ -complete. Finally, we extend these results to multiple recoverable robustness. We show that typical *NP*-complete combinatorial problems are  $\Sigma_{2m+1}^P$ -complete for  $m \in \mathbb{N}$ , where  $m$  is the number of recoveries.

## 1.3 Paper Summary

In the first section, we build a framework for combinatorial decision problems to define Hamming distance recoverable robust problems. In the second section, we use the framework to survey the complexity for polynomially computable scenario encodings. Thereby, we consider typical optimization problems, which are in *NP* or *NP*-complete. The third section consists of the analysis of compression-encoded scenarios, based on *xor*-dependencies, and their complexity. Furthermore, we look at multiple recoverable robustness and its complexity. At last, we establish various classes of Hamming distance recoverable robust problems by using our combinatorial decision problem framework and universe gadget reductions.

## 2 Preliminaries

The concept of *k*-dist recoverable robustness was introduced by Büsing [2]. A *k*-dist recoverable robust problem asks for a solution for a base scenario and solutions for one or more scenarios, from which we want to recover, by adding at most  $k$  elements to the recovery scenario solution, which were not used in the base scenario solution.

In this paper, we define a slightly different concept, which we denote as *Hamming distance recoverable robustness* and show complexity results for a large class of Hamming distance recoverable robust problems. For this, we use a special type of reduction, which can be used for many combinatorial problems based on scenarios on the combinatorial elements of the problem instance.

## 2.1 Definitions

In order to give a precise and useful definition of Hamming distance recoverable robust problems, we introduce a definition for combinatorial decision problems. A combinatorial problem consists of combinatorial elements, the universe,  $U$  and relations  $R$  over  $U$  and its relations.

The universe elements in universe  $U$  are the combinatorial atoms of the problem. Examples are the literals  $\ell \in L$  in 3-SATISFIABILITY, the vertices  $v \in V$  of graph problems or the numbers in  $\{i_1, \dots, i_n\} \in \mathbb{N}^n$  of number problems such as SUBSET SUM.

The relations in the relation set  $R$  are defined with the help of a recursively defined generating set  $\mathcal{R}$ . The set  $\mathcal{R}$  captures all supersets of relations on the universe elements and the relations itself. The relations of 3-SATISFIABILITY are for example the clause relation  $\{(\ell_a, \ell_b, \ell_c) \mid \{\ell_a, \ell_b, \ell_c\} \in C\}$  or the literal-clause relation  $\{(\ell, C_j) \mid \ell \in C_j\}$ . The relations of a graph problem are the edges  $E$  or all vertex covers of size  $k$ ,  $VC = \{\{v_1, \dots, v_k\} \mid \{v_1, \dots, v_k\} \text{ is a vertex cover of size } k\}$ .

### Definition 2.1 (Combinatorial Decision Problem)

Let  $g : \mathbb{N} \rightarrow \mathbb{N}$  a permutation and  $r, s \in \mathbb{N}$  with  $r \leq s$ . A tuple  $P_C = (U, R, F)$  is a combinatorial decision problem if

- $U$  is a set of universe elements.
- $R$  is a tuple of  $r$  relations over  $U$  or its relations. That is,

$$R = (R_1, \dots, R_r) \text{ for } R_i \subseteq \mathcal{R}_{g(i)} \in \mathcal{R}, 1 \leq i \leq r,$$

where

$$U \in \mathcal{R} \tag{1}$$

$$\text{if } A \in \mathcal{R}, \text{ then } 2^A \in \mathcal{R} \tag{2}$$

$$\text{if } A, B \in \mathcal{R}, \text{ then } A \times B \in \mathcal{R} \tag{3}$$

- $F \subseteq \{(f_1, \dots, f_s) \mid f_i \subseteq \mathcal{R}_{g(i)} \in \mathcal{R}, 1 \leq i \leq s\}$ , for some  $g : \mathbb{N} \rightarrow \mathbb{N}$  is the set of feasible solutions. If and only if an instance is a no-instance, then  $F = \emptyset$ .

We will use  $I$  as index set to denote the indices of the tuple  $1 \leq i \leq s$ .

To put the definition into context, we show how different relations can be generated by  $\mathcal{R}$ . The clause relation is generated by using the Cartesian product (3) on literals (1). The literal-clause relation  $\{(\ell, C_j) \mid \ell \in C_j\}$  is generated by the Cartesian product (3) on the literals (1) and the clauses (3). Undirected edges  $E$  of a graph problem are generated as a set (2) of two vertices (1). In contrast, directed arcs  $A$  of a graph problem are tuples (3) of literals (1). Furthermore, the set of all vertex covers of size  $k$ ,  $VC = \{\{v_1, \dots, v_k\} \mid \{v_1, \dots, v_k\} \text{ is a vertex cover of size } k\}$ , is a set (2) of  $k$  vertices (1). An example for a unary relation on the universe elements is the vertex (1)  $s$  or vertex  $t$  in the problem USTCON.

Observe that for combinatorial problems, the encoding of the input and the solutions depends only on the universe of elements. Thus, the universe elements in  $U$  build the atoms of the problem. The relations  $R$  model the relations between these atoms. The feasible solutions  $F$  model all possible combinations of universe elements and relations that are feasible. For this, the universe elements and all relations are part of the feasible solution set. Additionally, relations that model the feasibility relations of the combinatorial problem are part of the feasible solution set. These additional relations are used mostly implicit because they are the central relations given by the problem.

For a better understanding, an example for a combinatorial decision problem is the UNDIRECTED S-T-CONNECTIVITY (USTCON).

**Example 2.2 (Undirected  $s$ - $t$ -Connectivity Problem)**

The problem USTCON asks if there is a  $s$ - $t$ -path in an undirected graph. The *input* of USTCON is a graph  $G = (V, E)$  and two vertices  $s, t \in V$ . A *feasible solution* is a path from  $s$  to  $t$  in  $G$ . This translates to the following tuple  $\text{USTCON} = (U, R, F)$ .

The universe  $U$  consists of the vertices  $V$  of graph  $G$ , that is,  $U = V$ . The relations in  $R$  are the edges  $e \in E(G)$ , that is,  $R = (E)$ . The set of feasible solutions  $F$  are all  $V, E$  and  $s$ - $t$ -paths in  $G$ , that is,  $F = V \times E \times \mathcal{P}$ , where  $\mathcal{P}$  is the set of  $s$ - $t$ -paths in  $G$ . (We include  $V, E$  by Def. 2.1, thus all vertices and edges such that they build up a  $s$ - $t$ -paths in  $G$  are included.)

**Hamming Distance Recoverable Robustness**

For Hamming Distance Recoverable Robust problems, we need a definition of Hamming distance over a set.

**Definition 2.3 (Symmetric Difference and Hamming Distance of Sets)**

Let  $A, B$  be two sets. Then, we define the Hamming distance  $H(A, B)$  of set  $A$  and  $B$  to be

$$H(A, B) := |\{x \mid \text{either } x \in A \text{ or } x \in B\}|$$

For the Hamming Distance Recoverable Robust problems, we use explicit encodings, implicit encodings or compression encodings. These types are all based on combinatorial elements of an instance. The scenarios of a recoverable robust problem can be encoded over different combinatorial elements, not only the universe elements but also over relations or a combination of both. The intuitive definition, however, is over the universe elements only. If a combinatorial element, either an universe element or a relation element, is not part of a scenario, then all relation elements that include this combinatorial element are discarded in the scenario as well. For example, if a vertex in a graph problem is discarded, then all edges incident to that vertex are discarded as well.

First, we will use explicit encodings by providing the complete instance encoding over the base problem  $P_A$ . Additionally, we use implicitly encodings by providing a set of all elements that are different from base scenario  $\sigma_0$ . We call the elements that are part of the current scenario the *active* elements. In other words, active elements are those elements that are usable in a solution to the scenario, otherwise we call the elements *inactive*. Furthermore, we address compression encodings of scenarios as well. Compression encodings use logical operators to encode a usually exponential number of scenarios in polynomial space.

Now, we define Hamming Distance Recoverable Robust Problems. Intuitively, a Hamming distance recoverable robust problem  $P_A^{\text{HDDR}}$  is based on a normal combinatorial decision problem  $P_A$ , e.g. USTCON, whereby the scenarios are defined as follows.

**Definition 2.4 (Scenarios)**

A scenario of the problem  $P_A^{\text{HDDR}}$  is a problem instance of the problem  $P_A$ . We distinguish the *base scenario* from *uncertainty scenarios*. The base scenario  $\sigma_0$  is the instance on which the first solution  $\mathbf{s}_0$  has to be computed. The uncertainty scenarios  $\sigma \in S$  are the scenarios for which the solution  $\mathbf{s}$ , that has to be adapted from  $\mathbf{s}_0$ , has to be computed. All scenarios of a problem may share universe elements or relation elements.

We not only have to find a solution for one instance, but for one base scenario  $\sigma_0$  and for all recovery scenarios  $S$ . That is, we can recover from every possible scenario with a solution to the problem. The solutions to the recovery, nonetheless, may have a Hamming distance of at most  $\kappa$  to the solution of the base scenario. Formally, we obtain the following definition.

**Definition 2.5 (Hamming Distance Recoverable Robust Problem)**

A tuple  $P_A^{\text{HDDR}} = (U, R, F)$  is a Hamming Distance Recoverable Robust Problem based on problem  $P_A$ , if  $P_A^{\text{HDDR}}$  is a combinatorial decision problem with the following specifications:

$U = U_0 \cup \bigcup_{\sigma \in S} U_\sigma$  is the universe. The universe is the union over all universe elements that occur in a scenario.

$R = (R_0, (R_\sigma)_{\sigma \in S}) = ((R_0^1, \dots, R_0^r), (R_\sigma^1, \dots, R_\sigma^r)_{\sigma \in S})$  are the relations. The relations are separate for each scenario.

$F = (F_0, (F_\sigma)_{\sigma \in S}) = ((F_0^1, \dots, F_0^r), (F_\sigma^1, \dots, F_\sigma^r)_{\sigma \in S}, \{(s_0, (s_\sigma)_{\sigma \in S}) \mid H(s_0, s_\sigma) \leq \kappa \text{ for all } \sigma \in S\})$  are the feasible solutions.

The feasible solutions are included in  $F$ , separately for each scenario. Only the last relation covers the Hamming distance of  $\kappa$  between the solution  $s_0$  for the base scenario  $\sigma_0$  and the recovery solutions  $s_\sigma$  for each scenario  $\sigma \in S$ .

Observe that the specifications are not restrictions because every decision problem can be formulated as one base scenario and no recovery scenarios, that is  $S = \emptyset$ . On the other hand, the base problem  $P_A$  is a restriction of  $P_A^{HDDR}$  by setting  $S = \emptyset$ . Furthermore, the base scenario is defined by  $\sigma_0 = (U_0, R_0, F_0)$  and all uncertainty scenarios  $\sigma \in S$  are defined by  $\sigma = (U_\sigma, R_\sigma, F_\sigma)$ .

Again, we provide an example for a better understanding of the definition and again, we use the USTCON problem.

**Example 2.6 (HAMMING DISTANCE RECOVERABLE ROBUST USTCON)**

Let  $G = (V, E)$  a simple graph,  $s, t \in V$ . HAMMING DISTANCE RECOVERABLE ROBUST USTCON, short USTCON<sup>HDDR</sup>, is a Hamming distance recoverable robust problem over universe  $V(G)$ . We may include cost functions  $c_V$  on  $V(G)$  or  $c_E$  on  $E(G)$  in order to find a short  $s$ - $t$ -path; the feasible solutions are all paths that are shorter than some  $k$ .

- Each scenario  $\sigma \in S$  encodes which vertices or edges are available in  $\sigma$ . (If we search for a short undirected  $s$ - $t$ -path, each scenario  $\sigma \in S$  also encodes the costs on the vertices or edges)
- $\mathcal{P} \times \mathcal{P}^S$  encodes whether a given pair of tuples of vertices  $(p, p_\sigma)$  is a path in graph  $G$  for all  $\sigma \in S$ , that is

$$p' \stackrel{?}{\in} V^{\leq |V|} \wedge \{p'_i, p'_{i+1}\} \stackrel{?}{\in} E \wedge p'_j \neq p'_{j'},$$

for  $i \in \{1, \dots, |p'| - 1\}$  and  $j, j' \in [|p'|], j \neq j'$  for all  $p' \in \{p\} \cup \{p_\sigma \mid \sigma \in S\}$ , and

$$H(p, p_\sigma) \leq \kappa, \text{ for all } \sigma \in S.$$

- (If a short undirected  $s$ - $t$ -path is to be sought, the cost of the solution is the sum of the vertex costs or edge costs of all paths)
- $F$  consists of all vertices  $V$ , edges  $E$  and  $(p, p_{\sigma \in S}) \subseteq \mathcal{P} \times \mathcal{P}^S$  leading all from  $s$  to  $t$ .

$$\exists p \in S : \forall \sigma \in S : \exists p_\sigma \in \mathcal{P}^S : (p, p_\sigma) \in F.$$

(If the shortest undirected  $s$ - $t$ -path is to be sought,  $F$  contains only short paths from  $s$  to  $t$  over all scenarios, that is more precisely,

$$\exists p \in \mathcal{P} : \forall \sigma \in S : \exists p_\sigma \in \mathcal{P}^S : (p, p_\sigma) \in F \wedge c(p, p_\sigma) \leq k.)$$

### 3 Recoverable Robust Problems with Polynomially Computable Scenario Encodings

We will now survey the problems with polynomially computable scenario encodings. That is, all scenarios can be polynomially generated into fully encoded instances. For this, we will first establish the containment in  $NP$  and after that the hardness of such problems.

**Theorem 3.1** *Let  $P_A \in NP$ . Then  $P_A^{HDDR} \in NP$ , if the set of scenarios  $S$  of  $P_A^{HDDR}$  is polynomially computable.*

*Proof.* We present a polynomially verifiable certificate.

The certificate is  $(\sigma_0, S, s_0, (s_\sigma)_{\sigma \in S})$  all encoded as lists of elements.

Because  $\sigma_0$  and  $S$  encoded as sets can be polynomially computed from the input encoding and  $s_0$  and  $(s_\sigma)_{\sigma \in S}$  are subsets of  $\sigma_0$  and  $S$  correspondingly, the length of the certificate is at most polynomial in the input length.

Furthermore, the certificate is verifiable in polynomial time by the following algorithm. First, check whether  $s_0$  is really a solution to  $\sigma_0$ . Second, check whether  $s_\sigma$  is a solution to  $\sigma$  for all  $\sigma \in S$ . Third, check whether  $H(s_0, s_\sigma) \leq \kappa$  for all  $\sigma \in S$ .

Step one and two are polynomially computable because  $P_A \in NP$  and all scenarios for themselves are an instance of problem  $P_A$ .

Step three is easily polynomially computable by iterating over each scenario pair. Observe again that  $|S|$  is at most polynomial in the input length.  $\square$

Besides, general polynomially computable scenarios, we may have so called  $\Gamma$ -scenarios. They are an interesting and popular robustness concept. These consist of all scenarios that deviate in at most  $\Gamma$  many elements from the base instance corresponding to a set of possible activatable elements. If  $\Gamma$  is constant, we use the previous Theorem 3.1 for the following Corollary 3.2.

**Corollary 3.2** *Let  $P_A \in NP$ . Then  $P_A^{HDDR} \in NP$ , if the set of scenarios  $S$  of  $P_A^{HDDR}$  consists of all possible  $\Gamma$ -scenarios for a constant  $\Gamma$ .*

The following Lemma 3.3 can be directly established by Theorem 3.1. The original reduction to  $P_A$  can be reused by setting the scenario set  $S = \emptyset$ .

**Lemma 3.3** *Let  $P_A$  be an NP-complete problem. Then,  $P_A^{HDDR}$  is NP-complete if the set of scenarios  $S$  of  $P_A^{HDDR}$  is polynomially computable.*

*Proof.* The reduction from  $P_A$  is trivial because the scenarios can be set to  $S = \emptyset$  showing the hardness of  $P_A^{HDDR}$ . On the other hand, Theorem 3.1 proves the containment.  $\square$

### 3.1 Reduction for UNDIRECTED S-T-CONNECTIVITY

We have shown that problems with polynomial computable scenarios are in  $NP$ . The hardness for those problems can be established as well. For this, we use a simple problem as basis, the logspace-complete UNDIRECTED S-T-CONNECTIVITY (USTCON).

**Theorem 3.4** *There is a deterministic logarithmic space computable reduction from 3-SATISFIABILITY to  $USTCON^{HDDR}$  with one base and one recovery scenario. In short,  $3-SATISFIABILITY \leq_L USTCON^{HDDR}$ .*

*Proof.* First of all, there is a reduction from UNDIRECTED HAMILTONIAN CYCLE to 3-SATISFIABILITY, which is based on the reductions

$$3-SATISFIABILITY \leq_L DIRECTED HAMILTONIAN CYCLE$$

and

$$DIRECTED HAMILTONIAN CYCLE \leq_L UNDIRECTED HAMILTONIAN CYCLE$$

from Arora and Barak [14]. This is computable in logarithmic space. We will use this reduction to develop the reduction for  $USTCON^{HDDR}$ .

We can either define the scenarios over vertices or over edges. This, however, is equivalent in this reduction realm, because we can easily introduce a vertex for every edge, such that for the deletion of such a vertex the former edge is deleted. On the other hand, we can delete all incident edges of a vertex to exclude the vertex from a possible solution. For the sake of simplicity, we use edge scenarios in the reduction.




Figure 1: Example Instance for UNDIRECTED HAMILTONIAN CYCLE

We further provide a reduction from UNDIRECTED HAMILTONIAN CYCLE to  $\text{USTCON}^{\text{HDRR}}$ . Let  $G = (V, E)$  be a graph of the UNDIRECTED HAMILTONIAN CYCLE instance. We will map  $G$  to a graph  $G' = (V', E')$ , a base scenario  $\sigma_0$  and a recovery scenario  $\sigma_1$  as a  $\text{USTCON}^{\text{HDRR}}$  instance. A simple example instance for the construction can be found in Fig. 1.

First, all  $v \in V$  are duplicated  $|V| + 2$  times to connect them to one path. In Fig. 2 the duplication procedure is depicted.

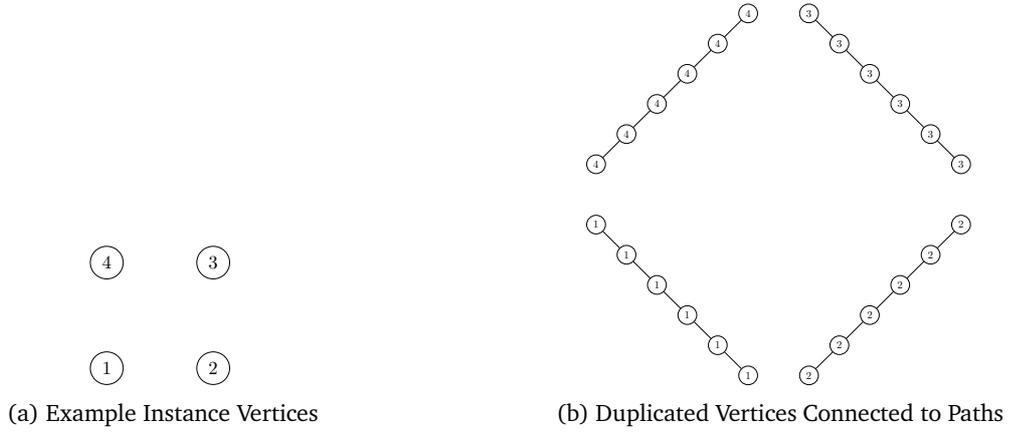


Figure 2: Duplication of Nodes

We then connect all of those duplicate paths to one big circle graph, which will be the base scenario  $\sigma_0$ , see Fig. 3.

For the recovery scenario  $\sigma_1$ , we deactivate the connections between the paths but not the paths themselves. Furthermore, we activate the actual edges of  $G$ . This is depicted in Fig. 4.

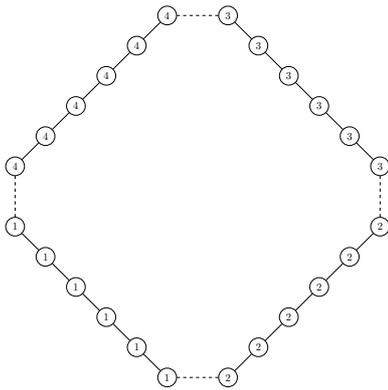


Figure 3: The Base Scenario

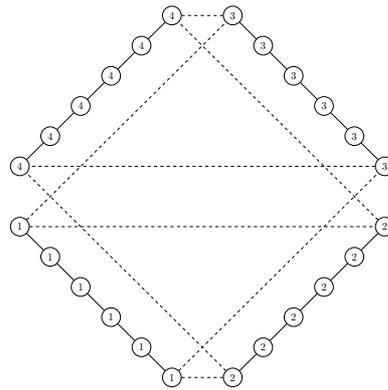


Figure 4: The Recovery Scenario

On one hand, the construction of the base scenario  $\sigma_0$  forces the base solution  $s_0$  to be the circle itself. The solution  $s_0$  is presented in Fig. 5a. On the other hand, the duplicate paths force the recovery solution to go over these duplicate paths because of setting  $\kappa = |V(G)|$  prevents the solution  $s_1$  from evading these paths. The possible solutions for the recovery scenario are shown in Fig. 5b.

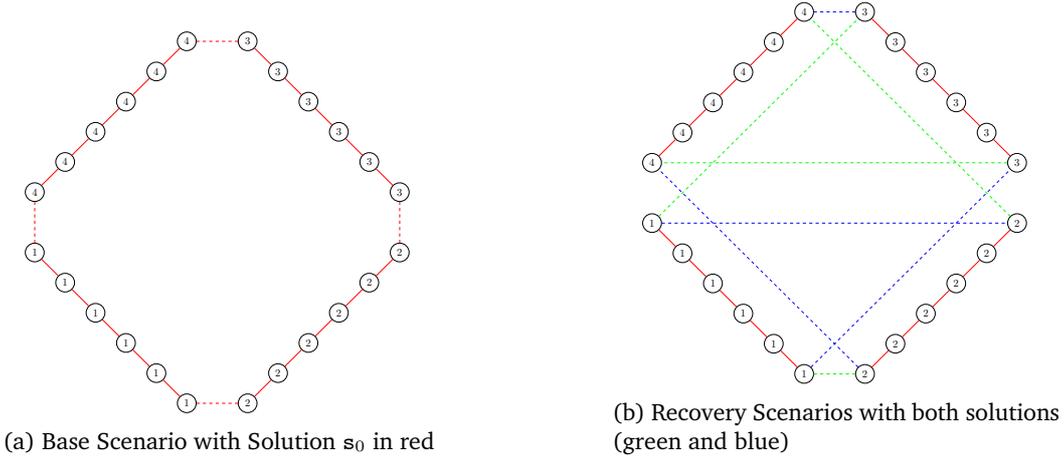


Figure 5: Both Scenarios with Solutions

The last thing to do is to introduce vertices  $s$  and  $t$ . These can be additional vertices, which we connect to the end of the duplicate path of vertex 1 and the neighboring vertex at the end of the duplicate path of vertex 1. The edge between the vertices in the duplicate path of vertex 1 has to be removed.

**Claim 3.5** *The reduction is computable in logarithmic space.*

*Proof.* The reduction is clearly computable in logarithmic space, because we only have to count the number of vertices in the duplication procedure. The connection to the circle is also directly possible if the number of vertices is known. At last, the introduction of the edges for the base scenario is only a duplication procedure based on the original graph, which is directly computable if the number of vertices is known.

**Claim 3.6** *The reduction is correct.*

*Proof.* First of all, the only solution for the base scenario is the path from  $s$  to  $t$  over the former cycle in  $\sigma_0$ . If a Hamiltonian cycle exists in the graph, then it is possible to compute the solution  $s_1$  for the recovery scenario. We can use the edges from the Hamiltonian cycle and use the one of both of the corresponding edges in the recovery scenario. Thus, the duplicate paths are connected to a Hamiltonian cycle as well. On the other hand, if there is no Hamiltonian cycle, there is no path from  $s$  to  $t$  in the recovery scenario. The base scenario  $\sigma_0$  in combination with the small  $\kappa = |V(G)|$  enables the possibility to switch only away from the edges that connect the duplicate path. However, it is not possible to switch away completely from a duplicate path as there are  $|V(G)| + 1$  edges. Thus, there will be no path from  $s$  to  $t$ .

Claim 3.5 and Claim 3.6 prove the theorem. □

## 4 Recoverable Robust Problems and the Polynomial Hierarchy

In this section, we want to survey the connection between Hamming Distance Recoverable Robust problems and the polynomial hierarchy. For this, we need more efficient encodings than the explicit or implicit encoding of scenarios. A more efficient encoding can be based

on compression in order to capture a large number of scenarios in a short encoding. One instance of such compression encodings can be established by *xor-dependency* scenarios.

**Definition 4.1 (*xor*-Dependency Scenarios)**

Let  $S = (\{(E_{1,1}, E_{1,2}), \dots, (E_{n,1}, E_{n,2})\}, E')$  be the scenario-encoding, where  $E_{i,j} \cap E_{i',j'} = \emptyset$  and  $E' \cap E_{i,j} = \emptyset$  for all  $i, j, i', j' \in \{1, \dots, n\}, i \neq i'$  or  $j \neq j'$ , whereby  $E$  and  $E_{i,j}$  are sets of combinatorial elements. Then the corresponding scenario set  $S$  includes all  $\sigma$  of the form  $\sigma = E' \cup \{E_1, \dots, E_n\}$  with either  $(E_i = E_{i,1})$  or  $(E_i = E_{i,2})$  for all  $i = 1, \dots, n$  and  $E'$  is a fixed set of combinatorial elements, which are activated and deactivated in all scenarios. We denote the scenarios with this property as *xor*-dependency scenarios.

Observe that with a linear sized encoding, exponentially many scenarios may be encoded. We study this combinatorial explosion with the result that it introduces more complexity for Hamming Distance Recoverable Robust problems. For this, we use 3-SATISFIABILITY as base problem and show the  $\Sigma_3^p$ -hardness of 3-SATISFIABILITY<sup>HDRR</sup> with a linear number of *xor*-dependencies. Furthermore, we show also that if  $P_A \in NP$ , then  $P_A^{\text{HDRR}}$  with a linear number of *xor*-dependencies is in  $\Sigma_3^p$ .

**Theorem 4.2** *If  $P_A \in NP$ , then  $P_A^{\text{HDRR}}$  with a linear number of *xor*-dependencies is in  $\Sigma_3^p$ .*

*Proof.* We present an  $\exists\forall\exists$ -ATM  $M$  that solves  $P_A^{\text{HDRR}}$  with a linear number of *xor*-dependencies in polynomial time. For this,  $M$  encodes the scenario  $\sigma_0$  and the solution  $s_0$  to the base scenario ( $\exists$ ). Secondly,  $M$  encodes the scenarios  $\sigma$  for all  $\sigma \in S$  ( $\forall$ ). Lastly,  $M$  encodes the solution  $s_\sigma$  for the selected ( $\exists$ ).

Because  $\sigma_0$  and each  $\sigma \in S$  encoded as sets can be polynomially computed from the input encoding and  $s_0$  and  $(s_\sigma)_{\sigma \in S}$  are subsets of  $\sigma_0$  and  $\sigma \in S$  correspondingly, the length of the input to the verifying algorithm is at most polynomial in the input length.

Furthermore, the given  $\exists\forall\exists$ -input is verifiable in polynomial time by the following algorithm. First, check whether  $s_0$  is really a solution to  $\sigma_0$ . Second, check whether  $s_\sigma$  is a solution to  $\sigma$  for all  $\sigma \in S$ . Third, check whether  $H(s_0, s_\sigma) \leq \kappa$  for all  $\sigma \in S$ .

Step one and two are polynomially computable because  $P_A \in NP$  and all scenarios for themselves are an instance of problem  $P_A \in NP$ .

Step three is easily polynomially computable by iterating over each scenario pair. Observe again that a scenario  $\sigma \in S$  is at most polynomial in the input length. □

**Theorem 4.3** 3-SATISFIABILITY<sup>HDRR</sup> with a linear number of *xor*-dependencies is  $\Sigma_3^p$ -hard.

*Proof.* We reduce  $\exists\forall\exists$ -SATISFIABILITY to 3-SATISFIABILITY<sup>HDRR</sup>.

Let  $(X, Y, Z, C)$  be the  $\exists\forall\exists$ -SATISFIABILITY-instance, where  $\exists X \forall Y \exists Z C(X, Y, Z)$  is the formula with clauses  $C(X, Y, Z)$ . We denote the 3-SATISFIABILITY<sup>HDRR</sup>-instance as  $I$ .

We modify the variable set as follows. The variable sets  $X$  and  $Z$  remain the same. We replace  $Y$  by two sets  $Y'$  and  $Y''$ . Thereby,  $Y'$  represents the true literal and  $Y''$  represents a the false literal. We further introduce a dummy variable set  $X'$  of size  $|Y| + |Z|$ .

Moreover, we modify the clause set. Every clause that includes a literal  $y_i \in Y$  will be replaced by two clauses in which  $y_i \in Y$  is replaced by  $y'_i \in Y'$  and  $y''_i \in Y''$  for all  $i \in \{1, \dots, |Y|\}$ , respectively. Besides, we introduce clauses  $1 \leftrightarrow y'_i$  and  $0 \leftrightarrow y''_i$  for all  $i \in \{1, \dots, |Y|\}$ .

The first scenario of  $I$  consists of variables  $X$  and the fresh  $X'$ . Thus, the clauses of the first scenario are  $C(X, Y, Z)|_X$  and the variables of  $X'$  are dummy variables that force an assignment of  $|Y| + |Z|$  variables that will not be in recovery scenarios. This only multiplies the number of clauses by 8 as we have a 3-SATISFIABILITY instance.

The recovery scenarios of  $I$  are encoded as scenarios with *xor*-dependencies. The variables are from sets  $X, Y', Y''$  and  $Z$ . The *xor*-dependencies are introduced on  $Y'$  and  $Y''$  with  $y'_i \oplus y''_i$  for all  $i \in \{1, \dots, |Y|\}$ . The variable sets  $X$  and  $Z$  are active in every recovery scenario.

At last, set  $\kappa = |Y| + |Z|$ .

Based on this definition, we have a reduction from  $\exists\forall\exists$ -SATISFIABILITY to 3-SATISFIABILITY<sup>HDRR</sup>.

This reduction is computable in polynomial time because for each literal and each clause in  $(X, Y, Z, C)$  a fixed amount of literals and clauses in  $I$  are created. Furthermore, the formula can be transformed into an equisatisfiable formula in polynomial time via Tseytin's transformation [15].

For the correctness, we have to prove that the *xor*-dependency scenarios in the construction are logically equivalent to a for all of the  $\exists\forall\exists$ -SATISFIABILITY formula.

First, we focus on the  $\exists X$  part. A solution to the base scenario is a valid solution to  $C(X, Y, Z)|_X$ . Overall,  $|X| + |Y| + |Z|$  variables are assigned a value. Under those are  $|X|$  variables for the solution to  $C(X, Y, Z)|_X$  and  $|Y| + |Z|$  dummy variables. Because all recovery scenarios do not have those  $|Y| + |Z|$  dummy variables, a solution always switches away from those dummy variables to  $|Y| + |Z|$  different variables. Because  $\kappa = |Y| + |Z|$ , the base solution forces  $X$  to be a solution to  $C(X, Y, Z)|_X$  for all recovery scenarios.

Next, we concentrate on the  $\forall Y$  part. First, the clauses  $1 \leftrightarrow y'_i$  and  $0 \leftrightarrow y''_i$  for all  $i \in \{1, \dots, |Y|\}$ , force all variables  $Y'$  to be always true and the variables  $Y''$  to be always false. The *xor*-dependencies activate exactly one of the two  $y'_i$  and  $y''_i$  for all  $i \in \{1, \dots, |Y|\}$ . Because the combinations allowed by the *xor*-dependencies are all  $2^{|Y|}$  possible truth assignments to variables  $Y$ , the *xor*-dependency scenarios are equivalent to a  $\forall Y$  for the variables  $Y$ .

At last, we have the  $\exists Z$  part. This is purely a solution to the recovery scenarios with the given  $Y$ .

Thus, a solution is a one-to-one correspondence of  $X, Y, Z$  for both instances.  $\square$

#### 4.1 Multiple Recoverable Robustness

Multiple Recoverable Robustness extends the recoverable robustness concept. There, the uncertainty is not only modeled by one set of scenarios but multiple sets that are connected inductively.

##### Definition 4.4 (Multiple Recoverable Robust Problem)

A multiple recoverable robust problem with  $m$  recoveries  $P_A^{m\text{-HDRR}}$  is recursively defined as

$$\begin{aligned} P_A^{m\text{-HDRR}} &:= P_A^{\text{HDRR}} && \text{for } m = 1, \\ P_A^{m\text{-HDRR}} &:= (P_A^{(m-1)\text{-HDRR}})^{\text{HDRR}} && \text{for } m > 1. \end{aligned}$$

The complexity results naturally extend to the multiple recoverable robustness concept. We make use of the inductive nature of the definition by proving the following theorems by induction. For this, we reuse Theorem 4.2 and Theorem 4.3 as induction base.

**Theorem 4.5**  $3\text{-SATISFIABILITY}^{m\text{-HDRR}}$  with a linear number of *xor*-dependencies is in  $\Sigma_{2m+1}^p$ .

*Proof.* We reuse the argumentation from Theorem 3.1, in which we proved the membership to  $NP$  for polynomially computable scenarios. Instead of a certificate we present an  $\exists(\forall\exists)^m$ -Alternating Turing Machine  $M$  that solves  $P_A^{m\text{-HDRR}}$ . First,  $M$  guesses:

- the solution  $\mathbf{s}_0$  to the base scenario  $\sigma_0$  ( $\exists$ )
- for  $i = 1$  to  $m$ 
  - all scenarios  $\sigma_i \in S_i$
  - the recovery solution  $\mathbf{s}_{\sigma_i}$  based on the base solution  $\mathbf{s}_0$  and preceding recovery solutions  $(\mathbf{s}_0, \mathbf{s}_{\sigma_1}, \dots, \mathbf{s}_{\sigma_{i-1}})$  and current scenario  $\sigma_i$ .

Then  $M$  can check the necessary properties:

- Check whether  $\mathbf{s}_0$  is a solution to  $\sigma_0$
- Check whether  $\mathbf{s}_{\sigma_j}$  is a solution to  $S_j$  for  $1 \leq j < m$
- Check whether  $H(\mathbf{s}_0, \mathbf{s}_1)$  and  $H(\mathbf{s}_{\sigma_j}, \mathbf{s}_{\sigma_{j+1}})$  for  $1 \leq j < m$   $\square$

**Theorem 4.6** 3-SATISFIABILITY <sup>$m$ -HDRR</sup> with a linear number of xor-dependencies is  $\Sigma_{2m+1}^p$ -hard.

*Proof.* Induction over  $m$ .

(IB)  $m = 0$

3-SATISFIABILITY is NP-complete

(IB)  $m = 1$

3-SATISFIABILITY<sup>HDRR</sup> is  $\Sigma_3^p$ -complete, see Theorem 4.3

(IS)  $m \mapsto m + 1$

We extend the argument from Theorem 4.3.

By the induction hypothesis, we know that  $P_A^{m\text{-HDRR}}$  is  $\Sigma_{2m+1}^p$ -hard. More precisely, the induction hypothesis yields that  $(\exists\forall)^m\exists - 3\text{-SATISFIABILITY}$  is reducible to  $P_A^{m\text{-HDRR}}$ . Thus, we need to model the additional alternation for  $m + 1$  with the additional recovery stage. For this, let

$$X_1, Y_1, X_2, Y_2, \dots, X_{m+1}$$

be the variable sets of the  $(\exists\forall)^{m+1}\exists - 3\text{-SATISFIABILITY}$ -instance, whereby

$$\exists X_1 \forall Y_1 \exists X_2 \forall Y_2 \dots \exists X_{m+1} C(X_1, Y_1, X_2, Y_2, \dots, X_{m+1})$$

is the formula. By interpreting the variable sets  $X_2, Y_2, \dots, X_{m+1}$  as the variable set  $Z$ , which is not altered in any way,  $X_2$  as variable set  $Y$ , which is substituted by  $Y'$  and  $Y''$  and  $X_1$  as  $X$ , the additional alternation of the  $(\exists\forall)^{m+1}\exists - 3\text{-SATISFIABILITY}$  formula can be modelled by one more recovery step.  $\square$

## 5 Classes of Recoverable Robust Problems

In order to establish a whole class of recoverable robust problems, we need to define a reduction that preserves the structure of the scenarios. That is for  $P_A^{\text{HDRR}} \preceq P_B^{\text{HDRR}}$ , if and only if a combinatorial element  $e_A$  is active, the combinatorial elements  $e_B$ , to which  $e_A$  is mapped, are active. In particular for  $P_A \preceq P_B$ , the combinatorial elements  $e_A$  and its relations of problem  $P_A$  must be mapped by a function  $f$  to a subset of combinatorial elements  $e_B$  and relations of problem  $P_B$ , such that the scenario encoding of  $P_A^{\text{HDRR}}$  can be easily mapped to a new scenario encoding in  $P_B^{\text{HDRR}}$  by using the one-to-one correspondence of  $f$  concerning the universe elements.

This property is already constituted by the informal concept of gadget reductions on the universe of elements. Gadget reductions describe that each part of a problem  $P_A$  is mapped to a specified part of the problem  $P_B$  that inherits the behavior in problem  $P_A$ . We adjust this concept to combinatorial elements, that is universe elements and relation elements, for our purpose such that a gadget is a subset of combinatorial elements in  $P_B$  for every combinatorial element in  $P_A$ . Thereby, we preserve the (in)activeness of elements in a scenario.

### Definition 5.1 (Universe Gadget Reduction)

Let  $P_A$  be a combinatorial decision problem with universe  $U_A$  and relations  $R_A$  (with index set  $I_A$ ) and  $P_B$  a combinatorial decision problem with universe  $U_B$  and relations  $R_B$  (with index set  $I_B$ ). A Universe Gadget Reduction  $f_{\preceq}^{UGR}$  that many-one-reduces  $P_A$  to  $P_B$  is composed of the following independent mappings

- $f_{const} : \emptyset \rightarrow U_B \cup \bigcup_{j \in I_B} R_B^j$ ,
- $f_{U_A, U_B} : U_A \rightarrow U_B$ ,
- $f_{U_A, R_B^j} : U_A \rightarrow R_B^j, j \in I_B$ ,

- $f_{R_A^i, U_B} : R_A^i \rightarrow U_B, i \in I_A,$
- $f_{R_A^i, R_B^j} : R_A^i \rightarrow R_B^j, i \in I_A, j \in I_B,$

whereby  $f_{\leq}^{UGR}$  is injective in the following sense:

Let  $y \in U_B \cup \bigcup_j R_B^j$ , then either

- $f_{const}(\emptyset) = y \neq \emptyset$  and  $f^{-1}(y) = f_{const}^{-1}(y) = \emptyset$
- or  $\exists x \in U_A$  with  $f_{U_A, U_B}(x) = y \neq \emptyset$  and  $|f^{-1}(y)| = |f_{U_A, U_B}^{-1}(y)| = 1$
- or  $\exists x \in U_A$  with  $f_{U_A, R_B^j}(x) = y \neq \emptyset$  and  $|f^{-1}(y)| = |f_{U_A, R_B^j}^{-1}(y)| = 1$  for exactly one  $j \in I_B$
- or  $\exists x \in R_A^i$  with  $f_{R_A^i, U_B}(x) = y \neq \emptyset$  and  $|f^{-1}(y)| = |f_{R_A^i, U_B}^{-1}(y)| = 1$  for exactly one  $i \in I_A$
- or  $\exists x \in R_A^i$  with  $f_{R_A^i, R_B^j}(x) = y \neq \emptyset$  and  $|f^{-1}(y)| = |f_{R_A^i, R_B^j}^{-1}(y)| = 1$  for exactly one  $(i, j) \in I_A \times I_B.$

Thereby, every universe element of  $U_A$  and relation  $R_A^i \in R_A$  of  $P_A$  is mapped to corresponding universe elements  $U_B$  or relations  $R_B^j \in R_B$  in  $P_B$  disjointly.

The definition of universe gadget reductions implies the following properties, which are valuable for the following Theorems 5.4 and 5.5.

**Lemma 5.2** *A universe gadget reduction is total and one-to-many. The inverse to a universe gadget reduction is total and many-to-one.*

*Proof.* Let  $P_A$  and  $P_B$  combinatorial problems with  $P_A \preceq^{UGR} P_B.$

For every  $x \in U_A \cup \bigcup_i R_A^i$ , the mappings  $f_{U_A, U_B}(x), f_{U_A, R_B^j}(x), f_{R_A^i, U_B}(x), f_{R_A^i, R_B^j}(x)$  map to corresponding universe elements and relations in  $P_B.$  By definition of a universe gadget reduction every universe element and relation element is based on such a mapping such that universal gadget reductions are total. By the either-or definition over the mappings, universe gadget reductions are one-to-many because a universe element or relation element  $y \in U_B \cup \bigcup_j R_B^j$  in  $P_B$  can be only mapped by one mapping from an universe element or relation element  $x \in U_A \cup \bigcup_i R_A^i.$

On the other hand, the inverse mapping of the universal gadget reduction is total and many-to-one. This follows directly from the proof above analogously.  $\square$

Thus by definition, it is ensured that each element  $y \in U_B \cup \bigcup_j R_B^j$  of  $P_B$  is left unique. We, then, call the substructure

$$Y = f_{U_A, U_B}(x) \cup \bigcup_{i,j} \left( f_{U_A, R_B^j}(x) \cup f_{R_A^i, U_B}(x) \cup f_{R_A^i, R_B^j}(x) \right)$$

a gadget for one specific universe element or relation element in  $x \in U_A \cup P_A.$

**Lemma 5.3** *Universe gadget reductions preserve the scenarios on the universe elements of  $P_A$  and the (disjointly) mapped universe element sets of  $P_B$  with a one-to-many correspondence.*

*Proof.* By the structure of the total and one-to-many universal gadget reduction, we can always activate and inactivate the whole gadget  $Y \subseteq U_B \cup \bigcup_j R_B^j,$  if the corresponding element  $x$  such that  $f(x) = Y$  is activated or inactivated by a scenario. For that, remember that a combinatorial element, which includes an combinatorial element  $e \in U_A \cup \bigcup_i R_A^i,$  is active if and only if the universal element  $e$  is active.  $\square$

Before, we can directly construct a whole class of Hamming distance recoverable robust problems, we need the transitivity for the universe gadget reductions. With the transitivity of those reductions, we have a much easier time to reduce Hamming distance recoverable robust problems to each other.

**Theorem 5.4**

- (a) Universe gadget reductions are transitive on Hamming distance recoverable robust problems. That is, if  $P_A^{HDDR} \preceq_p^{UGR} P_B^{HDDR}$  and  $P_B^{HDDR} \preceq_p^{UGR} P_C^{HDDR}$ , then  $P_A^{HDDR} \preceq_p^{UGR} P_C^{HDDR}$ .
- (b) Furthermore, polynomial time universe gadget reductions are still polynomial time computable if the scenarios have to be transformed as well. That is, if  $P_A \preceq_p^{UGR} P_B$ , then  $P_A^{HDDR} \preceq_p^{UGR} P_B^{HDDR}$ .

*Proof.* Let us begin with the proof for (a). Let  $P_A$  be a combinatorial decision problem with universe  $U_A$  and relation family  $(R_i)_{i \in I_A}$ ,  $P_B$  a combinatorial decision problem with universe  $U_B$  and relation family  $(R_j)_{j \in I_B}$  and  $P_C$  a combinatorial decision problem with universe  $U_C$  and relation family  $(R_k)_{k \in I_C}$ . Furthermore, we have  $P_A \preceq^{UGR} P_B$  by mapping  $g$  and  $P_B \preceq^{UGR} P_C$  by mapping  $h$ . We want to prove that  $f = g \circ h$  reduces  $P_A$  to  $P_C$ . That is,  $P_A \preceq^{UGR} P_C$ .

Theorem 5.2 already gives us the total one-to-many property of universal gadget reductions that we need. Now, we do the reduction explicitly.

For  $z \in U_C \cup \bigcup_k R_C^k$ , we have that it is generated by  $h_{const}$  or by exactly one total one-to-many mappings  $h_{U_B, U_C}(y)$ ,  $h_{U_B, R_C^k}(x)$ ,  $h_{R_B^j, U_C}(x)$ ,  $h_{R_B^j, R_C^k}(x)$ . Thus,  $z$  can be unambiguously inverted to exactly one  $y \in U_B \cup \bigcup_j R_B^j$ . This also holds for the corresponding  $y \in U_B \cup \bigcup_j R_B^j$ , which can be unambiguously mapped to a  $x \in U_A \cup \bigcup_i R_A^i$ .

The reduction can now map the combinatorial elements of a scenario in  $P_A$  to the combinatorial elements in  $P_B$ . Then again, the reduction can map the combinatorial elements of a scenario in  $P_B$  to the combinatorial elements in  $P_C$ .

Thus, we have  $f = g \circ h$  and, consequently, the transitivity of the universal gadget reductions on Hamming distance recoverable robust problems.

Finally, we prove (b), that is why the scenarios are polynomial time computable if a polynomial time universal gadget reduction exists for  $P_A$  to  $P_B$ .

For every combinatorial element  $x \in U_A \cup \bigcup_i R_A^i$ , we store the results of each mapping  $f_{U_A, U_B}(x)$ ,  $f_{U_A, R_B^j}(x)$ ,  $f_{R_A^i, U_B}(x)$ ,  $f_{R_A^i, R_B^j}(x)$  in a table. This is clearly computable in polynomial time, as we just store the gadget  $Y \subseteq U_B \cup \bigcup_j R_B^j$ , which is computable in polynomial time. Overall, we can compute each  $f(x)$  and each  $f^{-1}(y)$  for each  $y \in U_B \cup \bigcup_j R_B^j$  in linear time in the size of the table by searching in the table with a linear search. We just iterate over all scenarios and in there over all combinatorial elements in one scenario and substitute each element  $x \in U_A \cup \bigcup_i R_A^i$  by the corresponding combinatorial elements. Thus, a scenario contains the combinatorial elements, which are generated based on  $x \in U_A$  by  $f_{U_A, U_B}(x)$  and  $f_{U_A, R_B^j}(x)$  and the corresponding relational elements generated by  $f_{R_A^i, U_B}(x)$  and  $f_{R_A^i, R_B^j}(x)$ .  $\square$

Observe that we defined the *xor*-dependencies in a way such a whole set of universal elements can be activated or inactivated. If this would not be the case, a universal gadget reduction on *xor*-dependency scenarios would not be transitive.

With these structural properties in mind, we can directly construct a whole set of Hamming distance recoverable robust problems by proving the following theorem.

**Theorem 5.5** Let  $P_A$  be a combinatorial problem and let  $P_B$  be a combinatorial problem. If  $P_A \preceq_p^{UGR} P_B$ , then  $P_A^{HDDR} \preceq_p^{UGR} P_B^{HDDR}$  if  $P_A^{HDDR}$  and  $P_B^{HDDR}$  have the same scenario class as a basis.

*Proof.* This follows directly from the proofs of Theorem 5.3, Theorem 5.4 (a) and Theorem 5.4 (b) above.  $\square$

It is important to note, that the proofs of Theorem 5.3, Theorem 5.4 (a) and Theorem 5.4 (b) rely not on the structure of Hamming distance recoverable robustness, but only on the

scenarios to be over the universe elements or a relation. That is, Universe gadget reductions remain transitive between every combinatorial problem which is extended by scenarios on universe elements or a relation. Thus, these proofs also help to construct further classes of scenario problems.

## 5.1 Gadget Reductions for Various Combinatorial Decision Problems

In this section, we survey various but not all problems that are universe gadget reducible to 3-SATISFIABILITY. The reductions are all well-established results. We adapt these results to the universe gadget reduction framework to indicate that Theorem 5.5 is a general statement. The relations of the problem are not well-defined in the sense that the relations may be defined more fine-grained or more coarse-grained. As an example, we take a close look at a universe gadget reduction of 3-SATISFIABILITY to VERTEX COVER, which was initially developed by Garey and Johnson [16]. This example directly proves Theorem 5.6. In the following reductions, however, we will use the as fine-grained as necessary view to shorten our argumentation.

**Theorem 5.6** 3-SATISFIABILITY is universe gadget reducible to VERTEX COVER.

### Example 5.7 (Universe Gadget Reduction 3-SATISFIABILITY to VERTEX COVER)

The problem 3-SATISFIABILITY consists of the universe  $L$  for the literals and the relations

- $R_{\ell, \bar{\ell}}$  that relates a literal  $\ell$  with its negation  $\bar{\ell}$
- $R_{\ell, c}$  that relates a literal  $\ell$  to a clause  $c$ , iff  $\ell \in c$
- $R_{\ell, \ell', c}$  that relates literals  $\ell$  and  $\ell'$ , iff  $\ell, \ell' \in c$

The problem VERTEX COVER, on the other hand, consists of a vertices  $V$  and edges  $E$  that form a graph  $G = (V, E)$ . Based on these universe and relations, the gadgets as in Fig. 6 can be found. Therefore, we define the mappings:

$$f_{L, V}, f_{L, E}, f_{R_{\ell, \bar{\ell}}, V}, f_{R_{\ell, \bar{\ell}}, E}, f_{R_{\ell, c}, V}, f_{R_{\ell, c}, E}, f_{R_{\ell, \ell', c}, V}, f_{R_{\ell, \ell', c}, E}$$

This, however, is a very fine-grained view on the gadgets. The dashed vertices indicate that these are part of a different gadget. A complete overview based on the example 3-

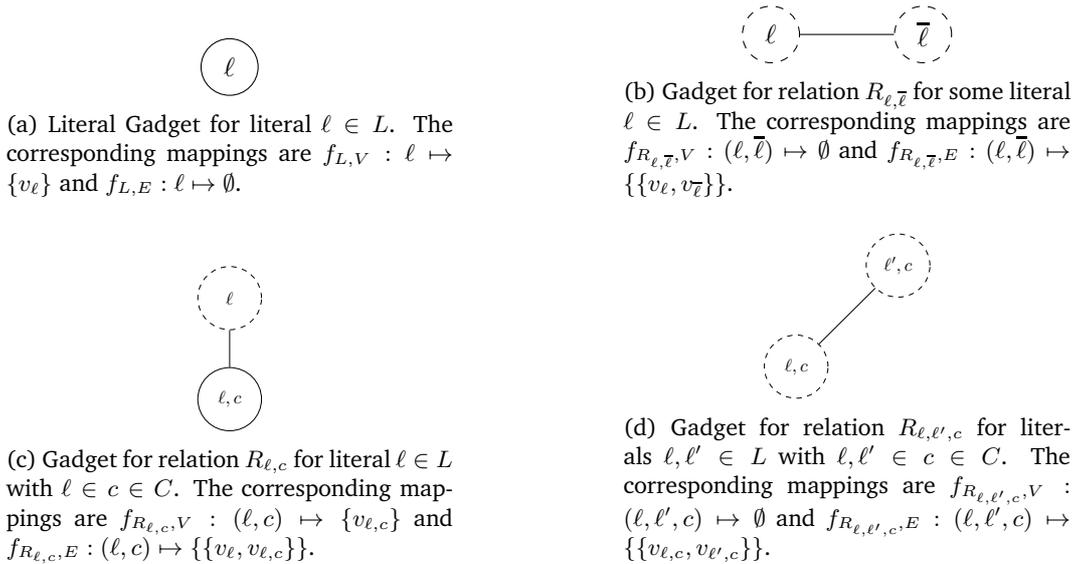


Figure 6: The gadgets for the universe and all relations for the 3-SATISFIABILITY-VERTEX COVER reduction

SATISFIABILITY-formula

$$L = \{X_1, X_2, X_3\}, C = \{\{X_1, X_2, X_3\}, \{\overline{X_1}, \overline{X_2}, X_3\}\}$$

can be found in Fig. 7. On the other hand, the as coarse-grained as possible, and as fine-


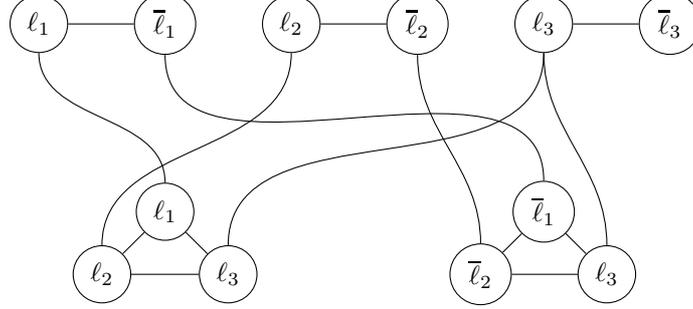


Figure 7: The reduction graph for 3-SATISFIABILITY-formula  
 $C = \{\{X_1, X_2, X_3\}, \{\overline{X_1}, \overline{X_2}, X_3\}\}$

grained as necessary view on the relations can be established. For this, the relations from above are combined in the gadgets.

- The universe  $L$  is combined with relation  $R_{\ell, \bar{\ell}}$  to a *variable gadget for variable*  $x \in X$ .
- The relations  $R_{\ell, c}$  and  $R_{\ell, \bar{\ell}, c}$  are combined to one clause gadget that connects the corresponding variable gadget correctly to a clause.

These gadgets are depicted in Fig. 8. The dashed vertices again indicate that these are part of a different gadget. Observe that the gadgets only combine the more fine-grained relations

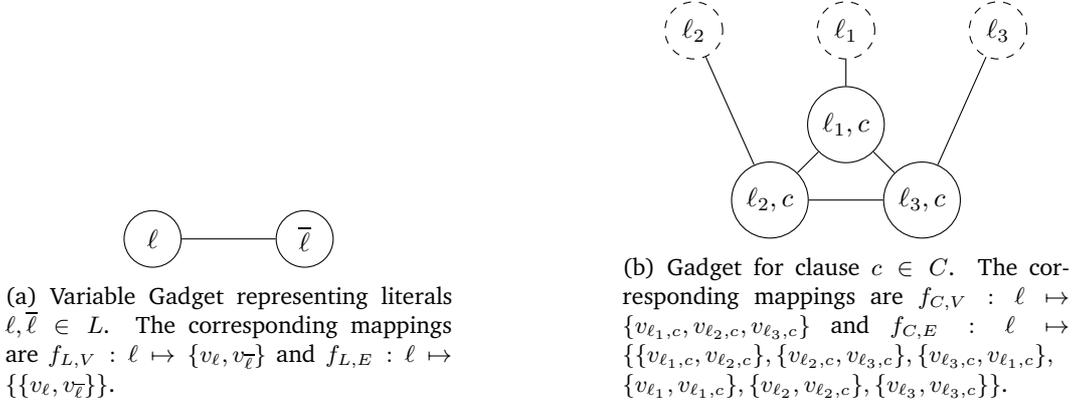

(a) Variable Gadget representing literals  $\ell, \bar{\ell} \in L$ . The corresponding mappings are  $f_{L,V} : \ell \mapsto \{v_\ell, v_{\bar{\ell}}\}$  and  $f_{L,E} : \ell \mapsto \{\{v_\ell, v_{\bar{\ell}}\}\}$ .

(b) Gadget for clause  $c \in C$ . The corresponding mappings are  $f_{C,V} : \ell \mapsto \{v_{\ell_1, c}, v_{\ell_2, c}, v_{\ell_3, c}\}$  and  $f_{C,E} : \ell \mapsto \{\{v_{\ell_1, c}, v_{\ell_2, c}\}, \{v_{\ell_2, c}, v_{\ell_3, c}\}, \{v_{\ell_3, c}, v_{\ell_1, c}\}, \{v_{\ell_1, c}, v_{\ell_1, c}\}, \{v_{\ell_2, c}, v_{\ell_2, c}\}, \{v_{\ell_3, c}, v_{\ell_3, c}\}\}$ .

Figure 8: Gadgets for universe and relations for the 3-SATISFIABILITY-VERTEX COVER reduction

and the overall reduction stays the same. That is, the reduction is overall the same for both views and can be found in Fig. 7 as well.

**Theorem 5.8** 3-SATISFIABILITY is universe gadget reducible to INDEPENDENT SET.

*Proof.* For INDEPENDENT SET, we reuse the 3-SATISFIABILITY-VERTEX COVER reduction from Garey and Johnson [16].

For 3-SATISFIABILITY, we use the literals as universe elements and the relations  $R_{\ell, \bar{\ell}}$ , which relates a literal and its negation,  $R_{\bar{\ell}, c}$ , which relates a clause with the negation of the its literals,  $R_{\ell, \bar{\ell}, c}$ , which relates the literal and its negation with the clauses the literal is in.

INDEPENDENT SET, on the other side, consists of vertices  $V$  and edges  $E$ . This results in the mappings for the variable gadget, see Fig. 9a,

$$f_{L,V}, f_{L,E}, f_{R_{\ell,\bar{\ell}},V}, f_{R_{\ell,\bar{\ell}},e},$$

and the clause gadget, see Fig. 9b,

$$f_{R_{\bar{\ell},c},V}, f_{R_{\bar{\ell},c},E}, f_{R_{\ell_1,c},V}, f_{R_{\ell_1,c},E}.$$

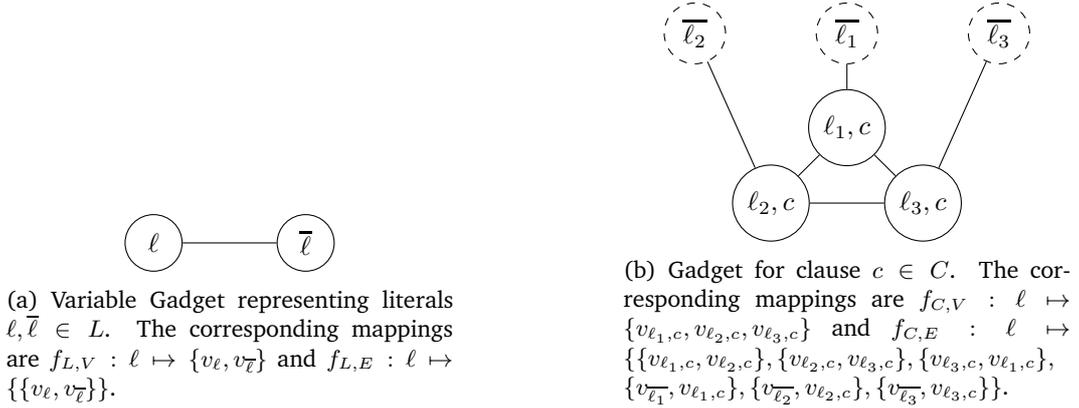


Figure 9: Gadgets for universe and relations for the 3-SATISFIABILITY-INDEPENDENT SET reduction

**Theorem 5.9** 3-SATISFIABILITY is universe gadget reducible to DOMINATING SET.

*Proof.* The folklore reduction is again based on the VERTEX COVER reduction presented by Garey and Johnson [16].

For 3-SATISFIABILITY, we use the literals as universe elements and the relations  $R_{\ell,\bar{\ell}}$ , which relates a literal and its negation, and  $R_{\ell,c}$ , which relates a clause with the its literals.

DOMINATING SET, on the other side, consists of vertices  $V$  and edges  $E$ . This results in the mappings for the variable gadget, see Fig. 10a,

$$f_{L,V}, f_{L,E}, f_{R_{\ell,\bar{\ell}},V}, f_{R_{\ell,\bar{\ell}},e},$$

and the clause gadget, see Fig. 10b,

$$f_{R_{\ell,c},V}, f_{R_{\ell,c},E}.$$

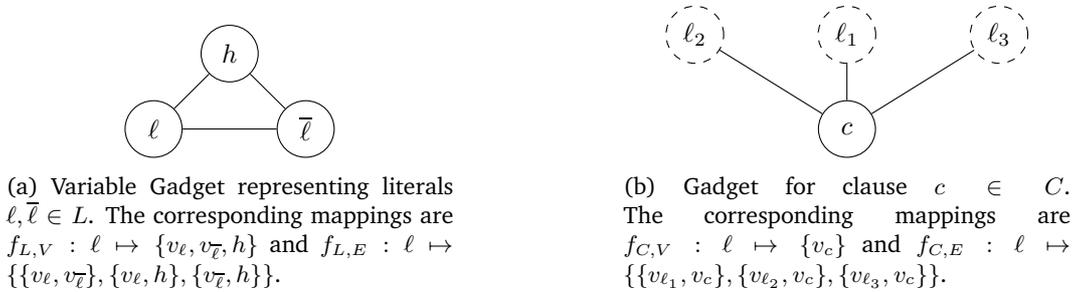


Figure 10: Gadgets for universe and relations for the 3-SATISFIABILITY-DOMINATING SET reduction

**Theorem 5.10** 3-SATISFIABILITY is universe gadget reducible to COLORING.

*Proof.* We reuse the commonly known reduction from 3-SATISFIABILITY to COLORING by Garey et al. [17]. COLORING has the vertices of the graph  $V$  as universe elements and the edges  $E$  as relation over the universe elements. We therefore, have the following mappings  $f_{const,V}$ ,  $f_{const,E}$ ,  $f_{L,V}$ ,  $f_{L,E}$ ,  $f_{C,V}$ ,  $f_{C,E}$ .




Figure 11: Constant Gadget for the reduction. The corresponding mappings are  $f_{const,V} : \emptyset \mapsto \{B, F, T\}$  and  $f_{const,E} : \emptyset \mapsto \{\{B, F\}, \{B, T\}, \{F, T\}\}$




Figure 12: Variable Gadget representing literals  $\ell, \bar{\ell} \in L$ . The corresponding mappings are  $f_{L,V} : \emptyset \mapsto \{v_\ell, v_{\bar{\ell}}\}$  and  $f_{L,E} : \emptyset \mapsto \{\{v_\ell, v_{\bar{\ell}}\}, \{v_\ell, B\}, \{v_{\bar{\ell}}, B\}\}$

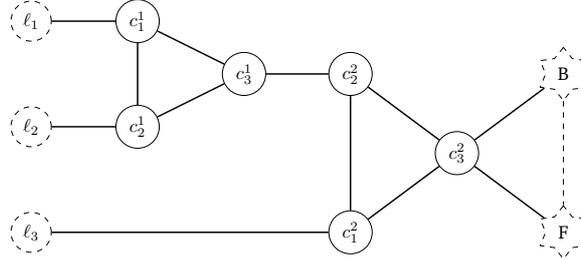


Figure 13: Clause Gadget for  $c \in C$ . The corresponding mappings are  $f_{C,V} : \emptyset \mapsto \{c_1^1, c_1^2, c_3^1, c_2^1, c_2^2, c_3^2\}$  and  $f_{C,E} : \emptyset \mapsto \{\{c_1^1, c_1^2\}, \{c_1^1, c_3^1\}, \{c_1^2, c_3^2\}, \{c_2^1, c_3^1\}, \{c_2^2, c_3^2\}, \{c_3^1, c_3^2\}, \{l_1, c_1^1\}, \{l_2, c_1^2\}, \{l_3, c_1^1\}, \{c_3^1, c_3^2\}, \{c_3^1, B\}, \{c_3^2, F\}\}$

The constant function maps the empty set to a gadget consisting of three vertices and three edges as 3-clique, see Fig. 11.

For the literals, the mapping  $f_{L,V}$  maps a literal  $\ell \in L$  to two vertices, see in Fig. 12 the diamond shaped vertices. The mapping  $f_{L,E}$ , on the other hand, maps a literal  $\ell \in L$  to three edges connecting the two vertices  $v_\ell$  and  $v_{\bar{\ell}}$  and vertex  $B$  of the constant gadget, which is generated by the constant mapping  $f_{const}$ , symbolized in Fig. 12.

At last, we have the clause gadget. The mapping  $f_{C,V}$  maps the clause to six vertices, which are depicted as circles in Fig. 13. The mapping  $f_{C,E}$  maps the clause to the edges as shown as solid edges in Fig. 13. The dashed vertices are part of different literal gadgets and the vertices  $T, F, B$  and the three dashed edges are from the constant gadget.

Overall, all vertices and edges are either generated by the constant function or are attributable to exactly one literal or one clause of the 3-SATISFIABILITY-instance. Thus, the reduction fulfills the universal gadget reduction property from the definition.  $\square$

**Theorem 5.11** 3-SATISFIABILITY is universe gadget reducible to DIRECTED HAMILTONIAN CYCLE.

*Proof.* In the book from Arora and Barak [14], a well-known reduction is explained. For 3-SATISFIABILITY, we use the literals as universe elements and the relations  $R_{\ell, \bar{\ell}}$ , which relates a literal and its negation, and  $R_{\ell, c}$ , which relates a clause with the negation of the its literals.

DIRECTED HAMILTONIAN CYCLE, on the other side, consists of vertices  $V$  and arcs  $A$ . This results in the mappings for the variable gadget, see Fig. 15,

$$f_{L,V}, f_{L,A}, f_{R_{\ell, \bar{\ell}}, V}, f_{R_{\ell, \bar{\ell}}, A},$$

and the clause gadget, see Fig. 16,

$$f_{R_{\ell, c}, V}, f_{R_{\ell, c}, A}.$$

In order to connect the variable gadgets, we also need a constant gadget defined by mappings  $f_{const, V}$  and  $f_{const, E}$ , see Fig. 14.

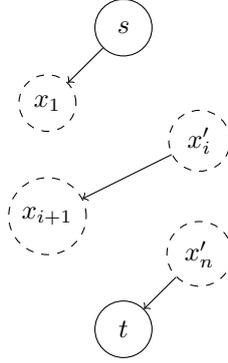


Figure 14: Constant Gadget for the reduction. The corresponding mappings are  $f_{const, V} : \emptyset \mapsto \{s, t\}$  and  $f_{const, A} : \emptyset \mapsto \{(s, x_1), (x'_i, x_{i+1}), (x'_n, t) \mid 1 \leq i \leq n-1\}$




Figure 15: Variable Gadget representing literals  $\ell, \bar{\ell} \in L$ . The corresponding mappings are  $f_{L, V} : \ell \mapsto \{x_i, x_i^1, x_i^2, x_i^{4|C|}, x'_i\}$  and  $f_{L, A} : \ell \mapsto \{(x_i, x_i^1), (x_i^1, x_i), (x_i^j, x_i^{j+1}), (x_i^{j+1}, x_i^j), (x_i^{4|C|}, x'_i), (x'_i, x_i^{4|C|}) \mid 1 \leq j \leq 4|C| - 1\}$




Figure 16: Clause Gadget for clause  $c \in C$ . The corresponding mappings are  $f_{C, V} : c \mapsto \{v_c\}$  and  $f_{C, A} : \ell \mapsto \{(x_i^{4j}, c_j), (c_j, x_i^{4j+1}) \mid x \in c_j\}$

**Theorem 5.12** 3-SATISFIABILITY is universe gadget reducible to SUBSET SUM.

*Proof.* The reduction from 3-SATISFIABILITY to SUBSET SUM is a folklore reduction. For 3-SATISFIABILITY, we use the literals as universe elements and the relations  $R_{\ell, \bar{\ell}}$ , which relates

a literal and its negation, the clause relation  $R_c$ , which is a unary relation on the clauses, and  $R_{\ell,c}$ , which relates a clause with the negation of the its literals.

SUBSET SUM, on the other side, consists of binary numbers of  $\{0,1\}^{|L|+1/2|L|+|C|} = \{0,1\}^t$ . This results in the mappings for the variable gadget, see Fig. 17,

$$f_{L,\{0,1\}^t},$$

and the clause gadget, see Fig. 18 Fig. 19,

$$f_{R_c,\{0,1\}^t}, f_{R_{\ell,c},\{0,1\}^t}.$$

To make clear, which target value  $k$  must be achieved, Fig. 20 depicts the target.

$\ell_1$	$\bar{\ell}_1$	...	$\ell_n$	$\bar{\ell}_n$	$x_1$	$x_2$	...	$x_n$	$c_1$	$c_2$	...	$c_m$
1	0	...	0	0	1	0	...	0	0	0	0	0
0	1	...	0	0	1	0	...	0	0	0	0	0

Figure 17: Variable Gadget representing literals  $\ell, \bar{\ell} \in L$  (here for  $\ell_1$  and  $\bar{\ell}$ ).

$\ell_1$	$\bar{\ell}_1$	...	$\ell_n$	$\bar{\ell}_n$	$x_1$	$x_2$	...	$x_n$	$c_1$	$c_2$	...	$c_m$
0	0	...	0	0	1	0	...	0	1	0	0	0
0	0	...	0	0	1	0	...	0	1	0	0	0

Figure 18: Clause Gadget for  $c \in C$  (here for  $c_1$ ).

$\ell_1$	$\bar{\ell}_1$	...	$\ell_n$	$\bar{\ell}_n$	$x_1$	$x_2$	...	$x_n$	$c_1$	$c_2$	...	$c_m$
0	1	...	0	0	0	0	...	0	1	1	0	1
1	0	...	0	0	0	0	...	0	0	0	1	0

Figure 19: Literal Clause Gadget for  $\ell \in c \in C$  (here for  $\ell_1$ ).

$\sum$	$\ell_1$	$\bar{\ell}_1$	...	$\ell_n$	$\bar{\ell}_n$	$x_1$	$x_2$	...	$x_n$	$c_1$	$c_2$	...	$c_m$
	1	1	...	1	1	1	1	...	1	3	3	3	3

Figure 20: The target value  $k$  of the sum.

Moreover, problems may be universe gadget reducible from 3-SATISFIABILITY by transitivity. This holds for example for the problems DOMINATING SET via VERTEX COVER and UNDIRECTED HAMILTONIAN CYCLE via DIRECTED HAMILTONIAN CYCLE.

**Theorem 5.13** VERTEX COVER is universe gadget reducible to DOMINATING SET.

*Proof.* The folklore reduction is a universe gadget reduction. The reduction adds for every edge  $\{a,b\}$  between vertices  $a, b \in V$  a vertex  $ab$  together with edges  $\{ab, a\}, \{ab, b\}$ . The universe elements of both problems are the vertices  $V$  and the relations are the edges  $E$ . Thus, there are vertex gadgets, see Fig. 21, defined by

$$f_{V,V}, f_{V,E}$$

and the edge gadgets, see Fig. 22,

$$f_{E,V}, f_{E,E}.$$

**Theorem 5.14** DIRECTED HAMILTONIAN CYCLE is universe gadget reducible to UNDIRECTED HAMILTONIAN CYCLE.



Figure 21: Vertex Gadget for  $v \in V$ . The corresponding mappings are  $f_{V,V} : v \mapsto \{v\}$  and  $f_{V,E} : \{u, v\} \mapsto \emptyset$ .




Figure 22: Edge Gadget for  $v \in V$ . The corresponding mappings are  $f_{E,V} : \{u, v\} \mapsto \{uv\}$  and  $f_{E,E} : \{u, v\} \mapsto \{\{u, v\}, \{u, uv\}, \{uv, v\}\}$ .

*Proof.* The reduction is based on Karp's 21 reductions [18]. In there, the variable gadgets from Theorem 5.11 are extended such that each vertex  $x_i^1, \dots, x_i^{4|C|}$  is mapped to three vertices connected by edges and each directed arc is mapped to an undirected edge. The arcs in the variable gadgets are thereby modified as in Fig. 24. The vertex gadget, see Fig. 23, is defined by

$$f_{V,V}, f_{V,E}$$

and the edge gadget, see Fig. 24, is defined by

$$f_{A,V}, f_{A,E}.$$




Figure 23: The vertex gadget for the variables vertices  $x_i^1, \dots, x_i^{4|C|}$  for each  $1 \leq i \leq |C|$ .

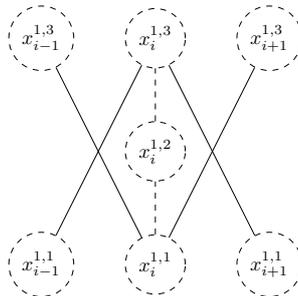


Figure 24: The edge gadget connecting variable vertices  $x_i^1, \dots, x_i^{4|C|}$  for each  $1 \leq i \leq |C|$  and  $x_i, x'_i$ . Other arcs are directly mapped to an edge with the same incident vertices.

To summarize the results from above, we state the following two Corollaries 5.15 and 5.16.

**Corollary 5.15**

*The following problems are NP-complete:*

- VERTEX COVER<sup>HDRR</sup> with polynomially computable scenarios
- INDEPENDENT SET<sup>HDRR</sup> with polynomially computable scenarios
- DOMINATING SET<sup>HDRR</sup> with polynomially computable scenarios
- COLORING<sup>HDRR</sup> with polynomially computable scenarios
- DIRECTED HAMILTONIAN CYCLE<sup>HDRR</sup> with polynomially computable scenarios
- UNDIRECTED HAMILTONIAN CYCLE<sup>HDRR</sup> with polynomially computable scenarios
- SUBSET SUM<sup>HDRR</sup> with polynomially computable scenarios

**Corollary 5.16**

The following problems are  $\Sigma_{2m+1}^P$ -complete:

- VERTEX COVER<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- INDEPENDENT SET<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- DOMINATING SET<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- COLORING<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- DIRECTED HAMILTONIAN CYCLE<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- UNDIRECTED HAMILTONIAN CYCLE<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios
- SUBSET SUM<sup>m-HDRR</sup> with a linear number of xor-dependent scenarios

## 6 Prospect

We have defined Hamming distance recoverable robust problems and applied this concept to various well-known optimization problems. Further, we have defined universe gadget reductions to build a framework for a large class of Hamming distance recoverable robust problems. The complexity results are that  $NP$ -complete problems remain  $NP$ -complete if the scenarios are polynomially computable and that the Hamming distance recoverable robust versions of  $NP$ -complete problems are  $\Sigma_3^P$ -complete for a linear number of xor-dependencies if 3-SATISFIABILITY is universe gadget reducible to them.

Remaining interesting questions are whether there are logical dependencies other than xor-dependencies. Furthermore, it is interesting to which other scenario based robust problems the concept of universe gadget reductions can be applied.

## References

- [1] Christian Liebchen, Marco Lübbecke, Rolf Möhring, and Sebastian Stiller. *The Concept of Recoverable Robustness, Linear Programming Recovery, and Railway Applications*, pages 1–27. Springer Berlin Heidelberg, Berlin, Heidelberg, 2009.
- [2] Christina Büsing. *Recoverable robustness in combinatorial optimization*. Cuvillier Verlag, 2011.
- [3] Serafino Cicerone, Gabriele Di Stefano, Michael Schachtebeck, and Anita Schöbel. Multi-stage recovery robustness for optimization problems: A new concept for planning under disturbances. *Information Sciences*, 190:107–126, 2012.
- [4] Serafino Cicerone, Gabriele Stefano, Michael Schachtebeck, and Anita Schöbel. Dynamic algorithms for recoverable robustness problems. 9, 01 2008.
- [5] Richard M. Lusby, Jesper Larsen, and Simon Bull. A survey on robustness in railway planning. *European Journal of Operational Research*, 266(1):1–15, 2018.
- [6] V. Cacchiani, A. Caprara, L. Galli, L. Kroon, G. Maroti, and P. Toth. Recoverable robustness for railway rolling stock planning. volume 9, 2008. cited By 11.
- [7] Serafino Cicerone, Gianlorenzo D’Angelo, Gabriele Di Stefano, Daniele Frigioni, and Alfredo Navarra. Recoverable robustness for train shunting problems. *Algorithmic Operations Research*, 4(2):102–116, 2009.
- [8] Serafino Cicerone, · Gianlorenzo, D Angelo, Gabriele Di, Daniele Frigioni, Alfredo Navarra, G angelo, Stefano Frigioni, and G Stefano. Recoverable robust timetabling for single delay: Complexity and polynomial algorithms for special cases. *Journal of Combinatorial Optimization*, 18:230–229, 10 2009.
- [9] Luis Cadarso and Ángel Marín. Recoverable robustness in rapid transit network design. *Procedia - Social and Behavioral Sciences*, 54:1288–1297, 2012. Proceedings of EWGT2012 - 15th Meeting of the EURO Working Group on Transportation, September 2012, Paris.
- [10] Marc Goerigk, Stefan Lendl, and Lasse Wulf. On the recoverable traveling salesman problem. *CoRR*, abs/2111.09691, 2021.
- [11] P. C. Bouman, J. M. van den Akker, and J. A. Hoogeveen. Recoverable robustness by column generation. In Camil Demetrescu and Magnús M. Halldórsson, editors, *Algorithms – ESA 2011*, pages 215–226, Berlin, Heidelberg, 2011. Springer Berlin Heidelberg.
- [12] Manindra Agrawal, Eric Allender, Russell Impagliazzo, Toniann Pitassi, and Steven Rudich. Reducing the complexity of reductions. In Frank Thomson Leighton and Peter W. Shor, editors, *Proceedings of the Twenty-Ninth Annual ACM Symposium on the Theory of Computing, El Paso, Texas, USA, May 4-6, 1997*, pages 730–738. ACM, 1997.
- [13] Luca Trevisan, Gregory B. Sorkin, Madhu Sudan, and David P. Williamson. Gadgets, approximation, and linear programming (extended abstract). In *37th Annual Symposium on Foundations of Computer Science, FOCS ’96, Burlington, Vermont, USA, 14-16 October, 1996*, pages 617–626. IEEE Computer Society, 1996.
- [14] Sanjeev Arora and Boaz Barak. *Computational Complexity: A Modern Approach*. Cambridge University Press, 2009.
- [15] G. S. Tseitin. *On the Complexity of Derivation in Propositional Calculus*, pages 466–483. Springer Berlin Heidelberg, Berlin, Heidelberg, 1983.
- [16] Michael R. Garey and David S. Johnson. *Computers and Intractability; A Guide to the Theory of NP-Completeness*. W. H. Freeman & Co., USA, 1990.

- [17] M. R. Garey, D. S. Johnson, and L. Stockmeyer. Some simplified np-complete problems. In *Proceedings of the Sixth Annual ACM Symposium on Theory of Computing, STOC '74*, page 47–63, New York, NY, USA, 1974. Association for Computing Machinery.
- [18] Richard M. Karp. *Reducibility among Combinatorial Problems*, pages 85–103. Springer US, Boston, MA, 1972.