

WATCH WHAT YOU PRETRAIN FOR: TARGETED, TRANSFERABLE ADVERSARIAL EXAMPLES ON SELF-SUPERVISED SPEECH RECOGNITION MODELS

Raphael Olivier¹ Bhiksha Raj¹

¹Carnegie Mellon University

{rolivier, bhiksha}@cs.cmu.edu

ABSTRACT

Targeted adversarial attacks against Automatic Speech Recognition (ASR) are thought to require white-box access to the targeted model to be effective, which mitigates the threat that they pose. We show that the recent line of Transformer ASR models pretrained with Self-Supervised Learning (SSL) are much more at risk: adversarial examples generated against them are transferable, making these models vulnerable to targeted, zero-knowledge attacks. We release an adversarial dataset that partially fools most publicly released SSL-pretrained ASR models (Wav2Vec2, HuBERT, WavLM, etc). With low-level additive noise achieving a 30dB Signal-Noise Ratio, we can force these models to predict our target sentences with up to 80% accuracy, instead of their original transcription. With an ablation study, we show that Self-Supervised pretraining is the main cause of that vulnerability. We also propose an explanation for that curious phenomenon, which increases the threat posed by adversarial attacks on state-of-the-art ASR models.

1 INTRODUCTION

It is common knowledge that Automatic Speech Recognition (ASR) models are vulnerable to adversarial attacks. In the past four years, dozens of attacks have been proposed with different threat models, assumptions, and often impressive results in certain experimental settings. Yet in contrast with the image recognition community, little effort has been spent in defending ASR models against such threats - as if ASR adversarial attacks have trouble bridging the gap between academic and practical settings. This prompts us to ask the question: how much should the ASR community worry about adversarial examples?

We find that some attacks can be particularly worrying when successful, such as *targeted* adversarial attacks (Carlini & Wagner, 2018; Qin et al., 2019). These attacks can make a model predict any target sentence of the attacker’s choice, but make unreasonable assumptions unlikely satisfied in real-world settings. These attacks usually suppose white-box access to the architecture and weights of the targeted ASR model. Other attacks relax those assumptions, such as Black-Box optimization attacks that only require oracle access to the model (Alzantot et al., 2018) or even *zero-knowledge* or *transferred* attacks that optimize adversarial examples on a *proxy* model, before transferring them on a different, target model. But such zero-knowledge attacks have much milder objectives, usually simple *untargeted* or *denial-of-service* attacks, i.e. preventing the model from recognizing the correct transcription.

On large ASR models, to our knowledge, no previous work has proposed targeted and zero-knowledge attacks - and for a specific reason. Those attacks rely on the well-known *transferability* of adversarial examples between different models (Papernot et al., 2016); and such transferability is thought to be unachievable for targeted attacks on ASR models. However, experiments establishing that impossibility were conducted on outdated architectures, like DeepSpeech2 (Abdullah et al., 2021b; 2022a); and as was shown in recent works, robustness properties may greatly vary from one architecture to another (Lu et al., 2021; Olivier & Raj, 2022).

In this work, we show that many recent state-of-the-art ASR architectures are in fact vulnerable to zero-knowledge attacks. Specifically, we argue that the pretraining of ASR models with Self-

Supervised Learning (SSL) makes adversarial attacks considerably more transferable between architectures. With an attack that we describe in section 3 we generate a single adversarial dataset by attacking HuBERT and Wav2Vec2 models as proxies (section 4). We show that with no extra modification, these adversarial examples are effective against a wide panel of publicly available SSL-pretrained models, while ASR models trained from scratch are much less affected. However, models can be partially vulnerable to that attack even when they are pretrained on entirely different data than our proxy models.

In section 5, we conduct an ablation study on Wav2Vec2-type models, comparing pretrained models and others trained from scratch, and we show that Self-Supervised Learning does indeed contribute greatly to the transferability of adversarial attacks, and that factors such as the amount of unlabeled data play an important role. In section 6, we propose an explanation for this curious phenomenon: targeted ASR attacks are highly difficult and need considerable *feature overlap* to be transferable; and Self-Supervised Learning objectives encourage such feature overlap between different models. We give partial empirical evidence for the first part of this hypothesis.

Our results show that Self-Supervised Learning, a line of work gathering attention in the ASR community that has pushed the state-of-the-art on many benchmarks, is also a source of vulnerability. Formerly innocuous attacks with unreasonable assumptions are now effective and with little-to-no assumptions at all when targeting SSL-pretrained models, paving the way for practical, real-world attacks on models in production. By no means do these results imply that this line of work should be aborted; but they emphasize the pressing need to focus on robustness alongside performance.

2 BACKGROUND AND RELATED WORK

2.1 SELF-SUPERVISED ASR MODELS

We focus on ASR models based on the Wav2Vec2 architecture (Baevski et al., 2020). They use raw audio inputs fed directly to a Convolutional encoder. The CNN outputs are passed to a Transformer encoder that learns contextualized representations. A final feed-forward network projects these representations in a character output space. The entire network is fine-tuned with the CTC loss (Graves et al., 2006).

A number of different models follow this architecture, including Wav2Vec2, HuBERT (Hsu et al., 2021), Data2Vec (Baevski et al., 2022), UniSpeech-SAT (Wang et al., 2021; Chen et al., 2021b) or WavLM (Chen et al., 2021a). These networks only have very minor differences in their architectures, to the point that standardized sizes are used for all of them. Base models have 12 transformer hidden layers and 90M parameters. Large models have 24 layers and 300M parameters. Finally, XLarge models have 48 layers for a total of 1B parameters.

While the networks are similar, the training pipelines of these models differ substantially. All models are pretrained on a large amounts of unlabeled data, then fine-tuned for ASR on smaller quantity of labeled data. The pretraining involves self-supervised learning objectives, such as Quantization and Contrastive Learning (Wav2Vec2), offline clustering and masked predictions (HuBERT), or masked prediction of contextualized labels (Data2Vec). Unispeech combines SSL and CTC pretraining with multitask learning. WavLM adds denoising objectives and scales to even greater amounts of unlabeled data.

In section 4, we evaluate all these models, along with several others for comparison: the massively multilingual speech recognizer or M-CTC (Lugosch et al., 2022) trained with pseudo-labeling, and three models trained from scratch for speech recognition: the Speech-to-text model from Fairseq (Wang et al., 2020) and the CRDNN and Transformer models from SpeechBrain (Ravanelli et al., 2021). To generate adversarial examples in section 4 and for the entirety of section 5 we focus on Wav2Vec2, HuBERT and Data2Vec, as these models are supported by the robust-speech library (Olivier & Raj, 2022).

2.2 ADVERSARIAL EXAMPLES FOR ASR

Adversarial examples have been an intensive research topic since 2014 (Szegedy et al., 2014; Goodfellow et al., 2014). Many works have focused on novel attacks (Carlini & Wagner, 2016; Moosavi-

Dezfooli et al., 2016; Madry et al., 2018), or on defending models against such attacks (Papernot et al., 2015; Madry et al., 2018; Cohen et al., 2019). While initial works have focused on adversarial examples for image classification, attacks were quickly adapted for other tasks such as Automatic Speech Recognition (Cisse et al., 2017; Carlini & Wagner, 2018; Qin et al., 2019). Defenses for ASR models have remained limited to a few approaches, like signal processing-guided detection of perturbations (Yang et al., 2019) or ASR adaptation of the randomized smoothing defense (Olivier & Raj, 2021)

The transferability of adversarial attacks has been known for many years in Image Classification (Papernot et al., 2016). On ASR it has been limited to simple attack objectives, like limiting Wake-Word detection in Alexa (Li et al., 2019) or signal processing-based attacks (Abdullah et al., 2021a; 2022b). When it comes to optimization-based attacks on large ASR models, transferability claims are usually limited, and focus on untargeted attacks (Wu et al., 2022). In very specific cases there have been limited claims of targeted, transferable attacks, such as Yuan et al. (2018); however this work does not focus on imperceptible attacks with small amounts of noise, but rather attacks embedded in music. When it comes to standard targeted optimization attacks, Abdullah et al. (2021b) have shown that they show no transferability on DeepSpeech2-type models, even when the proxy and target models are trained with identical hyperparameters apart from the initial random seed.

Past ASR adversarial attacks usually focus on a handful of neural architectures, typically DeepSpeech2 (et al., 2016), sometimes Listen Attend and Spell (Chan et al., 2016). Only recently have attacks been extended to multiple recent architectures for a fair comparison between models (Lu et al., 2021; Olivier & Raj, 2022; Wu et al., 2022). Most related to this work is Wu et al. (2022), which focus on the vulnerability of Self-Supervised Speech models. They however focus on attacking the base pretrained model with untargeted noise that remains effective on downstream tasks. Moreover their study of transferability between different pretrained models is limited to HuBERT and Wav2Vec2. We study targeted attacks, with a much deeper focus on transferability between different models. Olivier & Raj (2022) have hinted that Wav2Vec2 models are vulnerable to transferred attacks, but only report limited results on two models and do not investigate the cause of that phenomenon. We attribute it to Self-Supervised Learning, and back our claims with empirical results and discussion.

Abdullah et al. (2022a) have identified factors that hinder transferability for ASR attacks, such as MFCC features, Recurrent Neural Networks and large output sizes. Since Wav2Vec2 is a CNN-Transformer model with character outputs: this gives it a better prior than DeepSpeech2 to achieve transferable adversarial attacks. However, according to that paper this should be far from sufficient to obtain transferable attacks: our results are in direct contradiction with this statement.

3 METHODOLOGY

3.1 ATTACK

Our base adversarial attack is a mix version of the CW ASR attack (Carlini & Wagner, 2018) and the Projected Gradient Descent or PGD (Madry et al., 2018) attack. Given an input x , a target transcription y_t , and an ASR model f trained with loss L , our attack finds an additive perturbation δ optimizing the following objective:

$$\min_{\delta} L(f(x + \delta), y_t) + c \|\delta\|_2^2 \text{ s.t. } \|\delta\|_{\infty} < \epsilon \quad (1)$$

which we optimize using L_{∞} Projected Gradient Descent. While the CW attack typically uses a large initial ϵ , then gradually reduces it as it finds successful perturbations, we fix a single value of ϵ and optimize for a fixed number of iterations. We find that this scheme, closer to the PGD algorithm, greatly improves attack transferability. However we keep using the L_2 regularization term $c \|\delta\|_2^2$ introduced in the CW attack.

We also find that applying regularization such as dropout during attack optimization helps greatly generating transferable perturbations. This effect is analyzed more in details in section 5.3. Throughout the rest of the paper all attack optimization steps are run using the default dropout, layer drop, etc. that the proxy model used during training (typically a dropout of 0.1).

3.2 METRICS

We evaluate the performance of ASR models with the **Word-Error-Rate** (WER) between the model output and the correct outputs.

When evaluating the success of adversarial examples, we can also use the Word-Error-Rate. Between the prediction and the attack target y_t , a low WER indicates a successful attack. We therefore define the word-level **targeted attack success rate** as

$$TASR = \max(1 - WER(f(x + \delta), y_t), 0) \quad (2)$$

It is also interesting to look at the results of the attack in terms of *denial-of-service*, i.e. the attack’s ability to stop the model from predicting the correct transcription y . Here a high WER indicates a successful attack. We define the word-level **untargeted attack success rate** as

$$UASR = \min(WER(f(x + \delta), y), 1) \quad (3)$$

The attack success rate can also be defined at the character level, i.e. using the **Character-Error-Rate** (CER) instead of the Word-Error-Rate. character-level metrics are interesting when using weaker attacks that affect the model, but not enough to reduce the targeted WER significantly. We use them in our ablation study in section 5

Finally, we control the amount of noise in our adversarial examples with the Signal-Noise Ratio (SNR), defined as

$$SNR(\delta, x) = 10 \log\left(\frac{\|x\|_2^2}{\|\delta\|_2^2}\right) \quad (4)$$

for an input x and a perturbation δ . When generating adversarial examples we adjust the L_∞ bound ϵ (equation 1) to achieve a target SNR.

4 ZERO-KNOWLEDGE ATTACK ON STATE-OF-THE-ART ASR MODELS

We illustrate the potential of zero-knowledge attacks on SSL-pretrained ASR by generating a small set of strong, targeted audio adversarial examples. We then evaluate that same set on a large number of models available in the HuggingFace Transformers library. Complete experimental details are available in appendix A.

4.1 GENERATING ADVERSARIAL EXAMPLES

Our original utterances are a subset A of 85 sentences sampled from the LibriSpeech test-clean set. Their lengths range from 3 to 7 seconds. The targets have been selected at random: we sampled a completely disjoint subset B of utterances in the LibriSpeech test-other set. To each utterance in A we assign as target the transcription of the sentence in B whose length is closest to its own. This ensures that a very long target isn’t assigned to a very short utterance, or vice versa.

To maximize the transferability success rate of our perturbations we improve the base attack in Section 3.1 in several key ways.

- To limit attack overfitting on our proxy, we combine the losses of *two* proxy models: Wav2Vec2 and HuBERT (LARGE). Both models were pretrained on the entire LV60k dataset and finetuned on 960h of LibriSpeech. The sum of their losses is used as the optimization objective in Equation 1.
- We use 10000 optimization steps, which is considerable (for comparison Carlini & Wagner (2018) use 4000) and can also lead to overfitting on the proxy models. To mitigate this effect we use a third model as a stopping criterion for the attack. This “validation” proxy is the Data2Vec BASE network trained on LibriSpeech. We return the perturbation that achieves the lowest targeted loss on this model.

4.2 RESULTS

Our adversarial examples have been released on the HuggingFace Datasets platform¹. We report their results in Table 1 for $\epsilon = 0.015$, corresponding to a Signal-Noise Ratio of $30dB$ on average. Results for a larger ϵ value can be found in Appendix D.1.

| Model | Unlabeled data | Labeled data | Clean WER | Attack success rate (word level) | |
|--------------------|----------------|--------------|-----------|----------------------------------|------------|
| | | | | targeted | untargeted |
| Wav2Vec2-Large | LV60k | LS960 | 2.0% | 88.0% | 100% |
| HuBERT-Large | LV60k | LS960 | 1.9% | 87.2% | 100% |
| Data2Vec-Base | LS960 | LS960 | 2.5% | 63.4% | 100% |
| Wav2Vec2-Base | LS960 | LS960 | 2.6% | 55.7% | 100% |
| Wav2Vec2-Base | LS960 | LS100 | 3.4% | 53.9% | 100% |
| Wav2Vec2-Large | LS960 | LS960 | 2.3% | 50.7% | 100% |
| Data2Vec-Large | LS960 | LS960 | 1.9% | 66% | 100% |
| HuBERT-XLarge | LV60k | LS960 | 1.8% | 80.9% | 100% |
| UniSpeech-Sat-Base | LS960 | LS100 | 3.5% | 50.4% | 100% |
| WavLM-Base | LV60k+VoxP+GS | LS100 | 2.9% | 21.7% | 100% |
| Wav2Vec2-Large | CV | CV+LS1 | 7.69% | 19.7% | 100% |
| M-CTC-Large | None | CV | 21.7% | 7.5% | 76.4% |
| Speech2Text | None | LS960 | 3.5% | 7.3% | 63.3% |
| SB CRDNN | None | LS960 | 2.9% | 5.9% | 86.39% |
| SB Transformer | None | LS960 | 2.3% | 6.49% | 90.56% |

Table 1: Results of the Zero-knowledge adversarial attack on different ASR models ($SNR = 30dB$). The first three lines correspond to the proxies used to generate the adversarial examples. On all other models, the inputs have been transferred directly. We report for each model how much unlabeled data was used for SSL pretraining and for ASR finetuning. We also report its Word-Error-Rate on the LibriSpeech test-clean set, and the targeted and untargeted word-level attack success rate (see section 3.2)

On 8 out of 12 models, we observe that the attack achieves total denial-of-service (the untargeted success rate is 100%). Moreover on 6 of these models the targeted attack success rate ranges between 50% and 81%: the attack target is more than half correctly predicted! These results are in flagrant contradiction with past works on DeepSpeech2-like models, where even the slightest change in training leads to a total absence of targeted transferability between proxy and target model. Our target models vary from the proxies in depth, number of parameters and even training methods, yet we observe important transferability. However these 6 models have all been pretrained on LibriSpeech or Libri-Light with Self-Supervised Learning.

The remaining 2 of 8 models have been pretrained on different datasets. One was pretrained on a combination of Libri-Light, VoxPopuli and GigaSpeech; the other was only pretrained on Common-Voice. Although lower, the transferability success rate on these models remains above 20%, which is non-trivial. The only 4 models for which the targeted transferability rate is null or close to null are those that have not been SSL-pretrained at all. These four models also partially resist the untargeted attack.

It emerges from these results that some recent ASR models, specifically those trained with Self-Supervised Learning, can be vulnerable to transferred adversarial attacks. In the next section we analyse this phenomenon in more details.

5 IDENTIFYING THE FACTORS THAT ENABLE ATTACK TRANSFERABILITY

The results of section 4 contradict the conclusions of multiple previous works (Abdullah et al., 2021b; 2022a), in that targeted attacks display significant transferability on ASR models. However,

¹https://huggingface.co/datasets/RaphaelOlivier/librispeech_asr_adversarial

our experiments differ from past work in several aspects. For instance we use a strong attack with several proxy models, evaluate on larger models with greater performance, different architectures, and varying training objectives. Table 1 hints that out of all these potential factors, SSL pretraining plays an important role in attack transferability. In this section we conduct a thorough ablation study and establish rigorously that Self-Supervised Learning makes ASR models vulnerable to transferred attacks. We also measure the influence of several other factors on transferability. Throughout this section we run the base attack in section 3.1 with 1000 optimization steps, using varying models as proxy.

5.1 INFLUENCE OF SELF-SUPERVISED LEARNING

In this section we compare Wav2Vec2 models with varying amounts of pretraining data: 60k hours, 960h, or none at all. We use each model both as a proxy to generate adversarial noise, and as a model for evaluation with all proxy models

As Wav2Vec2 models fine-tuned from scratch are not publicly available, we train our own models with no pretraining, using the Wav2Vec2 fine-tuning configurations on 960h of labeled data available in Fairseq (Ott et al., 2019). These configurations are likely underoptimal and our models achieve test-clean WERs of 9.1% (Large) and 11.3% (Base), much higher than the pretrained+fine-tuned Wav2Vec2 models. This performance discrepancy could affect the fairness of our comparison. We therefore add to our experiments Wav2Vec2 Base models fine-tuned on 10h and 1h of labeled data only. These models achieve WERs of 24.5% and 11.1% (Baevski et al., 2020). Therefore we can observe the influence of SSL pretraining at comparable model performance.

We evaluate results at the character-level. For reference, we observe that the Character Error Rate between two random sentences is about 80-85% on average. Therefore attack success rates higher than 20% indicate a partially successful attack. We report those results in Table 2. Results in *italic* correspond to cases where the proxy and target models are the same, or fine-tuned from the same pretrained representation, and therefore do not correspond to a zero-knowledge attack.

| Model\Proxy | Base LS960 960h | Base LS960 10h | Base LS960 1h | Large LS960 960h | Large LV60k 960h | Base None 960h | Large None 960h |
|-------------------------|-----------------------|----------------------|---------------------|------------------------|------------------------|----------------------|-----------------------|
| Base LS960 960h | 96.37% | 64.11% | 53.41% | 47.08% | 44.7% | 2.62% | 2.53% |
| Base LS960 10h | 42.64% | 99.12% | 72.91% | 43.14% | 42.67% | 2.65% | 3.54% |
| Base LS960 1h | 69.3% | 81.12% | 99.50% | 41.21% | 36.68% | 3.03% | 3.04% |
| Large LS960 960h | 44.61% | 13.46% | 8.32% | 67.03% | 37.34% | 2.39% | 2.54% |
| Large LV60k 960h | 29.24% | 5.68% | 3.19% | 25.19% | 97.13% | 2.59% | 2.47% |
| Base None 960h | 7.84% | 4.05% | 3.83% | 11.19% | 7.16% | 99.57% | 19.05% |
| Large None 960h | 8.12% | 4.55% | 3.46% | 11.15% | 7.52% | 22.93% | 99.94% |

Table 2: Character-level targeted success rate of the attack with Wav2Vec2 proxies and models of varying size and training data. Each row correspond to a different proxy, each column to a different target model. The format is [Model-size pretraining-data -finetuning-data]

These results show unambiguously that SSL pretraining plays a huge role in the transferability of adversarial attacks. Adversarial examples generated on the pretrained Wav2Vec2 models and fine-tuned on 960h are partially successful on *all* pretrained models (success rate in the 25-46% range). They are however ineffective on the ASR models trained from scratch (4-8%). Similarly, ASR models trained from scratch are bad proxy for pretrained ASR models (2-3%) and even for each other (19-22%).

It follows that SSL pretraining is a necessary condition for transferable adversarial examples in both the proxy and the target model. We confirm it by plotting in Figure 1a the evolution of the target loss while generating one adversarial example. We display the loss for the proxy model (blue) and two target models. The loss of the pretrained target model (red) converges to a much lower value than the non-pretrained model (yellow).

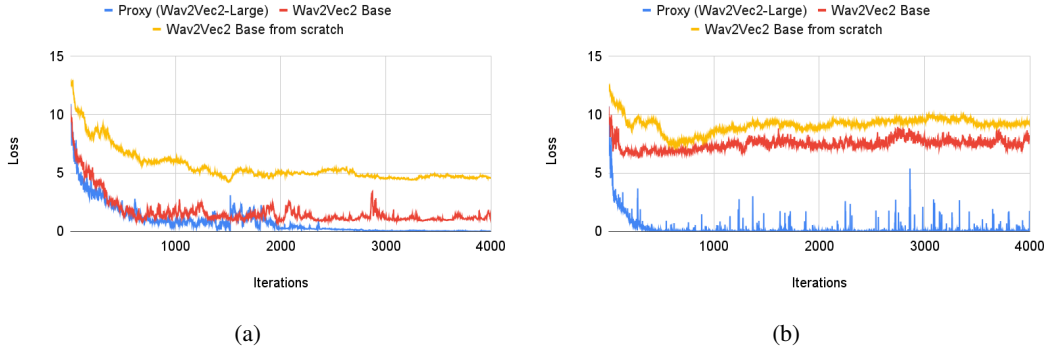


Figure 1: Evolution over attack steps of the loss on the adversarial input of three models: the Wav2Vec2 Large proxy and two targets, respectively with and without SSL pretraining. The attack is run (a) with dropout in the proxy model, and (b) without dropout in the proxy model.

SSL pretraining is however not a sufficient condition for attack transferability, and other factors play a role as well. For instance, the Base model fine-tuned on just 10h and 1h are ineffective proxies: so strong ASR models are likely better proxies than weaker ones.

5.2 MODEL SIZE AND TRAINING HYPERPARAMETERS

We now extend our ablation study to models pretrained with different SSL paradigms, such as HuBERT and Data2Vec. We report the results in Table 3. We make the following observations:

- Adversarial examples partially transfer even between models trained with different paradigms
- More pretraining data in the proxy makes for more transferable adversarial examples. For instance a Wav2Vec2 pretrained on 60kh of LibriLight beats the one pretrained on 960h of LibriSpeech on 4 out of 5 target models, by 10-20%.
- At equal pretraining data all models are not equal proxies, and the HuBERT Large model (pretrained on 60kh) is the best proxy by a large margin.

| Model \ Proxy | W2V2 Base LS960 | W2V2 Large LS960 | W2V2 Large LV60 | D2V Base LS960 | D2V Large LS960 | HB Large LV60 | HB XLarge LV60 |
|------------------|-----------------------|------------------------|-----------------------|----------------------|-----------------------|---------------------|----------------------|
| W2V2 Base LS960 | 96.37% | 47.08% | 44.7% | 20.61% | 24.9% | 55.55% | 47.46% |
| W2V2 Large LS960 | 44.61% | 67.07% | 37.34% | 16.8% | 20.89 | 56.87 | 42.21 |
| W2V2 Large LV60 | 29.24 | 25.19 | 97.13 | 13.73 | 16.05% | 71.78% | 46.61% |
| D2V Base LS960 | 37.9% | 34.49% | 47.15% | 98.44% | 24.2% | 58.75% | 46.71% |
| D2V Large LS960 | 28.72% | 28.27% | 47.75% | 25.03% | 94.53% | 68.97% | 51.02% |
| HB Large LV60 | 23.83% | 27.19% | 49.27% | 14.92% | 30.08% | 97% | 56.83% |
| HB XLarge LV60 | 26.55% | 33.31% | 51.68% | 17.53% | 30.5% | 83.92% | 87.66% |

Table 3: Character-level success rate of the attack with different proxies and models. Each row correspond to a different proxy, each column to a different target model. The format is [Model-type Model-size pretraining-data] where model types are Wav2Vec2 (W2V2), Data2Vec (D2V) and HuBERT (HB). Each model was fine-tuned on 960h of LibriSpeech training data.

5.3 EFFECT OF MODEL REGULARIZATION ON TRANSFERABILITY

As mentioned in section 3.1 we use regularization tricks like dropout in all proxy models when optimizing the adversarial perturbation. In Figure 1b we plot the loss on proxy and target models without that regularization, for comparison with Figure 1a. We observe that the loss degrades significantly on target models without regularization.

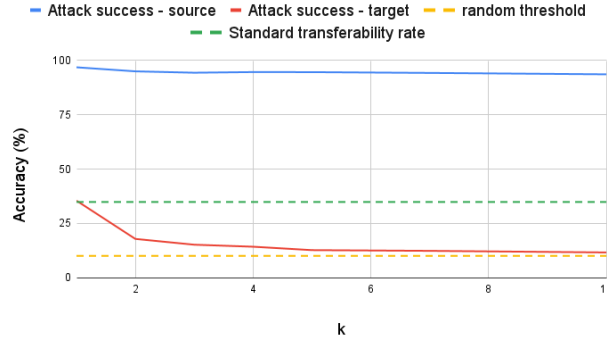


Figure 2: Transferred targeted attack success rate when varying the "target precision" on a CIFAR10 model. We observe that the more targeted the attack, the worse its transferability at equal white-box success rate

On the other hand the loss on the proxy converges much faster in Figure 1b: removing model regularization makes for better, faster white-box attacks, at the cost of all transferability. To the extent of our knowledge, past work like Carlini & Wagner (2018) have not used regularization for generation, explaining why they report better white-box attacks than we do in terms of WER and SNR. However, as we have established above, applying regularization against standard ASR models does *not* lead to transferable adversarial examples: for that Self-Supervised Learning is also required.

6 A HYPOTHESIS FOR THE VULNERABILITY OF SSL-PRETRAINED MODELS

6.1 VERY TARGETED ATTACKS ARE HARDER TO TRANSFER

Targeted attacks on CIFAR10 force the model to predict one out of 10 different labels. Targeted attacks on ASR models force the model to transcribe one of all the possible transcriptions: even restricting ourselves to sequences of five english words the number of possibilities is equal to $170000^5 \sim 10^{26}$. We can call such an attack "very targeted", by contrast to more "mildly targeted" attacks on CIFAR10.

We hypothesize that the target precision, or "how targeted" the attack is, negatively affects its transferability success rate, explaining why targeted ASR attacks do not transfer easily. To demonstrate it empirically, we can imagine an experiment where an attacker tries to run a very targeted attack on CIFAR10. We hypothesize that in such a case, even if the white box attack success rate remains high the transferred attack success rate would drop. Inversely, if we designed a "mildly targeted" attack on ASR models, we would expect it to achieve non-trivial transferability success rate. We designed experiments for both cases, which we summarize below. Complete experimental details are provided in Appendix B.

6.1.1 VERY TARGETED ATTACKS ON CIFAR10

We run an attack on a ResNet CIFAR10 model. We do not just enforce the model's most probable output (top1 prediction) but the first k most probable outputs (top k prediction). For example with $k = 3$, given an image of an airplane the attack objective could be to modify the image such that the most probable model output is "car", the second most probable is "bird" and the third is "frog". Our attack algorithm sets a "target distribution" of classes, then minimizes the KL divergence of the model's probabilistic outputs and the target, using Projected Gradient Descent. Success rate is evaluated by matching the top k predictions and the top k targets.

In figure 2 we plot the L_∞ attack success rate ($\epsilon = 0.03$) for both white-box and transferred attacks as a function of the "target precision" k . For $k = 1$, we measure a transferability success rate above 30%. However as k increases it drops close to 10%, which is the success threshold that a random model would achieve. In other words, the transferability becomes null as k increases. Meanwhile

the white box attack success rate remains above 95%. Therefore very targeted attacks on image do not transfer.

6.2 MILDLY TARGETED ATTACKS ON ASR

We train five small Conformer models on LibriSpeech. On each of them we generate targeted adversarial examples. The target objective is simply to prepend the word "But" to the original transcription. This makes for a much less targeted attack as is traditionally done with ASR. The attack success rate is evaluated simply by checking the presence of word "But" at the beginning of the prediction. We restrict evaluation to inputs whose original transcription do not start with that word.

For each model we generate 100 adversarial examples, and evaluate them on all 4 other models. We thus obtain 20 different transferability success rates. The average of these scores is **18%** with a standard deviation of **4.7%**. Therefore mildly targeted attacks on ASR transfer substantially better than regular, very targeted attacks. Equivalent experiments with very targeted ASR attacks are reported in Abdullah et al. (2021b): the word-level transferability success rate is 0%.

6.3 VERY TARGETED TRANSFERABILITY REQUIRES IMPORTANT FEATURE OVERLAP

Why would very targeted attacks transfer less? As Ilyas et al. (2019) show, statistically meaningful patterns in the training data may be "robust" (i.e. resilient to small perturbations) or non-robust. By leveraging non-robust features attackers can generate adversarial perturbations - and as these features can be learned by any models, these perturbations will transfer. The underlying assumption behind this framework is that all models learn the *same* features. In practice, features learned by two models are not identical, due to randomness in training. But if they are "close enough", i.e. if the *feature overlap* between both models is important, then transferability will be observed.

It therefore makes perfect sense that more targeted attacks would transfer less. The more precise and difficult the attack objective is, the more features the attacker will depend on to achieve it. This increases the amount of feature overlap needed between proxy and target model for the attack to transfer. In the case of targeted ASR attacks, the required overlap would be considerable. We can hypothesize that Self-Supervised Learning increases the feature overlap between ASR models. As empirically verifying it would pose important difficulties, we simply propose a high-level justification of that hypothesis.

ASR training aims at learning a representation that enables speech transcription. A subset of all features is sufficient to achieve this objective: for instance there is a lot of redundancies between low-frequency and high-frequency features, and a human listener can easily transcribe speech where most frequencies have been filtered out. The set of features learned by ASR models is therefore underspecified: two models even very similar identically may learn representations with little overlap.

Self-Supervised Learning on the other hand does not only learn useful features for transcription, but features needed for predicting *the input itself*: parts of the input are masked, then they (or their quantized or clusterized form) are predicted using context. Arguably this much more ambitious objective requires the network to learn as many features as possible. In fact the goal of such pretraining is to learn useful representations not just for ASR but any downstream task - i.e. "exhaustive" representations. Intuitively, different models trained in that way would share many more features than ASR models trained from scratch - leading to more transferable adversarial examples.

7 CONCLUSION

We have shown that ASR targeted attacks are transferable between SSL-pretrained ASR models. Direct access to their weights are no longer required to fool models to predict target sentences of the attacker's choice - and to an extent, knowledge of its training data is not required either. With that in mind, and given the existence of over-the-air attack algorithms, we expect attacks against ASR models to become a practical, realistic threat as soon as Wav2Vec2-type models are deployed in production.

In that context, it is paramount to develop adversarial defense mechanisms for ASR models. Fortunately such defenses already exist, but they come at the cost of a tradeoff in model performance (Olivier & Raj, 2021). Further research should be carried out into mitigating that tradeoff and to adapting to ASR the most effective defenses in image classification, such as adversarial training.

REFERENCES

- Hadi Abdullah, Muhammad Sajidur Rahman, Washington Garcia, Logan Blue, Kevin Warren, Anurag Swarnim Yadav, Tom Shrimpton, and Patrick Traynor. Hear “no evil”, see “Kenansville”: Efficient and Transferable Black-box Attacks on Speech Recognition and Voice Identification Systems. In *IEEE Symposium on Security and Privacy (IEEE S&P)*, 2021a.
- Hadi Abdullah, Kevin Warren, Vincent Bindschaedler, Nicolas Papernot, and Patrick Traynor. SoK: The Faults in our ASRs: An Overview of Attacks against Automatic Speech Recognition and Speaker Identification Systems. In *IEEE Symposium on Security and Privacy (IEEE S&P)*, 2021b.
- Hadi Abdullah, Aditya Karlekar, Vincent Bindschaedler, and Patrick Traynor. Demystifying limited adversarial transferability in automatic speech recognition systems. In *International Conference on Learning Representations*, 2022a. URL <https://openreview.net/forum?id=15aSHXi8jG5>.
- Hadi Abdullah, Aditya Karlekar, Saurabh Prasad, Muhammad Sajidur Rahman, Logan Blue, Luke A. Bauer, Vincent Bindschaedler, and Patrick Traynor. Attacks as defenses: Designing robust audio captchas using attacks on automatic speech recognition systems, 2022b. URL <https://arxiv.org/abs/2203.05408>.
- Moustafa Alzantot, Bharathan Balaji, and Mani Srivastava. Did you hear that? adversarial examples against automatic speech recognition. *arXiv preprint arXiv:1801.00554*, 2018.
- Alexei Baevski, Yuhao Zhou, Abdelrahman Mohamed, and Michael Auli. wav2vec 2.0: A framework for self-supervised learning of speech representations. In H. Larochelle, M. Ranzato, R. Hadsell, M. F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 12449–12460. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/92d1e1eb1cd6f9fba3227870bb6d7f07-Paper.pdf>.
- Alexei Baevski, Wei-Ning Hsu, Qiantong Xu, Arun Babu, Jiatao Gu, and Michael Auli. data2vec: A general framework for self-supervised learning in speech, vision and language, 2022. URL <http://arxiv.org/abs/2202.03555>. cite arxiv:2202.03555.
- Nicholas Carlini and David A. Wagner. Towards evaluating the robustness of neural networks. *CoRR*, 2016.
- Nicholas Carlini and David A. Wagner. Audio adversarial examples: Targeted attacks on speech-to-text. *CoRR*, 2018.
- William Chan, Navdeep Jaitly, Quoc Le, and Oriol Vinyals. Listen, attend and spell: A neural network for large vocabulary conversational speech recognition. In *2016 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 4960–4964, 2016. doi: 10.1109/ICASSP.2016.7472621.
- Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, Jian Wu, Long Zhou, Shuo Ren, Yanmin Qian, Yao Qian, Jian Wu, Michael Zeng, and Furu Wei. Wavlm: Large-scale self-supervised pre-training for full stack speech processing, 2021a.
- Sanyuan Chen, Yu Wu, Chengyi Wang, Zhengyang Chen, Zhuo Chen, Shujie Liu, Jian Wu, Yao Qian, Furu Wei, Jinyu Li, and Xiangzhan Yu. Unispeech-sat: Universal speech representation learning with speaker aware pre-training, 2021b.

-
- Moustapha M Cisse, Yossi Adi, Natalia Neverova, and Joseph Keshet. Houdini: Fooling deep structured visual and speech recognition models with adversarial examples. In I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017. URL <https://proceedings.neurips.cc/paper/2017/file/d494020ff8ec181ef98ed97ac3f25453-Paper.pdf>.
- Jeremy M. Cohen, Elan Rosenfeld, and J. Zico Kolter. Certified adversarial robustness via randomized smoothing. *CoRR*, 2019.
- Dario Amodei et al. Deep speech 2 : End-to-end speech recognition in english and mandarin. In Maria Florina Balcan and Kilian Q. Weinberger (eds.), *Proceedings of The 33rd International Conference on Machine Learning*, volume 48, pp. 173–182, New York, New York, USA, 20–22 Jun 2016. PMLR.
- Thomas Wolf et al. Transformers: State-of-the-art natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/2020.emnlp-demos.6>.
- Ian J. Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples, 2014.
- Alex Graves, Santiago Fernández, Faustino Gomez, and Jürgen Schmidhuber. Connectionist Temporal Classification: Labelling Unsegmented Sequence Data with Recurrent Neural Networks. In *Proceedings of the 23rd International Conference on Machine Learning, ICML '06*, pp. 369–376, New York, NY, USA, 2006. ACM. ISBN 1-59593-383-2. doi: 10.1145/1143844.1143891. URL <http://dx.doi.org/10.1145/1143844.1143891>.
- Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Tsai, Kushal Lakhotia, Ruslan Salakhutdinov, and Abdelrahman Mohamed. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, PP: 1–1, 10 2021. doi: 10.1109/TASLP.2021.3122291.
- Andrew Ilyas, Shibani Santurkar, Dimitris Tsipras, Logan Engstrom, Brandon Tran, and Aleksander Madry. Adversarial examples are not bugs, they are features. In *NeurIPS*, 2019.
- Quentin Lhoest, Albert Villanova del Moral, Yacine Jernite, Abhishek Thakur, Patrick von Platen, Suraj Patil, Julien Chaumond, Mariama Drame, Julien Plu, Lewis Tunstall, Joe Davison, Mario Šaško, Gunjan Chhablani, Bhavitvya Malik, Simon Brandeis, Teven Le Scao, Victor Sanh, Canwen Xu, Nicolas Patry, Angelina McMillan-Major, Philipp Schmid, Sylvain Gugger, Clément Delangue, Théo Matussière, Lysandre Debut, Stas Bekman, Pierric Cistac, Thibault Goehringer, Victor Mustar, François Lagunas, Alexander Rush, and Thomas Wolf. Datasets: A community library for natural language processing. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing: System Demonstrations*, pp. 175–184, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. URL <https://aclanthology.org/2021.emnlp-demo.21>.
- Juncheng Li, Shuhui Qu, Xinjian Li, Joseph Szurley, J. Zico Kolter, and Florian Metze. Adversarial music: Real world audio adversary against wake-word detection system. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d'Alché-Buc, E. Fox, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 32. Curran Associates, Inc., 2019. URL <https://proceedings.neurips.cc/paper/2019/file/ebbdfea212e3a756a1fded7b35578525-Paper.pdf>.
- Zhiyun Lu, Wei Han, Yu Zhang, and Liangliang Cao. Exploring Targeted Universal Adversarial Perturbations to End-to-End ASR Models. In *Proc. Interspeech 2021*, pp. 3460–3464, 2021. doi: 10.21437/Interspeech.2021-1668.
- Loren Lugosch, Tatiana Likhomanenko, Gabriel Synnaeve, and Ronan Collobert. Pseudo-labeling for massively multilingual speech recognition. *ICASSP*, 2022.

-
- Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. Towards deep learning models resistant to adversarial attacks. In *ICLR 2018, Conference Track Proceedings*, 2018.
- Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: a simple and accurate method to fool deep neural networks. In *CVPR*, 2016.
- Raphael Olivier and Bhiksha Raj. Sequential randomized smoothing for adversarially robust speech recognition. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 6372–6386, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.514. URL <https://aclanthology.org/2021.emnlp-main.514>.
- Raphael Olivier and Bhiksha Raj. Recent improvements of asr models in the face of adversarial attacks. *Interspeech*, 2022. URL <https://arxiv.org/abs/2203.16536>.
- Shmuel Onn and Ishay Weissman. Generating uniform random vectors over a simplex with implications to the volume of a certain polytope and to multivariate extremes. *Annals of Operations Research*, 189(1):331–342, September 2011. doi: 10.1007/s10479-009-0567-7. URL <https://ideas.repec.org/a/spr/annopr/v189y2011i1p331-34210.1007-s10479-009-0567-7.html>.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. fairseq: A fast, extensible toolkit for sequence modeling. In *Proceedings of NAACL-HLT 2019: Demonstrations*, 2019.
- Nicolas Papernot, Patrick D. McDaniel, Xi Wu, Somesh Jha, and Ananthram Swami. Distillation as a defense to adversarial perturbations against deep neural networks. *CoRR*, 2015.
- Nicolas Papernot, Patrick D. McDaniel, and Ian J. Goodfellow. Transferability in machine learning: from phenomena to black-box attacks using adversarial samples. *CoRR*, 2016.
- Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner, Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep learning library. In H. Wallach, H. Larochelle, A. Beygelzimer, F. d’Alché-Buc, E. Fox, and R. Garnett (eds.), *Advances in Neural Information Processing Systems 32*, pp. 8024–8035. Curran Associates, Inc., 2019. URL <http://papers.neurips.cc/paper/9015-pytorch-an-imperative-style-high-performance-deep-learning-library.pdf>.
- Yao Qin, Nicholas Carlini, Garrison Cottrell, Ian Goodfellow, and Colin Raffel. Imperceptible, robust, and targeted adversarial examples for automatic speech recognition. In Kamalika Chaudhuri and Ruslan Salakhutdinov (eds.), *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 5231–5240. PMLR, 09–15 Jun 2019. URL <http://proceedings.mlr.press/v97/qin19a.html>.
- Mirco Ravanelli, Titouan Parcollet, Peter Plantinga, Aku Rouhe, Samuele Cornell, Loren Lugosch, Cem Subakan, Nauman Dawlatabad, Abdelwahab Heba, Jianyuan Zhong, Ju-Chieh Chou, Sung-Lin Yeh, Szu-Wei Fu, Chien-Feng Liao, Elena Rastorgueva, François Grondin, William Aris, Hwidong Na, Yan Gao, Renato De Mori, and Yoshua Bengio. SpeechBrain: A general-purpose speech toolkit, 2021. arXiv:2106.04624.
- Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. In *ICLR*, 2014. URL <http://arxiv.org/abs/1312.6199>.
- Changhan Wang, Yun Tang, Xutai Ma, Anne Wu, Dmytro Okhonko, and Juan Pino. fairseq s2t: Fast speech-to-text modeling with fairseq. In *Proceedings of the 2020 Conference of the Asian Chapter of the Association for Computational Linguistics (AACL): System Demonstrations*, 2020.

-
- Chengyi Wang, Yu Wu, Yao Qian, Kenichi Kumatani, Shujie Liu, Furu Wei, Michael Zeng, and Xuedong Huang. Unispeech: Unified speech representation learning with labeled and unlabeled data. In Marina Meila and Tong Zhang (eds.), *Proceedings of the 38th International Conference on Machine Learning, ICML 2021, 18-24 July 2021, Virtual Event*, volume 139 of *Proceedings of Machine Learning Research*, pp. 10937–10947. PMLR, 2021. URL <http://proceedings.mlr.press/v139/wang21y.html>.
- Haibin Wu, Bo Zheng, Xu Li, Xixin Wu, Hung-Yi Lee, and Helen Meng. Characterizing the adversarial vulnerability of speech self-supervised learning. In *IEEE International Conference on Acoustics, Speech and Signal Processing, ICASSP 2022, Virtual and Singapore, 23-27 May 2022*, pp. 3164–3168. IEEE, 2022. doi: 10.1109/ICASSP43922.2022.9747242. URL <https://doi.org/10.1109/ICASSP43922.2022.9747242>.
- Zhuolin Yang, Pin Yu Chen, Bo Li, and Dawn Song. Characterizing audio adversarial examples using temporal dependency. In *7th International Conference on Learning Representations, ICLR 2019*, 2019.
- Xuejing Yuan, Yuxuan Chen, Yue Zhao, Yunhui Long, Xiaokang Liu, Kai Chen, Shengzhi Zhang, Heqing Huang, XiaoFeng Wang, and Carl A. Gunter. Commandersong: A systematic approach for practical adversarial voice recognition. In *27th USENIX Security Symposium (USENIX Security 18)*, pp. 49–64, Baltimore, MD, August 2018. USENIX Association. ISBN 978-1-939133-04-5. URL <https://www.usenix.org/conference/usenixsecurity18/presentation/yuan-xuejing>.

A EXPERIMENTAL DETAILS FOR LIBRISPEECH EXPERIMENTS

A.1 FRAMEWORKS

We compute adversarial examples using the `robust_speech` framework (Olivier & Raj, 2022). This library uses `Speechbrain` (Ravanelli et al., 2021) to load and train ASR models, and offers implementations various adversarial attack algorithms. Models and attacks are implemented using `PyTorch` (Paszke et al., 2019).

We use `robust_speech` for evaluation on `SpeechBrain` models. In section 4 we export a `HuggingFace` Dataset (Lhoest et al., 2021), then evaluate models via the `HuggingFace Transformers` (et al., 2020) library. Finally we use `Fairseq` (Ott et al., 2019) for training models from scratch

All of our `robust_speech` and `Fairseq` configurations are released alongside this article.

A.2 ATTACK HYPERPARAMETERS

We exploit the Carlini&Wagner attack (see section 3.1) implemented in `robust_speech`, with the following hyperparameters:

- initial ϵ : 0.015 (and 0.04 in appendix D.1)
- learning rate: 0005
- number of decreasing ϵ values: 1
- Regularization constant c : 10
- optimizer: SGD
- attack iterations: 10000 in section 4.1, 1000 in section 5

A.3 DATASET AND TARGETS

Our adversarial dataset in section 4.1 consists of 85 sentences from the LibriSpeech test-clean set. To extract these sentences we take the first 200 sentences in the manifest, then keep only those shorter than 7 seconds. In section 5, we take the first 100 sentences and filter those shorter than 14 seconds.

As attack targets, we use actual LibriSpeech sentences sampled from the test-other set. Our candidate targets are:

- Let me see how can i begin
- Now go i can't keep my eyes open
- So you are not a grave digger then
- He had hardly the strength to stammer
- What can this mean she said to herself
- Not years for she's only five and twenty
- What does not a man undergo for the sake of a cure
- It is easy enough with the child you will carry her out
- Poor little man said the lady you miss your mother don't you
- At last the little lieutenant could bear the anxiety no longer
- Take the meat of one large crab scraping out all of the fat from the shell
- Tis a strange change and i am very sorry for it but i'll swear i know not how to help it
- The bourgeois did not care much about being buried in the vaugirard it hinted at poverty pere lachaise if you please

To each sentence we attack, we assign the candidate target with the closest length to the sentence's original target.

A.4 MODELS

A.4.1 TRAINING WAV2VEC2 MODELS FROM SCRATCH

We use Fairseq to train Base and Large Wav2Vec2 models from scratch. Unfortunately, no configuration or pretrained weights have been released for that purpose, and we resort to using Wav2Vec2 fine-tuning configurations while simply skipping the pretraining step. Despite our attempts to tune training hyperparameters, we do not match the expected performance of a Wav2Vec2 model trained from scratch: (Baevski et al., 2020) report a WER of 3.0% for a large model, while we only get 9.1%.

A.4.2 GENERATING ADVERSARIAL EXAMPLES

Wav2Vec2, HuBERT and Data2Vec models are all supported directly in robust_speech and are therefore those we use for generating adversarial examples. We use the HuggingFace backend of SpeechBrain for most pretrained models, and its Fairseq backend for a few (Wav2Vec2-Base models fine-tuned on 10h and 1h, and models trained from scratch). In both cases, the model’s original tokenizer cannot be loaded in SpeechBrain directly. Therefore, we fine-tune the final projection layer of each model on 1h of LibriSpeech train-clean data.

The Wav2Vec2 model pretrained and fine-tuned on CommonVoice is a SpeechBrain original model. Similarly, we fine-tune it on 1h of LibriSpeech data as a shift from the CommonVoice output space to the LibriSpeech one. As a result, all our models share the same character output space.

A.4.3 EVALUATING PRETRAINED MODELS

In section 4, we directly evaluate models from HuggingFace Transformers and SpeechBrain on our adversarial dataset, without modification.

B EXPERIMENTAL DETAILS FOR SMALL-SCALE EXPERIMENTS

This section describes the experimental details used in section 6.

B.1 CIFAR10 EXPERIMENTS

We use a pretrained ResNet18 as proxy, and a pretrained ResNet50 as target model.

Our ”very targeted attack” PGD_k consists in applying the following steps for each input:

- **target selection.** We sample uniformly an ordered subset of k classes out of 10 (E.g. with $k = 3$: (2, 5, 6)). We also sample a point uniformly on the unit k -simplex $\{x_1, \dots, x_k \in [0, 1]^n / \sum_i X_i = 1\}$, by sampling from an exponential distribution and normalizing (Onn & Weissman, 2011) (e.g. (0.17, 0.55, 0.28)). We combine the two to obtain a 10-dimensional vectors with zero probability on all but the selected k classes ($y = (0, 0.17, 0, 0, 0.55, 0.28, 0, 0, 0, 0)$). This is our target.
- During the attack, we use Projected Gradient Descent (Madry et al., 2018) to minimize the KL divergence $KL(f(x), y)$ between the softmax output and the target, within L_2 radius $\epsilon = 0.5$. We use learning rate 0.1 for $k * 1000$ attack steps.
- We measure attack success rate by measuring the top- k match between $f(x)$ and y :

$$acc = \frac{1}{k} \sum_{i=1}^k \mathbf{1}[argsort(f(x))_i = argsort(y)_i]$$

with $argsort(y)$ returning the indices of the sorted elements of y in decreasing order. For instance $f(x) = (0.1, 0.05, 0.05, 0.05, 0.35, 0.2, 0.05, 0.05, 0.05, 0.05)$ would get an accuracy of 0.666, as the top 2 classes match with y but not the third.

We evaluate attacks on 256 random images from the CIFAR10 dataset. For each value of k between 1 and 10 we repeat the experiment 3 times and average the attack success rates.

B.2 MILDLY TARGETED ASR ATTACKS

We train 5 identical conformer encoder models with 8 encoder layers, 4 attention heads and hidden dimension 144. We train them with CTC loss for 30 epochs on the LibriSpeech train-clean-100 set, with different random seeds.

We run a L_2 -PGD attack with SNR bound 30dB, in which we minimize the cross-entropy loss between the utterance and its transcription prepended with the word "But". The utterance we attack are the first 100 sentences in the LibriSpeech test-clean set, to which we remove 7 sentences already starting with the word "But". We generate adversarial examples using each of the 5 models as proxy, and evaluate these examples on all 5 models. We report the full results in Table 4.

| Model\Proxy | 1 | 2 | 3 | 4 | 5 |
|-------------|-----|------|-----|------|-----|
| 1 | 98% | 14% | 12% | 13% | 19% |
| 2 | 23% | 100% | 11% | 14% | 24% |
| 3 | 18% | 22% | 96% | 20% | 16% |
| 4 | 12% | 19% | 20% | 100% | 17% |
| 5 | 28% | 14% | 22% | 22% | 96% |

Table 4: Success rate of our mildly targeted attack, using each of the 5 conformer networks both as proxy and model. The attack is considered successful on an input if the prepended target word is the first word in the transcription.

C FULL RESULTS TABLE FOR CROSS-MODEL ATTACKS

Table 5 completes the ablation study in Section 5 by evaluating all pairwise Proxy-Model combinations in our pool of Wav2Vec2-type models.

D INFLUENCE OF HYPERPARAMETERS ON ATTACK RESULTS

D.1 ATTACK RADIUS

In Table 6 we extend the results of Table 1 by comparing attack results for two different attack radii. These radii are $\epsilon = 0.015$ and $\epsilon = 0.04$, corresponding respectively to Signal-Noise Ratios of 30dB and 22dB respectively. The former is identical to Table 6; the latter is substantially larger, and corresponding to a more easily perceptible noise.

Looking at the white-box attack results on the proxy models the difference is drastic: with larger noise the targeted success rate jumps from 88% to 98%. The zero-knowledge attack results on SSL-pretrained models also increase overall, with success increases ranging from 0% (Wav2Vec2-Large) to 20% (Data2Vec-Large) with a median increase of 10%. Crucially however, the targeted success does not increase at all and even decreases for ASR models trained from scratch. This confirms that there is a structural difference between the robustness of ASR models with and without SSL, that cannot be bridged simply by increasing the attack strength.

D.2 LANGUAGE MODELS

In section 4 we report the results of our adversarial dataset on multiple Wav2Vec2-type models, enhanced with a N-gram language model whenever available. In Table 7 we evaluate the influence of that language model on attack results.

We observe that the attack success rate systematically increases by 8 to 17% when adding a language model to the ASR model. This is understandable considering that our targets are sound English sentences: if a model tends to transcribe that target with mistakes, the language model can bridge that gap. To put it differently, the more prone an ASR model is to output sentences in a given distribution, the more vulnerable it is to attacks with targets sampled from that distribution. Language models are therefore more of a liability than a defense against attacks, and most likely so would be many tricks applied to an ASR model in order to improve its general performance.

| Model\Proxy | W2V- B | | W2V-B | | W2V-B | | W2V-B | | D2V-B | |
|------------------|------------|-------|------------|-------|------------|-------|------------|-------|------------|-------|
| | LS960 960h | | LS960 100h | | LS960 10h | | LS960 1h | | LS960 960h | |
| | CER | WER | CER | WER | CER | WER | CER | WER | CER | WER |
| W2V-B LS960 960h | 96.37 | 84.72 | 80.61 | 49.01 | 64.11 | 30.69 | 53.41 | 18.46 | 20.61 | 0 |
| W2V-B LS960 100h | 81.42 | 54.46 | 99.24 | 97.74 | 81.18 | 47.6 | 64.18 | 25.04 | 25.23 | 0 |
| W2V-B LS960 10h | 42.64 | 42.64 | 87.9 | 60.25 | 99.117 | 97.6 | 72.91 | 30.13 | 23.47 | 0 |
| W2V-B LS960 1h | 69.3 | 33.52 | 78.84 | 43.71 | 81.12 | 45.12 | 99.498 | 98.66 | 20.91 | 0 |
| D2V-B LS960 960h | 37.9 | 0 | 17.68 | 0 | 10.88 | 0 | 7.94 | 0 | 98.44 | 94.13 |
| W2V-L LS960 960h | 44.61 | 11 | 20.36 | 0 | 13.46 | 0 | 8.32 | 0 | 16.8 | 0 |
| D2V-L LS960 960h | 28.72 | 0 | 8.68 | 0 | 5.36 | 0 | 4.94 | 0 | 25.03 | 0 |
| W2V-L LV60k 960h | 29.24 | 0 | 11.12 | 0 | 5.68 | 0 | 3.19 | 0 | 13.73 | 0 |
| HB-L LV60k 960h | 23.83 | 0 | 7.29 | 0 | 4.83 | 0 | 3.91 | 0 | 14.92 | 0 |
| HB-XL LV60k 960h | 26.55 | 0 | 6.71 | 0 | 5.21 | 0 | 4.37 | 0 | 17.53 | 0 |
| W2V-L CV CV+1h | 27.38 | 0 | 12.59 | 0 | 11.01 | 0 | 9.61 | 0 | 19.24 | 0 |
| W2V-B None 960h | 7.84 | 0 | 4.45 | 0 | 4.05 | 0 | 3.83 | 0 | 5.51 | 0 |
| W2V-L None 960h | 8.12 | 0 | 4.63 | 0 | 4.55 | 0 | 3.44 | 0 | 5.44 | 0 |
| | W2V- L | | D2V-L | | W2V-L | | HB-L | | HB-XL | |
| | LS960 960h | | LS960 960h | | LV60k 960h | | LV60k 960h | | LV60k 960h | |
| | CER | WER | CER | WER | CER | WER | CER | WER | CER | WER |
| W2V-B LS960 960h | 47.08 | 8.49 | 24.9 | 0 | 44.7 | 9.48 | 55.55 | 19.17 | 47.46 | 8.98 |
| W2V-B LS960 100h | 46.01 | 5.73 | 26.77 | 0 | 48.57 | 9.76 | 58.41 | 18.03 | 48.42 | 8.13 |
| W2V-B LS960 10h | 43.14 | 0 | 25.1 | 0 | 42.67 | 0 | 53.12 | 5.59 | 44.36 | 0 |
| W2V-B LS960 1h | 41.21 | 8.63 | 25.48 | 0.57 | 36.68 | 4.74 | 45.32 | 6.65 | 42.95 | 10.18 |
| D2V-B LS960 960h | 34.49 | 0 | 24.2 | 0 | 47.15 | 0.92 | 58.75 | 14.29 | 46.71 | 0.14 |
| W2V-L LS960 960h | 67.07 | 30.69 | 20.89 | 0 | 37.34 | 1.84 | 56.87 | 19.02 | 42.21 | 5.87 |
| D2V-L LS960 960h | 28.27 | 0 | 94.53 | 80.69 | 47.75 | 15.21 | 68.97 | 38.61 | 51.02 | 18.6 |
| W2V-L LV60k 960h | 25.19 | 0 | 16.05 | 0 | 97.13 | 88.61 | 71.78 | 39.18 | 46.61 | 11.88 |
| HB-L LV60k 960h | 27.19 | 0 | 30.08 | 0 | 49.27 | 17.47 | 97 | 87.98 | 56.83 | 28.71 |
| HB-XL LV60k 960h | 33.31 | 0 | 30.5 | 0 | 51.68 | 14.99 | 83.92 | 55.3 | 87.66 | 62.38 |
| W2V-L CV CV+1h | 27.8 | 0 | 26.85 | 0 | 56.72 | 11.67 | 46.94 | 0 | 39.95 | 0 |
| W2V-B None 960h | 11.19 | 0 | 9.6 | 0 | 7.16 | 0 | 6.72 | 0 | 11.07 | 0 |
| W2V-L None 960h | 11.15 | 0 | 9.19 | 0 | 7.52 | 0 | 7.45 | 0 | 11.23 | 0 |
| | W2V- L | | | | W2V-B | | | | W2V-L | |
| | CV CV+1h | | | | None 960h | | | | None 960h | |
| | CER | WER | | | CER | WER | | | CER | WER |
| W2V-B LS960 960h | 10.81 | 0 | | | 2.62 | 0 | | | 2.53 | 0 |
| W2V-B LS960 100h | 11.01 | 0 | | | 2.82 | 0 | | | 2.58 | 0 |
| W2V-B LS960 10h | 11.19 | 0 | | | 2.65 | 0 | | | 2.66 | 0 |
| W2V-B LS960 1h | 11.81 | 0 | | | 3.03 | 0 | | | 3.04 | 0 |
| D2V-B LS960 960h | 8.01 | 0 | | | 2.32 | 0 | | | 2.38 | 0 |
| W2V-L LS960 960h | 8.2 | 0 | | | 2.39 | 0 | | | 2.54 | 0 |
| D2V-L LS960 960h | 8.76 | 0 | | | 2.44 | 0 | | | 2.39 | 0 |
| W2V-L LV60k 960h | 9.08 | 0 | | | 2.59 | 0 | | | 2.47 | 0 |
| HB-L LV60k 960h | 8.65 | 0 | | | 2.5 | 0 | | | 2.55 | 0 |
| HB-XL LV60k 960h | 8.41 | 0 | | | 2.49 | 0 | | | 2.36 | 0 |
| W2V-L CV CV+1h | 97.46 | 88.68 | | | 3.25 | 0 | | | 3.18 | 0 |
| W2V-B None 960h | 5.77 | 0 | | | 99.57 | 99.01 | | | 19.05 | 0 |
| W2V-L None 960h | 5.53 | 0 | | | 22.93 | 0 | | | 99.93 | 99.58 |

Table 5: Targeted Character-level and Word-level success rate for adversarial attacks when varying the proxy and the target model. All proxy-model pairs are evaluated within a pool of 13 models varying in training scheme, training data and size. The format is [Model]-[Size] [Unlabeled data] [Labeled data]. Model is equal to W2V (Wav2Vec2), D2V (Data2Vec) or HB (HuBERT). Size is equal to B (Base), L (Large) or XL (XLarge).

| Model | Unlabeled data | Labeled data | Attack SNR | Attack success rate (word level) | |
|--------------------|----------------|--------------|------------|----------------------------------|------------|
| | | | | targeted | untargeted |
| Wav2Vec2-Large | LV60k | LS960 | 30dB | 88.0% | 100% |
| | | | 22dB | 98.4% | 100% |
| HuBERT-Large | LV60k | LS960 | 30dB | 87.2% | 100% |
| | | | 22dB | 98.5% | 100% |
| Data2Vec-Base | LS960 | LS960 | 30dB | 63.4% | 100% |
| | | | 22dB | 92% | 100% |
| Wav2Vec2-Base | LS960 | LS960 | 30dB | 55.7% | 100% |
| | | | 22dB | 62.9% | 100% |
| Wav2Vec2-Base | LS960 | LS100 | 30dB | 53.9% | 100% |
| | | | 22dB | 59.5% | 100% |
| Wav2Vec2-Large | LS960 | LS960 | 30dB | 50.7% | 100% |
| | | | 22dB | 49.4% | 100% |
| Data2Vec-Large | LS960 | LS960 | 30dB | 66% | 100% |
| | | | 22dB | 86.4% | 100% |
| HuBERT-XLarge | LV60k | LS960 | 30dB | 80.9% | 100% |
| | | | 22dB | 95.5% | 100% |
| UniSpeech-Sat-Base | LS960 | LS100 | 30dB | 50.4% | 100% |
| | | | 22dB | 62.4% | 100% |
| WavLM-Base | LV60k+VoxP+GS | LS100 | 30dB | 21.7% | 100% |
| | | | 22dB | 22.9% | 100% |
| Wav2Vec2-Large | CV | CV+LS1 | 30dB | 19.7% | 100% |
| | | | 22dB | 36.1% | 100% |
| M-CTC-Large | None | CV | 30dB | 7.5% | 76.4% |
| | | | 22dB | 3.5% | 83.4% |
| Speech2Text | None | LS960 | 30dB | 7.3% | 63.3% |
| | | | 22dB | 2.3% | 74.6% |
| SB CRDNN | None | LS960 | 30dB | 5.9% | 86.39% |
| | | | 22dB | 1.5% | 76.8% |
| SB Transformer | None | LS960 | 30dB | 6.49% | 90.56% |
| | | | 22dB | 1.2% | 76.1% |

Table 6: Results of the Zero-knowledge adversarial attack on different ASR models, with multiple Signal-Noise Ratios. The first three models correspond to the proxies used to generate the adversarial examples. On all other models, the inputs have been transferred directly. We report for each model how much unlabeled data was used for SSL pretraining and for ASR finetuning. We also report its Word-Error-Rate on the LibriSpeech test-clean set, and the targeted and untargeted word-level attack success rate (see section 3.2)

| Model | Unlabeled data | Labeled data | Clean WER | | Attack success rate (word level) | |
|--------------------|----------------|--------------|-----------|---------|----------------------------------|---------|
| | | | w/o LM | with LM | w/o LM | with LM |
| Wav2Vec2-Large | LV60k | LS960 | 2.2% | 2.0% | 80.2% | 88.0% |
| HuBERT-Large | LV60k | LS960 | 2.1% | 1.9% | 77.3% | 87.2% |
| Data2Vec-Base | LS960 | LS960 | 3.2% | 2.5% | 51.7% | 63.4% |
| Wav2Vec2-Base | LS960 | LS960 | 3.4% | 2.6% | 43.6% | 55.7% |
| Wav2Vec2-Base | LS960 | LS100 | 6.2% | 3.4% | 41.8% | 53.9% |
| Wav2Vec2-Large | LS960 | LS960 | 2.8% | 2.3% | 41.4% | 50.7% |
| Data2Vec-Large | LS960 | LS960 | 2.2% | 1.9% | 56.9% | 66% |
| HuBERT-XLarge | LV60k | LS960 | 2.0% | 1.8% | 63.9% | 80.9% |
| UniSpeech-Sat-Base | LS960 | LS100 | 6.4% | 3.5% | 39.5% | 50.4% |

Table 7: Results of the Zero-knowledge adversarial attack on different ASR models, with and without language models. We report for each model how much unlabeled data was used for SSL pre-training and for ASR finetuning. We also report its Word-Error-Rate on the LibriSpeech test-clean set, and the targeted word-level attack success rate (see section 3.2)