

# Data-driven Parsing Evaluation for Child-Parent Interactions

**Zoey Liu**  
Boston College  
zoey.liu@bc.edu

**Emily Prud'hommeaux**  
Boston College  
prudhome@bc.edu

## Abstract

We present a syntactic dependency treebank for naturalistic child and child-directed speech in English (MacWhinney, 2000). Our annotations largely followed the guidelines of the Universal Dependencies project (UD (Zeman et al., 2022)), with detailed extensions to lexical/syntactic structures unique to conversational speech (in opposition to written texts). Compared to existing UD-style spoken treebanks as well as other dependency corpora of child-parent interactions specifically, our dataset is of (much) larger size ( $N$  of utterances = 44,744;  $N$  of words = 233,907) and contains speech from a total of 10 children covering a wide age range (18-66 months). With this dataset, we ask: (1) How well would state-of-the-art dependency parsers, tailored for the written domain, perform for speech of different interlocutors in spontaneous conversations? (2) What is the relationship between parser performance and the developmental stage of the child? To address these questions, in ongoing work, we are conducting thorough dependency parser evaluations using both graph-based and transition-based parsers with different hyperparameterization, trained from three different types of out-of-domain written texts: news, tweets, and learner data. Our dataset and code are available at [https://github.com/zoeyliu18/childes\\_parsing](https://github.com/zoeyliu18/childes_parsing).

## 1 Introduction

Research on syntactic dependency parsing has undoubtedly enjoyed tremendous progress with the continuous development of the Universal Dependencies project (Zeman et al., 2022) (hereafter UD). That said, of the 228 treebanks in the latest version of UD (v2.10 at the time of writing), only 12 are treebanks of fully spoken data (see also Dobrovoljc (2022)), while the rest focus on different genres

within the written domain (e.g. news, wikipedia texts). This means that most (if not all) off-the-shelf dependency parsers that are considered state-of-the-art are oriented towards written texts, rather than tailored specifically for spontaneous speech. Therefore a natural question arises: how well would parsing systems developed for written data perform when it comes to spontaneous speech?

Over the past decade, there have been efforts devoted into dependency parsing for the spoken domain, especially for (a subset of) the Switchboard corpus (Godfrey et al., 1992), which contains transcripts of telephone conversations in English; while some focused on parsing the full subset (Yoshikawa et al., 2016; Rasooli and Tetreault, 2013; Miller and Schuler, 2008), others attended to specific phenomena common in spoken data, such as speech repairment (Miller, 2009a,b). In addition to English, dependency treebanks have been developed for speech of other languages, including but not limited to French (Gerdes and Kahane, 2009; Bazillon et al., 2012), Czech (Mikulová et al., 2017), Russian (Kovrigin et al., 2018), Japanese (Ohno et al., 2005) and Mandarin Chinese (He et al., 2018). These treebanks, including Switchboard, however, were not always built on the basis of the UD guidelines; the annotations and trained parsers are not always publicly available, making it less straightforward to perform parsing evaluation with the data, especially given the fact that the majority of dependency parsers are specific to UD-formatted treebanks.

This paper presents a wide-coverage dataset of spontaneous child-parent interactions (MacWhinney, 2000), annotated with syntactic dependencies largely following the UD standards. We illustrate careful annotation guidelines that hopefully would be useful to other developments of spoken dependency treebanks. Compared to previous studies, our work goes beyond in several respects (see Section 2). First, compared to most of the other spo-

ken dependency treebanks that contain telephone conversations (Bechet et al., 2014), interactions between adults (Dobrovoljc and Martinc, 2018; Dobrovoljc and Nivre, 2016), or user-generated content (Davidson et al., 2019), our dataset attends to child and child-directed speech.

Second, in contrast to other spoken treebanks in the UD project, our dataset as a whole is of considerable size: there are 26,098 utterances ( $N$  of words = 116,428) for child speech, and 18,646 utterances ( $N$  of words = 117,479) for parent speech.

Third, while there are some dependency corpora of child-parent interactions in English (Sagae et al., 2010), Japanese (Miyata et al., 2013), and Hebrew (Gretz et al., 2013), they only include data from one or two children, whereas we provide annotations for the speech of 10 children across a wider age range, therefore covering in more details lexical/syntactic phenomena that are more unique to child speech (e.g., repetition, speech disfluency) and spoken language more broadly.

With this dataset, in ongoing work, we ask two additional questions: (1) How do state-of-the-art dependency parsing architectures trained on out-of-domain data perform when it comes to naturalistic speech of separate interlocutors? To address this question, we evaluate parsers trained on three genres within the written domain: news texts, tweets and learner data, all in English. (2) What is the relationship, if any, between parser performance and the developmental stage of the child? In a way one might foresee a positive correlation between the two, with the expectation that as the child continues to develop their language skills, they would utilize more and more cohesive syntactic structures, instead of, for example, produce speech with unintelligible speech or word omissions. On the other hand, it is possible that parser performance would increase as the child reaches a certain developmental stage, then start decreasing, since the child might start articulating sentences with more complex or expressive syntactic structures, which thereby are potentially harder to analyze.

## 2 Related Work

Earlier work on dependency parsing of child-parent conversations (Sagae et al., 2001, 2004) focused on the Eve corpus (Brown, 1973) from the CHILDES project (MacWhinney, 2000), though the annotations did not follow those of UD. Subsequent research extended the annotation guidelines for the

Eve corpus (Sagae et al., 2010) to child and child-directed speech in Japanese (Miyata et al., 2013) and Hebrew (Gretz et al., 2013).

We note two studies that carried out UD-style dependency parse annotations for child and/or child-directed speech.. Liu and Prud'hommeaux (2021) took a semi-automatic approach to convert part of the existing dependency parses from the Eve corpus (Brown, 1973) to UD standards; specifically, they focused on child and parent utterances when the child is within 18-27 months old. Concurrent work by Szubert et al. (2021) annotated dependency parses and semantic logical forms for two languages: English (a large portion from the Adam corpus (Brown, 1973)) and Hebrew (The Hagar corpus (BERMAN, 1990)), although they only looked at child-directed speech.

## 3 Meet the Data

For dataset construction, we borrowed transcripts of English naturalistic parent-child interactions from the `chilides-db` interface (Sanchez et al., 2019), which contains data from the CHILDES (MacWhinney, 2000) database. As we are interested in how parser evaluation results change at different developmental stages of a child, we used *age* as a proxy for developmental stage and set 6-month as one age bin. For every unique child from each corpus of English, we calculated the total number of words produced by the child ( $N_{child}$ ) and by the parent(s) ( $N_{parent}$ ; excluding data from other care-givers) respectively within each age bin of the child. From each age bin, for both child and parent speech, we randomly sampled a number of utterances (mostly without replacement) that amounted to approximately 2,000 words; the criteria was relaxed somewhat in order to include data across a wide range of age bins. This resulted in spoken data of ten children from 6 corpora (Table 1). In what follows, we briefly describe each of the selected corpora.

**Kuczaj** (Kuczaj II, 1977) The Kuczaj corpus includes speech from diary study of the child, Abe; each original recording lasts  $\sim$ 30 minutes.

**Brown** (Brown, 1973) From the Brown corpus we included naturalistic speech from Adam and Sarah.

**Thomas** (Lieven et al., 2009) The Thomas corpus contains spoken interactions between the child, Thomas, and primarily his mother at their house; each initial audio recording is about an-hour long.

**Weist** (Weist and Zevenbergen, 2008) The data

Child	18-24	24-30	30-36	36-42	42-48	48-54	54-60	60-66
Violet	1,730	1,855	1,889	1,886	1,894			
Parent	2,007	1,995	2,025	2,044	2,030			
Naima	1,748	1,752	1,814	1,902	1,943			
Parent	2,019	2,007	2,005	2,032	2,019			
Thomas		1,969	1,965	1,972	1,984	2,009	1,992	
Parent		2,013	2,035	2,050	2,016	2,025	2,010	
Adam		2,012	2,004	2,016	2,021	2,012	2,026	2,025
Parent		2,012	2,009	2,020	2,008	2,015	2,007	1,234
Lily	2,004	1,788	1,908	1,981	1,957	1,161		
Parent	1,996	2,016	1,999	2,038	2,006	2,000		
Laura	1,930	1,925	1,955	1,912	1,956	1,943	1,954	
Parent	2,022	2,019	2,013	1,991	2,023	1,984	2,015	
Roman		1,980	1,975	1,990	2,004	1,999	2,009	
Parent		1,712	2,017	2,012	2,020	2,013	2,027	
Emma			2,007	2,014	2,029	2,025		
Parent			2,020	2,038	2,015	1,455		
Sarah		2,014	2,008	2,011	2,007	2,020	2,015	2,028
Parent		2,019	2,043	2,037	2,036	2,026	2,032	2,049
Abe		2,007	2,007	2,022	2,020	2,036	2,021	1,386
Parent		2,028	2,040	2,025	2,020	2,017	2,019	

Table 1:  $N$  of words for child and parent speech at different age ranges of the children.

of Emma and Roman came from the Weist corpus, which includes caregiver-child interactions recorded in either a laboratory setting or in their own homes twice a month for around 30 minutes.

**Braunwald** We used recorded longitudinal speech of Laura when interacting with different interlocutors; the speech was produced under naturalistic environments.

**Providence** We took data of three children, Naima, Lily and Violet, from the Providence corpus (Demuth et al., 2006); the data contains longitudinal spontaneous interactions at home between the children and mostly their mothers.

## 4 Annotation process

Our annotations largely followed those of UD (Zeman et al., 2022). Annotator A, who has advanced training in dependency syntax, initially annotated data of age 18-24 months and 24-30 months from Abe and Sarah, as a way to take notes of any domain-specific phenomenon or cases that might not be straightforward to annotate (see Section 5). These guidelines were discussed with annotator B and modified if needed. Then given each age bin of every child, the two annotators annotated 10% of data from both child and parent speech. We calculated agreement scores using Cohen’s Kappa (Artstein and Poesio, 2008). The overall agreement score taking into account all syntactic head and dependency relation annotations of all data is 0.97; the average agreement score across each depen-

dency parse is 0.96. (We also computed agreement scores for each child and the results are around 0.97). Final annotations of all data were performed and checked by annotator A.

## 5 Annotation guidelines

Here we describe in details our approach to transcription orthography, tokenization and dependency annotations for syntactic constructions that are unique or more common in child speech and spoken data more broadly.

### 5.1 Orthography and tokenization

Regarding orthography of the transcripts, we made four decisions, all of which are on the basis of a principle that we call “annotate what is actually there”. First, we did not perform any orthographic normalization of most intelligible words in the speech (e.g., *she wana eat*); in other words, these words stayed true to their original forms taken from CHILDES. That said, the tokenizations of certain cases were updated following UD. These cases include: (1) possessives (e.g., *Daddy’s* → *Daddy ’s*); (2) shortened copulas (e.g., *I’m eating* → *I ’m eat-ing*); (3) combined conjunctives (e.g., *in spite of* → *in spite of*); (4) combined adverbs (e.g., *as well* → *as well*); (5) negation (e.g., *don’t* → *do n’t*); (6) other informal contraction (e.g., *gonna* → *gon na*); (7) childish expressions (e.g., *poo\_poo*, *choo\_choo*)

Second, unintelligible speech words (e.g., *xxx*, *yyy*) were removed as it is hard to tell whether the

words existed in the first place and whether they have any syntactic roles in the utterances.

Third, we kept the initial capitalization in the transcripts, since most of the times only proper names or words such as *Mommy* were capitalized.

Lastly, we omitted all punctuations with the exceptions of apostrophe (to abide with UD’s standards), since punctuations tend to not be explicitly articulated in actual spontaneous speech; they are instead added manually during the transcription process based on judgments by the annotators. Admittedly, under certain circumstances it is relatively easy to make choices of punctuations; for instance, one could use a question mark at the end of an utterance with a raising pitch contour. That said, deciding which punctuation to use is not always easy and could be quite time-consuming; for example, for spoken data, there could always be the problem of setting utterance boundary (see Section 5.2), and accordingly, whether to insert, say, a period or a semi-colon is not as simple as one might think. Therefore the process of adding punctuations in transcripts is quite subjective itself.

## 5.2 (Vague) utterance boundary

Each instance in the dataset was originally treated as one utterance in CHILDES, therefore we tried to annotate them as one sentence most of the times. That said, the initial utterance boundaries are not always adequate. This means that one extracted instance can be considered as having “side-by-side” sentences (Figure 1a)<sup>1</sup>; we abided by the instructions of UD and annotated the first sentence to be the root; then later sentences in the instance were treated as *parataxis* of the root.

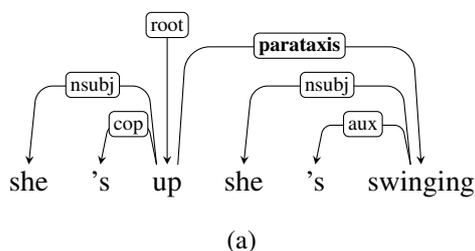


Figure 1: Examples of (*vague*) utterance boundary.

## 5.3 Creative lexical usage

It is common that children make certain lexical choices that do not necessarily follow the standards

<sup>1</sup>Examples presented in this paper are often modified from the original utterances for ease of presentation.

of parent speech or (formal) written data (e.g., *mine pillow*; *my mummy telephones me*). On the other hand, these cases in a way reflect children’s world, in the sense that they capture children’s own understanding of these words and their lexical (and syntactic) development at different stages. Therefore here we refer to such cases as *creative usage*; for each case, we analyzed their syntactic usage given the remaining structure of the sentence (Lee et al., 2017; Santorini, 1990), then assigned dependency parses accordingly. For example, in Figure 2a, the word *magicked* is creatively used as a verb that links the subject *I* and object *it*.

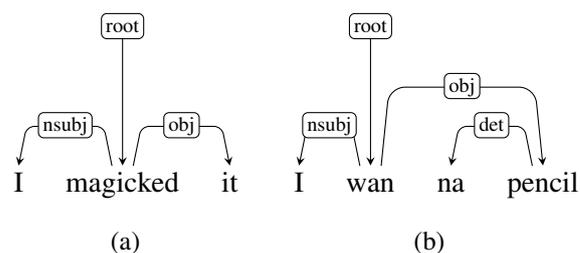


Figure 2: Examples of *creative lexical usage*.

For some instances, it is relatively difficult to decide whether the utterance contains the child’s creative usage of some lexical items, or potential transcription errors induced by annotators. Given that transcribing spoken data manually requires large amounts of time and energy, it is not against expectations that the resulting transcriptions might have errors. For instance, with Figure 2b, it is not exactly clear whether the child really said *I wan na pencil*, or the transcription should have been *I want a pencil*. Our approach is that we compared how often each alternative occurs in our dataset, then made the final decision. Therefore between the two alternatives above, we chose to annotate *na* as the determiner of *pencil*.

## 5.4 Possible lexical omission

As we are taking a data-driven approach, we tried to perform annotations based on how words or phrases are used within an utterance; this means that we avoided assuming potential word omissions as much as possible. We assigned dependency structures to an utterance if a reasonable parse (given the context) could be derived without the assumption that certain words are missing.

In other cases, we deemed the utterance as having lexical omission if the omitted word could be *automatically retrievable*; this way other re-

searchers could formulate a different analysis for the utterance as they see fit. In our annotations, we considered two types of lexical omissions. The first type is copula omission, where the syntactic head of the copula is mostly a noun (Figure 3a), an adjective ((Figure 3b), or an adposition ((Figure 4a); other times we assumed that a copula is omitted if the utterance can be interpreted as an expletive structure (e.g., *there book*, with *there* as the *expl* dependent of *book*). The second type is adposition omission, mostly the adposition that is the function head of an oblique phrase (Figure 4a) or the infinitival-*to* in a complement clause (Figure 4b).

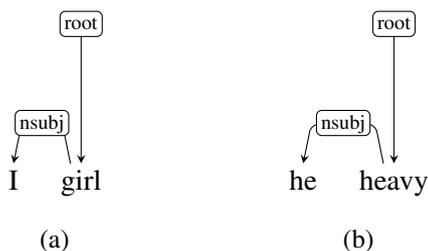


Figure 3: Examples of *possible lexical omission*: omission of copula.

## 5.5 Nominal phrases

For certain nominal phrases that serve as adverbial modifiers in a given utterance (e.g., Figure 5a), and/or express time and dates, we tried to annotate them more carefully using subtypes of specific dependency relations (e.g., *nmod:tmod* or *obl:tmod*) (Schneider and Zeldes, 2021). For example, in Figure 5b, depending on their respective role, *morning* should be an oblique phrase of *go* whereas *tomorrow* modifies *morning*).

## 5.6 Ambiguity

The syntactic structure of a sentence can be ambiguous when looking at the sentence by itself. Therefore we took into account the surrounding context of an utterance when performing annotations. In some cases, contexts could be helpful; for example, in (1), *like* can be treated as the verb of the sentence, rather than an adposition.

(1) *Parent: do you like this*

*Child: like this*

In other (rare) cases, context might not be quite useful; for instance, in (2), it is not clear whether *rain* should be a verb and the relation between the

two words is *obl:tmod*, or a noun and the dependency relation is *nmod:tmod*. For these examples we opted for the simpler analysis given characteristics of child speech and treated *rain* as a noun.

(2) *Parent: eat your soup please*

*Child: rain tonight*

Another source of ambiguity comes from whether to treat proper names or words like *mommy* and *daddy* as *vocative* or not, e.g., *Momma try it*. For these cases, we decided to consider them as *vocative* if this interpretation is reasonable, since subject omission is common in early child speech (Hughes and Allen, 2006).

## 5.7 Non-canonical word order

Often times in child speech or spoken data more broadly, an utterance does not have the canonical word order that is presumed in (formal) written data. In our dataset, cases as such usually involve post-posed subject and (copula) verb (Figure 6a). For these cases, we assigned dependency relations based on the syntactic function of a word/phrase which is not constrained by their relative orderings.

## 5.8 Speech repairment

For speech repair, which captures one type of disfluency (Ferreira and Bailey, 2004), we used *reparandum* in the same way as suggested by the UD guidelines, that is, the speech repair is the syntactic head of the subtree that constitutes the disfluent speech (e.g., *seven* in Figure 7a). If the disfluent speech contains discourse fillers or editing terms such as *uh* or *um*, these elements are annotated to be the syntactic dependents of the repair with the relation *discourse* (also to avoid unnecessary crossing dependencies). In some more complicated cases, the disfluency subtrees are word fragments that do not form a whole coherent phrase together (e.g., *grab the* in Figure 7b); for these cases, we used the principle of promotion to analyze elements within the subtree structure of the disfluency if needed. For example, with Figure 7b, the word *grab* is most likely to be the head within the disfluency subtree, therefore we promoted the following *the* to be the *object* of *grab*, then analyzed the dependency relations of the residual structures in the instance.

To separate repairment from speech restart or abandonment (Section 5.9), we only categorized an utterance as having speech repairment if the repairment occurs in-between the utterance / is

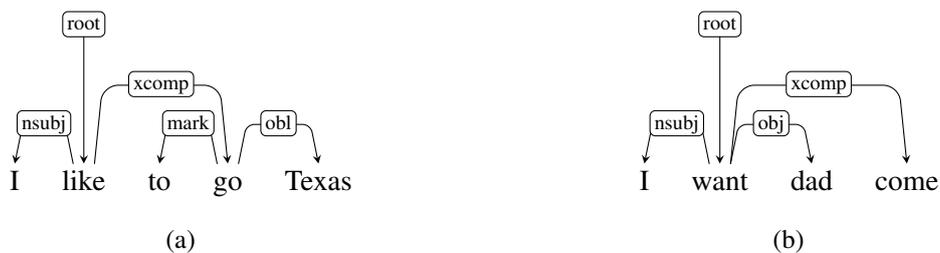


Figure 4: Examples of *possible lexical omission*: omission of adposition.

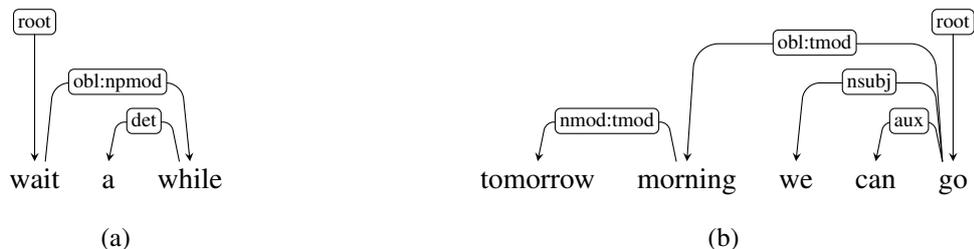


Figure 5: Examples of *nominal phrases*.

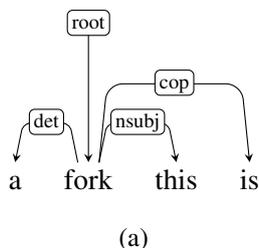


Figure 6: Examples of non-canonical word order.

sentence-medial (as opposed to the beginning of the sentence).

## 5.9 Speech restart

Another type of disfluency is speech restart. We generally considered an instance as having speech restart or abandonment if the abandoned elements occur at the beginning of the instance and do not form a coherent phrase together; what’s more, the abandoned elements need to be different from the speech restart. For these cases, given that speech restart falls broadly under the umbrella of disfluency, and in order to distinguish restart from repairment above, we extended *reparandum* with a new dependency relation subtype: *reparandum:restart* to connect the abandoned elements as the dependents of the speech restart. This way the dependency relation will also go “right-to-left” (Dobrovoljc, 2022), following the usage of *reparandum*.

## 5.10 Repetition

Overall we identify three major kinds of repetitions. For the first type, an utterance consists of repetitions of the same dependency subtree and the repeated subtree is a coherent phrase by itself. Examples include cases such as discursive repetition (e.g., *no no mommy*; Figure 9a), onomatopoeia (e.g., *honk honk*), or repetition of other kinds of word or phrase (e.g., *this is my truck my truck*; Figure 9b). For these cases, we treated the first appearance of the repeated subtree as the syntactic head with the following repetitions as the dependents connected with the relation *conj*. A special case is when the instance repeats a full sentence (or just containing a verbal phrase?), e.g., *I did it I did it* (Figure 9c); for these examples we used *parataxis* to adhere to the annotations of side-by-side sentences noted by UD.

For the second type, repetition is used to emphasize the characteristics of certain objects or conditions (or serves as an intensifier (Szubert et al., 2021)); in these cases the repeated element is usually a single word with a POS tag of adjective or adverb. These cases were annotated similarly as those from the first type above (Figure 9d).

The third type of repetition pertains disfluency. Whether to interpret an instance as disfluent repetitions or not could be challenging when the instance does not have a corresponding audio, where the prosody could help guide the interpretation. Therefore to distinguish the two types mentioned before, we considered an instance as having disfluent rep-

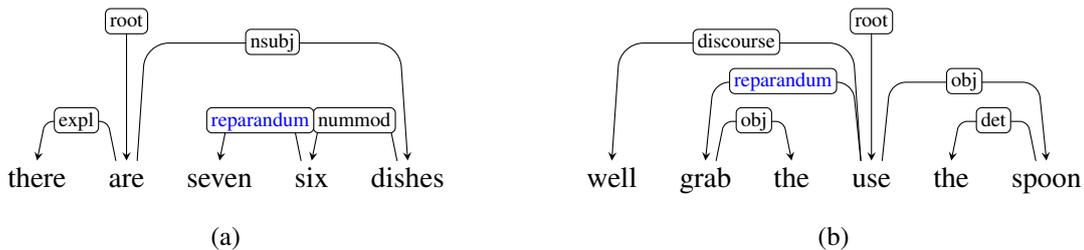


Figure 7: Examples of *repairment*; the dependency relation for speech repair in each example is in blue.

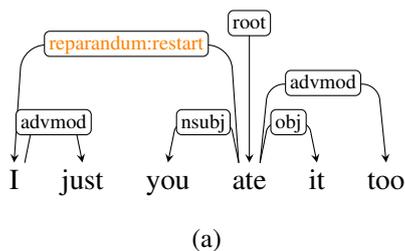


Figure 8: Examples of *restart*; the dependency relation between repeated elements in each example is in orange.

itions if the repetition appears at the beginning or in-between a sentence; in addition, the repeated element has to be either word fragments that do not form a whole coherent phrase together when taking the sentential context into account (Figure 9e), or a single word and its POS tag is neither an adjective or an adverb (Figure 9f). For these cases, in order to not go against the fact that *conj* is usually applied left-to-right (i.e., syntactic head precedes its dependents), we again extended the usage of *reparandum* and applied a new dependency relation subtype: *reparandum:repetition* to describe repetition in disfluency; speech repairment, restart and disfluent repetition hence would also be easily distinguishable in an automatic fashion.

### 5.11 Other structures

The last three types of structures to be mentioned are serial verb construction (SVC), tag question and *unintelligible* structure where we could not decide on a clear (or sometimes any) interpretation. For SVC, we followed Szubert et al. (2021); for an utterance such as *he came see me play*, *see* was treated as the dependent of *came* and the relation is *compound:svc*.

Tag questions are mostly used in parent speech (e.g., *you like that book do n't you*); for these examples we abided by the UD annotations and used *parataxis* to connect the tag question to the main

clause of the utterance.

Lastly, for utterances without a clear syntactic structure, we used *dep* to connect the individual word fragments. Given that UD advises to avoid applying this relation as much as possible, we restricted its usage to mostly utterances produced in early developmental stages of the child (e.g., 18-24 months), where the utterances are composed of usually two to three words in total.

## 6 Experiments

### 6.1 Meet the parsers

We experimented with two graph-based parsers and one transition-based parser using their default parameters: (1) **Diaparser** (Attardi et al., 2021): A graph-based biaffine parser model (Dozat and Manning, 2017) which uses a language model (LM) with three BiLSTM layers as encoder. (2) **MaChamp** (van der Goot et al., 2021): A multi-task learning toolkit which includes the option of dependency parsing; the parser is also a graph-based biaffine parser (Dozat and Manning, 2017). To increase the variety of parser hyperparameterization, for both Diaparser and MaChamp, we explored three LMs as encoders: *bert-base-cased* (*bert*) (Devlin et al., 2018), *roberta-base* (*roberta*) (Liu et al., 2019), and *twitter-roberta-base* (*twitter*) (Barbieri et al., 2020). (3) **UU-Parser** (de Lhoneux et al., 2017; Smith et al., 2018): A greedy transition-based parser that extends the model from Kiperwasser and Goldberg (2016) via allowing predictions to have non-projective dependency trees (Nivre, 2009).

### 6.2 Out-of-domain data

We used three out-of-domain datasets of written English (Table 2): (1) UD\_English-EWT (EWT) (Silveira et al., 2014), which contains written texts from five genres of web media, including weblogs, newsgroups, emails, reviews, and Yahoo! answers;

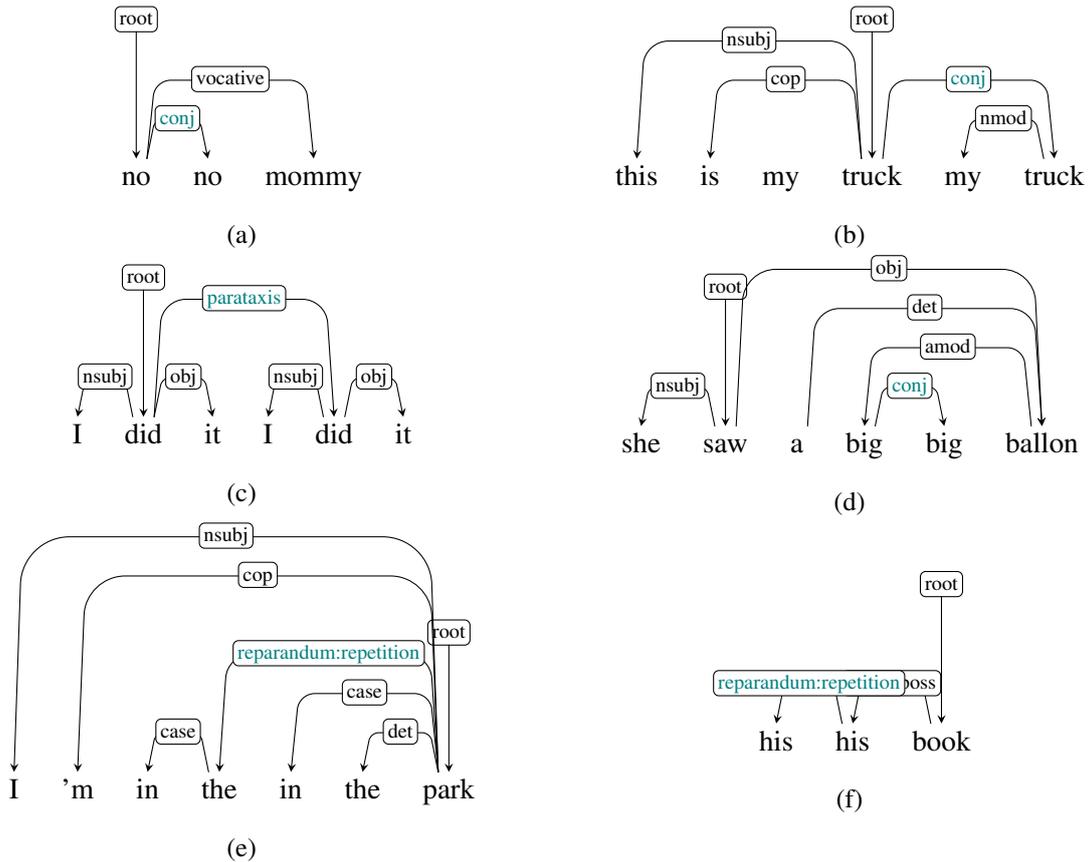


Figure 9: Examples of *repetition*; the dependency relation between repeated elements in each example is in teal.

Data	Set	<i>N</i> of sentences	<i>N</i> of words
EWT	train	12,543	204,579
	dev	2,001	25,149
	test	2,077	25,097
Tweebank	train	1,639	24,753
	dev	710	11,742
	test	1,201	19,112
ESL	train	4,124	78,541
	dev	500	9,549
	test	500	9,591

Table 2: Descriptive statistics for out-of-domain data sets.

(2) UD\_Tweebank (Tweebank) (Liu et al., 2018), which consists of English tweets; (3) UD\_English-ESL (ESL) (Berzak et al., 2016), which includes writing of learner English taken from the Cambridge Learner Corpus First Certificate in English dataset (Yannakoudakis et al., 2011).

For each of the aforementioned datasets, we trained the parsers described in Section 6.1 with their default parameters. We calculated micro unlabeled attachment scores and labeled attachment scores (LAS) to evaluate parser performance. Due

Data	Parser	LM	LAS
EWT	MaChamp	bert	90.49
		roberta	91.27
		twitter	90.84
	Diaparser	bert	89.89
		roberta	88.40
		twitter	88.26
	UUParser	-	82.68
Tweebank	MaChamp	bert	79.57
		roberta	80.49
		twitter	80.26
	Diaparser	bert	80.01
		roberta	79.48
		twitter	79.65
	UUParser	69.54	
ESL	MaChamp	bert	91.70
		roberta	92.27
		twitter	91.94
	Diaparser	bert	91.48
		roberta	90.74
		twitter	90.60
	UUParser	-	86.57

Table 3: Parser evaluation results for out-of-domain data sets.

to space limitation, throughout this paper we focus on reporting LAS. Parser evaluation results across three random seeds for all out-of-domain datasets are reported in Table 3.

### 6.3 Evaluation of out-of-domain parsers

We first performed automatic part-of-speech tagging for all child and parent speech using the publicly-open NLP library Stanza (Qi et al., 2020). We then applied each of the out-of-domain parsers to child and parent speech within each age range of the child; parser performance was again index by LAS across 3 random seeds. We foresee two directions regarding the parsing results. On one hand, EWT has significantly much more data in contrast to Tweebank and ESL, which might lead to overall better results on child and parent speech. That said, among the three out-of-domain datasets, the domains of Tweebank and ESL are possibly most relevant or more similar to child-parent interactions, in the sense that they are less “formal” compared to EWT. This potentially means that parsers trained from Tweebank or ESL might outperform those based on EWT.

Note that to be fair for the out-of-domain parsers, here the evaluations did not consider new dependency relation subtypes that were introduced in our annotations, which are *reparandum:restart* and *reparandum:repetition*.

## 7 Results and analysis

We present analysis mainly for results based on MaChamp; though we performed the same analysis for the other two parsers as well and there were no noticeable discrepancies in the patterns. (While there are differences in numerical results given that UUParser was not trained with neural LMs).


### 7.1 Parent’s speech

When looking at parser performance for all parents across different age ranges of their children, on average parsers trained on the out-of-domain ESL dataset with *twitter* achieved the best result (83.88). By contrast, the best parsers from EWT, which were also trained with *twitter* notably performed worse; the average difference in LAS ranges from 2.11 between the age range of 48-54 months, to 3.95 between the age range of 18 to 24. On the other hand, the best parsers from Tweebank, trained with *bert*, achieved comparable performance (83.48) to the best parsers


based on the ESL dataset. What’s worth noting here, is that comparing the parsing results of different LMs, the discrepancies in LAS for Tweebank are smaller than those for ESL. For example, the biggest difference in LAS for Tweebank is 0.80 at the age range of 60-66 months between *bert* and *roberta*; whereas for ESL, the smallest discrepancy is 1.51 (48-54 months), and can be as large as 3.42 (18-24 months). This means that parsers trained from Tweebank, which contains less than 1/8 of the amount of data from EWT, and around 1/3 from ESL, are able to lead to good and reliable performance.

So where do the discrepancies between parsers trained from different out-of-domain treebanks come from, especially during early ages of the children? Comparing the best performing parsers based on EWT and those from Tweebank and ESL, it appears that for some utterances where the copula takes the form of ‘s’, parsers trained from EWT erroneously annotated the copula as the subject, therefore assigning two subjects to the same syntactic head; this accounts for around 17.07% of all differences between the parsers’ and our manual annotations. This raises the worrisome question of why a structure where the syntactic head has two subjects would arise. The most plausible answer is that such structures exist in the training set. To check that, we looked into the training data of the EWT treebank and found five relevant sentences. In these cases, the first subject between the two were incorrectly annotated as headed by the verb of the subordinate clause at a lower level (e.g., in *it is not about how much you earn* (adapted), *it* was annotated as the subject of *earn*). Similarly, in cases where ‘s’ has a dependency relation of *aux*, the parsers trained from EWT also tended to assign it a relation of *nsubj* instead; this led to around 7.69% of all the discrepancies between parser and manual annotations. The patterns described above seem to be the main and consistent explanation for the performance discrepancies between the best parsers trained from different out-of-domain treebanks, even when the children get older; between the age range of 54-60 months, around 11.30% of all differences when comparing parsers’ annotations to those done manually came from the parsers assigning *nsubj* instead of *cop*; and the number is approximately 11.99% when the age range is between 60 and 66 months.

Now let us turn to the question of where do best-

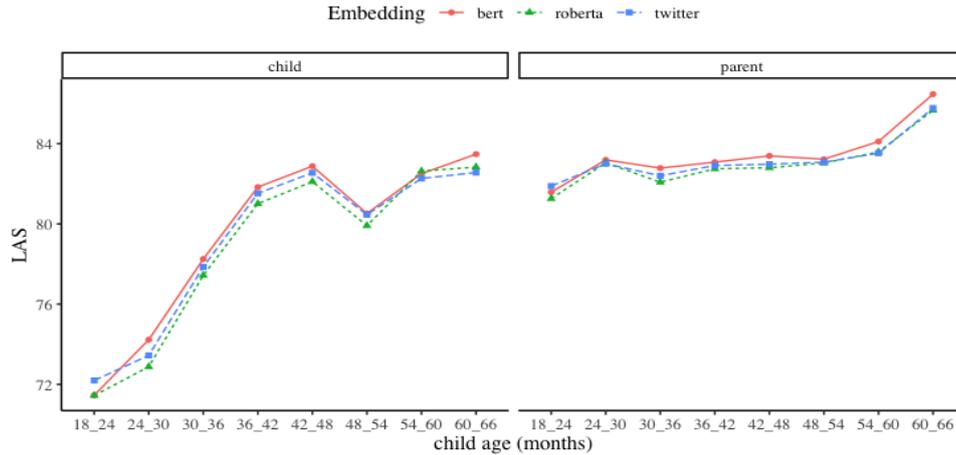

(a) MaChamp

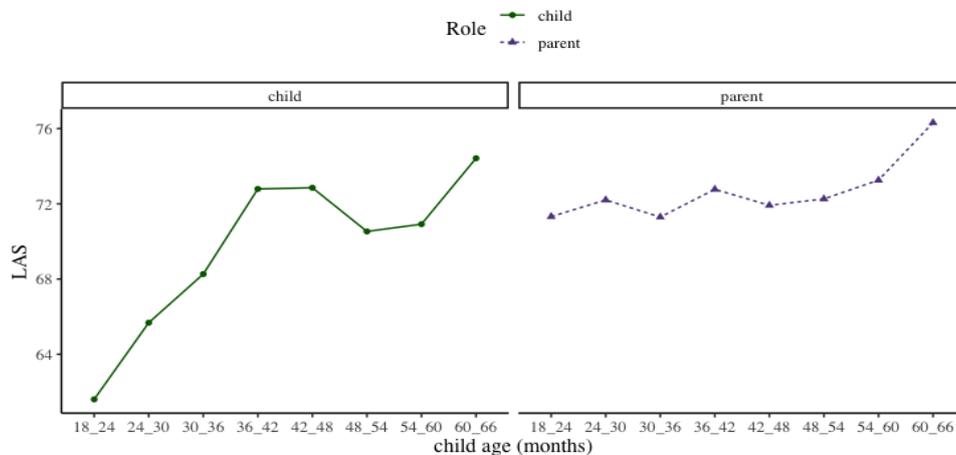

(b) UUParser

Figure 10: Evaluation of out-of-domain Tweebank parsers; at each age range of the children, the parser score for child (or parent) speech was averaged across all children (or parents) within that age range.

performing parsers trained from out-of-domain treebanks fall short in general? We note four cases here. During early ages of the children, for parent speech, the dependency relation that results in the biggest discrepancy between parser and manual annotations is *nmod:poss*, e.g., *my book*, where the parsers annotated the relation as *nmod*, which is less preferred in latest annotation guidelines of UD. The second case that caused confusion for the parsers is when the sentences contain elements that should be annotated as *discourse* and/or *vocative* (e.g., *hahaha I see*, *Roman oh that is beautiful*) whereas the parsers appeared to more consistently annotate the first word in these instance as the root of the sentence.

One other noteworthy example is when the parsers think of a *vocative* as the subject (e.g., *Adam eat your soupe*) or sometimes object (e.g.,

*sit Sarah*) of the utterance, since there is no punctuation in the annotations and the main clause of the sentence is subjectless or should not take an object at all. The last one is *conj*, which we used for cases of repetition or when the speaker appears to be listing individual nouns (e.g., *orange grape apple*); the parsers, however, annotated the relation between pairs of nouns to be *compound*, which was common in the training sets of the out-of-domain treebanks given that they were annotated (largely) based on UD guidelines.

As the children age, the aforementioned dependency relations still turned out to be the main reasons to explain parser performance, though to lesser extents. Note this was not because the parsers started correctly annotating these relations, but due to the fact that the relevant instances occur less frequently in parent speech at later age ranges of

the children, at least in the data samples that we selected and annotated. In addition, another dependency relation that the parsers tended to not annotate correctly at later developmental stages of the children is *compound:prt*, in cases such as *hurry up*; instead the parsers assigned *compound*, which is not entirely wrong, but less precise.

## 7.2 Child’s speech

Overall parser performance for child’s speech demonstrates similar patterns to those found for parent’s speech. Across all age ranges, again the best parsers trained on the ESL treebank using `twitter` and the best parsers trained on the Tweebank with `bert` arrived at comparable performance (79.35 vs. 79.39); these parsers also outperformed the best parsers based on the EWT treebank (76.48), indicating that ESL and Tweebank, especially the latter, suffice for yielding reasonable parser performance despite their much smaller dataset scales in contrast to EWT.

In terms of what dependency relations resulted in the discrepancies between parser performance and manual annotations, we identified four main categories that are applicable especially during early ages of the children, which again are similar to those noted for parent speech. The first one is *conj*; the parsers tended to assign *compound* for an utterance that consists mostly of individual nouns (*book table pencil*) where none of the nouns modifies each other.

The other three categories appear to be mainly caused by the utterances potentially having word omissions or ambiguous structures. For instance, when the utterances consist of two words, where the first one was treated as the subject of the second (*Adam home*) in our annotations, given the length of the utterances, the parsers again preferred to annotate *Adam* as the *compound* of *home*. Another case pertains *nmod:poss*; in addition to assigning *nmod* for utterances that contain possessives such as *my*, the parsers also used *nmod* for utterances that possibly involve the omission of the possessive marker ‘*s*’. The last one concerns the treatment of *vocative*, which again sometimes were annotated by the parsers as *nsubj* or *obj*.

Notice there is small fluctuation in LAS between the age of 48-54 months. When looking at the differences between parser and manual annotations for this age range, we see an additional type of instance where the parsers committed errors, which

involve a head verb with an adverbial modifier, such as *bring them back*; rather than parsing *back* as *advmod* of *bring*, the parsers assigned *aux*.

In all, contrasting results for child speech to those for parent speech, not so surprisingly, parser performance is better overall for the latter. That said, when children reach later ages, the parsers’ evaluation results ( $\sim 87.83$ ) approach those for parent speech ( $\sim 89.13$ ), suggesting that children’s development of syntactic structures are becoming more parent-like. While parser scores for parent speech slowly increase between the age range of 18-66 months, this progress is much more pronounced for child speech; in other words, we do see an overall improvement of parser performance as children progress along the syntactic developmental trajectory, particularly within 18-42 months.

## 8 Ongoing in-domain parser training and evaluation

After observing the performance of out-of-domain parsers, we now turn to evaluating the performance of parsers trained with in-domain data of child-parent interactions; in particular, these parsers are expected to pick up the new dependency relations for disfluencies that we introduced, at least to some extent. Based on results from Section 7, on average parsers trained with MaChamp using the `twitter` LM seemed to achieve the most stable performance, therefore we adopted the same parser setup here.

Our training scheme is as follows. Say we want to evaluate parser performance for Adam from the Brown Corpus. We first trained parsers using all the data from the other nine child-parent pairs; we then measured parser performance for both child and parent speech at each age range of the child using LAS averaged across 3 random seeds.

## 9 Conclusion

We present a wide-coverage dataset of child-parent interactions annotated with syntactic dependencies, along with detailed annotation guidelines extending the Universal Dependencies project. The dataset covers child and parent speech from the age range of 18-66 months for the children. Evaluations from graph-based and transition based dependency parsers with varying hyperparameters demonstrate that parsers trained using a relatively small amount of English tweets (Tweebank) are able to yield comparable or even outperform parsers trained from much larger dependency treebanks. In addition, we

observed the general trend that on average, parser performance increases as the children reach older ages, indicating that as children progress along their syntactic developmental trajectory, they start producing more cohesive structures but not too complex for the parsers to handle. We wait to verify this again with our ongoing work of in-domain parser training and evaluation..

## References

- Ron Artstein and Massimo Poesio. 2008. Inter-coder agreement for computational linguistics. *Computational linguistics*, 34(4):555–596.
- Giuseppe Attardi, Daniele Sartiano, and Maria Simi. 2021. [Biaffine Dependency and Semantic Graph Parsing for Enhanced Universal Dependencies](#). In *Proceedings of the 17th International Conference on Parsing Technologies and the IWPT 2021 Shared Task on Parsing into Enhanced Universal Dependencies (IWPT 2021)*, pages 184–188, Online. Association for Computational Linguistics.
- Francesco Barbieri, Jose Camacho-Collados, Luis Espinosa Anke, and Leonardo Neves. 2020. [TweetEval: Unified Benchmark and Comparative Evaluation for Tweet Classification](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 1644–1650, Online. Association for Computational Linguistics.
- Thierry Bazillon, Melanie Deplano, Frederic Bechet, Alexis Nasr, and Benoit Favre. 2012. [Syntactic annotation of spontaneous speech: application to call-center conversation data](#). In *Proceedings of the Eighth International Conference on Language Resources and Evaluation (LREC’12)*, pages 1338–1342, Istanbul, Turkey. European Language Resources Association (ELRA).
- Frederic Bechet, Alexis Nasr, and Benoit Favre. 2014. Adapting dependency parsing to spontaneous speech for open domain spoken language understanding. In *Fifteenth Annual Conference of the International Speech Communication Association*.
- RUTH A. BERMAN. 1990. [On acquiring an \(S\)VO language: subjectless sentences in children’s Hebrew](#). 28(6):1135–1166.
- Yevgeni Berzak, Jessica Kenney, Carolyn Spadine, Jing Xian Wang, Lucia Lam, Keiko Sophie Mori, Sebastian Garza, and Boris Katz. 2016. [Universal Dependencies for Learner English](#). In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 737–746. Association for Computational Linguistics.
- Roger Brown. 1973. *A first language: The early stages*. Harvard University Press.
- Sam Davidson, Dian Yu, and Zhou Yu. 2019. [Dependency parsing for spoken dialog systems](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 1513–1519, Hong Kong, China. Association for Computational Linguistics.
- Katherine Demuth, Jennifer Culbertson, and Jennifer Alter. 2006. Word-minimality, epenthesis and coda licensing in the early acquisition of English. *Language and speech*, 49(2):137–173.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. [BERT: pre-training of deep bidirectional transformers for language understanding](#). *CoRR*, abs/1810.04805.
- Kaja Dobrovoljc. 2022. Spoken Language Treebanks in Universal Dependencies: an Overview. In *Proceedings of the 13th Language Resources and Evaluation Conference*, page 1798–1806, Marseille, France. European Language Resources Association.
- Kaja Dobrovoljc and Matej Martinc. 2018. [Er ... well, it matters, right? On the role of data representations in spoken language dependency parsing](#). In *Proceedings of the Second Workshop on Universal Dependencies (UDW 2018)*, pages 37–46, Brussels, Belgium. Association for Computational Linguistics.
- Kaja Dobrovoljc and Joakim Nivre. 2016. [The Universal Dependencies treebank of spoken Slovenian](#). In *Proceedings of the Tenth International Conference on Language Resources and Evaluation (LREC’16)*, pages 1566–1573, Portorož, Slovenia. European Language Resources Association (ELRA).

- Timothy Dozat and Christopher D. Manning. 2017. [Deep Biaffine Attention for Neural Dependency Parsing](#). In *5th International Conference on Learning Representations, ICLR 2017, Toulon, France, April 24-26, 2017, Conference Track Proceedings*. OpenReview.net.
- Fernanda Ferreira and Karl G.D. Bailey. 2004. [Disfluencies and human language comprehension](#). *Trends in Cognitive Sciences*, 8(5):231–237.
- Kim Gerdes and Sylvain Kahane. 2009. [Speaking in piles: Paradigmatic annotation of French spoken corpus](#). In *Fifth Corpus Linguistics Conference*, pages 1–15, Liverpool, United Kingdom.
- John J Godfrey, Edward C Holliman, and Jane McDaniel. 1992. Switchboard: Telephone speech corpus for research and development. In *Acoustics, Speech, and Signal Processing, IEEE International Conference on*, volume 1, pages 517–520. IEEE Computer Society.
- Rob van der Goot, Ahmet Üstün, Alan Ramponi, Ibrahim Sharaf, and Barbara Plank. 2021. [Massive choice, ample tasks \(MaChAmp\): A toolkit for multi-task learning in NLP](#). In *Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: System Demonstrations*, pages 176–197, Online. Association for Computational Linguistics.
- Shai Gretz, Alon Itai, Brian MacWhinney, Bracha Nir, and Shuly Wintner. 2013. [Parsing Hebrew CHILDES transcripts](#). *Language Resources and Evaluation*, 49(1):107–145.
- Ruifang He, Yaru Wang, Dawei Song, Peng Zhang, Yuan Jia, and Aijun Li. 2018. [A dependency parser for spontaneous Chinese spoken language](#). *ACM Transactions on Asian and Low-Resource Language Information Processing*, 17(4):1–13.
- Mary Hughes and Shanley Allen. 2006. A discourse-pragmatic analysis of subject omission in child english. In *Proceedings of the 30th Annual Boston University Conference on Language Development*, volume 1, pages 293–304. Cascadilla Press Somerville, MA.
- Eliyahu Kiperwasser and Yoav Goldberg. 2016. [Simple and Accurate Dependency Parsing Using Bidirectional LSTM Feature Representations](#). *Transactions of the Association for Computational Linguistics*, 4:313–327.
- Liubov Kovriginina, Ivan Shilin, Alina Putintseva, and Alexander Shipilo. 2018. Multilevel annotation in the corpus for parsing russian spontaneous speech. In *Speech and Computer*, pages 311–320, Cham. Springer International Publishing.
- Stan A Kuczaj II. 1977. The acquisition of regular and irregular past tense forms. *Journal of verbal learning and verbal behavior*, 16(5):589–600.
- John Lee, Herman Leung, and Keying Li. 2017. [Towards Universal Dependencies for Learner Chinese](#). In *Proceedings of the NoDaLiDa 2017 Workshop on Universal Dependencies (UDW 2017)*, pages 67–71, Gothenburg, Sweden. Association for Computational Linguistics.
- Miryam de Lhoneux, Sara Stymne, and Joakim Nivre. 2017. Arc-hybrid non-projective dependency parsing with a static-dynamic oracle. In *Proceedings of the The 15th International Conference on Parsing Technologies (IWPT)*, Pisa, Italy.
- Elena Lieven, Dorothé Salomo, and Michael Tomasello. 2009. Two-year-old children’s production of multiword utterances: A usage-based analysis. *Cognitive Linguistics*, 20(3):481–508.
- Yijia Liu, Yi Zhu, Wanxiang Che, Bing Qin, Nathan Schneider, and Noah A. Smith. 2018. [Parsing tweets into Universal Dependencies](#). In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pages 965–975, New Orleans, Louisiana. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. [Roberta: A robustly optimized BERT pretraining approach](#). *CoRR*, abs/1907.11692.
- Zoey Liu and Emily Prud’hommeaux. 2021. [Dependency parsing evaluation for low-resource spontaneous speech](#). In *Proceedings of the Second Workshop on Domain Adaptation for NLP*, pages 156–165, Kyiv, Ukraine. Association for Computational Linguistics.

- Brian MacWhinney. 2000. *The CHILDES Project: Tools for analyzing talk. transcription format and programs*, volume 1. Psychology Press.
- Marie Mikulová, Jiří Mírovský, Anja Nedoluzhko, Petr Pajas, Jan Štěpánek, and Jan Hajič. 2017. Pdtsc 2.0 - spoken corpus with rich multi-layer structural annotation. In *Text, Speech, and Dialogue*, pages 129–137, Cham. Springer International Publishing.
- Tim Miller. 2009a. [Improved syntactic models for parsing speech with repairs](#). In *Proceedings of Human Language Technologies: The 2009 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pages 656–664, Boulder, Colorado. Association for Computational Linguistics.
- Tim Miller. 2009b. [Improved syntactic models for parsing speech with repairs](#). In *Proceedings of Human Language Technologies: The 2009 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pages 656–664, Boulder, Colorado. Association for Computational Linguistics.
- Tim Miller and William Schuler. 2008. A unified syntactic model for parsing fluent and disfluent speech. In *Proceedings of the 46th Annual Meeting of the Association for Computational Linguistics on Human Language Technologies: Short Papers*, pages 105–108, Columbus, Ohio. Association for Computational Linguistics.
- Susanne Miyata, Kenji Sagae, and Brian MacWhinney. 2013. The syntax parser GRASP for CHILDES (in Japanese). *Journal of Health and Medical Science*, (3):45–62.
- Joakim Nivre. 2009. [Non-projective dependency parsing in expected linear time](#). In *Proceedings of the Joint Conference of the 47th Annual Meeting of the ACL and the 4th International Joint Conference on Natural Language Processing of the AFNLP*, pages 351–359, Suntec, Singapore. Association for Computational Linguistics.
- Tomohiro Ohno, Shigeki Matsubara, Nobuo Kawaguchi, and Yasuyoshi Inagaki. 2005. [Robust Dependency Parsing of Spontaneous Japanese Spoken Language](#). *IEICE - Trans. Inf. Syst.*, E88-D(3):545–552.
- Peng Qi, Yuhao Zhang, Yuhui Zhang, Jason Bolton, and Christopher D. Manning. 2020. [Stanza: A Python Natural Language Processing Toolkit for Many Human Languages](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: System Demonstrations*, pages 101–108, Online. Association for Computational Linguistics.
- Mohammad Sadegh Rasooli and Joel Tetreault. 2013. [Joint Parsing and Disfluency Detection in Linear Time](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 124–129, Seattle, Washington, USA. Association for Computational Linguistics.
- Kenji Sagae, Eric Davis, Alon Lavie, Brian Macwhinney, and Shuly Wintner. 2010. [Morphosyntactic annotation of CHILDES transcripts](#). *Journal of Child Language*, 37(3):705–729.
- Kenji Sagae, Alon Lavie, and Brian MacWhinney. 2001. [Parsing the CHILDES database: Methodology and lessons learned](#). In *Proceedings of the Seventh International Workshop on Parsing Technologies*, pages 166–176, Beijing, China.
- Kenji Sagae, Brian MacWhinney, and Alon Lavie. 2004. [Adding syntactic annotations to transcripts of parent-child dialogs](#). In *Proceedings of the Fourth International Conference on Language Resources and Evaluation (LREC'04)*, Lisbon, Portugal. European Language Resources Association (ELRA).
- Alessandro Sanchez, Stephan C Meylan, Mika Braginsky, Kyle E MacDonald, Daniel Yurovsky, and Michael C Frank. 2019. childes-db: A flexible and reproducible interface to the child language data exchange system. *Behavior research methods*, 51(4):1928–1941.
- Beatrice Santorini. 1990. Part-of-speech tagging guidelines for the penn treebank project.
- Nathan Schneider and Amir Zeldes. 2021. [Mischievous nominal constructions in Universal Dependencies](#). In *Proceedings of the Fifth Workshop on Universal Dependencies (UDW, SyntaxFest 2021)*, pages 160–172, Sofia, Bulgaria. Association for Computational Linguistics.
- Natalia Silveira, Timothy Dozat, Marie-Catherine de Marneffe, Samuel Bowman, Miriam Connor,

- John Bauer, and Christopher D. Manning. 2014. A gold standard dependency corpus for English. In *Proceedings of the Ninth International Conference on Language Resources and Evaluation (LREC-2014)*.
- Aaron Smith, Bernd Bohnet, Miryam de Lhoneux, Joakim Nivre, Yan Shao, and Sara Stymne. 2018. [82 treebanks, 34 models: Universal Dependency parsing with multi-treebank models](#). In *Proceedings of the CoNLL 2018 Shared Task: Multilingual Parsing from Raw Text to Universal Dependencies*, pages 113–123, Brussels, Belgium. Association for Computational Linguistics.
- Ida Szubert, Omri Abend, Nathan Schneider, Samuel Gibbon, Sharon Goldwater, and Mark Steedman. 2021. Cross-linguistically consistent semantic and syntactic annotation of child-directed speech. *arXiv preprint arXiv:2109.10952*.
- Richard M Weist and Andrea A Zevenbergen. 2008. Autobiographical memory and past time reference. *Language Learning and Development*, 4(4):291–308.
- Helen Yannakoudakis, Ted Briscoe, and Ben Medlock. 2011. A new dataset and method for automatically grading esol texts. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies-Volume 1*, pages 180–189. Association for Computational Linguistics.
- Masashi Yoshikawa, Hiroyuki Shindo, and Yuji Matsumoto. 2016. [Joint transition-based dependency parsing and disfluency detection for automatic speech recognition texts](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 1036–1041, Austin, Texas. Association for Computational Linguistics.
- Daniel Zeman, Joakim Nivre, Mitchell Abrams, Elia Ackermann, Noëmi Aepli, Hamid Aghaei, Željko Agić, Amir Ahmadi, Lars Ahrenberg, Chika Kennedy Ajede, Gabrielé Aleksandravičiūtė, Ika Alfina, Avner Algom, Erik Andersen, Lene Antonsen, Katya Aplonova, Angelina Aquino, Carolina Aragon, Glyd Aranes, Maria Jesus Aranzabe, Bilge Nas Arıcan, Hórunn Arnardóttir, Gashaw Arutie, Jessica Naraiswari Arwidarasti, Masayuki Asahara, Deniz Baran Aslan, Cengiz Asmazoğlu, Luma Ateyah, Furkan Atmaca, Mohammed Attia, Aitziber Atutxa, Liesbeth Augustinus, Elena Badmaeva, Keerthana Balasubramani, Miguel Ballesteros, Esha Banerjee, Sebastian Bank, Verginica Barbu Mititelu, Starkaður Barkarson, Rodolfo Basile, Victoria Basmov, Colin Batchelor, John Bauer, Seyyit Talha Bedir, Kepa Bengoetxea, Yifat Ben Moshe, Gözde Berk, Yevgeni Berzak, Irshad Ahmad Bhat, Riyaz Ahmad Bhat, Erica Biagetti, Eckhard Bick, Agnė Bielinskienė, Kristín Bjarnadóttir, Rogier Blokland, Victoria Bobicev, Loïc Boizou, Emanuel Borges Völker, Carl Börstell, Cristina Bosco, Gosse Bouma, Sam Bowman, Adriane Boyd, Anouck Braggaar, Kristina Brokaitė, Aljoscha Burchardt, Marie Candito, Bernard Caron, Gauthier Caron, Lauren Cassidy, Tatiana Cavalcanti, Gülşen Cebiroğlu Eryiğit, Flavio Masimiliano Cecchini, Giuseppe G. A. Celano, Slavomír Čéplö, Neslihan Cesur, Savas Cetin, Özlem Çetinoğlu, Fabricio Chalub, Shweta Chauhan, Ethan Chi, Taishi Chika, Yongseok Cho, Jinho Choi, Jayeol Chun, Juyeon Chung, Alessandra T. Cignarella, Silvie Cinková, Aurélie Collomb, Çağrı Çöltekin, Miriam Connor, Daniela Corbetta, Marine Courtin, Mihaela Cristescu, Philemon Daniel, Elizabeth Davidson, Mathieu Dehouck, Martina de Laurentiis, Marie-Catherine de Marneffe, Valeria de Paiva, Mehmet Oguz Derin, Elvis de Souza, Arantza Diaz de Ilarraza, Carly Dickerson, Arawinda Dinakaramani, Elisa Di Nuovo, Bamba Dione, Peter Dirix, Kaja Dobrovoljc, Timothy Dozat, Kira Droganova, Puneet Dwivedi, Hanne Eckhoff, Sandra Eiche, Marhaba Eli, Ali Elkahky, Binyam Ephrem, Olga Erina, Tomaž Erjavec, Aline Etienne, Wograinne Evelyn, Sidney Facundes, Richárd Farkas, Federica Favero, Jannatul Ferdaousi, Marília Fernanda, Hector Fernandez Alcalde, Jennifer Foster, Cláudia Freitas, Kazunori Fujita, Katarína Gajdošová, Daniel Galbraith, Federica Gamba, Marcos Garcia, Moa Gärdenfors, Sebastian Garza, Fabrício Ferraz Gerardi, Kim Gerdes, Filip Ginter, Gustavo Godoy, Iakes Goenaga, Koldo Gojenola, Memduh Gökırmak, Yoav Goldberg, Xavier Gómez Guinovart, Berta González Saavedra, Bernadeta Griciūtė, Matias Grioni, Loïc Grobol, Normunds Grūzītis, Bruno Guillaume, Céline Guillot-Barbance, Tunga Güngör, Nizar

Habash, Hinrik Hafsteinsson, Jan Hajič, Jan Hajič jr., Mika Hämäläinen, Linh Hà Mỹ, Na-Rae Han, Muhammad Yudistira Hanifmuti, Takahiro Harada, Sam Hardwick, Kim Harris, Dag Haug, Johannes Heinecke, Oliver Hellwig, Felix Hennig, Barbora Hladká, Jaroslava Hlaváčková, Florinel Hociung, Petter Hohle, Jena Hwang, Takumi Ikeda, Anton Karl Ingason, Radu Ion, Elena Irimia, Olájidé Ishola, Kaoru Ito, Siratun Jannat, Tomáš Jelínek, Apoorva Jha, Anders Johannsen, Hildur Jónsdóttir, Fredrik Jørgensen, Markus Juutinen, Sarveswaran K, Hüner Kaşikara, Andre Kaasen, Nadezhda Kabaeva, Sylvain Kahane, Hiroshi Kanayama, Jenna Kanerva, Neslihan Kara, Rítván Karahóga, Boris Katz, Tolga Kayadelen, Jessica Kenney, Václava Kettnerová, Jesse Kirchner, Elena Klementieva, Elena Klyachko, Arne Köhn, Abdullatif Köksal, Kamil Kopacewicz, Timo Korikiakangas, Mehmet Köse, Natalia Kotsyba, Jolanta Kovalevskaitė, Simon Krek, Parameswari Krishnamurthy, Sandra Kübler, Oğuzhan Kuyrukçu, Asli Kuzgun, Sookyong Kwak, Veronika Laipala, Lucia Lam, Lorenzo Lambertino, Tatiana Lando, Septina Dian Larasati, Alexei Lavrentiev, John Lee, Phuong Lê Hồng, Alessandro Lenci, Saran Lertpradit, Herman Leung, Maria Levina, Cheuk Ying Li, Josie Li, Keying Li, Yuan Li, KyungTae Lim, Bruna Lima Padovani, Krister Lindén, Nikola Ljubešić, Olga Loginova, Stefano Lusito, Andry Luthfi, Mikko Luukko, Olga Lyashevskaya, Teresa Lynn, Vivien Macketanz, Menel Mahamdi, Jean Maillard, Aibek Makazhanov, Michael Mandl, Christopher Manning, Ruli Manurung, Büşra Marşan, Cătălina Mărănduc, David Mareček, Katrin Marheinecke, Stella Markantonatou, Héctor Martínez Alonso, Lorena Martín Rodríguez, André Martins, Jan Mašek, Hiroshi Matsuda, Yuji Matsumoto, Alessandro Mazzei, Ryan McDonald, Sarah McGuinness, Gustavo Mendonça, Tatiana Merzhevich, Niko Miekka, Karina Mischenkova, Margarita Misirpashayeva, Anna Missilä, Cătălin Mititelu, Maria Mitrofan, Yusuke Miyao, AmirHossein Mojiri Foroushani, Judit Molnár, Amir-saeid Moloodi, Simonetta Montemagni, Amir More, Laura Moreno Romero, Giovanni Moretti, Keiko Sophie Mori, Shinsuke Mori, Tomohiko Morioka, Shigeki Moro, Bjartur Mortensen, Bohdan Moskalevskyi, Kadri Muischnek, Robert

Munro, Yugo Murawaki, Kaili Mütirisep, Pinkey Nainwani, Mariam Nakhlé, Juan Ignacio Navarro Horñiacek, Anna Nedoluzhko, Gunta Nešpore-Bēzkalne, Manuela Nevaci, Luong Nguyễn Thị, Huyền Nguyễn Thị Minh, Yoshihiro Nikaido, Vitaly Nikolaev, Rattima Nitisaroj, Alireza Nourian, Hanna Nurmi, Stina Ojala, Atul Kr. Ojha, Adedayo Olúòkun, Mai Omura, Emeka Onwuegbuzia, Noam Ordan, Petya Osenova, Robert Östling, Lilja Øvrelid, Şaziye Betül Özateş, Merve Özçelik, Arzucan Özgür, Balkız Öztürk Başaran, Teresa Paccosi, Alessio Palmero Aprosio, Hyunji Hayley Park, Niko Partanen, Elena Pascual, Marco Passarotti, Agnieszka Patejuk, Guilherme Paulino-Passos, Giulia Pedonese, Angelika Peljak-Łapińska, Siyao Peng, Cenel-Augusto Perez, Natalia Perkova, Guy Perrier, Slav Petrov, Daria Petrova, Andrea Peverelli, Jason Phelan, Jussi Piitulainen, Tommi A Pirinen, Emily Pitler, Barbara Plank, Thierry Poibeau, Larisa Ponomareva, Martin Popel, Lauma Pretkalniņa, Sophie Prévost, Prokopis Prokopidis, Adam Przepiórkowski, Tina Puolakainen, Sampo Pyysalo, Peng Qi, Andriela Rääbis, Alexandre Rademaker, Mizanur Rahoman, Taraka Rama, Loganathan Ramasamy, Carlos Ramisch, Fam Rashel, Mohammad Sadegh Rasooli, Vinit Ravishankar, Livy Real, Petru Rebeja, Siva Reddy, Mathilde Regnault, Georg Rehm, Ivan Riabov, Michael Rießler, Erika Rimkutė, Larissa Rinaldi, Laura Rituma, Putri Rizqiyah, Luisa Rocha, Eiríkur Rögnvaldsson, Mykhailo Romanenko, Rudolf Rosa, Valentin Roşca, Davide Rovati, Ben Rozonoyer, Olga Rudina, Jack Rueter, Kristján Rúnarsson, Shoal Sadde, Pegah Safari, Benoît Sagot, Aleksí Sahala, Shadi Saleh, Alessio Salomoni, Tanja Samardžić, Stephanie Samson, Manuela Sanguinetti, Ezgi Sanıyar, Dage Särg, Baiba Saulīte, Yanin Sawanakunanon, Shefali Saxena, Kevin Scannell, Salvatore Scarlata, Nathan Schneider, Sebastian Schuster, Lane Schwartz, Djamé Seddah, Wolfgang Seeker, Mojgan Seraji, Syeda Shahzadi, Mo Shen, Atsuko Shimada, Hiroyuki Shirasu, Yana Shishkina, Muh Shohibussirri, Dmitry Sichinava, Janine Siewert, Einar Freyr Sigurðsson, Aline Silveira, Natalia Silveira, Maria Simi, Radu Simionescu, Katalin Simkó, Mária Šimková, Kiril Simov, Maria Skachedubova, Aaron Smith, Isabela Soares-Bastos, Shafi Surov, Carolyn

Spadine, Rachele Sprugnoli, Vivian Stamou, Steinhór Steingrímsson, Antonio Stella, Milan Straka, Emmett Strickland, Jana Strnadová, Alane Suhr, Yogi Lesmana Sulestio, Umut Sulubacak, Shingo Suzuki, Daniel Swanson, Zsolt Szántó, Chihiro Taguchi, Dima Taji, Yuta Takahashi, Fabio Tamburini, Mary Ann C. Tan, Takaaki Tanaka, Dipta Tanaya, Mirko Tavoni, Samson Tella, Isabelle Tellier, Marinella Testori, Guillaume Thomas, Sara Tonelli, Liisi Torga, Marsida Toska, Trond Trosterud, Anna Trukhina, Reut Tsarfaty, Utku Türk, Francis Tyers, Sumire Uematsu, Roman Untilov, Zdeňka Urešová, Larraitz Uria, Hans Uszkoreit, Andrius Utka, Elena Vagnoni, Sowmya Vajjala, Rob van der Goot, Martine Vanhove, Daniel van Niekerk, Gertjan van Noord, Viktor Varga, Uliana Vedenina, Eric Villemonte de la Clergerie, Veronika Vincze, Natalia Vlasova, Aya Wakasa, Joel C. Wallenberg, Lars Wallin, Abigail Walsh, Jing Xian Wang, Jonathan North Washington, Maximilan Wendt, Paul Widmer, Shira Wigderson, Sri Hartati Wijono, Seyi Williams, Mats Wirén, Christian Wittern, Tsegay Woldemariam, Tak-sum Wong, Alina Wróblewska, Mary Yako, Kayo Yamashita, Naoki Yamazaki, Chunxiao Yan, Koichi Yasuoka, Marat M. Yavrumyan, Arife Betül Yenice, Olcay Taner Yıldız, Zhuoran Yu, Arlisa Yuliawati, Zdeněk Žabokrtský, Shorouq Zahra, Amir Zeldes, He Zhou, Hanzhi Zhu, Anna Zhuravleva, and Rayan Ziane. 2022. [Universal dependencies 2.10](#). LINDAT/CLARIAH-CZ digital library at the Institute of Formal and Applied Linguistics (ÚFAL), Faculty of Mathematics and Physics, Charles University.