

YATO: Yet Another deep learning based Text analysis Open toolkit

Zeqiang Wang^{1,2*}

Yile Wang^{3*}

Jiageng Wu^{1,2}

Zhiyang Teng³

Jie Yang^{1,2†}

WZQ99@ZJU.EDU.CN

WANGYILE@WESTLAKE.EDU.CN

JIAGENGWU@ZJU.EDU.CN

TENGZHIYANG@WESTLAKE.EDU.CN

JIEYNLP@GMAIL.COM

¹*School of Public Health and the Second Affiliated Hospital, Zhejiang University, Hangzhou, China*

²*The Key Laboratory of Intelligent Preventive Medicine of Zhejiang Province, Hangzhou, China*

³*School of Engineering, Westlake University, Hangzhou, China*

Editor: TBD

Abstract

We introduce YATO, an open-source toolkit for text analysis with deep learning. It focuses on fundamental sequence labeling and sequence classification tasks on text. Designed in a hierarchical structure, YATO supports free combinations of three types of features including 1) traditional neural networks (CNN, RNN, etc.); 2) pre-trained language models (BERT, RoBERTa, ELECTRA, etc.); and 3) user-customed neural features via a simple configurable file. Benefiting from the advantages of flexibility and ease of use, YATO can facilitate reproducing and refinement of state-of-the-art NLP models, and promote the cross-disciplinary applications of NLP techniques. Source code, examples, and documentation are publicly available at <https://github.com/jiesutd/YATO>.

Keywords: Text Analysis, Reproducibility, Pre-trained language model, Deep learning

1. Introduction

Benefiting from the development of deep learning, natural language processing (NLP) has gained much advance in the past decade. Neural models, including recurrent neural network (RNN), convolutional neural network (CNN), and pretrained language models (PLM), have been widely utilized for text understanding. With the model architecture being more and more complex, it becomes more challenging to reproduce methods and reported results from the literature, especially for researchers with less or no artificial intelligence background. The different implementations of these models can lead to unfair comparisons, which can mislead developers and further hinder the cross-disciplinary applications of NLP techniques. Meanwhile, most existing framework does not support user-defined features (e.g., morphological/domain features), which are important in many domain applications. It is necessary to build a flexible, user-friendly, and customizable platform to promote interdisciplinary research among deep learning, NLP techniques and various disciplinary applications.

*. Equal contribution.

†. Corresponding author.

System	Framework Size	Neural Models	User-Defined Features	Configurable w/o Coding	SOTA Performance
CoreNLP	Lightweight	✗	✗	✗	✗
spaCy	Lightweight	✓	✗	✗	✗
AllenNLP	Lightweight	✓	✗	✗	✓
FlairNLP	Lightweight	✓	✗	✗	✓
FairSeq	Heavy	✓	✗	✗	✓
Transformers	Heavy	✓	✗	✗	✓
YATO	Lightweight	✓	✓	✓	✓

Table 1: Comparison between YATO and existing popular text analysis libraries.

There exist several text analysis toolkits in the NLP community. CoreNLP (Manning et al., 2014) and spaCy (Honnibal and Montani, 2017) offer pipelines for many traditional NLP tasks, while the performance is sometimes under-optimal due to the use of less powerful models. AllenNLP (Gardner et al., 2017) and flairNLP (Akbik et al., 2019) utilize pre-trained models while they do not support user-defined features. FairSeq (Ott et al., 2019) is designed for sequence-to-sequence tasks like machine translation and document summarization. Transformers (Wolf et al., 2020) offers implementation for various tasks by using state-of-the-art models across different modalities, which is heavily engineered. However, the above toolkits are mostly developed for professional AI researchers or engineers, where heavily coding effort is necessary during model development and deployment. Overall, the learning curve can be steep to fully leverage these toolkits for cross-disciplinary researchers (e.g. medical, financial) who need to build NLP models in their own areas.

This paper presents a new toolkit, called **YATO** (**Y**et **A**nother deep learning based **T**ext analysis **O**pen toolkit), for researchers and engineers looking for a convenient way to build state-of-the-art sequence labeling and classification models. A comparison between YATO and the aforementioned frameworks is shown in Table 1. Specifically, YATO is built based on NCRF++ (Yang and Zhang, 2018)¹, a neural sequence labeling toolkit. YATO keeps its main framework while integrating the training of sequence classification task, being compatible with more neural architectures, and offering visualizations of the attention relationship between model output and input sequence.

2. YATO

YATO is hierarchically designed to support flexible combinations of character-level features, word-level features, pre-trained language models², as well as handcrafted features. As shown in the overall framework in Figure 1, the input text can be encoded with PLM and traditional neural network (TNN) separately (pattern 1 and pattern 4, respectively), or can be encoded in a stacking architecture (pattern 3) or a concatenation structure (pattern 4). Among all patterns, users can inject flexible handcrafted features through feature embeddings. The encoded text embeddings are sent into a softmax/conditional random field (CRF) layer for sequence labeling, or a pooling layer for sequence classification, respectively. In conclusion, the main advantages of YATO are:

1. <https://github.com/jiesutd/NCRFpp>. Until September 2022, NCRF++ has attracted 170+ citations, 1,800+ stars, 160+ closed issues and 120+ merged pull requests on GitHub.
2. It supports all available pre-trained models from <https://huggingface.co/models>.

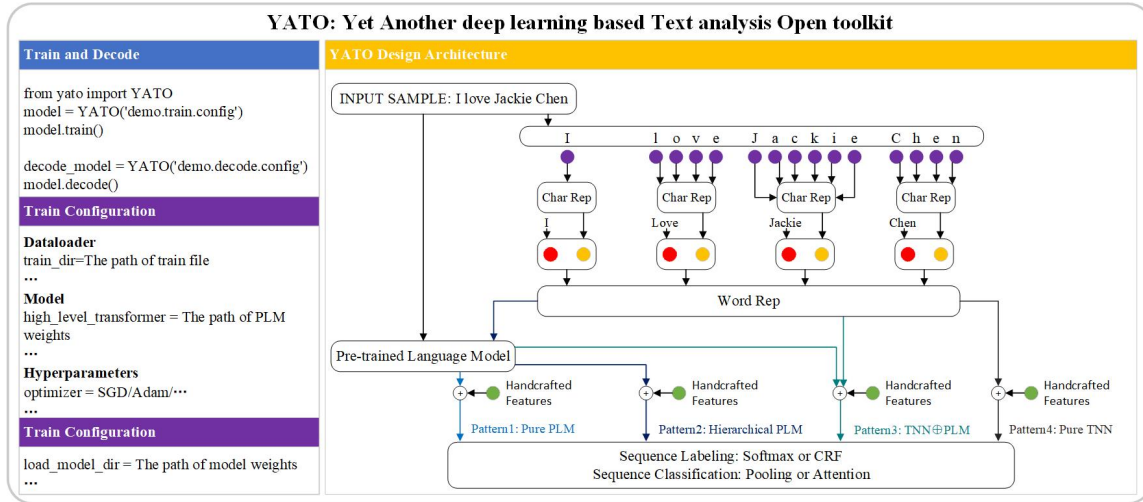


Figure 1: Architecture and demonstration code. The purple, red, yellow, green, and blue circles represent character embeddings, word embeddings, character sequence representation, custom features, and word sequence representation, respectively.

- **Light-weight.** YATO focuses on only two fundamental but popular NLP tasks: sequence labeling and sequence classification. Hence it is light-weight, relies on very limited libraries and can be fast developed and deployed in various environments.
- **Flexible.** Users can customize their models through free combinations of various neural models, including traditional neural networks (CNN, RNN) and state-of-the-art PLMs. Besides, YATO supports user-defined features to integrate domain-specific information.
- **Configurable.** All the model developments on YATO can be conducted through editing the configuration file. YATO will load the configuration file and construct the deep learning models following the configurations.
- **Easy to Use.** YATO is built in Python and has been released on PyPI, the installation can be done through `pip install ylab-yato`. Besides, YATO offers user-friendly tutorials and examples to let both academic researchers and non-professional users get started quickly.

3. Experiments

To evaluate our framework, we use 8 datasets that cover sequence labeling and classification in both English and Chinese, including named entity recognition (NER) on CoNLL2003 (Tjong Kim Sang and De Meulder, 2003), OntoNotes (Hovy et al., 2006) and MSRA (Levow, 2006); CCG supertagging on CCGBank (Hockenmaier and Steedman, 2007); sentiment analysis on SST2, SST5 (Socher et al., 2013), and ChnSentiCorp (Tan and Zhang, 2008).

Table 2 and Table 3 show that the model can reproduce the classical and state-of-the-art deep learning models on most of sequence labeling and classification. Specifically, it achieves the best performance on MSRA, OntoNotes 4.0, CCG supertagging, and ChnSentiCorp. The compatibility and reproducibility across different models and tasks demonstrate that YATO can be served as a platform for reproducing and comparing different methods from classical neural models to the state-of-the-art PLMs.

Model	CoNLL 2003		OntoNotes 5.0		MSRA		Ontonotes 4.0		CCG supertagging	
	YATO	Ref.	YATO	Ref.	YATO	Ref.	YATO	Ref.	YATO	Ref.
CCNN+WLSTM+CRF	91.00	91.11 ^a	81.53	-	92.83	-	74.55	-	93.80	-
BERT-base	91.61	92.4 ^b	84.68	85.54 ^c	95.81	94.71 ^f	80.57	79.93 ^f	96.14	92.16 ^h
RoBERTa-base	90.23	90.11 ^c	86.28	86.2 ^c	96.02	95.1 ^g	80.94	80.37 ^e	96.16	-
ELECTRA-base	91.59	91.5 ^d	85.25	87.6 ^d	96.03	-	80.47	-	96.29	-

Table 2: Results for sequence labeling tasks. ^a(Yang et al., 2018) ^b(Devlin et al., 2019) ^c(Liang et al., 2020) ^d(Shelmanov et al., 2021) ^e(Wang et al., 2022) ^f(Liu et al., 2021) ^g(Li et al., 2022) ^h(Durrani et al., 2020)

Model	SST2		SST5		ChnSentiCorp	
	YATO	Ref.	YATO	Ref.	YATO	Ref.
CCNN+WLSTM	87.61	-	43.48	-	88.22	-
BERT-base	93.00 [†]	92.7 ^{†a}	53.48	53.2 ^d	95.96	95.3 ^g
RoBERTa-base	92.55 [†]	94.8 ^{†b}	51.99	56.4 ^e	96.04	95.6 ^h
ELECTRA-base	94.72 [†]	95.1 ^{†c}	55.11	54.8 ^f	95.96	94.5 ^g

Table 3: Results for sequence classification tasks. † denotes the results of the dev set. ^a(Devlin et al., 2019) ^b(Zaheer et al., 2020) ^c(Clark et al., 2020) ^d(Munika et al., 2019) ^e(Sun et al., 2020) ^f(Xia et al., 2022) ^g(Cui et al., 2021) ^h(Xin et al., 2020)

Beyond performance, YATO provides a visualization tool to illustrate the attention weights of input text. Figure 2 provides examples of attention visualization on sentiment prediction tasks. Words or characters with sentiment polarities can be automatically extracted and highlighted using our toolkit. This visualization module can improve the interpretability of deep learning models in our toolkit.

Negative	a dreary rip-off of goodfellas that serves as a muddled and offensive cautionary tale for hispanic americans	Negative	送的包比较普通，做工也不好，而商城上99块的歌东芝笔记本是一样的，希望能送好点的包
Negative	nothing debases concept comedy quite like the grinding of bad ideas, and showtime is crammed full of them	Negative	转轴很结实，合屏幕后面缝隙大，手抓变形了，能抓前侧
Positive	it's one of the saddest films i have ever seen that still manages to be uplifting but not overly sentimental	Positive	配高，画质细腻触摸板做了凸点处理，手感也不错白色键盘抢眼
Positive	a fairly by-the-books blend of action and romance with sprinklings of intentional and unintentional comedy	Positive	价廉物美的好选择，晚上到机住合适，服务热情房没地毯很清爽，海景很好看

Figure 2: Visualization of attention weights. Different degrees of background color reflect the distributions of attention in words or characters.

4. Conclusion

YATO is an open-source toolkit for text analysis, supporting various combinations of state-of-the-art deep learning models and user-customed features with high flexibility and minimum coding effort. YATO is maintained by core developers from YLab (<https://ylab.top/>) of Zhejiang University and Westlake University. YATO aims to help AI researchers build state-of-the-art NLP models and assist non-AI researchers in conducting cross-interdisciplinary research with advanced NLP techniques. In the future, we plan to introduce high-performance pre-trained models for domain-specific usage, and custom modules that support modeling time series, multimodal features, and various types of features in different domains.

References

- Alan Akbik, Tanja Bergmann, Duncan Blythe, Kashif Rasul, Stefan Schweter, and Roland Vollgraf. Flair: An easy-to-use framework for state-of-the-art nlp. In *Proc. of NAACL, (Demonstrations)*, 2019.
- Kevin Clark, Minh-Thang Luong, Quoc V. Le, and Christopher D. Manning. ELECTRA: Pre-training text encoders as discriminators rather than generators. In *Proc. of ICLR*, 2020.
- Yiming Cui, Wanxiang Che, Ting Liu, Bing Qin, and Ziqing Yang. Pre-training with whole word masking for Chinese BERT. *IEEE/ACM Trans. Audio, Speech and Lang. Proc.*, 29: 3504–3514, jan 2021. ISSN 2329-9290.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proc. of NAACL*, 2019.
- Nadir Durrani, Hassan Sajjad, Fahim Dalvi, and Yonatan Belinkov. Analyzing individual neurons in pre-trained language models. In *Proc. of EMNLP*, 2020.
- Matt Gardner, Joel Grus, Mark Neumann, Oyvind Tafjord, Pradeep Dasigi, Nelson F. Liu, Matthew Peters, Michael Schmitz, and Luke S. Zettlemoyer. Allennlp: A deep semantic natural language processing platform. 2017.
- Julia Hockenmaier and Mark Steedman. CCGbank: A Corpus of CCG Derivations and Dependency Structures Extracted from the Penn Treebank. *Computational Linguistics*, 33(3):355–396, 09 2007. ISSN 0891-2017.
- Matthew Honnibal and Ines Montani. spacy 2: Natural language understanding with bloom embeddings, convolutional neural networks and incremental parsing. 2017.
- Eduard Hovy, Mitchell Marcus, Martha Palmer, Lance Ramshaw, and Ralph Weischedel. OntoNotes: The 90% solution. In *Proc. of NAACL*, 2006.
- Gina-Anne Levow. The third international Chinese language processing bakeoff: Word segmentation and named entity recognition. In *Proceedings of the Fifth SIGHAN Workshop on Chinese Language Processing*, 2006.
- Linyang Li, Yong Dai, Duyu Tang, Zhangyin Feng, Cong Zhou, Xipeng Qiu, Zenglin Xu, and Shuming Shi. Markbert: Marking word boundaries improves chinese bert. *arXiv preprint arXiv:2203.06378*, 2022.
- Chen Liang, Yue Yu, Haoming Jiang, Siawpeng Er, Ruijia Wang, Tuo Zhao, and Chao Zhang. Bond: Bert-assisted open-domain named entity recognition with distant supervision. In *Proc. of SIGKDD*, 2020.
- Wei Liu, Xiyang Fu, Yue Zhang, and Wenming Xiao. Lexicon enhanced Chinese sequence labeling using BERT adapter. In *Proc. of ACL-IJCNLP*, 2021.

- Christopher Manning, Mihai Surdeanu, John Bauer, Jenny Finkel, Steven Bethard, and David McClosky. The Stanford CoreNLP natural language processing toolkit. In *Proc. of ACL: System Demonstrations*, 2014.
- Manish Munikar, Sushil Shakya, and Aakash Shrestha. Fine-grained sentiment classification using bert. In *2019 Artificial Intelligence for Transforming Business and Society (AITB)*, volume 1, pages 1–5. IEEE, 2019.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. fairseq: A fast, extensible toolkit for sequence modeling. In *Proc. of NAACL-HLT: Demonstrations*, 2019.
- Artem Shelmanov, Dmitri Puzyrev, Lyubov Kupriyanova, Denis Belyakov, Daniil Larionov, Nikita Khromov, Olga Kozlova, Ekaterina Artemova, Dmitry Dylov, and Alexander Panchenko. Active learning for sequence tagging with deep pre-trained models and bayesian uncertainty estimates. pages 1698–1712, 01 2021. doi: 10.18653/v1/2021.eacl-main.145.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Ng, and Christopher Potts. Recursive deep models for semantic compositionality over a sentiment treebank. In *Proc. of EMNLP*, 2013.
- Zijun Sun, Chun Fan, Qinghong Han, Xiaofei Sun, Yuxian Meng, Fei Wu, and Jiwei Li. Self-explaining structures improve nlp models. *arXiv preprint arXiv:2012.01786*, 2020.
- Songbo Tan and Jin Zhang. An empirical study of sentiment analysis for chinese documents. *Expert Systems with Applications*, 34(4):2622–2629, 2008. ISSN 0957-4174.
- Erik F. Tjong Kim Sang and Fien De Meulder. Introduction to the CoNLL-2003 shared task: Language-independent named entity recognition. In *Proc. of NAACL*, 2003.
- Shuhe Wang, Xiaoya Li, Yuxian Meng, Tianwei Zhang, Rongbin Ouyang, Jiwei Li, and Guoyin Wang. knn-ner: Named entity recognition with nearest neighbor search. *arXiv preprint arXiv:2203.17103*, 2022.
- Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi, Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art natural language processing. In *Proc. of EMNLP: System Demonstrations*, 2020.
- Mengzhou Xia, Mikel Artetxe, Jingfei Du, Danqi Chen, and Ves Stoyanov. Prompting electra: Few-shot learning with discriminative pre-trained models. *arXiv preprint arXiv:2205.15223*, 2022.
- Ji Xin, Raphael Tang, Jaejun Lee, Yaoliang Yu, and Jimmy Lin. DeeBERT: Dynamic early exiting for accelerating BERT inference. In *Proc. of ACL*, 2020.

Jie Yang and Yue Zhang. NCRF++: An open-source neural sequence labeling toolkit. In *Proc. of ACL, System Demonstrations*, 2018.

Jie Yang, Shuailong Liang, and Yue Zhang. Design challenges and misconceptions in neural sequence labeling. In *Proc. of COLING*, 2018.

Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, et al. Big bird: Transformers for longer sequences. *Advances in NeurIPS*, 2020.