

Collaborative knowledge exchange promotes innovation

Tomoya Mori^{a,b,1}, Jonathan Newton^a, and Shosei Sakaguchi^c

^aInstitute of Economic Research, Kyoto University. Yoshida-Honmachi, Sakyo-Ku, Kyoto, Kyoto 606-8501, Japan.; ^bResearch Institute of Economy, Trade and Industry, 11th floor, Annex, Ministry of Economy, Trade and Industry 1-3-1, Kasumigaseki Chiyoda-ku, Tokyo 100-8901, Japan.; ^cFaculty of Economics, The University of Tokyo, 7-3-1, Hongo, Bunkyo-ku, Tokyo 113-0033, Japan.

This manuscript was compiled on November 7, 2022

Considering collaborative patent development, we provide micro-level evidence for innovation through exchanges of differentiated knowledge. Knowledge embodied in a patent is proxied by word pairs appearing in its abstract, while novelty is measured by the frequency with which these word pairs have appeared in past patents. Inventors are assumed to possess the knowledge associated with patents in which they have previously participated. We find that collaboration by inventors with more mutually differentiated knowledge sets is likely to result in patents with higher novelty.

collaboration | knowledge | differentiation | novelty | innovation

Humans are a collaborative species (1–3) and bring this collaborative nature with them to the workplace and to the laboratory. Collaboration within teams has been increasingly important within academic research (4) and patent development (5, 6), and has long been an essential part of other creative endeavors such as the production of Broadway musicals (7). A necessary condition for successful collaboration is successful coordination on roles and tasks (8, 9), which can be complicated when the characteristics of one’s collaborative partners are imperfectly understood (10). Hence, collaboration requires shared knowledge among collaborators. However, for collaboration to be creative, it also requires differentiated knowledge (11). There is, for example, evidence that the successful production of Broadway musicals involves teams that comprise both people who have previously collaborated and people who have not previously collaborated (7, 12).

Using Japanese patent data and adopting a measure of novelty based on word combinations that appeared in the patent (13), we find a strong positive relationship between collaborators’ mutual knowledge differentiation and the novelty of their output.

Results

\mathbf{W}_p represents the set of distinct word pairs in patent p ’s abstract. (Hereafter, a bold capital letter expresses a set, and the corresponding italic letter its cardinality.) The *novelty* of a word pair at a given point in time is measured by the likelihood of its appearance in patents filed in the past (13). Specifically, the novelty n_{wt} of word pair w at time t is the ratio of (i) the sum of $W_p = |\mathbf{W}_p|$ over all patents p filed at dates up to and including t , to (ii) the number of these patents that include word pair w . We measure patent novelty by the average novelty of word pairs in its abstract, $\frac{1}{W_p} \sum_{w \in \mathbf{W}_p} n_{wt_p}$, where t_p is the patent’s filing time.

We consider collaborative aspects of patent development by focusing on the productivity per inventor pair, following (11). \mathbf{H}_p is the set of all inventors who participated in patent p , while $\mathbf{M}_p \equiv \{(i, j) : i, j \in \mathbf{H}_p, i \neq j\}$ is the set of pairs

of such inventors. The *average pairwise-contribution to the patent’s novelty* is given by

$$n_p = \frac{1}{M_p W_p} \sum_{w \in \mathbf{W}_p} n_{wt_p}.$$

Denoting by \mathbf{G}_{it} the set of patents inventor i participated in at time t , define i ’s *knowledge* at t by $\mathbf{K}_{it} = \cup_{\tau < t} \cup_{p \in \mathbf{G}_{i\tau}} \mathbf{W}_p$ and its novelty by $k_{it} = \sum_{w \in \mathbf{K}_{it}} n_{wt}$.

Inventor pair $\{i, j\}$ has total knowledge $\mathbf{K}_{ijt} = \mathbf{K}_{it} \cup \mathbf{K}_{jt}$, with novelty $k_{ijt} = \sum_{w \in \mathbf{K}_{ijt}} n_{wt}$, and inventor i ’s *differentiated knowledge* relative to j is $\mathbf{K}_{ijt}^D = \mathbf{K}_{it} \setminus \mathbf{K}_{jt}$, with novelty $k_{ijt}^D = \sum_{w \in \mathbf{K}_{ijt}^D} n_{wt}$.

Knowledge differentiation between $\{i, j\}$ is evaluated by the geometric mean of their respective differentiated-knowledge shares in the union of their knowledge,

$$s_{ijt} = \sqrt{k_{ijt}^D k_{jit}^D} / k_{ijt} \in [0, 0.5].$$

Their average in patent p ,

$$s_p = \frac{1}{M_p} \sum_{(i,j) \in \mathbf{M}_p} s_{ijt_p}$$

measures knowledge differentiation in p . We focus on patents with $s_p > 0$, since $s_p = 0$ implies no knowledge exchange as inventors can be indexed so that $\mathbf{K}_1 \subseteq \mathbf{K}_2 \cdots \subseteq \mathbf{K}_{H_p}$.

We estimate the effect of s_p on n_p by the model:

$$n_p = \beta_0 + \beta_1 s_p + \cdots + \beta_m s_p^m + \gamma \bar{K}_p + \delta M_p + f_p + \varphi_p + \tau_p + \varepsilon_p, \quad [1]$$

controlling for average knowledge size $\bar{K}_p \equiv \frac{1}{H_p} \sum_{i \in \mathbf{H}_p} K_{it_p}$, inventor-pair count M_p (reflecting the costs/benefits of coordination and task specialization), and fixed effects, f_p , φ_p , and τ_p , for firms, classes of International Patent Classification (IPC), and years, respectively. ε_p is a stochastic error.

The estimated conditional expectation and quantiles of n_p indicate a positive association between s_p and n_p , except for a range of small s_p , while the observed s_p are spread over the entire feasible range, (0, 0.5] (Fig. 1).

To see the robustness of the result, we consider citation count of a patent as an alternative measure of output. Let \bar{c}_p be the citation count of patent p within five years of application, excluding self-citations, where the self-citations include those

Author contributions: Conceptualization: T.M., J.N.; Funding acquisition: T.M.; Theoretical analysis: J.N., T.M.; Empirical analysis: S.S., T.M.; Writing: J.N., T.M.

The authors declare no conflict of interest.

¹To whom correspondence should be addressed. E-mail: mori@kier.kyoto-u.ac.jp

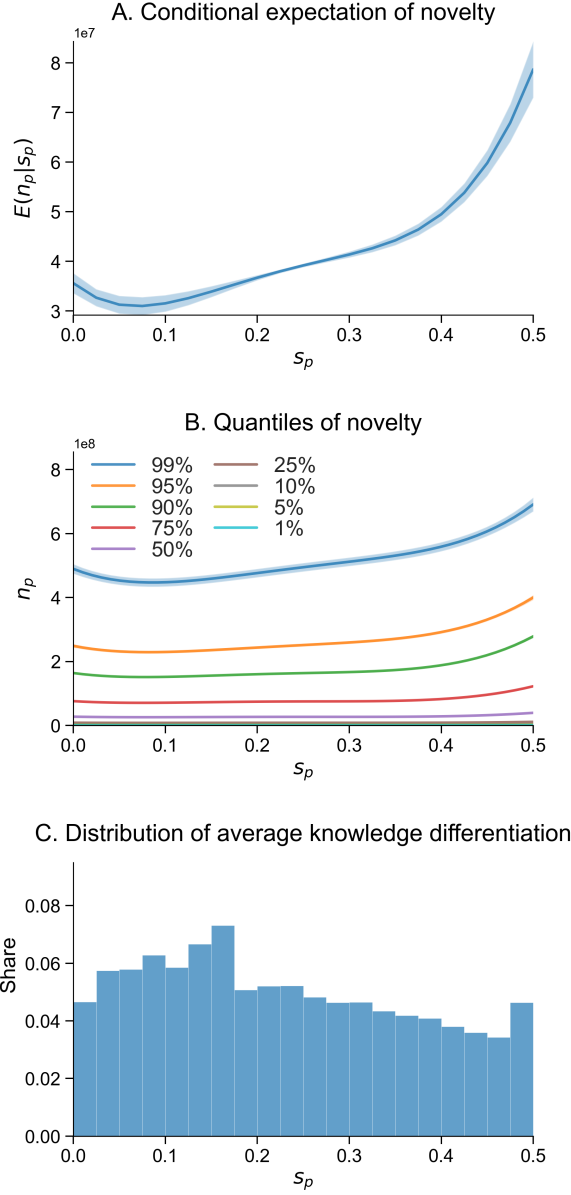


FIG. 1. (A,B) Estimated expectation and quantiles of n_p conditional on s_p , respectively. Other variables are evaluated at their mean. $m = 4$ is chosen by the Bayesian Information Criterion for the regression to estimate $E(n_p|s_p)$. Shaded areas indicate 95% confidence intervals. In the regressions, standard errors are clustered by 124 IPC classes. The fixed effects f_p are applied to firms that file 500 or more patents. (C) Frequency distribution of s_p (> 0).

by any patent q whose set of inventors overlaps with that of p , that is, $\mathbf{H}_p \cap \mathbf{H}_q \neq \emptyset$. We then use the citation count per inventor pair, $c_p = \bar{c}_p/M_p$, as an alternative output measure to n_p . The basic relationships observed between n_p and s_p carry over to those between c_p and s_p as indicated by Fig. 2A and B that correspond to Fig. 1A and B, respectively.

Theoretical model and simulation

There is a set of agents, $\mathbf{I} \equiv \{1, 2, \dots, I\}$, I even, who collaborate in pairs to invent new knowledge. When agents $\{i, j\}$ collaborate on a given patent, the novelty n of the patent is stochastic and follows a known probability distribution $P(n|s)$

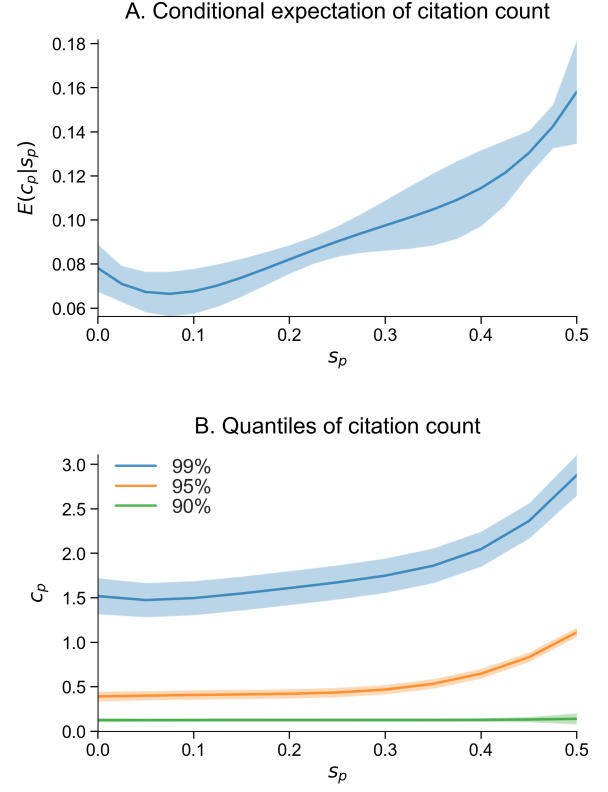


FIG. 2. (A,B) Estimated expectation and quantiles of c_p conditional on s_p corresponding to Fig. 1(A,B), respectively. $m = 4$ is chosen by the Bayesian Information Criterion for the regression to estimate $E(c_p|s_p)$. Only the results for the 99, 95, and 90 percentiles are computed for Panel B since more than half the patents have zero citations. The shaded area indicates 95% confidence interval.

conditional on the knowledge differentiation $s \in (0, 0.5]$ between the collaborators.

The value $v = v(n)$ of an invention is an increasing function of the novelty of the invention. Assume that $v(\cdot) \ll \infty$ so that $V(s) \equiv E_{P(\cdot|s)}[v(n)] \ll \infty$.

The cost of collaboration by a pair $\{i, j\}$ is a continuous, increasing function $c_{ij}(s)$ of s between the collaborators. Assume $c_{ij}(0) > 0$. Collaboration carries a cost which increases as the knowledge sets of the collaborators become more differentiated, as there is less of a basis for the common understanding that assists effective communication. Various factors, such as geographic proximity and personality traits mean that this cost will be heterogeneous across pairs

As only profitable collaborations are pursued, the net value of a collaboration between $\{i, j\}$ is given by $A_{ij} = \max\{0, V(s) - c_{ij}(s)\}$. For simplicity, assume that A_{ij} differs across all pairs $\{i, j\}$ and that when a pair collaborates, A_{ij} is split equally between members of a pair (see SI for an alternative value split by bargaining). This defines a one-sided non-transferable utility matching problem (14). Under these assumptions, a unique stable Pareto-efficient matching exists. To find this matching, first match the pair $\{i, j\}$ with the largest A_{ij} and remove them from \mathbf{I} . Then, repeat this process until all agents match into collaborating pairs.

To simulate a specific instantiation of this model, we consider technological categories with different levels of technological maturity that give rise to different levels of knowledge

differentiation. Specifically, assume technological categories $\mathbf{L} \equiv \{1, \dots, L\}$ with each agent working in a single category. That is, $\mathbf{I} = \mathbf{I}^1 \cup \dots \cup \mathbf{I}^L$, where \mathbf{I}^l represents the set of agents working in category $l \in \mathbf{L}$; $\mathbf{I}^l \cap \mathbf{I}^m = \emptyset$ for $l \neq m$. Assume that if agents i and j are in different categories, then c_{ij} is large enough that such agents never collaborate.

Let $\mathbf{K}^l \equiv \cup_{i \in \mathbf{I}^l} \mathbf{K}_i$ denote the knowledge set specific to category $l \in \mathbf{L}$. Assume each agent i 's knowledge set has equal size $K_i = \bar{K} (< K^l \forall l \in \mathbf{L})$ and that all word pairs are equally novel so that n_{wt} is the same for all w . Note that the maximum feasible value of s_{ij} is increasing in K^l . In this setup, categories with smaller K^l can be considered to represent more technologically *mature* categories since agents have more knowledge in common, hence less room for knowledge recombination in these categories.

Assume that all categories share a value function, $v(n(s_{ij})) = \tilde{v}(s_{ij})e^{\varepsilon_{ij}}$, where $\tilde{v}(s)$ is given by the quartic function of s from the estimated conditional expectation of the observed novelty of patents (Fig. 1A), with an appropriately adjusted intercept $v_0 > 0$. For agents within the same category, the cost function is given by $c_{ij}(s_{ij}) \equiv c(s_{ij})e^{\varepsilon_{ij}}$ with $c(s) \equiv c_0 s$ and $c_0 > 0$. $\varepsilon_{ij}, \epsilon_{ij} \sim \mathcal{N}(0, 1)$ are idiosyncratic noises.

Fig. 3 demonstrates that this model qualitatively replicates the observed variation in s and in n from inter-category variation in technological maturity and intra-category variation due to mismatch and idiosyncratic costs in collaboration. The mismatch results from failing to achieve the best match due to the finiteness of the set of possible collaborators (see SI).

Discussion

The current paper has found a direct, micro-level relationship linking knowledge exchange between collaborators to the novelty of patent applications. A team of inventors with diverse expertise does not necessarily promote knowledge exchange if the team members have collaborated in the past and the diverse knowledge is already their common knowledge (cf., 5, 6). Thus, team reshuffling is key to maintaining the novelty of collaborative outcomes (11).

This provides support for a broader model class of knowledge spillovers in invention that have, thus far, lacked micro-level evidence (e.g., 11, 15). Importantly, our estimation shows a generally positive relationship between patent novelty and knowledge differentiation, with the highest novelty attained with the highest differentiation (Fig. 1A). Our approach should also provide guidance for researchers studying different contexts involving knowledge exchange in collaboration (9, 12) such as art creation (7) and community formation (8).

Materials and Methods

Patent data. Patent data are taken from the *published patent applications* of Japan (16). Identical inventors are traced by matching their names and the establishments they belong to. The data includes all patents filed between 1994 and 2017. We focus on those in 2009 and later, 970,197 of which involve multiple inventors. The 1994-2008 data are used to compute the novelty of the patents filed after 2009.

Word standardization. We use NLTK python library to standardize words as follows. (i) Nouns and verbs are lemmatized. (ii) Distinction between a verb and a noun is judged in the context. (iii) Numbers, non-alphabetical characters, and single-character words

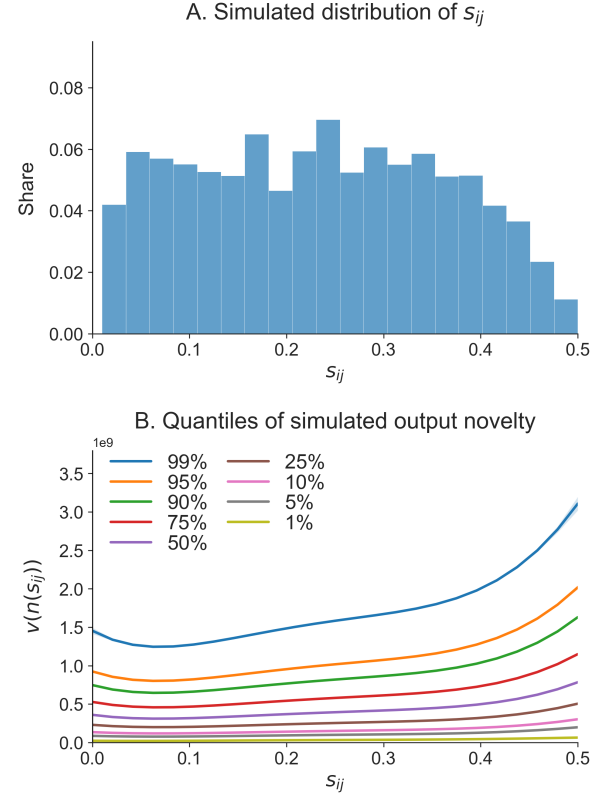


FIG. 3. Simulated pairwise collaboration. $L = 100,000$, $I^l = 100 \forall l \in \mathbf{L}$, $\bar{K} = 100$. K^l ($l \in \mathbf{L}$) is given by an integer rounding the value drawn from Pareto distribution with scale and shape parameters being $\bar{K} + 1$ and 2, respectively. $v_0 = c_0 = 3.5 \times 10^7$. (A) The distribution of s_{ij} for matched inventor pairs. (B) Estimated quantiles of output values. Shaded areas indicate 95% confidence intervals.

are removed. As an exception, hyphen-connected words (e.g., *self-organization*) are kept. Noun/verb parts of these words are lemmatized. (iv) Stop-words (e.g., *are* and *also*) are removed.

Data availability. All data and codes are provided in SI.

ACKNOWLEDGMENTS. This research was conducted as part of the project, “Agglomeration-based framework for empirical and policy analyses of regional economies,” undertaken at the RIETI, Japan. This research has also been supported by the Kajima Foundation, and the Murata Science Foundation, the International Joint Research Center of Advanced Economic Theory of the Institute of Economic Research in Japan, and the Grant in Aid for Research Nos. 17H00987, 19K15108, and 21H00695 of the MEXT, Japan.

1. M Tomasello, M Carpenter, Shared intentionality. *Dev. science* **10**, 121–125 (2007).
2. M Tomasello, E Herrmann, Ape and human cognition what’s the difference? *Curr. Dir. Psychol. Sci.* **19**, 3–8 (2010).
3. M Tomasello, H Rakoczy, What makes human cognition unique? from individual to shared to collective intentionality. *Mind & Lang.* **18**, 121–147 (2003).
4. S Wuchty, BF Jones, B Uzzi, The increasing dominance of teams in production of knowledge. *Science* **316**, 1036–1039 (2007).
5. J Singh, L Fleming, Lone inventors as sources of breakthroughs: Myth or reality? *Manag. Sci.* **56**, 41–56 (2010).
6. J Singh, D Kryscynski, X Li, R Gopal, Pipes, pools, and filters: How collaboration networks affect innovative performance. *Strateg. Manag. J.* **37**, 1649–1666 (2016).
7. B Uzzi, J Spiro, Collaboration and creativity: The small world problem. *Am. journal sociology* **111**, 447–504 (2005).
8. SD Angus, J Newton, Emergence of shared intentionality is coupled to the advance of cumulative culture. *PLOS Comput. Biol.* **11**, e1004587 (2015).
9. J Newton, Shared intentions: The evolution of collaboration. *Games Econ. Behav.* **104**, 517–534 (2017).
10. H Rusch, The evolution of collaboration in symmetric 2×2 -games with imperfect recognition of types. *Games Econ. Behav.* **114** (2019).

11. M Berliant, M Fujita, Knowledge creation as a square dance on the hilbert cube. *Int. Econ. Rev.* **49**, 1251–1295 (2008).
12. R Bel, V Smirnov, A Wait, Team composition, worker effort and welfare. *Int. J. Ind. Organ.* **41**, 1–8 (2015).
13. M Watzinger, JL Krieger, M Schnitzer, Standing on the shoulders of science. Discussion Paper No. 13766 (v.2), Centre for Economic Policy Research (2021).
14. D Gale, LS Shapley, College admissions and the stability of marriage. *The Am. Math. Mon.* **69**, 9–15 (1962).
15. ML Weitzman, Recombinant growth. *Q. J. Econ.* **113**, 331–360 (1998).
16. Artificial Life Laboratory, Inc., Patent database for research (2020).

Supporting Information

S1. Dataset

Replication package including the datasets, Python and R codes is available from <https://www.dropbox.com/sh/ad1qrbkd5nik9x2/AAAOHuoQhO0hSkHoiUruKf3ha?dl=0>.

S2. Theoretical model and simulation

An alternative matching with bargaining. In the Model section it was assumed that value generated by collaborating agents is evenly split. This simplifies exposition, but no real problem arises if we assume that members of a pair can bargain over the allocation of surplus from a collaboration. In this case the matching problem become a one sided assignment game. There will still be Pareto efficient outcomes (matchings with allocation of surplus). However, these need not be stable. Indeed, the set of stable outcomes may be empty.

Optimal knowledge differentiation in the simulation model. Assume that $K_i = K_j = \bar{K}$ for all agents, i, j , and that $n_{wt} = 1$ for all w . This implies $K_{ij}^D \equiv k_{ij}^D = k_{ji}^D \equiv K_{ji}^D$ so that $s_{ij} = K_{ij}^D / K_{ij}$, where $K_{ij}^D = |\mathbf{K}_i^D \setminus \mathbf{K}_j^D|$ and $K_{ij} \equiv |\mathbf{K}_i \cup \mathbf{K}_j|$. Since the feasible values of K_{ij}^D are $0, 1, \dots, \bar{K}$, the set of feasible values of s_{ij} is given by

$$\mathbf{s}(\bar{K}) = \left\{ \frac{K^D}{K^D + \bar{K}} \mid K^D = 0, 1, \dots, \bar{K} \right\}.$$

Optimal levels of knowledge differentiation between agents i and j for a given size, \bar{K} , of individual knowledge set are given by the set

$$s_{ij}^*(\bar{K}) = \arg \max_{s \in \mathbf{s}(\bar{K})} V(s) - c_{ij}(s).$$

Note that, even if c_{ij} is identical across all pairs $\{i, j\}$, in a finite population it may still be impossible for a given agent i to find and match with an agent j satisfying $s_{ij} \in s_{ij}^*(\bar{K})$. Such an agent may not exist in the population, or may have already been matched to someone else.