

CONCHSHELL: A GENERATIVE ADVERSARIAL NETWORKS THAT TURNS PICTURES INTO PIANO MUSIC

Wanpeng Fan[†] Yuanzhi Su[†] Yuxin Huang^{*}

[†] School of Computer Science and Cyber Engineering, Guangzhou University, Guangzhou, China

^{*} Law School, Guangzhou University, Guangzhou, China

ABSTRACT

We present ConchShell, a multi-modal generative adversarial framework that takes pictures as input to the network and generates piano music samples that match the picture context. Inspired by I3D, we introduce a novel image feature representation method: time-convolutional neural network (TCNN), which is used to forge features for images in the temporal dimension. Although our image data consists of only six categories, our proposed framework will be innovative and commercially meaningful. The project will provide technical ideas for work such as 3D game voice overs, short-video soundtracks, and real-time generation of metaverse background music. We have also released a new dataset, the Beach-Ocean-Piano(BOP) dataset ¹, which contains more than 3,000 images and more than 1,500 piano pieces. This dataset will support multimodal image-to-music research.

Index Terms— GAN, Jukebox, VQ-VAE, I3D, music generation

1. INTRODUCTION

Music is the art of time. It appeals to people’s auditory senses and expresses people’s emotions through sound. At the same time, painting is an art of space, appealing to people’s visual senses through lines and colors, and expressing the stories in people’s minds. In an artistic activity, the mutual sense of hearing and vision is the most active and influential. Based on this idea, we propose a model, ConchShell, to connect music and images, and it will be a project full of artistic significance, commercial significance and scientific significance.

In the field of art, many scholars are interested in the art composed of music and painting together[1, 2], and some of them discuss the relationship between music and painting from the perspective of history and theory[3, 4]. In ancient China, there was also the habit of poets composing poems for ink painting[5]. Therefore, studying the association between music signals and picture signals essentially provides a theoretical basis for the integration and progress of art.

¹Hyperlink to BOP dataset: https://drive.google.com/drive/folders/1iTh076nJzvPQ6_GIQbokfdRvy6pcN9ti

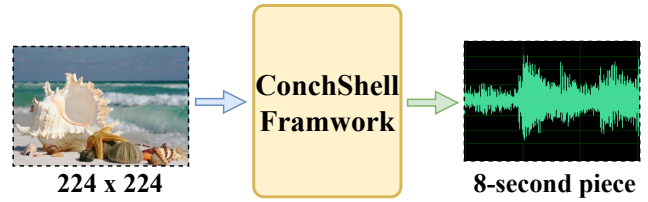


Fig. 1. Working diagram of ConchShell. The size of the input picture is 224x224. After encoding and decoding by ConchShell, a single channel piano piece with a length of 8 seconds will be generated.

Meanwhile, excellent 3D games and Open-World games have become a way for people to entertain. Players roam in the virtual world, let their mind shocked, in addition to the fantastic images, and surround their ears with music. Undeniably, the exquisite pictures are an important factor for a game to arouse the enthusiasm of players. However, the plot and music are the key factors to determine whether the players can be retained. However, composing music for virtual worlds is very expensive, such as Genshin Impact and Dungeon&Fighter, and composing music for movies can cost millions of dollars or more, Therefore, our project will create great commercial value and reduce the expenditure on soundtrack of excellent works.

In order to realize the mapping of pictures to music, this paper proposes the following contributions:

- We propose ConchShell, a multimodal GAN framework that will take an image and generate an 8-second piano piece (Figure 1).
- This model uses TCNN, which uses fewer neurons than VGG [6] to forge a third dimension for the picture: time dimension, which makes the connection between the picture and the music more explicit.
- We have created BOP dataset, which contains manual annotation of image-music labels, and we will release this dataset in the future to provide data support for multi-modal academic research on images and music for free.

2. RELATED WORK

We did not find a reliable open source project before attempting the task of converting images to music. For this reason, we turned our goal to similar multimodal tasks in an attempt to find common ground on these studies.

2.1. Music Generation

Due to the high dimensionality of audio data and its complex temporal correlation, the computational overhead is unimaginable. As a result, many models use intermediate audio representations to learn generative models in order to reduce the computational requirements.

MelNet [7] uses a two-dimensional frequency domain signal converted to a time domain signal, while MidiNet [8] is a CNN-based GAN framework that generates MIDI notes one after the other in the symbolic domain. Our ConchShell framework, on the other hand, uses the VQ representation of Jukebox [9], a model for generating music in the raw audio domain. It uses multi-scale VQ-VAE to compress raw audio into discrete codes and models them using autoregressive Transformers.

2.2. Images, Videos and Music

The biggest difference between pictures and music is that music has a complex temporal correlation, but pictures do not. This means that pictures may not contain information that can be mapped to the melody of the music. Video, however, has temporal correlation. In Two-Stream Inflated 3D ConvNet (I3D) [10], the model learns seamless spatio-temporal features from video, and knowing that video is actually an ordered collection of multiple pictures, then attempting to associate pictures with video, i.e. pre-converting pictures to have some form of temporal features, can achieve the goal of converting pictures to music.

3. OUR METHOD

The process of converting images to music can be briefly summarised as follows: 1) extract enough features from the images. 2) compress these features to get some sort of underlying musical information. 3) map this information to musical wave. The overall model is illustrated in Fig2.

3.1. Time-Convolutional Neural Network

To extract features from the images, we designed the Time-Convolutional Neural Network (TCNN), which is a classification network consisting of 6 convolutional blocks combined. After training, we will extract features from the convolutional blocks, and each layer of features will be repeatedly spliced 3 times to fake the temporal dimension for the images, the

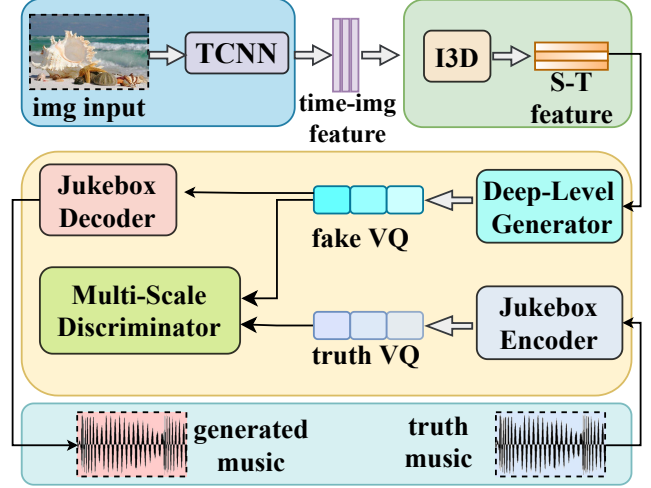


Fig. 2. ConchShell-Framework. Details of how this framework works.

final features will contain 3 image channels and 18 temporal channels, the specific pseudo-code is as follows:

Algorithm 1: Get Time-Image-Feature

Data: A list of image feature f_{image}

Result: Image features containing temporal information f_{t-img}

```

1  $f_{t-img}^* \leftarrow []$ ;
2 for  $i \leftarrow 0$  to 5 do
3    $f^* \leftarrow \text{mean}(f_{image}[i], \text{dim} = 0)$ ;
4    $\triangleright [3, 1, 224, 224]$ 
5   for  $j \leftarrow 0$  to 2 do
6      $f_{t-img}^*.append(f^*)$ ;
7   end
8 end
9  $f_{t-img} \leftarrow \text{cat}(f_{t-img}^*, \text{dim}=1)$ ;  $\triangleright [3, 18, 224, 224]$ 
```

Space is limited so only a simplified version of the pseudo-code is written here, but rest assured that we will open source the entire code for this project.

In order to verify the effectiveness of the method, we also used VGG networks [6] for feature extraction and detailed comparison results can be found in tables 1 and 2.

3.2. I3D and Jukebox

The T-Img-Features of the TCNN will be used as input to I3D [10], a pre-trained model, and output spatio-temporal features (S-T-Features) which will be fed into the ConchShell generator.

Jukebox is also a pre-trained model that contains High, Low and Deep levels of decoder. The High-Level model will

focus more on the melody and temporal relevance of the generated music, but will ignore the quality of the generated audio. The Low-Level and Deep-Level models generate audio with less noise, but their ability to focus on the overall melody is diminished. We have designed three different generators for these three levels to take the best out of the worst as far as possible.

3.3. Generators and Multi-Scale Discriminator

Inspired by Zhu, Ye et al [11], we follow the Multi-Scale Discriminator they designed, the discriminator that has worked in many audio synthesis tasks in recent years [12, 13]. In our project, the discriminator will accept two inputs, Vector Quantized (VQ_1) [14] generated from ConchShell-Generator and ground truth VQ_2 from Jukebox-Encoder.

We have modified the generator, which is essentially a convolutional network with a kernel size of up to 40, in order for it to capture melodically relevant information, and multiple residual structures between each convolutional layer to increase the perceptual field as well as to adjust its details, finally passing through a linear layer with 16k output channels, which is designed to match the output format of Jukebox.

3.4. Loss Function

We have adopted the following loss function, drawing on the approach of Zhu, Ye et al [11].

Discriminator Loss. The loss function used by the discriminator is essentially a hinge loss [15].

$$L_D(G, D) = \sum_{k=1}^3 E[(\max(0, 1 - D_k(J_{ukebox}^{en}(x_g)))] + \sum_{k=1}^3 E[\max(0, 1 + D_k(G(x_{img})))] \quad (1)$$

x_g represents the original audio which will be used as input to Jukebox’s encoder. x_{img} is a image which will be fed into ConchShell. k is the number of layers in the discriminator and we have empirically set k to 3.

Generator Loss is a modified version of hinge loss.

$$L_G(G, D) = \sum_{k=1}^3 E[(-D_k(G(x_{img})))] \quad (2)$$

Feature Matching Loss. The feature matching loss [16] is defined as the L1 loss, whose inputs are the real VQ features and the generated VQ features, and this loss is used to encourage the adjustment of some detail information in the audio signal.

$$L_{FM}(G, D) = \frac{1}{N_i} \sum_{i=1}^T \|(D^i(J_{ukebox}^{en}(x_g)) - D^i(G(x_{img})))\| \quad (3)$$

Audio Perceptual Losses. The perceptual loss is defined as the L1 distance between the original audio and the generated audio samples. We expect the perceptual loss of audio signals from the time and Mel domains to further improve the quality of listening.

$$L_{wave}(G) = L_1(x_g, J_{ukebox}^{de}(G(x_{img}))) \quad (4)$$

$$L_{Mel}(G) = L_1(\phi(x_g), \phi(J_{ukebox}^{de}(G(x_{img})))) \quad (5)$$

where ϕ is the function to compute the mel-spectrogram features for the audio signal waveforms. The generated audio will be used as input to Jukebox’s decoder.

ConchShell Loss. The final training objective for our framework is defined as follows:

$$L_{CS} = \lambda_g L_G + \lambda_{fm} L_{FM} + \lambda_w L_{wave} + \lambda_m L_{Mel} \quad (6)$$

where the λ_g , λ_{fm} , λ_w , and λ_m are hyperparameters, and in our experiments they were adjusted to 0.5, 3, 40 and 15.

4. EXPERIMENTS

4.1. Datasets

We created Beach-Ocean-Piano Datasets (BOP), a dataset containing six image categories with approximately 3k images. We split it into a training set and a validation set, with the training set accounting for 85% of the total number of images. The images were manually annotated with audio that matched the context of the images, the emotion of the music and the background story.

The audio was all piano-only, single-channel, and resampled to 16k, and we decided to set the duration of the music to 8 seconds, considering that too short a duration would make it difficult to convey the emotion and too long would increase the computational overhead. The size of the images was limited to 224x224, and in order to retain the emotional information attached to the colours, we used coloured three-channel images.

4.2. Training Details

We used a multi-stage training strategy, and TCNN was trained using this dataset, whose goal was to classify six images. Whereas ConchShell is difficult to train, we use a distributed training approach on four Tesla-4 GPUs in distributed data parallel (DDP) mode, and because its model is large, the batch size we set to 2.

Both the generator and discriminator use AdamW as the optimizer, $\beta_1 = 0.5$ and $\beta_2 = 0.999$. Their learning rates are initialized to $1e-5$, with the generator’s learning rate reduced to 0.8 times and the discriminator reduced to 0.9 times for every 20k steps run.

We also trained three other baseline models with the same training strategy, except for a slightly different batch size. The exact combination of baseline models can be found in table 1.

GAN-Model	D-Module			G-Module			Img-Module		
	Model	FLOPs	Params	Model	FLOPs	Params	Model	FLOPs	Params
Baseline-1	D-High	2.734G	9.212M	G-High	23.800G	33.109M	TCNN-6	827.507M	2.285M
Baseline-2	D-Low	10.976G	9.212M	G-Low	27.205G	65.183M	TCNN-6	827.507M	2.285M
ConchShell	D-Deep	43.950G	9.212M	G-Deep	59.197G	100.420M	TCNN-6	827.507M	2.285M
Baseline-3	D-Deep	43.950G	9.212M	G-Deep	59.197G	100.420M	TCNN-18	1.443G	7.543M

Table 1. A comparison of the composition of ConchShell with each baseline model.

Data-Type	GAN-Model	PESQ	STOI	I2M-MOS	Muse-MOS	Clean-MOS
train-set	Baseline-1	1.4	0.32	1.7 ± 0.4	1.6 ± 0.3	1.7 ± 0.3
	Baseline-2	1.8	0.55	2.7 ± 0.4	2.6 ± 0.5	2.3 ± 0.1
	ConchShell	3.1	0.73	3.5 ± 0.4	3.3 ± 0.5	3.7 ± 0.2
	Baseline-3	2.7	0.69	2.9 ± 0.3	2.8 ± 0.3	4.1 ± 0.2
test-set	Baseline-1	1.4	0.33	1.5 ± 0.5	1.5 ± 0.3	1.5 ± 0.2
	Baseline-2	1.5	0.49	2.5 ± 0.7	2.4 ± 1.0	2.4 ± 0.2
	ConchShell	2.9	0.66	2.8 ± 0.5	3.0 ± 0.6	3.7 ± 0.2
	Baseline-3	2.7	0.67	2.4 ± 0.4	2.5 ± 0.4	4.0 ± 0.3
truth-data	-	-	-	4.6 ± 0.3	5.0	5.0

Table 2. The evaluation results for each model.

4.3. Evaluations

After training, we chose two objective metrics to evaluate the quality of the generated music, namely Perceptual Evaluation of Speech Quality (PESQ) [17] and Short-Time Objective Intelligibility (STOI), while we drew on Mean opinion scores (MOS) and designed several subjective evaluation metrics, namely Image-to-Muse-MOS (I2M), Melody-MOS, and Noise-MOS.

The evaluators will evaluate the generated audio using the above three subjective metrics, where I2M-MOS represents the relevance of the image to the music, with a score range of 1-5, where 1 means the generated music is not relevant to the image at all, and 5 means the generated music perfectly expresses the connotations of the image. Melody-MOS refers to the generated music itself and is used to assess whether the generated music has a melodic structure that is acceptable to humans, i.e. whether the generated music is temporally relevant, where 1 means that the generated music is completely incompatible with human auditory aesthetics, e.g. the generated music repeats a single note all the time or the generated notes do not have any pattern, and 5 means that the generated music has a strong melodic structure. Finally, the Noise-MOS measures how much background noise the generated music contains, with 1 meaning that the noise almost covers the original music, and 5 meaning that no noise is heard at all.

During this process, the evaluators were asked to repeat the evaluation twice and we averaged the results from these two occasions. This resulted in table 2. From the results we can see that our ConchShell outperformed the baseline

model in almost all metrics. As can be seen from the results of Baseline-3, using only VGG for feature extraction on images without falsifying the temporal dimension leads to a decrease in the values of I2M-MOS and Melody-MOS. We believe that I3D is insensitive to irregular features, resulting in little to no mapping of the S-T-Features it generates to music. At the same time, we observed that the values in the test set were lower than those in the training set, probably because we had less training data, which made the model over-fit, and increasing the amount of data should improve this situation. We can then see that, regardless of the model, the Noise-MOS results do not reach the desired values, which means that the music generated is always noisy, so it is better to perform noise reduction [18] for all results if you want to get high quality music.

5. CONCLUSION

We have released a new dataset, Beach-Ocean-Piano(BOP) dataset, which will be free and open source, to provide data support for multi-modal tasks with images and music. In the meantime we created ConchShell, a multi-modal framework based on GAN, which will take an image and generate an 8-second piano piece for it. To better associate images with music, we also designed the Time-Convolutional Neural Network (TCNN), which will work with the I3D model to transform images into features with a temporal dimension. This framework will provide data support and research ideas for other multimodal tasks, especially image-to-music tasks.

6. REFERENCES

- [1] Bogue and Ronald, “Deleuze on music, painting, and the arts,” *Routledge*, 2003.
- [2] Ronald Bogue, *Deleuze on music, painting, and the arts*, Routledge, 2014.
- [3] Marsha Morton, Peter L Schmunk, and Marsha L Morton, *The arts entwined: music and painting in the nineteenth century*, Routledge, 2013.
- [4] B Shevchuk, “Interspecific correlations of music and painting: Historical, theoretical and perceptual aspects,” *PARADIGM OF KNOWLEDGE*, vol. 1, no. 27, 2018.
- [5] Ana Filipa Neves Ferreira, “Painting a western musical score with chinese ink,” *ÍMPAR: Online Journal for Artistic Research*, vol. 5, no. 1, pp. 14–33, 2021.
- [6] Karen Simonyan and Andrew Zisserman, “Very deep convolutional networks for large-scale image recognition,” *arXiv preprint arXiv:1409.1556*, 2014.
- [7] Sean Vasquez and Mike Lewis, “Melnet: A generative model for audio in the frequency domain,” *arXiv preprint arXiv:1906.01083*, 2019.
- [8] Li-Chia Yang, Szu-Yu Chou, and Yi-Hsuan Yang, “Midinet: A convolutional generative adversarial network for symbolic-domain music generation,” *arXiv preprint arXiv:1703.10847*, 2017.
- [9] Prafulla Dhariwal, Heewoo Jun, Christine Payne, Jong Wook Kim, Alec Radford, and Ilya Sutskever, “Jukebox: A generative model for music,” *arXiv preprint arXiv:2005.00341*, 2020.
- [10] Joao Carreira and Andrew Zisserman, “Quo vadis, action recognition? a new model and the kinetics dataset,” in *proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 6299–6308.
- [11] Ye Zhu, Kyle Olszewski, Yu Wu, Panos Achlioptas, Menglei Chai, Yan Yan, and Sergey Tulyakov, “Quantized gan for complex music generation from dance videos,” *arXiv preprint arXiv:2204.00604*, 2022.
- [12] Jungil Kong, Jaehyeon Kim, and Jaekyoung Bae, “Hifi-gan: Generative adversarial networks for efficient and high fidelity speech synthesis,” *Advances in Neural Information Processing Systems*, vol. 33, pp. 17022–17033, 2020.
- [13] Kundan Kumar, Rithesh Kumar, Thibault de Boissiere, Lucas Gestin, Wei Zhen Teoh, Jose Sotelo, Alexandre de Brébisson, Yoshua Bengio, and Aaron C Courville, “Melgan: Generative adversarial networks for conditional waveform synthesis,” *Advances in neural information processing systems*, vol. 32, 2019.
- [14] Aaron Van Den Oord, Oriol Vinyals, et al., “Neural discrete representation learning,” *Advances in neural information processing systems*, vol. 30, 2017.
- [15] Takeru Miyato, Toshiki Kataoka, Masanori Koyama, and Yuichi Yoshida, “Spectral normalization for generative adversarial networks,” *arXiv preprint arXiv:1802.05957*, 2018.
- [16] Anders Boesen Lindbo Larsen, Søren Kaae Sønderby, Hugo Larochelle, and Ole Winther, “Autoencoding beyond pixels using a learned similarity metric,” in *International conference on machine learning*. PMLR, 2016, pp. 1558–1566.
- [17] Antony W Rix, John G Beerends, Michael P Hollier, and Andries P Hekstra, “Perceptual evaluation of speech quality (pesq)-a new method for speech quality assessment of telephone networks and codecs,” in *2001 IEEE international conference on acoustics, speech, and signal processing. Proceedings (Cat. No. 01CH37221)*. IEEE, 2001, vol. 2, pp. 749–752.
- [18] Anton Porov, Eunmi Oh, Kihyun Choo, Hosang Sung, Jonghoon Jeong, Konstantin Osipov, and Holly Francois, “Music enhancement by a novel cnn architecture,” in *Audio Engineering Society Convention 145*. Audio Engineering Society, 2018.