

Integrating Voice-Based Machine Learning Technology into Complex Home Environments

Ye Gao
University of Virginia
United States
yg9ca@virginia.edu

Jason Jabbour
Harvard University
United States
jasonjabbour@g.harvard.edu

Eunjung Ko
Ohio State University
United States
ko.363@buckeyemail.osu.edu

Lahiru Nuwan Wijayasingha
University of Virginia
United States
lnw8px@virginia.edu

Sooyoung Kim
Ohio State University
United States
kim.8201@buckeyemail.osu.edu

Zetao Wang
New York University
United States
zw3478@nyu.edu

Meiyi Ma
Vanderbilt University
United States
meiyi.ma@vanderbilt.edu

Karen Rose
Ohio State University
United States
rose.1482@osu.edu

Kristina Gordon
University of Tennessee
United States
kgordon1@utk.edu

Hongning Wang
University of Virginia
United States
hw5x@virginia.edu

John A. Stankovic
University of Virginia
United States
jas9f@virginia.edu

ABSTRACT

To demonstrate the value of machine learning based smart health technologies, researchers have to deploy their solutions into complex real-world environments with real participants. This gives rise to many, oftentimes unexpected, challenges for creating technology in a lab environment that will work when deployed in real home environments. In other words, like more mature disciplines, we need solutions for what can be done at development time to increase success at deployment time. To illustrate an approach and solutions, we use an example of an ongoing project that is a pipeline of voice based machine learning solutions that detects the anger and verbal conflicts of the participants. For anonymity, we call it the XYZ system. XYZ is a smart health technology because by notifying the participants of their anger, it encourages the participants to better manage their emotions. This is important because being able to recognize one's emotions is the first step to better managing one's anger. XYZ was deployed in 6 homes for 4 months each and monitors the emotion of the caregiver of a dementia patient. In this paper we demonstrate some of the necessary steps to be accomplished during the development stage to increase deployment time success, and show where continued work is still necessary. Note

that the complex environments arise both from the physical world and from complex human behavior.

CCS CONCEPTS

• **General and reference** → **Empirical studies; Evaluation.**

KEYWORDS

deployment, methodologies, lessons learned

ACM Reference Format:

Ye Gao, Jason Jabbour, Eunjung Ko, Lahiru Nuwan Wijayasingha, Sooyoung Kim, Zetao Wang, Meiyi Ma, Karen Rose, Kristina Gordon, Hongning Wang, and John A. Stankovic. 2018. Integrating Voice-Based Machine Learning Technology into Complex Home Environments. In *Proceedings of Make sure to enter the correct conference title from your rights confirmation email (Conference acronym 'XX)*. ACM, New York, NY, USA, 13 pages. <https://doi.org/XXXXXXX.XXXXXXX>

1 INTRODUCTION

Smart health research teams often develop novel machine learning technologies. To prove the value of the technologies, the research teams have to deploy the solutions into a complex environment such as a smart home [3, 13, 18, 26]. However, the aforementioned works do not describe the problems related to the transition from the development stage to the deployment stage. In other words, during the development stage, the research teams try to develop their solution in an environment, usually a lab environment and/or a controlled home environment, which is less complex than the environment in which the technology is going to be deployed. It is well known that when new technology is actually deployed in real complex environments, issues previously unseen in the less complex environments are going to occur, especially for long-term

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](https://permissions.acm.org).

Conference acronym 'XX, June 03–05, 2018, Woodstock, NY

© 2018 Association for Computing Machinery.
ACM ISBN 978-1-4503-XXXX-X/18/06...\$15.00
<https://doi.org/XXXXXXX.XXXXXXX>

have not been enough works for the methodology for deploying smart health technologies (usually in smart homes). Bellandi et al. [4] is among the first works that propose a design methodology that matches smart health requirements. They argued that due to the rapidly aging world population, smart health technologies are about to playing an even more important role in caring for the aging population at homes. They propose that the perspective of deploying those smart health technologies at homes should be user-centered. To select a solution to be deployed, researchers need to perform domain analysis (surveying the state of the art), requirement gathering (stakeholder elicitation), requirement integration (determining the consistency of the requirements), and then finally solution selection.

2.2 Human behavior that affects the efficacy of smart technologies

There has not been enough work on how human behavior affects the efficacy of smart technologies. A previous work [46] hypothesizes that the perceived usefulness directly contributes to the user's attitude towards the technology. Nikou et al. [33] suggest that perceived innovation and cost directly contribute to if the user will adopt a smart technology. Perri et al. [35] point out that the attitude of the user directly affects the adoption of smart technologies, which we would like to extend to that their attitude directly affects the efficacy of smart technologies as shown by the observation of a user of our XYZ system: he was not very compliant and sometimes pulled out the wires to the laptop on which we ran our system. As a result, the computer was out-of-power and the system was unable to monitor the participant's emotion for a period.

2.3 Voice Activity Detection

There have been lots of work on voice activity detection (VAD) so we only discuss the recent advances in the field. MarbleNet [25] uses deep residual network consisting of blocks of 1-D time-channel separable convolution, able to achieve the state-of-the-art performance with the advantage that the number of their parameters is significantly smaller. The robustness of MarbleNet is also extensively studied to demonstrate that it is robust to real-world acoustical distortions. Using teacher-student training, Dinkel et al. [17] also strive to train a model that is robust to real-world acoustic distortions. Dinkel et al. identify that traditional VAD algorithms are trained on data devoid of such acoustic distortions, and therefore their usage is limited to data without the acoustic distortions that are inevitable in the real world, rendering them unable to perform well in real-world settings. Other works on VAD include Wang et al. [44] that uses a cross channel attention based model to achieve voice activity detection in the M2met challenge, Braun et al. [5] that is specifically concerned about dealing with the robustness issue of many state-of-the-art models. What is worth-noting is that, some works developed for other purposes such as transcription, can be used as voice activity detection models. For example, the Google speech Recognition (GSR), a transcription service, outputs the transcribed sentence from an audio clip if that audio clip is speech, and it will throw an exception is the audio clip is silence. It is worth noting that although works such as MarbleNet [25] and Dinkel et al. [17] attempt to ensure that they work on datasets

that account for realism to be encountered in real, designated environments in which the algorithms are to be deployed, they do not evaluate their post-deployment performances in the real, designated environments. Realisms that the VAD model deals with usually arise from background noise such as footsteps, and the VAD model needs to differentiate not only silence from human speech but also those background noises from speech. The realisms that the VAD model faces is simpler than the models that we discuss in the later sections, the speaker identification (SID) model, the emotion detection model, and the conflict detection model, which needs to deal with the tv sound as the speech from the tv could affect the classification performance of these models.

2.4 Speaker Identification

Again, the works in the field of speaker identification (SID) are abundant, so we only discuss the recent advances in the field. Chen et al. [10] introduce a graph-based speaker identification model that is reliant on speaker label inference. It is particularly concerned with the task of SID in household scenarios. WavLM [11] recognizes that the speech content by speakers contains multi-faceted information such as the identities of the speakers, the content of the speech, and paralinguistics. WavLM is proposed as a pre-trained model that can be used to be fine-tuned for the purpose of various speech recognition tasks such as speaker identification. Snyder et al. [40] proposes an xvector, the results of mapping variable-length spoken clips to fixed-dimensional embeddings. Again, works such as Chen et al. [10] evaluate their algorithms on datasets in which the realism to be encountered in real, designated environments in which the algorithms are to be deployed, but no post-deployment evaluation is presented in such works to show if their approaches to deal with the realism are successful. Realisms that the SID model faces arise from background noise, especially the tv sounds. Note that the realisms that the SID model needs to deal with are more complex than the realisms that the VAD model needs to deal with, as voice from the tv could confound the model from correctly identifying the identity of the speaker in an audio clip. In other words, the SID model needs to be able to deal with more complex background noise (more complex acoustical realisms) than the VAD model.

2.5 Emotion Detection

There have also been a lot of work [1, 14, 15, 43] on using voice as a modality to classify emotions. These use several datasets that have speech files with emotion labels. EMO-DB, a dataset of the German language [6], is a popular one for many works [16, 42]. It consists of six emotion categories such as anger, sadness, and happiness performed by actors. Another popular dataset is RAVDESS [30] that consists not only of the emotional utterances, but also video footage of emotional speech. CREMA-D [8], like RAVDESS, contains both audio and audio-video samples. Despite the variety in modalities, since some datasets like EMO-DB have only audio samples, and others like RAVDESS have both audio and video samples, the emotions that they have are largely in common. The common emotion categories in the datasets are happiness, anger, sadness, and neutrality. One common problem with the emotional utterance datasets is that they are often collected in controlled studio environments in which realisms expected in a real, designated environment do

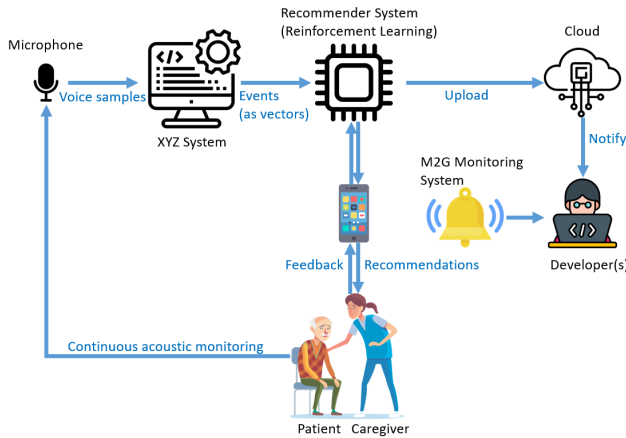


Figure 2: Overview of the XYZ system with *add-on components*. The add-on components are the Recommender System, the Cloud, and the M2G (Monitor) system.

own emotions, and notifying the developers when the XYZ system crashes. In addition to those assistive functionalities, one of the add-ons, the Recommender System, recommends tips to the caregivers to help them manage their anger. The entirety of the XYZ system and its add-ons is referred to as the XYZ-W (XYZ-Whole) System. An overview of the XYZ-W system is described in Figure 2.

One of the add-on components is the Recommender System with the EMA. Recommender system uses reinforcement learning to decide if a conflict/anger management tip should be sent and what tip to send. The EMA is a smartphone app developed to send messages to the caregivers. Another add-on component, the Cloud keeps track of the raw acoustic signal files, the SID module’s detection on the identity of the speaker, the emotion classification module’s classification result, the conflict detection module’s detection result, and the recommendations and user responses.

The final add-on component is the M2G System [31] that monitors the other three components to make sure that they are alive. If one or more of the other three components crash, the M2G system restarts the component(s) and sends the developers an email to announce the crash so the developers can investigate the causes.

5 EVALUATIONS

Many speech processing works have collected or augmented datasets with real world sounds. Good solutions are usually then developed. But, in many cases the resultant datasets have limited in-the-wild sounds so where they actually work is limited, and many times the solutions are not validated in-the-wild, but only on the datasets.

Our pre-deployment strategies are to significantly increase the collected and augmented datasets to increase comprehensiveness of the situations which are modeled, and specialize the datasets to a specific speech module (if needed). In pre-deployment, we also choose a set of “best” solutions from the literature and using the comprehensive datasets, determine which ones work. If one or more off-the-shelf solution work, the best one is chosen. Below we show that often many off-the-shelf solutions do not work, but for many common speech tasks there are good solutions available, but

it is necessary to verify that. We don’t want to reinvent the wheel. Then, in post deployment we validate the resulting performance on real data, a step often not performed.

Speech processing is typically performed in a pipeline depending on the overall purpose. In our system we need voice activity detection, speaker identification, emotion detection, and conflict detection. There are commonalities and unique aspects to each of these stages so the pre-deployments strategies must account for them. We now consider each of these 4 stages in more detail. Specifically, we briefly reiterate what the components are, why they are important, and demonstrate what we did at pre-deployment time to maximize the deployment time success based on post-deployment data (how we evaluated them at pre-deployment time). In all cases the acoustic solutions had to address the real world complexities such as reverberation, deamplification, and the many types of noise found in real homes over long deployments. The relative success of the acoustic solutions (at the post-deployment time) confirms our hypothesis that it is possible to perform comprehensive and realistic pre-deployment testing to increase post deployment success.

5.1 Voice Activity Detection

The VAD model filters silence and other sounds that are not produced by the human vocal tract. Since the acoustic system is constantly listening to the environment, we do not want to activate the emotion and conflict classifiers when an input sound window contains no human speech. As a result, the VAD model is an important and necessary component in the XYZ System. In this Section, we describe testing on the VAD model for the question: Is it possible to perform comprehensive and realistic pre-deployment testing to improve post-deployment success? Note that the acoustic realisms that the VAD model faces are deamplification, reverberation, and (non-speech) background noise, so in our pre-deployment stage assessment we seek to find a VAD solution that is robust against these three types of acoustical realisms.

5.1.1 Pre-deployment Stage Assessment. During pre-deployment time, we first looked into several state-of-the-art VAD algorithms. In particular, we studied the performance of a set of SOTA VAD algorithms on the Aurora-2 database [23]. The performance of the algorithms on the Aurora-2 database is a good indicator of how they might perform in the real world because Aurora-2’s speech samples are mixed with noise collected from realistic settings such as streets, airports, and cars. Table 1 is a list of existing SOTA VAD algorithms’ accuracy scores on the testing set of Aurora-2. Unfortunately, as we can see, the highest-performing one is rVAD, which only achieves an accuracy score of 66.23%, which is far from being usable in the real world. In other words, there exists solutions in the literature that do not work on datasets with deamplification, reverberation, and background noise. It is good to discover that these solutions are not likely to work at post-deployment time, because this helps us filter out existing solutions so that we won’t use those solutions.

However, there was another algorithm, the Google Speech Recognition (GSR) algorithm, that had not been evaluated on a dataset that contained the three environmental distortions: reverberation, deamplification, and background noise. As a result, we next evaluated the Google Speech Recognition solution. we aimed to evaluate it in a comprehensive way to demonstrate that it would be robust

	Dyad 1	Dyad 2	Dyad 3	Dyad 4	Dyad 5	Dyad 6
GSR	100%	100%	94.0%	95.0%	100%	98.0%

Table 3: The evaluation results for the voice activity detection model on the dyads. The high accuracy scores achieved from the dyads indicate that the VAD algorithm (Google Speech Recognition) is highly effective at differentiating non-speech from human speech audio samples.

5.2 Speaker Identification (SID)

The SID model determines the identity of a speaker. The SID is a crucial part of the Acoustic System because we only want the voices of the caregiver and patient to be sent to the emotion and conflict detection models. However, in real deployments, voices from the TV and visitors must be filtered out. In this Section, we test SID model to answer this question: is it possible to perform comprehensive and realistic pre-deployment testing to improve post-deployment success? Note that the acoustical realisms that the SID faces, in addition to (non-speech) background noise, reverberation, and deamplification, also include sounds from the tv such as the dialogues from tv characters, for the presence of another person’s voice in an audio sample could confuse the speaker identification model.

5.2.1 Pre-deployment Stage Assessment. During pre-deployment time, we investigated a state-of-the-art SID algorithm, the Google Speaker Identification API. However, the API asks us to input the maximum number of speakers there can be in a clip. This is impractical because a dyad can have the TV on and there could be many people’s voices from the TV, or there may be multiple visitors. It is good to discover that this solution is not likely to work at post-deployment time, because this helps us filter out existing solution(s).

Now we describe how we test to make sure the about-to-be-deployed SID algorithm developed by Microsoft [11] is robust to environmental distortions such as reverberation, background noise, and deamplification. Again, this is to verify our hypothesis that for an algorithm to be successful in the real, designated environment, it must be able to overcome the challenges present in the real, designated environment during the pre-deployment stage. In our case, the challenges are reverberation, deamplification, non-speech background noise and TV sounds. Specifically, we have two persons, P1 and P2, each of whom spoke next to the microphone for 2.5 minutes. Then, for each of their voice files, we sliced it into 28 audio samples. Because these 56 (28×2) samples were collected when the speakers were right next to the microphone, they were considered clean speech, free of the three types of environmental distortions. We needed to craft environmentally distorted samples out of the 56 clean samples to ensure that the testing samples accounted for both clean and environmentally distorted samples. To do so, we copy each of the 56 clips and deamplify them by randomly choosing a real number between 0 and 12 decibels. Then, we randomly chose a noise clip from Table 2 as well as TV sounds we recorded using a microphone, out of which we randomly chose a consecutive

5-second segment to be overlaid with one of the copies. This guaranteed samples that were deamplified and contaminated with noise, and the last step was to reverberate it. Again, the reverberation effect is described by the three parameters: the wet/dry ration r , diffusion d , and decay factor f , as per the practice of a previous work [37]. When we reverberated a (noise-contaminated and deamplified) copy, the values of r , d , and f are randomly chosen. In total, we had 112 samples, 56 of which belonged to P1 and the other 56 belonged to P2. We fed the 112 samples to our SID model. **The SID model achieves an f1 score of 85.7% on P1 and 92.8% on P2.** The high performance of the SID model led us to believe that it was reasonably robust to reverberation, deamplification, background noise, and TV sound.

5.2.2 Post-deployment Stage Assessment. To validate post-deployment success, from all audio samples that our speaker identification algorithm identifies to contain the voice of the caregiver or the patient, or both, we randomly chose 28 from the first dyad, 28 from the second dyad, and 28 from the third dyad, 100 from the fourth dyad, 80 from the fifth dyad, and 100 from the sixth dyad. The results are reported in Table 4. In the following sentences we describe how we obtain the f1 scores in Table 4. For a sample, if it only contains the voice of the caregiver, then it is labeled as belonging to the caregiver; if it only contains the voice of the patient, then it is labeled as belonging to the patient. If it contains voices from both the caregiver and patient, then it is labeled as belonging to both. Otherwise, it labeled as belonging to neither. With this labeling scheme, we obtain the positives and negatives of the caregiver’s voice and the positives and negatives of the patient’s voice. The SID model can label a sample as belonging to the caregiver, belonging to the patient, or neither. As a result, we obtain the results in Table 4 in which we report the f1 scores to measure the performance of our SID model for both the caregiver and patient of each dyad. The SID model achieves an f1 score in the range of 93.1% to 97.4% for the caregivers and 91.6% to 98.3% on the patients in the six dyads. The high performance in Table 4 indicates that our SID algorithm is effective at picking out the voices by the caregiver and the patient in each home in their real home environment. Given that the SID algorithm was specifically assessed to see if it could overcome the challenges (reverberation, deamplification, and background noise) present in the real, designated environment (homes), we have shown that for an algorithm to be successful in the real, designated environment, it must be able to overcome the challenges present in the real, designated environment during the pre-deployment stage. The high performance of the SID during the post-deployment time suggests that our way to perform comprehensive and realistic pre-deployment is effective at improving post-deployment SID success. Note that we only validate the SID solution on the voices of the caregiver and patient of each dyad, because at post-deployment time, the SID solution filtered out voice samples that belonged to neither. As a result, we only have samples that are labelled by the SID solution as either the caregiver or the patient. For samples that made through the SID solution, we have the performance reported in Table 4.

In Table 5 we report the f1 score of a model [27] that we did not use because at pre-deployment time it achieves bad performance (an f1 score of 79.3% on P1 and an f1 score of 71.2% on P2). As

	Dyad 1	Dyad 2	Dyad 3	Dyad 4	Dyad 5	Dyad 6
Caregiver	94.5%	97.4%	95.7%	93.1%	92.0%	89.2%
Patient	94.6%	95.9%	96.0%	94.6%	91.6%	98.3%

Table 4: The evaluation results for the speaker identification model on the dyads. The results are the f1 scores.

	Dyad 1	Dyad 2	Dyad 3	Dyad 4	Dyad 5	Dyad 6
Caregiver	57.1%	71.4%	83.6%	52.6%	44.3%	-
Patient	74.8%	75.9%	79.5%	77.7%	74.2%	97.0%

Table 5: The post-deployment evaluation results for a speaker identification model that we did not use because it achieved bad performance pre-deployment time. As we can observe, its performance on all dyads is bad at post-deployment time.

Work	Dataset(s)	Accuracy
Beard et al. [2]	SAVEE, CREMA-D	41.2%
VGG [39]	EMO-DB	43.0%
Huang et al. [24]	RAVDESS, SAVEE	60.8%
Ghaleb et al. [20]	RAVDESS	67.7%
Ghaleb et al. [20]	CREMA-D	74.0%
SpeechBrain [36]	IEMOCAP	78.7%

Table 6: State-of-the-art emotion detection algorithms on different emotional speech datasets. This Table is adapted from a table in the work [19]. As we can see, the best performing state-of-the-art algorithm’s accuracy is capped at 80%. Since SpeechBrain achieves the highest performance, we select it as our emotion detection model.

we can see, this model also achieves bad performance on the post-deployment data. This indicates that at pre-deployment time, the model that performs badly also performs badly at post-deployment time.

5.3 The Emotion Detection Models

The emotion detection model detects the emotion of the speaker in a given audio clip. During the pre-deployment study, we looked into the state-of-the-art solutions for emotion detection. Table 6 shows the performance of several existing state-of-the-art solutions using various datasets of emotional utterances. In this Section, we aim to test the emotion detection model: is it possible to perform comprehensive and realistic pre-deployment testing to improve post-deployment success?

5.3.1 Pre-deployment Stage Assessment. At first glance, Table 6 suggests that 4 solutions are not viable, but that SpeechBrain [36] is the best candidate among all the state-of-the-art algorithms, given its high performance on the dataset IEMOCAP [7]. But is it capable of overcoming the challenges (reverberation, deamplification, and

background noise) that are present in the real, designated environment (a dyad’s home)? To answer that question, we need to look into the dataset IEMOCAP [7], on which it is evaluated. If the dataset has accounted for the challenges, i.e. during the data collection and processing process, the audio samples are touched by the effects of the three challenges, then we conclude that the evaluation result yielded by SpeechBrain indicates that it had overcome the three challenges perceived to be present in the real, designated environment that is a dyad’s home. The dataset IEMOCAP [7] indicates that the audio clips are collected when there are furniture items in the room, instead of an empty acoustic studio, which suggests that the audio clips in IEMOCAP [7] are touched by the effect of reverberation. The audio clips in IEMOCAP [7] are *not* collected where a speaker is right next to the microphone. This suggests that the audio clips in IEMOCAP [7] are touched by the effect of deamplification. Last but not least, IEMOCAP is not collected in a studio environment and there was no indication that the indoor background noise events such as footsteps were deliberately removed. Therefore, this suggests that the audio clips in IEMOCAP are touched by the effect of background noise. Consequently, we conclude that IEMOCAP’s audio samples on which SpeechBrain is evaluated on account for the challenges that are perceived to be present in the real, designated environment in which the emotion detection algorithm (SpeechBrain) is to be deployed. Here, we set the stage to prove (once again) the hypothesis that for an algorithm to work well in the real, designated environment in which it is envisioned to be deployed, during pre-deployment stage, it must show that it is capable of handling the challenges that are perceived to arise in the real, designated environment. In the meantime, we have observed that algorithms such as Huang et al. [24] are not likely to work sufficiently at post-deployment time. It is good to discover that these solutions are not likely to work at post-deployment time, because this helps us filter out such existing solutions.

Note that none of the state-of-the-art approaches in Table 6 include TV sounds as one of the acoustical realisms that they need to address. In the future, we plan to develop an emotion detection algorithm that takes TV sounds into consideration.

5.3.2 Post-deployment Stage Assessment. In the following paragraphs we describe how we evaluate our emotion detection model post-deployment. Out of the audio clips we collected from each dyad, we first select all samples that are classified by the emotion detection model and conflict detection model as anger speech. Then, we randomly select the same number of audio clips from all the samples by that dyad that are not classified as anger speech. Each of the audio clips is **manually labeled** based on the emotion in the clip by the labelers. Table 7 describes our emotion detection model’s performance on the labeled samples: For the 1st dyad, there are 233 samples. For the 2nd dyads, there are 392 samples. For the 3rd dyads, there are 281 samples. For the 4th and 6th dyads, there are 100 samples each. For the 5th dyads, there are 80 samples.

During the post-deployment stage assessment, researchers should let third-party labellers label the data to obtain ground truth, instead of letting the participants do the labelling, because the participants are not necessarily good at discerning their own emotion (and if they are in a verbal conflict) if they are not trained. The XYZ system

	Dyad 1	Dyad 2	Dyad 3	Dyad 4	Dyad 5	Dyad 6
SpeechBrain	88.8%	87.2%	91.8%	92.9%	85.3%	97.4%
VGG	44.6%	65.4%	48.3 %	45.3%	53.3%	61.5%

Table 7: The post-deployment evaluation results for the emotion detection model (SpeechBrain) as well as the VGG model [39], which we did not use because at pre-deployment time it achieves bad performance with an accuracy score of 43.0%. As we can see, it also achieves bad performance on the post-deployment data. The measurement in this Table is f1 score.

detects if a person is in a verbal conflict or is angry. Initially, we sought to validate our system’s performance by survey questions using EMA, similar to many other studies. However, we quickly found out that their responses did not always agree with the decision of the system. Who was wrong: the caregiver or our machine learning solutions? There is existing literature [21] stating that people not trained to recognize their emotions are often bad at recognizing their own emotions. To investigate, we employed 5 labellers who are approved by the IRB to listen to and label the saved clips of the participants’ voices. Their labelling suggests that in some cases, the labellers annotation did not agree with the participants’ self reported emotional states. This data supports the claim that people are often bad at recognizing their emotions. We were able to verify the claim only because we planed, during pre-deployment time, to save all the raw data during the full deployment time. We found that post deployment labeling is better than EMA surveys and also supports determination of ground truth which, in turn, provides a better accuracy assessment of the acoustic classifiers. Determining ground truth from deployment time data is very important and often not done in many studies.

The emotion detection model achieves an f1 score of 85.3% to 97.4% on the six dyads. According to Table 7, the emotion detection algorithm (SpeechBrain)’s performances in all six homes are satisfactory, highly efficient at identifying the emotions in each clip in each of the six homes. The success of the emotion detection algorithm demonstrated by Table 7 proves our hypothesis: for an algorithm to be able to work satisfactorily post-deployment in a real, designated environment, it must demonstrate that it is able to overcome the challenges perceived to arise in that environment during pre-deployment time. The high performance of the emotion detection model at post-deployment time suggests that our way to perform comprehensive and realistic pre-deployment testing is effective at improving post-deployment success. Table 7 also includes the performance of VGG [39] which yields bad results (an accuracy score of 43.0%) at pre-deployment time. As we can see, the model that achieves bad performance at pre-deployment time also achieves bad performance (an average of an f1 score of 50.1%).

5.4 The Conflict Detection Model

For conflict detection, currently, there is no available conflict detection algorithm that is acoustics-based. Therefore, we developed our own conflict detection algorithm. In this Section, we aim to test on the conflict detection model: is it possible to perform comprehensive

	Dyad 1	Dyad 2	Dyad 3	Dyad 4	Dyad 5	Dyad 6
Ours	63.4%	65.9%	70.7%	86.2%	82.7%	90.1%

Table 8: The evaluation results for the conflict detection model. The measurement is f1 score.

and realistic pre-deployment testing to improve post-deployment success?

5.4.1 Pre-deployment Stage Assessment. Here we briefly describe how the new algorithm we developed is trained and why the training process makes it specifically account for the (three) challenges that arise in the real, designated environment in which the algorithm is going to be deployed. The training and testing samples are from 19 couples and each sample is labeled conflict if the content of the sample indicates that the couple are in a verbal conflict. It is labeled non-conflict if the couple are not in a verbal conflict. Since the samples are already collected from home-environments, deamplification and reverberation are accounted for, but the samples are free of background noise. As a result, we mix each of the samples with background noise by randomly selecting a segment from a randomly chosen indoor background noise sample in Table 2 and overlaying that segment with each sample. Out of the samples, there are 3,072 in the training set and 1,009 in the testing set. As a result, both the training and the testing set accounts for a variety range of indoor environmental distortions. Since the training samples are touched by deamplification, reverberation, and background noise, our conflict detection algorithm trained on them is designed to be able to handle the three challenges (deamplification, reverberation, and background noise).

The conflict detection model’s performance on the testing set achieves an f1 score of 93.1%. The high performance suggests that the conflict detection is robust against environmental distortions such as reverberation, background noise, and deamplification. This help us set the stage to prove our hypothesis that, for an algorithm to work sufficiently in the real, designated environment in which challenges are perceived to be present, the algorithm must show that, during pre-deployment stage, it is able to handle the challenges. Our conflict detection algorithm has indicated that during pre-deployment stage, it is able to handle the three challenges: reverberation, deamplification, and background noise. Note that we do not include TV sounds as one of the acoustic realisms that the conflict detection model needs to address. In the future, we plan to develop a conflict detection algorithm that takes TV sounds into consideration.

5.4.2 Post-deployment Stage Assessment. In the post-deployment time, we seek to prove our hypothesis that, for an algorithm to work well post-deployment time in the real, designated environment in which it is going to be deployed, during pre-deployment stage it must show that it is capable of overcoming the challenges that are present in the real, designated environment. Our conflict detection algorithm has showed that it is capable of overcoming the challenges (it achieves an f1 score of 93.1% pre-deployment time). However, is it going to work well in the post-deployment time?

Table 8 shows our conflict detection algorithm’s performance during the post-deployment time at the six homes. Now we explain how we obtain the f1 score results in Table 8. If a clip is labeled by the labelers such that it contains verbal conflict and the classifier also thinks this clip contains verbal conflict, then it is a hit. If the clip is labeled by the labelers as not containing verbal conflict and the classifier also thinks that it does not contain verbal conflict, then it is a hit. All other cases are misses (for example, the labelers think that a sample contain verbal conflict but the classifier fails to classify it as so). By looping through all samples produced by a dyad, we produce an f1 score on that dyad. From Table 8, we observe that the sixth dyad achieves the best performance with an f1 score of 90.1% while the first dyad achieves the lowest performance with an f1 score of 63.4%. For each of the dyads, we observe a drop in performance compared to 93.1% obtained when the same model is evaluated on the dataset containing speech samples from the 19 couples. This indicates that despite our effort in mitigating environmental distortions, the effects of the environmental distortions such as room reverberation, background noise, and the deamplification effect are not fully mitigated. But the relatively satisfactory performance of the conflict detection model on dyads 4, 5 and 6 indicates that our way to perform comprehensive and realistic pre-deployment testing to improve post-deployment success is effective for expected conditions.

We also investigate why the performance of the conflict detection model is lower in dyads 1-3 (f1 score of 63.4% to 70.7%). Upon communicating with the dyads, we learned that dyad 1 moved the system (which included the microphone) to the hallway which is very far away from the usual places that the participants were speaking. Dyad 2 had a construction team renovating their home, so there was a lot of construction noise to confuse the conflict detection model. When we developed the conflict detection model, we did not take construction noises into consideration. In dyad 3, the caregiver's voice was always very low, almost inaudible, and our conflict detection model was not designed to handle such low-to-inaudible voice samples.

5.5 Summary

In this Section we briefly summarize our findings in Section 5.

The first finding is that, to ensure post-deployment success of an algorithm, during pre-deployment time it must be rigorously tested on samples that are touched by the challenges that are perceived to be present in the real, designated environment during post-deployment time. This finding is confirmed by the pre-deployment stage assessment results and post-deployment stage assessment results of the VAD model, the SID model, the emotion detection model, and the conflict detection model.

The second finding is that in the acoustic processing pipeline we should always go for off-the-shelf solutions first before developing your own algorithm. Many acoustic functions have been under study for many years and excellent solutions exist. Yet, rigorous testing is still required since not all of the available solutions will work for the environment where the system will be deployed. In our case, the VAD, SID, and emotion detection models are off-the-shelf. Since there are no state-of-the-art conflict detection models that *only use (the prosody of the) voice* to detect verbal conflict, this has

to be developed and will not have the luxury of having solutions refined many many researchers over many years. This likely is why the performance is lower than the well developed acoustic functions.

6 ADAPTABLE ADD-ON COMPONENTS

Deploying research systems over long time periods requires significant adaptability in many ways. Because the user is central, in this section we concentrate on adaptability in regards to the user interface.

6.1 EMA Wording

EMA apps are common interfaces to humans. They are used to send messages to the participants and receive responses. In our system messages are the interventions or recommendations based on the output of the emotion, conflict detection, and reinforcement learning recommendation modules.

During the pre-deployment time, we collaborated with a team of psychologists and specialists from the nursing field and determined four main categories of interventions/recommendations: the breathing exercise, which encourages the participants to take deep breaths to calm down, the timeout exercise, which encourages the participants to take a timeout/break from engaging with their loved one (the dementia patient), the mindfulness exercise, which encourages them to practice mindfulness, and enjoyable activities, which encourage them to partake activities that they enjoy. Each of these categories contains multiple subcategories. Our implementation allows the exact wordings of the messages to be easily changeable in case during the deployment time the participants preferred different wording.

Indeed, during the deployment time, we received feedback from the some participants that certain messages seemed insensitive and harsh, and the insensitivity and harshness of the messages actually discouraged them from implementing the recommended interventions. To fix this problem for these users, we went back to the EMA app and easily changed the wording based on the participants' complaints. After we made the changes to the wording for all participants, they no longer felt the wording as insensitive and harsh, and were encouraged by the messages to implement the interventions.

6.2 Personalized Recommendations

We have previously stated in Section 6.1 that there are four categories of interventions or recommendations. In this Section, we describe how we make the personalized recommendations adaptable during pre-deployment time and verify if our strategy (that makes the recommendations adaptable) succeeds during post-deployment time.

We have also stated that during pre-deployment time we made the EMA app to be easily adjustable in case we need to change the interventions or recommendations. The EMA app is easily adjustable because it reads text questions (such as the list of enjoyable activities for the participants) from a database and to change that list, we just need to go to the database instead of recompiling the app every time we make changes to the list of text surveys and interventions. The adaptability of the EMA app and, therefore, the

XYZ-W system came in handy when we discovered that participants want more specific recommendations, especially under the category of enjoyable activities. In other words, instead of a generic “now it’s time to do some enjoyable activities,” they wanted the enjoyable activities to be more specific and personalized such as “now it’s time to play with the family cat.” To accommodate this, we asked each participant to provide us a list of their personalized enjoyable activities. Because the EMA app was made to be easily adjustable, the integration of the personalized enjoyable activities for each participant was quick and easy.

The participants of all six dyads reported that they liked the personalization (we asked them through surveys during our interviews with them). For smart health apps that make recommendations, we feel that it is imperative to be able to change them to accommodate the personal needs of the participants.

6.3 Positive Feedback

Before we deployed our XYZ-W System, we decided to only send out at the end of the day post-recommendation surveys that asked the participants if they had implemented the recommendations. Then, we received requests from the participants that they would like some positive feedback after they implemented the recommendations. The positive feedback should acknowledge the effort they put in to adhering to the recommendations and remind them of the importance of implementing the recommendations (to improve their mental health and lessen their care-giving burden). Again, because the EMA app was designed at pre-deployment time to be easily changed, integrating the feature of positive feedback into the existing system was quick and easy. The participants of all six dyads reported to have liked the positive feedback.

6.4 Summary

In this Section we briefly summarize our findings in Section 6. The main takeaway message in Section 6 is that researchers need to anticipate the need of the participants and make sure that their technology (in our case, the add-on components to the XYZ System), is adaptable to those needs. For example, we initially set the positive feedback times to be in the morning and in the evening, but participants report that they want the positive feedback more often. Since we have anticipated that they might have the need (to want to see the positive feedback more often), we have designed our add-on components in such a way that allows the change to be easily made.

7 PRIVACY CONCERNS

Developing new research systems that will be deployed in homes require solutions for privacy issues during recruitment and during deployment. This is especially true when using sensing that can be considered invasive such a microphones. Our XYZ system is privacy-conserving, meaning that it concentrates on allowing users to benefit from its functionalities without releasing their voice data in its original form.

7.1 Pre-deployment Stage Preparation

During pre-deployment a set of privacy mechanisms were implemented. This included that users could set the day start and end

Reason for Rejection	Number(%)
Did not meet inclusion criteria	3 (4.41%)
Didn’t reply to call for screening	15 (22.06%)
Not interested	12 (17.65%)
Burdensome	10 (14.71%)
No longer wanted to participate	2 (2.94%)
Other	9 (13.23%)
Worried about privacy issue	17 (25.00%)
Total	68 (100%)

Table 9: The reasons that potential participants did not join our study. 25% of the potential participants refused to participate in our study because they were worried about privacy since our system would be listening to their conversation.

times when the system is operational, turn off the system at any point, e.g., when a visitor was there, all voice from non-registered speakers would not be recorded, and that the content of speech would not be recorded, i.e., only prosody features would be recorded.

During recruitment, the above privacy mechanisms were fully described to potential dyads. Also, using a graph and tables we showed them what prosody means. Nevertheless, one in four care-giving dyads who rejected participation in the study worried about the privacy issue despite the thorough explanation of the study procedures. Basically, once we explained that our system listens to them for anger/conflict events, it caused some of the prospective dyads to think about privacy invasion and they declined to participate in the study.

Overall, Table 9 describes the reasons that potential participants did not choose to participate in our study: 3 potential participants did not meet the criteria to be included in our study. 15 potential participants lost interest in participating and did not reply to our call for screening that they must pass in order to be included in our study. 12 potential participants decided upfront with us during our communication with them that they were not interested. 10 potential participants found the study to likely be burdensome. 2 potential participants in our follow-up calls with them indicated that they are no longer interested in the study. 9 potential participants were no longer interested to participate due to various issues such as the patient passing away. 17 potential participants refused to participate out of the concern for privacy issues. Privacy is the main reason for 25% of those interviewed (the largest percentage among all categories of the reasons to not participate). It can be expected that when deploying sensing systems in homes some people will reject the system. With enough privacy mechanisms we were able to limit those not willing to participate due to privacy to 25%.

7.2 Post-deployment Stage Assessment

Using a survey after the 4 month study, five out of six of the recruited dyads agreed that their privacy concerns are addressed and they have had no issue regarding privacy. However, one dyad still has some concerns over their privacy. In this home, the Alzheimers’ patient (not the caregiver) pulled out the wires that connect our equipment to the power source, for he feared that during the time

the system is set to not monitor them, the system is still actively listening. We countered this distrust our system by showing these participants the data we collected: namely, we showed them the timestamps of the voice samples that we collected so they knew that outside of the active hours of the system that we were true to our word and the system did not listen to them. We also showed them amplitude plots of the data we collected where there are no words. We also showed them that there did not exist files which recorded the transcriptions of their conversation, since some concerns had been raised such that the participants were worried about being transcribed.

7.3 Summary

Privacy concerns are likely to arise when researchers deploy their technology in the home environments. During the pre-deployment stage, researchers must implement privacy mechanisms even if they are not the core purpose of the system. These mechanisms must be explained to participants. We believe that the mechanisms we describe can be used in many systems that utilize speech of the participants. Finally, the responses from the dyads at post-deployment time provide some evidence that privacy can be addressed to users' satisfaction.

8 CONCLUSION

As research projects (not pilot studies), smart health groups often design novel smart technologies to be deployed in people's homes. However, the integration of novel smart technology from the less complex lab environments to the more complex real environments poses many challenges. In this paper, using the XYZ system as a case study, we present and evaluate various techniques for acoustic pipelines, adaptability of the user interface, and privacy that increase deployment time success.

REFERENCES

- [1] Starlet Ben Alex, Ben P Babu, and Leena Mary. 2018. Utterance and Syllable Level Prosodic Features for Automatic Emotion Recognition. In *2018 IEEE Recent Advances in Intelligent Computational Systems (RAICS)*. IEEE, 31–35.
- [2] Rory Beard, Ritwik Das, Raymond WM Ng, PG Keerthana Gopalakrishnan, Luka Eerens, Pawel Swietojanski, and Ondrej Miksik. 2018. Multi-Modal Sequence Fusion via Recursive Attention for Emotion Recognition. In *Proceedings of the 22nd Conference on Computational Natural Language Learning*. 251–259.
- [3] John Bedón-Molina, Mario J Lopez, and Ivan S Derpich. 2020. A home-based smart health model. *Advances in Mechanical Engineering* 12, 6 (2020), 1687814020935282.
- [4] Valerio Bellandi, Paolo Ceravolo, Alessia Cristiano, Ernesto Damiani, Alberto Sanna, and Diana Trojaniello. 2021. A design methodology for matching smart health requirements. *Concurrency and Computation: Practice and Experience* 33, 22 (2021), e6062.
- [5] Sebastian Braun and Ivan Tashev. 2021. On training targets for noise-robust voice activity detection. In *2021 29th European Signal Processing Conference (EUSIPCO)*. IEEE, 421–425.
- [6] Felix Burkhardt, Astrid Paeschke, Miriam Rolfes, Walter F Sendlmeier, and Benjamin Weiss. 2005. A database of German emotional speech. In *Ninth European Conference on Speech Communication and Technology*.
- [7] Carlos Busso, Murtaza Bulut, Chi-Chun Lee, Abe Kazemzadeh, Emily Mower, Samuel Kim, Jeannette N Chang, Sungbok Lee, and Shrikanth S Narayanan. 2008. IEMOCAP: Interactive emotional dyadic motion capture database. *Language resources and evaluation* 42, 4 (2008), 335–359.
- [8] Houwei Cao, David G Cooper, Michael K Keutmann, Ruben C Gur, Ani Nenkova, and Ragini Verma. 2014. CREMA-D: Crowd-sourced emotional multimodal actors dataset. *IEEE transactions on affective computing* 5, 4 (2014), 377–390.
- [9] Marie-José Caraty and Claude Montacié. 2015. Detecting speech interruptions for automatic conflict detection. In *Conflict and Multimodal Communication*. Springer, 377–401.
- [10] Long Chen, Venkatesh Ravichandran, and Andreas Stolcke. 2021. Graph-based label propagation for semi-supervised speaker identification. *arXiv preprint arXiv:2106.08207* (2021).
- [11] Sanyuan Chen, Chengyi Wang, Zhengyang Chen, Yu Wu, Shujie Liu, Zhuo Chen, Jinyu Li, Naoyuki Kanda, Takuya Yoshioka, Xiong Xiao, et al. 2022. Wavlm: Large-scale self-supervised pre-training for full stack speech processing. *IEEE Journal of Selected Topics in Signal Processing* (2022).
- [12] Zeya Chen, Mohsin Y Ahmed, Asif Salekin, and John A Stankovic. 2019. ARASID: Artificial Reverberation-Adjusted Indoor Speaker Identification Dealing with Variable Distances.. In *EWSN*. 154–165.
- [13] Hariton Costin, Cristian Rotariu, Ioana Alexa, Gina Constantinescu, Vlad Cehan, B Dionisie, Gladiola Andrusac, V Felea, E Crauciuc, and M Scutariu. 2009. TELEMOM-A complex system for real time medical telemonitoring. In *World Congress on Medical Physics and Biomedical Engineering, September 7-12, 2009, Munich, Germany*. Springer, 92–95.
- [14] Tamer Danisman and Adil Alpkocak. 2008. Emotion classification of audio signals using ensemble of support vector machines. In *International Tutorial and Research Workshop on Perception and Interactive Technologies for Speech-Based Systems*. Springer, 205–216.
- [15] Jun Deng, Xinzhou Xu, Zixing Zhang, Sascha Frühholz, and Björn Schuller. 2017. Universon autoencoder-based domain adaptation for speech emotion recognition. *IEEE Signal Processing Letters* 24, 4 (2017), 500–504.
- [16] Robert F Dickerson, Enamul Hoque, Philip Asare, Shahriar Nirjon, and John A Stankovic. 2014. Resonate: reverberation environment simulation for improved classification of speech models. In *IPSN-14 Proceedings of the 13th International Symposium on Information Processing in Sensor Networks*. IEEE, 107–117.
- [17] Heinrich Dinkel, Shuai Wang, Xuean Xu, Mengyue Wu, and Kai Yu. 2021. Voice activity detection in the wild: A data-driven approach using teacher-student training. *IEEE/ACM Transactions on Audio, Speech, and Language Processing* 29 (2021), 1542–1555.
- [18] Ye Gao, Meiyi Ma, Kristina Gordon, Karen Rose, Hongning Wang, and John Stankovic. 2020. A monitoring, modeling, and interactive recommendation system for in-home caregivers: Demo abstract. In *Proceedings of the 18th Conference on Embedded Networked Sensor Systems*. 587–588.
- [19] YE GAO, ASIF SALEKIN, KRISTINA GORDON, KAREN ROSE, HONGNING WANG, and JOHN STANKOVIC. 2021. Emotion Recognition Robust to Indoor Environmental Distortions and Non-targeted Emotions Using Out-Of-Distribution Detection. (2021).
- [20] Esam Ghaleb, Mirela Popa, and Stylianos Asteriadis. 2019. Multimodal and Temporal Perception of Audio-visual Cues for Emotion Recognition. In *8th International Conference on Affective Computing & Intelligent Interaction (ACII 2019)*, Cambridge, United Kingdom.
- [21] Katharina S Goerlich. 2018. The multifaceted nature of alexithymia—a neuroscientific perspective. *Frontiers in psychology* (2018), 1614.
- [22] Félix Grezes, Justin Richards, and Andrew Rosenberg. 2013. Let me finish: automatic conflict detection using speaker overlap.. In *Interspeech*. 200–204.
- [23] Hans-Günter Hirsch and David Pearce. 2000. The Aurora experimental framework for the performance evaluation of speech recognition systems under noisy conditions. In *ASR2000-Automatic speech recognition: challenges for the new Millennium ISCA tutorial and research workshop (ITRW)*.
- [24] Che-Wei Huang and Shrikanth Narayanan. 2018. Stochastic Shake-Shake Regularization for Affective Learning from Speech.. In *Interspeech*. 3658–3662.
- [25] Fei Jia, Somshubra Majumdar, and Boris Ginsburg. 2021. Marblenet: Deep 1d time-channel separable convolutional neural network for voice activity detection. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 6818–6822.
- [26] Tarannum Khan and Manju K Chattopadhyay. 2017. Smart health monitoring system. In *2017 International Conference on Information, Communication, Instrumentation and Control (ICICIC)*. IEEE, 1–6.
- [27] Yann LeCun, Yoshua Bengio, et al. 1995. Convolutional networks for images, speech, and time series. *The handbook of brain theory and neural networks* 3361, 10 (1995), 1995.
- [28] Iulia Lefter and Catholijn M Jonker. 2017. Aggression recognition using overlapping speech. In *2017 Seventh International Conference on Affective Computing and Intelligent Interaction (ACII)*. IEEE, 299–304.
- [29] Alistair Letcher, Jelena Trisović, Collin Cademartori, Xi Chen, and Jason Xu. 2018. Automatic conflict detection in police body-worn audio. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2636–2640.
- [30] Steven R Livingstone and Frank A Russo. 2018. The Ryerson Audio-Visual Database of Emotional Speech and Song (RAVDESS): A dynamic, multimodal set of facial and vocal expressions in North American English. *PLoS one* 13, 5 (2018), e0196391.
- [31] Meiyi Ma, Ridwan Alam, Brooke Bell, Kayla de la Haye, Donna Spruijt-Metz, John Lach, and John Stankovic. 2017. M² 2G: a monitor of monitoring systems with ground truth validation features for research-oriented residential applications. In *2017 IEEE 14th International Conference on Mobile Ad Hoc and Sensor Systems (MASS)*. IEEE, 10–18.

- [32] Annamaria Mesaros, Toni Heittola, and Tuomas Virtanen. 2016. TUT database for acoustic scene classification and sound event detection. In *2016 24th European Signal Processing Conference (EUSIPCO)*. IEEE, 1128–1132.
- [33] Shahrokh Nikou. 2019. Factors driving the adoption of smart home technology: An empirical assessment. *Telematics and Informatics* 45 (2019), 101283.
- [34] Ainize Peña-Sarrionandia, Moira Mikolajczak, and James J Gross. 2015. Integrating emotion regulation and emotional intelligence traditions: a meta-analysis. *Frontiers in psychology* 6 (2015), 160.
- [35] Cecilia Perri, Carlo Giglio, and Vincenzo Corvello. 2020. Smart users for smart technologies: Investigating the intention to adopt smart energy consumption behaviors. *Technological Forecasting and Social Change* 155 (2020), 119991.
- [36] Mirco Ravanelli, Titouan Parcollet, Peter Plantinga, Aku Rouhe, Samuele Cornell, Loren Lugosch, Cem Subakan, Nauman Dawalatabad, Abdelwahab Heba, Jianyuan Zhong, et al. 2021. SpeechBrain: A general-purpose speech toolkit. *arXiv preprint arXiv:2106.04624* (2021).
- [37] Asif Salekin, Zeya Chen, Mohsin Y Ahmed, John Lach, Donna Metz, Kayla De La Haye, Brooke Bell, and John A Stankovic. 2017. Distant emotion recognition. *Proceedings of the ACM on Interactive, Mobile, Wearable and Ubiquitous Technologies* 1, 3 (2017), 1–25.
- [38] Eugene Yu Shchetinin, Leonid A Sevastianov, Dmitry S Kulyabov, Edik A Ayrjan, and Anastasia V Demidova. 2020. Deep Neural Networks for Emotion Recognition. In *International Conference on Distributed Computer and Communication Networks*. Springer, 365–379.
- [39] Karen Simonyan and Andrew Zisserman. 2014. Very deep convolutional networks for large-scale image recognition. *arXiv preprint arXiv:1409.1556* (2014).
- [40] David Snyder, Daniel Garcia-Romero, Gregory Sell, Daniel Povey, and Sanjeev Khudanpur. 2018. X-vectors: Robust dnn embeddings for speaker recognition. In *2018 IEEE international conference on acoustics, speech and signal processing (ICASSP)*. IEEE, 5329–5333.
- [41] Zheng-Hua Tan, Najim Dehak, et al. 2020. rVAD: An unsupervised segment-based robust voice activity detection method. *Computer speech & language* 59 (2020), 1–21.
- [42] Andreas Triantafyllopoulos, Gil Keren, Johannes Wagner, Ingmar Steiner, and Björn Schuller. 2019. Towards Robust Speech Emotion Recognition Using Deep Residual Networks for Speech Enhancement. *Proc. Interspeech 2019* (2019), 1691–1695.
- [43] Kunxia Wang, Ning An, Bing Nan Li, Yanyong Zhang, and Lian Li. 2015. Speech emotion recognition using Fourier parameters. *IEEE Transactions on Affective Computing* 6, 1 (2015), 69–75.
- [44] Weiqing Wang, Xiaoyi Qin, and Ming Li. 2022. Cross-Channel Attention-Based Target Speaker Voice Activity Detection: Experimental Results for the M2met Challenge. In *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 9171–9175.
- [45] Lahiru Wijayasingha and John A Stankovic. 2021. Robustness to noise for speech emotion classification using CNNs and attention mechanisms. *Smart Health* 19 (2021), 100165.
- [46] Nour-Mohammad Yaghoubi and Ebrahim Bahmani. 2010. Factors affecting the adoption of online banking: An integration of technology acceptance model and theory of planned behavior. *International journal of business and management* 5, 9 (2010), 159–165.
- [47] Sherali Zeadally, Farhan Siddiqui, Zubair Baig, and Ahmed Ibrahim. 2019. Smart healthcare: Challenges and potential solutions using internet of things (IoT) and big data analytics. *PSU research review* (2019).