

On the Alignment of Group Fairness with Attribute Privacy

Jan Aalmoes
jan.aalmoes@insa-lyon.fr
Univ Lyon, INSA Lyon, Inria, CITI
Lyon, France

Vasisht Duddu
vasisht.duddu@uwaterloo.ca
University of Waterloo
Waterloo, Canada

Antoine Boutet
antoine.boutet@insa-lyon.fr
Univ Lyon, INSA Lyon, Inria, CITI
Lyon, France

ABSTRACT

Group fairness and privacy are fundamental aspects in designing trustworthy machine learning models. Previous research has highlighted conflicts between group fairness and different privacy notions. We are the *first* to demonstrate the *alignment* of group fairness with the specific privacy notion of attribute privacy in a *blackbox setting*. Attribute privacy, quantified by the resistance to attribute inference attacks (AIAs), requires indistinguishability in the target model’s output predictions. Group fairness guarantees this thereby mitigating AIAs and achieving attribute privacy. To demonstrate this, we first introduce ADAPT AIA, an enhancement of existing AIAs, tailored for real-world datasets with class imbalances in sensitive attributes. Through theoretical and extensive empirical analyses, we demonstrate the efficacy of two standard group fairness algorithms (i.e., adversarial debiasing and exponentiated gradient descent) against ADAPT AIA. Additionally, since using group fairness results in attribute privacy, it acts as a defense against AIAs, which is currently lacking. Overall, we show that group fairness aligns with attribute privacy at no additional cost other than the already existing trade-off with model utility.

1 INTRODUCTION

Machine learning (ML) has been adopted for several high-stakes decision-making applications, such as criminal justice and healthcare. This raises concerns about the model’s discriminatory behaviour across different demographic subgroups [39] and compromising data privacy [9]. Several regulations require ML practitioners to train models satisfying both privacy and group fairness [28, 29, 33, 34, 48]. To design such models, practitioners have to first understand the interactions between group fairness and privacy [13].

Prior works have shown that group fairness conflicts with different privacy notions such as differential privacy [8, 19], membership inference [6] and distribution inference [47]. However, it is unclear about how group fairness interacts with privacy of sensitive attributes (hereafter referred to as attribute privacy) which ensures that an adversary cannot exploit distinguishability in target model’s predictions to infer sensitive attributes. In this work, we ask: **How does group fairness relate to attribute privacy?**

To answer this, we first quantify attribute privacy as the resistance to *attribute inference attacks* (AIAs) where an adversary infers sensitive attributes (e.g., Race and Sex), from *model observables* (e.g., predictions, intermediate outputs [11, 21, 37, 38, 46, 52]). These attacks pose a practical threat to data privacy and confidentiality. For example, inferring Race from a model predicting mortgage eligibility, even if not part of the training data, could violate customer privacy and potentially lead to discrimination. We focus on representation-based AIAs in a practical *blackbox* setting where an adversary exploits distinguishability in model observables for

different sensitive attribute values [11, 37, 46]. For instance, Figure 1 depicts distinguishable prediction distributions for two sub-groups.

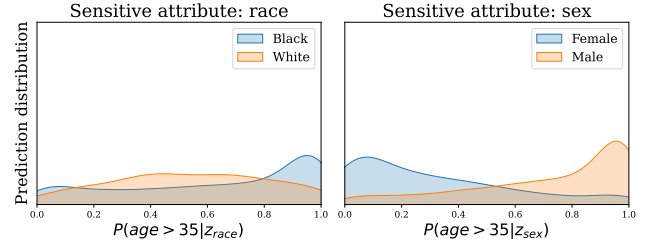


Figure 1: Privacy is violated if an (potentially sensitive) attribute is inferred from the output predictions of a learning model if these predictions are distinguishable for different attribute values (Appendix B).

Ensuring attribute privacy requires the success of AIAs to be close to random guessing, meaning model observables should be indistinguishable for different sensitive attribute values. Group fairness achieves this by ensuring indistinguishability in predictions. Implementations of such group fairness include adversarial debiasing (ADVDEBIAS) [35, 55] and exponentiated gradient descent (EGD) [1]. Hence, we conjecture that group fairness is *aligned* with attribute privacy and can be used as a defense against AIAs, which is currently lacking.

Contributions. We are the *first* to show that the objective of group fairness *aligns* with attribute privacy. In other words, using group fairness results in attribute privacy at no additional cost except for the already existing trade-off with utility. To demonstrate this, we first propose a state-of-the-art AIA, ADAPT AIA, designed to infer sensitive attributes while accounting for class imbalance (Section 5). Finally, we demonstrate, theoretically and through extensive empirical evaluation, the effectiveness of EGD and ADVDEBIAS against ADAPT AIA (Sections 6 and 7). Our source code will be publicly available upon publication.

2 BACKGROUND

We present a background on ML and notations used in the rest of the paper (Section 2.1), followed by a discussion on AIAs (Section 2.2), and group fairness (Section 2.3).

2.1 Machine Learning Classifiers

Training. ML classifiers are functions f_{trg}^θ (omit θ for simplicity) parameterized by θ that map inputs with corresponding classification labels. θ is updated using a training dataset ($\mathcal{D}_{tr}$) with the objective to minimize the loss incurred on predicting the classification label for inputs from $\mathcal{D}_{tr}$. We remove sensitive attributes such

Table 1: Comparison of prior AIAs: attack vector exploited (e.g., $f_{trg}(X(\omega))$, $X(\omega)$, $Y(\omega)$), distribution over S (P_S) and confusion matrix $C(Y, f_{trg} \circ X)$), whether S is censored, i.e., included in $\mathcal{D}_{tr}$ and inputs, whether AIAs account for class imbalance in S , whether $\mathcal{A}dv$ is active or passive and whether the threat model is blackbox or whitebox.

Literature	Attack Vector	Is S censored?	Imbalance in S ?	$\mathcal{A}dv$	Threat Model
Imputation-based Attacks					
Fredrikson et al. [21]	$X, Y, f_{trg} \circ X, P_S, C(Y, f_{trg} \circ X)$	✓	×	Passive	Blackbox
Yeom et al. [52]	X, Y, f_{trg}, P_S	✓	×	Passive	Blackbox
Mehnaz et al. [38]	$X, Y, f_{trg}, P_S, C(Y, f_{trg} \circ X)$	✓	×	Passive	Blackbox
Jayaraman and Evans [30]	$X, Y, f_{trg}, P_S, C(Y, f_{trg} \circ X)$	×	×	Passive	Whitebox
Representation-based Attacks					
Song et al. [46]	$f_{trg} \circ X$	×	×	Passive	Both
Mahajan et al. [11]	$f_{trg} \circ X$	✓	×	Passive	Blackbox
Malekzadeh et al. [37]	$f_{trg} \circ X$	×	×	Active	Blackbox
Our Work	$f_{trg} \circ X$	×	✓	Passive	Blackbox

as Race or Sex from $\mathcal{D}_{tr}$ to censor them [46]. Consequently, f_{trg} is trained on non-sensitive attributes. Formally, consider a probability space $(\Omega, \mathcal{T}, \mathcal{P})$, measurable spaces $(E, \mathcal{U})$, $(\{0, 1\}, \mathcal{P}(\{0, 1\}))$ and $([0, 1], \mathcal{B})$ where $\mathcal{B}$ is the Borel tribe on $[0, 1]$. We define random variables X for the input data, Y for the classification labels and S for the sensitive attributes:

- $X : (\Omega, \mathcal{T}, \mathcal{P}) \rightarrow (E, \mathcal{U})$,
- $Y : (\Omega, \mathcal{T}, \mathcal{P}) \rightarrow (\{0, 1\}, \mathcal{P}(\{0, 1\}))$,
- $S : (\Omega, \mathcal{T}, \mathcal{P}) \rightarrow (\{0, 1\}, \mathcal{P}(\{0, 1\}))$,

Then, f_{trg} is a measurable function $f_{trg} : (E, \mathcal{U}) \rightarrow ([0, 1], \mathcal{B})$ which is used to build the statistic approaching Y by updating the parameters θ on $\mathcal{D}_{tr}$. The prediction of f_{trg} on X is a random variable: $\hat{Y}_h = 1_{[\tau, 1]} \circ \hat{Y}_s$ where $\hat{Y}_s = f_{trg} \circ X$ and $\tau \in [0, 1]$. We present a background on probability and measured spaces in Appendix A.

Inference. Once training is completed, $X(\omega)$ is passed to f_{trg} to obtain a prediction score $f_{trg}(X(\omega))$ (aka soft labels). The attributes during inference, are sampled from an unseen test dataset $\mathcal{D}_{te}$ disjoint from $\mathcal{D}_{tr}$ to evaluate how well f_{trg} generalizes. We refer to f_{trg} 's final predictions and intermediate outputs as *model observables*. Sensitive attributes, although available for different data records, play no role in training or inference. They are reserved solely for designing and evaluating attacks.

2.2 Attribute Inference Attacks

An attack constitutes a privacy risk if $\mathcal{A}dv$ learns something about $\mathcal{D}_{tr}$ or the inputs which would be impossible to learn without access to f_{trg} . This differentiates between a privacy risk and simple statistical inference [7]. AIAs infer the specific value of a sensitive attribute for a specific input to ML model given some model observables and background information [11, 21, 37, 38, 46, 52]. $\mathcal{A}dv$ has access to auxiliary data $\mathcal{D}_{aux}$ which is sampled from the same distribution as $\mathcal{D}_{tr}$, a standard assumption across all AIAs. Based on $\mathcal{A}dv$'s knowledge and access, AIAs can be categorized into (a) imputation-based and (b) representation-based attacks.

Imputation-based attacks assume $\mathcal{A}dv$ has access to non-sensitive attributes and background information (e.g., marginal prior over sensitive attribute and confusion matrix) in addition to model's predictions. Fredrikson et al. [21], Yeom et al. [52] and Mehnaz et

al. [38] assume that S is part of the input of f_{trg} and the targeted data point belongs to $\mathcal{D}_{tr}$. Fredrikson et al. [21] and Mehnaz et al. [38] for a targeted data point, compute f_{trg} for different values of the sensitive attribute to find the most likely one. Yeom et al. [52] predict S using the output of a membership oracle or assuming it follows some distribution. However, these attacks perform no better than data imputation and does not pose an actual privacy risk [30]. Jayaraman and Evans [30] propose a whitebox AIA which is a privacy risk in the setting where $\mathcal{A}dv$ has limited knowledge. We omit a comparison with this work due to difference in threat model.

Representation-based attacks exploit the distinguishability in model observables for different values of sensitive attributes [11, 37, 46]. For instance, the distribution of $f_{trg} \circ X$ for $S = \text{males}$ is different from $S = \text{females}$. Song et al. [46] / Mahajan et al. [11] assume that S is not in the input. $\mathcal{A}dv$ only observes $f_{trg} \circ X$. $\mathcal{A}dv$ trains an ML attack model f_{att} to map the output predictions $f_{trg}(X(\Omega))$ to $S(\Omega)$. Malekzadeh et al. [37] assume that $\mathcal{A}dv$ can actively introduce a "backdoor" and train f_{trg} to explicitly encode information about S in $f_{trg} \circ X$. We omit comparison with Malekzadeh et al. [37] due to difference in threat model and focus on Song et al. [46] / Mahajan et al. [11].

We empirically measure attribute privacy using the resistance to AIAs which exploit distinguishability in model predictions for different values of sensitive attributes. Specifically, f_{trg} satisfies attribute privacy if the success of AIA is random guess.

2.3 Group Fairness

Generally, data records in the minority subgroup, identified by some sensitive attribute (e.g., Race or Sex), face unfair prediction behaviour compared to data records in the majority subgroup. For instance in criminal justice, Race plays a non-negligible role in predicting the likelihood of them re-offending [2]. Group fairness algorithms add constraints during training such that different subgroups (i.e., $S : \Omega \rightarrow \{0, 1\}$) are treated equally (e.g., ADVDEBIAS [55] and EGD [1]). S is either Sex or Race (i.e., $S(\omega)$ is 0 for woman and 1 for man, or 0 for black and 1 for white). There are different definitions of group fairness which have been introduced in prior work.

We discuss two well-established definitions: demographic parity (DEMPAR) and equalized odds (EQODDS).

Definition 2.1. $\hat{Y}_h$ satisfies DEMPAR for S if and only if: $P(\hat{Y}_h = 0|S = 0) = P(\hat{Y}_h = 0|S = 1)$.

DEMPAR ensures that the number of correct predictions is the same for each subgroup. However, this may result in different false positive (FPR) and true positive rates (TPR) if the true outcome varies with S [14]. EQODDS is a modification of DEMPAR to ensure that both TPR and FPR are the same for each subgroup [27].

Definition 2.2. $\hat{Y}_h$, classifier of Y , satisfies EQODDS for S if and only if: $P(\hat{Y}_h = \hat{y}|S = 0, Y = y) = P(\hat{Y}_h = \hat{y}|S = 1, Y = y) \quad \forall (\hat{y}, y) \in \{0, 1\}^2$.

We consider two algorithms: (a) adversarial debiasing (ADVDEBIAS) [35, 55] and (b) exponentiated gradient descent (EGD) [1]. ADVDEBIAS achieves fairness by training f_{trg} to have indistinguishable output predictions in the presence of a discriminator network f_{disc} . f_{disc} infers S corresponding to a target data point given $f_{trg} \circ X$. f_{trg} is then trained to minimize the success of f_{disc} . ADVDEBIAS outputs *soft labels* (i.e., a probability attached to each value of the sensitive attribute). EGD solves an under-constraint optimization problem to find a collection of optimal measurable functions $t_0, \dots, t_{N-1}$ and threshold $(\tau_0, \dots, \tau_{N-1}) \in [0, 1]^N$. These are used to create the statistic for predictions $\hat{Y}_h$ to estimate Y . A random variable $I : \Omega \rightarrow \{0, \dots, N-1\}$ selects one of the measurable functions and generates a randomized classifier: $\hat{Y}_h = 1_{[\tau_I, 1]} \circ t_I \circ X$. EGD can satisfy different fairness constraints (e.g., DEMPAR or EQODDS). EGD outputs *hard labels* (i.e., a binary assignment to the sensitive attribute).

3 PROBLEM STATEMENT

Understanding the interaction between group fairness and privacy notions is crucial for practitioners to address conflicts before model deployment [13]. This is essential for regulatory compliance, as both fairness and privacy are mandated by regulations [28, 29, 33, 34, 48]. Previous research highlights a conflict between group fairness and differential privacy showing an impossibility to train a differentially private model while ensuring group fairness [8]. Additionally, group fairness increases susceptibility to membership inference attacks [6] and distribution inference attacks [47]. However, the interaction of group fairness with attribute privacy remains unclear.

Challenge 1: Our goal is to better understand and evaluate the relation between group fairness and attribute privacy. We *conjecture* that group fairness *aligns* with attribute privacy by ensuring indistinguishability in the predictions for different values of $S(\omega)$. However, to effectively validate this, we need to address two other challenges.

Challenge 2: We evaluate group fairness algorithms against AIAs. If the success of AIAs is random guess, it indicates that attribute privacy is satisfied. Appendix B shows that distinguishable output predictions for two sub-groups could be exploited to infer a sensitive attribute even when it is not included in f_{trg} 's $\mathcal{D}_{tr}$. However, none of the current AIAs in literature are effective as they fail to account for real-world datasets with significant class imbalance in sensitive attributes. For instance, the fraction of males and whites in different datasets are 68% and 90% (CENSUS), 81% and 51% (COMPAS), 53% and

36% (MEPS), and 78% and 96% (LFW). We have to design AIAs to account for this class imbalance to make them effective.

Challenge 3: Group fairness algorithms can output either soft labels (probability scores indicating that an input belongs to different classes) or hard labels (most likely class from soft labels). We have to design AIA for both.

After addressing *Challenge 2* and *Challenge 3*, we can then revisit *Challenge 1* to show that group fairness aligns with attribute privacy by mitigating our proposed AIAs. We now present our threat model and assumptions about $\mathcal{Adv}$'s knowledge and capabilities.

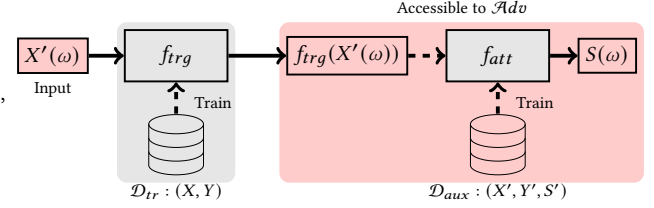


Figure 2: $\mathcal{Adv}$ wants to infer $S(\omega)$ for $X(\omega)$ given $f_{trg}(X(\omega))$. $\mathcal{Adv}$ uses f_{att} which is trained on $\mathcal{D}_{aux}$ to map $S'(\omega)$ from $f_{trg}(X'(\omega))$.

Threat Model. We assume a blackbox $\mathcal{Adv}$ with no knowledge of f_{trg} 's parameters or architecture. $\mathcal{Adv}$ can query f_{trg} and obtain corresponding predictions. This is the most practical setting typically seen in ML as a service. Additionally, $\mathcal{Adv}$ has access to $\mathcal{D}_{aux}$ sampled from the same distribution as $\mathcal{D}_{tr}$ similar to prior works [11, 46, 52]. $\mathcal{D}_{aux}$ is split into two disjoint datasets: $\mathcal{D}_{aux}^{tr}$ used for designing the attack and $\mathcal{D}_{aux}^{te}$ to evaluate the attack. This is a strong assumption, but it was made to favor $\mathcal{Adv}$ since, in practice, $\mathcal{Adv}$ is likely to have a different distribution. We revisit the case where $\mathcal{D}_{aux}$ is sampled from a different distribution in Appendix F. $\mathcal{Adv}$ trains f_{att} on $\mathcal{D}_{aux}^{tr}$ to infer S using $f_{trg} \circ X$. f_{att} is then evaluated on $\mathcal{D}_{aux}^{te}$ (Figure 2). This attack is applicable in both cases when f_{trg} 's outputs are hard and soft labels:

TM1 For hard labels, $\mathcal{Adv}$ builds a statistic $\hat{S}$ to infer S : $\hat{S} = f_{att} \circ \hat{Y}_h \circ X$.

TM2 For soft labels, $\mathcal{Adv}$ builds a statistic $\hat{S}$ to infer S : $\hat{S} = 1_{[v, 1]} \circ f_{att} \circ \hat{Y}_s \circ X$. Here, $v \in [0, 1]$ is a threshold which can be adapted to improve the attack.

4 EXPERIMENTAL SETUP

Datasets: We consider four real-world datasets covering different domains: criminal justice (COMPAS), income prediction (CENSUS), healthcare (MEPS), and face recognition (LFW), to illustrate the effectiveness of the proposed AIAs. These have been used as benchmarks for privacy [11, 38, 46] and fairness [39].

CENSUS comprises 30,940 data records with 95 attributes about individuals from 1994 US Census data. The attributes include marital status, education, occupation, job hours per week among others. The classification task is to estimate whether an individual makes an income of 50k per annum. For f_{trg} , we use 24,752 data records for $\mathcal{D}_{tr}$ and 6,188 data records as $\mathcal{D}_{te}$. We use 4,950 data records from $\mathcal{D}_{te}$ as $\mathcal{D}_{aux}^{tr}$ for training f_{att} and evaluate it on 1,238 unseen data records in $\mathcal{D}_{aux}^{te}$.

COMPAS is used for commercial algorithms by judges and parole officers for estimating the likelihood of a criminal re-offending using seven attributes. The classification task is whether a criminal will re-offend or not, and contains 6,172 criminal defendants in Florida. The dataset contains 7 attributes and we use 4,937 data records for training f_{trg} and 1,235 data records as testing dataset. We use 988 data records from $\mathcal{D}_{te}$ as $\mathcal{D}_{aux}^{tr}$ for training f_{att} , i.e., $\mathcal{D}_{aux}^{tr}$ and evaluate it on 247 unseen data records in $\mathcal{D}_{aux}^{te}$.

MEPS contains 15,830 records of different patients using medical services by capturing the trips made to clinics and hospitals. The classification task is to predict the utilization of medical resources as 'High' if the sum of the number of office based visits, outpatient visits, ER visits, inpatient nights and home health visits, is greater than ten. We use 12,664 data records for training f_{trg} and 3,166 $\mathcal{D}_{tr}$ records as testing dataset. We use 2,532 data records from $\mathcal{D}_{te}$ as $\mathcal{D}_{aux}^{tr}$ for training f_{att} and evaluate it on 634 unseen data records in $\mathcal{D}_{aux}^{te}$.

LFW has 8,212 images of people with the classification task to predict whether their age is >35 years. In all datasets, we consider Race and Sex as binary sensitive attributes to be inferred.

We use 80% of the dataset as $\mathcal{D}_{tr}$ and the remaining 20% for $\mathcal{D}_{te}$. We use $\mathcal{D}_{te}$ as $\mathcal{D}_{aux}$ and ensure that the distribution of S is uniform between them. We use 80% of $\mathcal{D}_{aux}$ for training f_{att} and 20% for evaluation of the attack. The impact of an adversary using auxiliary knowledge ($\mathcal{D}_{aux}$) which differs from the target model training data ($\mathcal{D}_{tr}$) is evaluated in the Appendix F. We use cross validation where each split is done five times without any overlap. f_{trg} is trained and evaluated five times and f_{att} is trained and validated ten times. We check for statistical significance for the results (i.e., p-value <0.05).

Model Architectures: For all the datasets, we use neural networks with four hidden layers with the following dimensions: [32, 32, 32, 32] and ReLU activation functions.

Metrics: We use standard classification accuracy between predicted labels and ground truth labels for evaluating f_{trg} 's performance. We refer to this as *utility*. We evaluate attack success using *balanced accuracy* which is the average of the proportion of correct predictions of each class of the sensitive attribute individually: $\frac{1}{2}(P(\hat{S} = 0|S = 0) + P(\hat{S} = 1|S = 1))$. This metric accounts for class imbalance and simple accuracy is misleading when the datasets have significant class imbalance. An accuracy of 50% corresponds to random guesses. To evaluate fairness, we use $DEMPAR_Level$ given by $|P(\hat{Y} = 0|S = 0) - P(\hat{Y} = 0|S = 1)|$. $DEMPAR$ -level close to zero indicates that f_{trg} is fair.

Baselines: To evaluate the impact of group fairness on attribute privacy, we compare the attack success of ADAPTAIA with and without using group fairness (the former case is referred to as Empirical while the latter is referred to as Baseline). For classifiers that output hard labels (i.e., using ADAPTAIA-H), we also indicate the theoretical bound from Theorem (referred to as Theoretical).

5 ADAPTAIA: AN EFFECTIVE AIA

We first address *Challenge 2* and *Challenge 3* from Section 3. Our goal is to design an AIA which accounts for class imbalance in S , typical of real-world applications [25, 44], and is applicable for soft and hard labels. We present ADAPTAIA, an AIA with adaptive threshold and its two variants of the attack, ADAPTAIA-S for soft

labels, and ADAPTAIA-H for hard labels. We describe our proposed attacks below.

ADAPTAIA-S. Recall from Section 3 that datasets have significant class imbalance in sensitive attributes. We conjecture that this skews f_{trg} 's predictions, thereby requiring us to adapt f_{att} to correctly infer the value of sensitive attributes [4, 25, 44]. Hence, the default threshold of 0.5 over f_{att} 's soft labels will not result in accurate estimation of S . $\mathcal{Adv}$'s attack success can be improved by using an adaptive threshold [4, 25, 44]. However, none of the prior AIAs account for this.

Hence, we can improve AIAs with an adaptive threshold instead of using a default threshold of 0.5 as in prior AIAs. $\mathcal{Adv}$ computes the optimized threshold v^* on $\mathcal{D}_{aux}^{tr}$ which is later used for the attack on $\mathcal{D}_{aux}^{te}$. We compute v^* to balance TPR and FPR. Ideally, a perfect attack would result in no FPR and only TPR. $\mathcal{Adv}$'s goal is thus to approach this optimal value of TPR and FPR. Formally, $v^* \in [0, 1]$ where $v^* = \operatorname{argmin}_v (1 - TPR_v)^2 + FPR_v^2$.

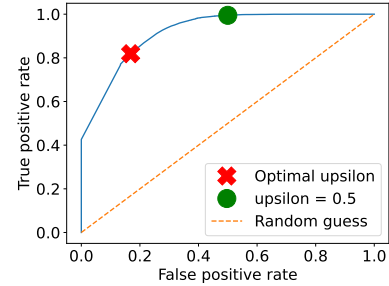


Figure 3: ROC curve: v^* can lower FPR to infer Race.

For illustration purposes, we plot the ROC curve for inferring Race in Figure 3. We observe that v^* does not correspond to the default classification threshold of 0.5 used in the literature and results in lower FPR resulting in a more confident attack.

ADAPTAIA-H. For hard labels, it is not necessary to train f_{att} . Instead, we consider a set of functions from $\{0, 1\}$ to $\{0, 1\}$ containing four elements: $x \mapsto 0$, $x \mapsto x$, $x \mapsto 1 - x$, and $x \mapsto 1$. We optimize the attack by finding the functions which give the best balanced accuracy on $\mathcal{D}_{aux}^{tr}$ which is used to evaluate attack success on $\mathcal{D}_{aux}^{te}$.

Evaluating ADAPTAIA-H and ADAPTAIA-S. For hard labels (TM1),

we consider the baseline of training a neural network over hard labels to infer the value of S given X . We then compare this with ADAPTAIA-H. For soft labels (TM2), we consider the attacks by Song et al. [46]/Mahajan et al. [11] as the prior state-of-the-art baselines with the default $v = 0.5$ over $f_{att}(f_{trg}(X(\omega)))$. We then compare this with ADAPTAIA-S.

We present the comparison of the baseline attack with ADAPTAIA-H and ADAPTAIA-S in Table 2. For all datasets, we see that ADAPTAIA-H and ADAPTAIA-S are significantly better on average than prior AIAs. Having successfully addressed *Challenge 2* and *Challenge 3* by designing ADAPTAIA-H and ADAPTAIA-S, we use the AIAs to evaluate the alignment with two well-established group fairness algorithms: EGD and AdvDEBIAS.

Table 2: Comparing attack accuracy (average over ten runs) for baseline with $\nu = 0.5$ [11, 46] and both ADAPTAIA-H and ADAPTAIA-S: an adaptive threshold improves the success of the attack for hard and soft labels.

Dataset	TM1			
	Baseline ($\nu=0.50$)		ADAPTAIA-H	
	Race	Sex	Race	Sex
CENSUS	0.50 ± 0.0	0.50 ± 0.0	0.56 ± 0.01	0.58 ± 0.01
COMPAS	0.62 ± 0.3	0.50 ± 0.0	0.62 ± 0.03	0.57 ± 0.03
MEPS	0.51 ± 0.01	0.55 ± 0.02	0.53 ± 0.01	0.55 ± 0.01
LFW	0.59 ± 0.00	0.64 ± 0.15	0.61 ± 0.11	0.78 ± 0.05

Dataset	TM2			
	Baseline ($\nu=0.50$)		ADAPTAIA-S	
	Race	Sex	Race	Sex
CENSUS	0.50 ± 0.02	0.56 ± 0.04	0.61 ± 0.02	0.68 ± 0.01
COMPAS	0.62 ± 0.03	0.50 ± 0.00	0.62 ± 0.03	0.57 ± 0.03
MEPS	0.52 ± 0.02	0.55 ± 0.02	0.60 ± 0.02	0.62 ± 0.02
LFW	0.50 ± 0.10	0.77 ± 0.07	0.61 ± 0.10	0.79 ± 0.05

6 ALIGNMENT OF EGD

We first consider EGD under the threat model **TM1** as it outputs hard labels. We evaluate if EGD is aligned with attribute privacy by mitigating ADAPTAIA-H. We also quantify the impact on both the utility and group fairness of f_{trg} . As described in Section 2.3, f_{trg} can be trained with EGD to satisfy either DEMPAR or EQODDS. Here, we focus on EGD + DEMPAR but revisit EGD + EQODDS in Appendix E and demonstrate that EQODDS cannot mitigate ADAPTAIA-H and by consequence ADAPTAIA-S. We first present theoretical results followed by empirical evaluation.

EGD: Theoretical Guarantees We theoretically compute the bound on the attack accuracy under EGD + DEMPAR (proof in Appendix C).

Theorem 6.1. The maximum attack accuracy achievable by ADAPTAIA-H is equal to $\frac{1}{2}(1 + \text{DEMPAR-Level of } f_{trg})$.

Hence, we obtain a bound for ADAPTAIA-H without any conditions on f_{trg} or datasets. Additionally, we observe that $\text{DEMPAR-Level} = 0$. Consequently, if f_{trg} satisfies DEMPAR then no f_{att} will perform better than a random guess. Hence, EGD + DEMPAR satisfies attribute privacy.

EGD: Empirical Evaluation We will now empirically validate the above theoretical guarantee by evaluating f_{trg} trained with EGD + DEMPAR against ADAPTAIA. Due to space limitation, we only present results for CENSUS and MEPS and move the results for other datasets in Appendix C.

To evaluate alignment of EGD + DEMPAR with attribute privacy, we compare in Figure 11 the result of ADAPTAIA-H on a classification without using EGD + DEMPAR and on using EGD + DEMPAR. Results show that ADAPTAIA-H demonstrates significantly lower effectiveness (approaching random guessing, 50%) when utilizing EGD + DEMPAR compared to the Baseline. Additionally, for ADAPTAIA-H, we note that the theoretical bound on attack accuracy matches with the empirical attack accuracy. The theoretical accuracy is equal to the empirical accuracy when the values are $> \frac{1}{2}$. But $\text{DEMPAR-Level} \geq 0$ implies that $(1 + \text{DEMPAR-Level}) \geq \frac{1}{2}$. Hence, we observe that the theoretical accuracy is not equal to the experimental when f_{att} 's attack accuracy is random guess (under $\frac{1}{2}$). This happens when f_{trg} nearly follows DEMPAR where $\mathcal{A}dv$'s f_{att} is optimal on $\mathcal{D}_{tr}$ but worse than random guess for $\mathcal{D}_{te}$.

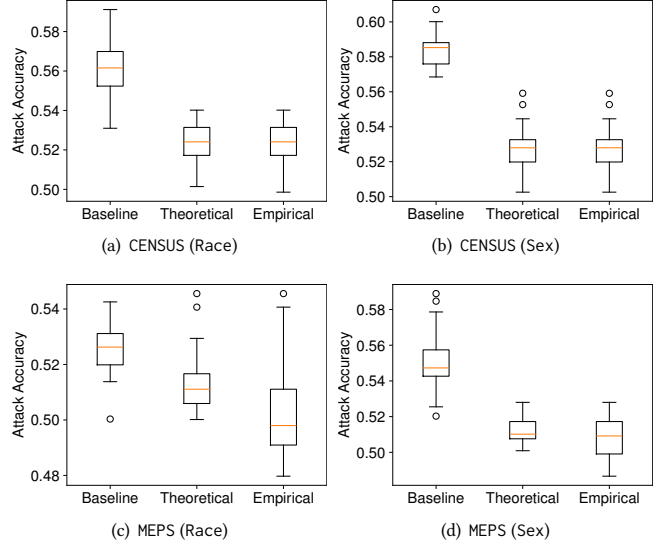


Figure 4: For ADAPTAIA-H, we observe that EGD reduces the attack accuracy to random guess ($\sim 50\%$).

Trade-off with f_{trg} 's Utility. Using group fairness improves the attribute privacy, but comes at the cost of f_{trg} 's utility [1]. To quantify this impact, we compare in Figure 12 the accuracy of f_{trg} with and without using EGD + DEMPAR. Results show that the utility is reduced by 15% CENSUS and 5% for MEPS datasets. This trade-off with the utility of f_{trg} is inherent to the group fairness algorithms [42, 45, 50, 54].

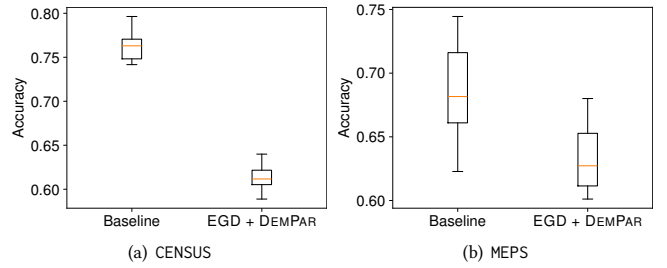


Figure 5: Imposing fairness with EGD + DEMPAR has a significant impact on the accuracy of f_{trg} , matching with the observation from prior work [1]

Sanity Check for Fairness. We now quantify group fairness as measured by DEMPAR-level with and without training f_{trg} with EGD + DEMPAR (the lower the better). As seen in Figure 6, we observe that f_{trg} with EGD + DEMPAR has significantly lower DEMPAR-level which is closer to zero as compared to baseline. Hence, EGD + DEMPAR is effective in achieving group fairness.

Summary: Considering our theoretical and empirical evaluation, we conclude that EGD + DEMPAR induces attribute privacy.

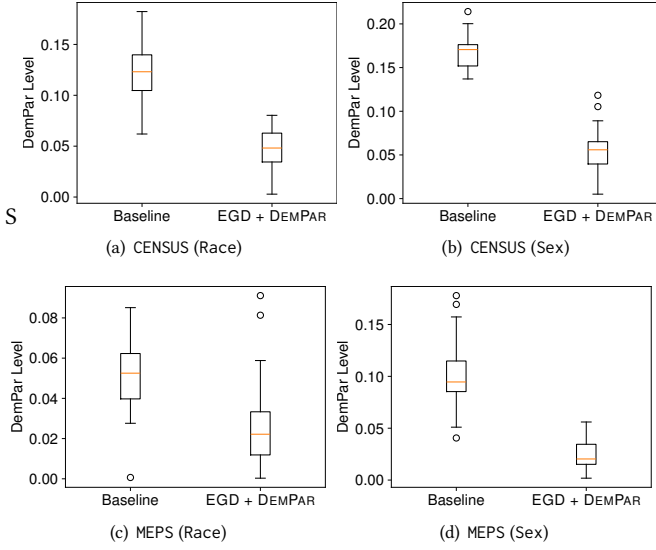


Figure 6: DEMPAR – Level close to 0 indicates that EGD + DEMPAR successfully imposes fairness to f_{trg} .

This alignment allows us to calibrate the two dimensional trade-off between group fairness and utility while accounting attribute privacy.

7 ALIGNMENT OF ADVDEBIAS

We now consider ADVDEBIAS under threat model **TM2** as it outputs soft labels. As described Section 2.3, ADVDEBIAS minimizes the success of f_{disc} to correctly infer the value of S , which makes the predictions indistinguishable. We can view f_{disc} as a weak AIA without adaptive threshold. Since ADVDEBIAS accounts for f_{disc} , we conjecture that the success of ADAPTAIA will decrease but not completely, thereby aligning attribute privacy. We validate this conjecture both theoretically and empirically.

ADVDEBIAS: Theoretical Guarantees We first theoretically show that using ADVDEBIAS bounds the balanced attack accuracy to random guess (proof in Appendix D).

Theorem 7.1. The following propositions are equivalent:

- $\hat{Y}_S$ is independent of S ;
- Balanced accuracy of ADAPTAIA-S is $\frac{1}{2}$.

ADVDEBIAS: Empirical Evaluation We will now empirically validate the above theoretical guarantee by evaluating f_{trg} trained with ADVDEBIAS against ADAPTAIA-S. This evaluation of ADVDEBIAS using the soft labels can be converted to hard labels for using ADAPTAIA-H. Due to space constraints, this section only reports the results of ADAPTAIA-S, leaving the results of ADAPTAIA-H in Appendix D. Similarly to Section 6, we only report results for CENSUS and MEPS and move the results for other datasets in Appendix D.

To evaluate the alignment of the fairness constraint imposed by ADVDEBIAS with attribute privacy, we compare in Figure 7 the attack success of ADAPTAIA-S on the target model trained with and without group fairness using ADVDEBIAS. Results show that

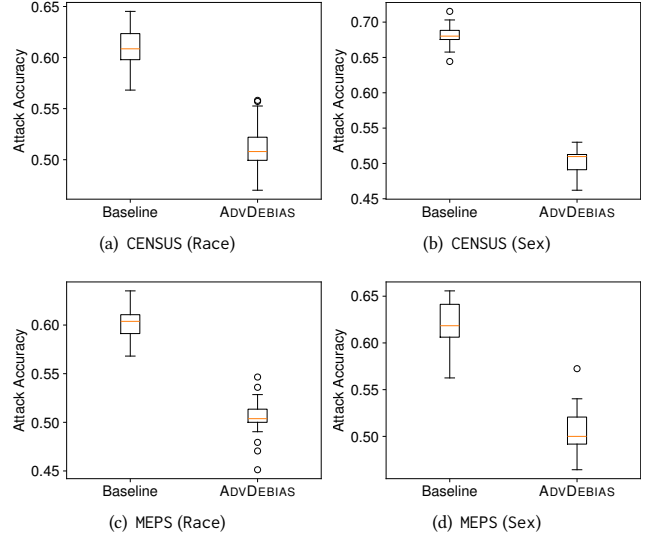


Figure 7: We observe that ADVDEBIAS reduces the attack accuracy to random guess ($\sim 50\%$).

for all datasets ADVDEBIAS reduces the attack accuracy close to random guess (i.e., 50%) regardless of the value of the attack accuracy without group fairness (i.e., Baseline).

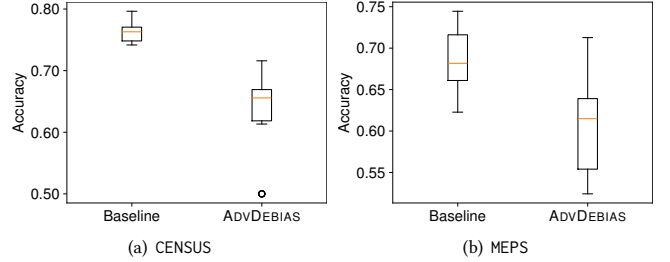


Figure 8: By imposing a constraint of fairness, ADVDEBIAS introduces a significant drop in f_{trg} 's accuracy, which is consistent with prior works [55, 57].

Trade-off with f_{trg} 's Utility. We now quantify the impact on f_{trg} 's utility on using ADVDEBIAS (Figure 8). We report the model accuracy on $\mathcal{D}_{te}$ for f_{trg} with and without ADVDEBIAS. Results show that there is a significant decrease in utility on using ADVDEBIAS across all datasets. However, this trade-off between group fairness and utility is consistent with prior works [55, 57].

Sanity Check for Fairness. We now quantify the fairness as measured by DEMPAR-level with and without training f_{trg} with ADVDEBIAS (Figure 9). Results show that f_{trg} with ADVDEBIAS has significantly lower DEMPAR-level which is closer to zero as compared to baseline. Hence, ADVDEBIAS is effective for group fairness.

Summary: Similarly to EGD, considering our theoretical and empirical evaluation, we conclude that ADVDEBIAS induces attribute

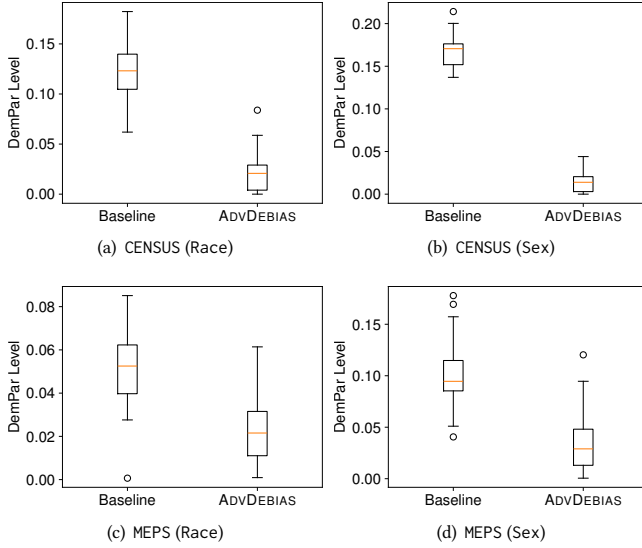


Figure 9: By reducing DEMPAR-Level close to 0 indicates that f_{trg} is fair after ADVDEBIAS.

privacy. This alignment allows us to account attribute privacy while only calibrating the two dimensional trade-off between group fairness and utility.

8 RELATED WORK

AIAs have been extensively studied in the context of online social media where $\mathcal{Adv}$ can leverage user’s behavioural information [5, 22–24, 32, 58]. In ML, AIAs are approached as data imputation challenges [21, 38, 52] and by leveraging intermediate model representations [11, 37, 46], which we extensively cover in Section 2.2. Moreover, $\mathcal{Adv}$ can execute AIA using membership inference attacks as a subroutine [52]. Here, the success of AIA mirrors that of membership inference attacks, hinging on the degree of f_{trg} overfitting. Nevertheless, Zhao et al.[56] establish this link only holds when membership inference attacks are highly effective. If not, AIA offers minimal advantage, despite the model’s vulnerability to membership inference attacks. Additionally, AIAs are effective against model explanations, presenting a compromise between attribute privacy and transparency [12].

Defenses against AIAs have limited prior literature. Attriguard [31] safeguards sensitive attributes in social networks by introducing adversarial noise to the output predictions, compelling f_{att} to make incorrect classifications. For ML, adversarial training has proven effective in diminishing the inference of sensitive attributes within predictions [57]. This technique can additionally disentangle sensitive features from model representations [17, 26, 36, 40, 51]. An alternative avenue, variational autoencoders, was explored for minimizing AIA[53]; however, Song et al.[46] found these defences to be ineffective.

Interactions between Privacy and Fairness have been explored in prior work [3, 6, 15, 20, 43, 49]. Chang et al. [6] demonstrate that applying in-processing fairness algorithms escalates overfitting, heightening vulnerability to MIAs, particularly affecting minority

subgroups. Additionally, differential privacy and individual fairness share a common goal, with individual fairness encompassing differential privacy as a broader concept [15]. However, differential privacy and group fairness are at odds when there’s performance discrepancy between minority and majority subgroups [3, 20, 43, 49]. Ferry et al. [18] introduced AIA aimed at predicting sensitive attributes from a fair model. Their approach assumes that the group fairness algorithm for f_{trg} is known to $\mathcal{Adv}$, enabling calibration of the attacks. However, in practice, revealing model training specifics for confidentiality is improbable. In distinction from their approach, our attacks function within the context of $\mathcal{Adv}$ ’s blackbox understanding of f_{trg} , and the defenses we present effectively counter such attacks.

9 DISCUSSION AND CONCLUSION

This paper shows that there are no conflicts between group fairness and the specific notion of attribute privacy, which is lacking in the literature. Specifically, through an extensive empirical evaluation and theoretical guarantees, we show that group fairness imposed through the use of ADVDEBIAS and EGD satisfying DEMPAR is aligned with attribute privacy. This alignment means that ensuring group fairness also ensures a protection against the attribute inference attack, which is lacking in the literature. However, ensuring fairness remains at the cost of model utility. To perform our extensive evaluation, we also propose new AIAs which outperform prior works.

Output indistinguishability is a general framework which can be applied to satisfy group fairness instead of explicitly optimizing for different fairness metrics [16]. Any algorithm which falls into the category of output indistinguishability with respect to sensitive attributes is likely to satisfy attribute privacy as it will reduce the ability of $\mathcal{Adv}$ to perform accurate representation-based AIA in a blackbox setting.

Following the setting of prior AIA and fairness [1, 11, 21, 35, 37, 38, 46, 52, 55], we focus on the case where the sensitive attributes are binary. However, for ADAPTAIA-S, the f_{att} can be trained to learn to infer non-binary attributes as well. For ADAPTAIA-H, if we have q classes and there are p sensitive attributes, then there are p^q functions to select from. While this is reasonable for small values, efficiently finding functions for large values is left as future work.

REFERENCES

- [1] Alekh Agarwal, Alina Beygelzimer, Miroslav Dudik, John Langford, and Hanna Wallach. A reductions approach to fair classification. In *International Conference on Machine Learning*, volume 80, pages 60–69, 2018.
- [2] Kiana Alikhademi, Emma Drobina, Diandra Prioleau, Brianna Richardson, Duncan Purves, and Juan E. Gilbert. A review of predictive policing from the perspective of fairness. *Artif. Intell. Law*, 30(1):1–17, mar 2022.
- [3] Eugene Bagdasaryan, Omid Poursaeed, and Vitaly Shmatikov. Differential privacy has disparate impact on model accuracy. In *Advances in Neural Information Processing Systems*, pages 15479–15488, 2019.
- [4] Jason Brownlee. A Gentle Introduction to Threshold-Moving for Imbalanced Classification - MachineLearningMastery.com — machinelearningmastery.com. [Accessed 31-08-2023].
- [5] Abdelberri Chaabane, Gergely Acs, and Mohamed Ali Kaafar. You Are What You Like! Information Leakage Through Users’ Interests. In *Network and Distributed System Security Symposium*, pages 1–14, 2012.
- [6] Hongyang Chang and R. Shokri. On the privacy risks of algorithmic fairness. *2021 IEEE European Symposium on Security and Privacy*, pages 292–303, 2021.
- [7] Graham Cormode. Personal privacy vs population privacy: Learning to attack anonymization. In *ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD ’11, page 1253–1261. Association for Computing

- Machinery, 2011.
- [8] Rachel Cummings, Varun Gupta, Dhamma Kimpara, and Jamie Morgenstern. On the compatibility of privacy and fairness. In *Conference on User Modeling, Adaptation and Personalization*, UMAP'19 Adjunct, page 309–315, 2019.
 - [9] Emiliano De Cristofaro. An overview of privacy in machine learning. *arXiv preprint arXiv:2005.08679*, 2020.
 - [10] Frances Ding, Moritz Hardt, John Miller, and Ludwig Schmidt. Retiring adult: New datasets for fair machine learning. *Advances in Neural Information Processing Systems*, 34, 2021.
 - [11] Amit Sharma Divyat Mahajan, Shruti Tople. Does learning stable features provide privacy benefits for machine learning models? In *NeurIPS PPML Workshop*, 2020.
 - [12] Vasisht Duddu and Antoine Boutet. Inferring sensitive attributes from model explanations. *arXiv preprint arXiv:2208.09967*, 2022.
 - [13] Vasisht Duddu, Sebastian Szyller, and N Asokan. Sok: Unintended interactions among machine learning defenses and risks. *arXiv preprint arXiv:2312.04542*, 2023.
 - [14] Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Rich Zemel. Fairness through awareness, 2011.
 - [15] Cynthia Dwork, Moritz Hardt, Toniann Pitassi, Omer Reingold, and Richard Zemel. Fairness through awareness. In *Innovations in Theoretical Computer Science Conference*, ITCS '12, page 214–226, 2012.
 - [16] Cynthia Dwork, Michael P. Kim, Omer Reingold, Guy N. Rothblum, and Gal Yona. Outcome indistinguishability. In *Proceedings of the 53rd Annual ACM SIGACT Symposium on Theory of Computing*, STOC 2021, page 1095–1108, New York, NY, USA, 2021. Association for Computing Machinery.
 - [17] Harrison Edwards and Amos Storkey. Censoring representations with an adversary. In *International Conference on Learning Representations*, 2016.
 - [18] J. Ferry, U. Aivodji, S. Gambs, M. Huguet, and M. Siala. Exploiting fairness to enhance sensitive attributes reconstruction. In *2023 IEEE Conference on Secure and Trustworthy Machine Learning (SaTML)*, pages 18–41, Los Alamitos, CA, USA, feb 2023. IEEE Computer Society.
 - [19] Ferdinando Fioretto, Cuong Tran, Pascal Van Hentenryck, and Keyu Zhu. Differential privacy and fairness in decisions and learning tasks: A survey. In Lud De Raedt, editor, *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI-22*, pages 5470–5477. International Joint Conferences on Artificial Intelligence Organization, 7 2022. Survey Track.
 - [20] Ferdinando Fioretto, Cuong Tran, Pascal Van Hentenryck, and Keyu Zhu. Differential privacy and fairness in decisions and learning tasks: A survey. *arXiv preprint arXiv:2202.08187*, 2022.
 - [21] Matthew Fredrikson, Eric Lantz, Somesh Jha, Simon Lin, David Page, and Thomas Ristenpart. Privacy in pharmacogenetics: An end-to-end case study of personalized warfarin dosing. In *USENIX Conference on Security Symposium*, SEC'14, page 17–32, 2014.
 - [22] Neil Zhenqiang Gong and Bin Liu. You are who you know and how you behave: Attribute inference attacks via users' social friends and behaviors. In *USENIX Security Symposium*, pages 979–995, 2016.
 - [23] Neil Zhenqiang Gong and Bin Liu. Attribute inference attacks in online social networks. *ACM Trans. Priv. Secur.*, 21(1), 2018.
 - [24] Neil Zhenqiang Gong, Ameet Talwalkar, Lester Mackey, Ling Huang, Eui Chul Richard Shin, Emil Stefanov, Elaine (Runtig) Shi, and Dawn Song. Joint link prediction and attribute inference using a social-attribute network. *ACM Trans. Intell. Syst. Technol.*, 5(2), 2014.
 - [25] Lan-Zhe Guo and Yu-Feng Li. Class-imbalanced semi-supervised learning with adaptive thresholding. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato, editors, *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pages 8082–8094. PMLR, 17–23 Jul 2022.
 - [26] Jihun Hamm. Minimax filter: Learning to preserve privacy from inference attacks. *J. Mach. Learn. Res.*, 18(1):4704–4734, 2017.
 - [27] Moritz Hardt, Eric Price, and Nathan Srebro. Equality of opportunity in supervised learning. In *Advances in Neural Information Processing Systems*, page 3323–3331, 2016.
 - [28] High-Level Expert Group on AI. Ethics guidelines for trustworthy ai. Report, European Commission, Brussels, April 2019.
 - [29] White House. Guidance for regulation of artificial intelligence applications. In *Memorandum For The Heads Of Executive Departments And Agencies*, 2020.
 - [30] Bargav Jayaraman and David Evans. Are attribute inference attacks just imputation? *arXiv preprint arXiv:2209.01292*, 2022.
 - [31] Jinyuan Jia and Neil Zhenqiang Gong. Attriguard: A practical defense against attribute inference attacks via adversarial machine learning. In *USENIX Security*, pages 513–529, 2018.
 - [32] Jinyuan Jia, Binghui Wang, Le Zhang, and Neil Zhenqiang Gong. Attrinfer: Inferring user attributes in online social networks using markov random fields. In *International Conference on World Wide Web*, WWW '17, page 1561–1569, 2017.
 - [33] Emre Kazim, Danielle Mendes Thame Denny, and Adriano Koshiyama. AI auditing and impact assessment: according to the uk information commissioner's office. *AI and Ethics*, Feb 2021.
 - [34] European Union Law. Art. 35 GDPR data protection impact assessment. In *General Data Protection Regulation (GDPR)*, 2018.
 - [35] Gilles Louppe, Michael Kagan, and Kyle Cranmer. Learning to pivot with adversarial networks. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett, editors, *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017.
 - [36] David Madras, Elliot Creager, Toniann Pitassi, and Richard Zemel. Learning adversarially fair and transferable representations. In *Proceedings of Machine Learning Research*, volume 80, pages 3384–3393, 2018.
 - [37] Mohammad Malekzadeh, Anastasia Borovykh, and Deniz Gündüz. Honest-but-curious nets: Sensitive attributes of private inputs can be secretly coded into the classifiers' outputs. In *ACM SIGSAC Conference on Computer and Communications Security*, CCS '21, page 825–844, 2021.
 - [38] Shaguftha Mehnaz, Sayanton V. Dibbo, Ehsanul Kabir, Ninghui Li, and Elisa Bertino. Are your sensitive attributes private? novel model inversion attribute inference attacks on classification models. In *USENIX Security Symposium*, pages 4579–4596, 2022.
 - [39] Ninareh Mehrabi, Fred Morstatter, Nripsuta Saxena, Kristina Lerman, and Aram Galstyan. A survey on bias and fairness in machine learning. *ACM Comput. Surv.*, 54(6), jul 2021.
 - [40] Daniel Moyer, Shuyang Gao, Rob Brekelmans, Greg Ver Steeg, and Aram Galstyan. Invariant representations without adversarial training. In *Advances in Neural Information Processing Systems*, 2018.
 - [41] Neha Patki, Roy Wedge, and Kalyan Veeramachaneni. The synthetic data vault. In *IEEE International Conference on Data Science and Advanced Analytics (DSAA)*, pages 399–410, Oct 2016.
 - [42] Carlos Pinzon, Catuscia Palamidessi, Pablo Piantanida, and Frank Valencia. On the incompatibility of accuracy and equal opportunity. *Machine Learning*, pages 1–30, 05 2023.
 - [43] David Pujol, Ryan McKenna, Satya Kuppam, Michael Hay, Ashwin Machanavajjhala, and Jerome Miklau. Fair decision making using privacy-protected data. In *Conference on Fairness, Accountability, and Transparency*, FAT* '20, page 189–199, 2020.
 - [44] Sivaramakrishnan Rajaraman, Prasanth Ganesan, and Sameer K. Antani. Deep learning model calibration for improving performance in class-imbalanced medical image classification tasks. *PLoS ONE*, 17, 2021.
 - [45] Kit T Rodolfa, Hemank Lamba, and Rayid Ghani. Empirical observation of negligible fairness–accuracy trade-offs in machine learning for public policy. *Nature Machine Intelligence*, 3(10):896–904, 2021.
 - [46] Congzheng Song and Vitaly Shmatikov. Overlearning reveals sensitive attributes. In *International Conference on Learning Representations*, 2020.
 - [47] Anshuman Suri, Yifu Lu, Yanjin Chen, and David Evans. Dissecting distribution inference. In *2023 IEEE Conference on Secure and Trustworthy Machine Learning (SaTML)*, pages 150–164. IEEE, 2023.
 - [48] Elham Tabassi, Kevin J. Burns, M. Hadjimichael, Andres Molina-Markham, and Julian Sexton. A taxonomy and terminology of adversarial machine learning. In *NIST Interagency/Internal Report*, 2019.
 - [49] Cuong Tran, My H Dinh, Kyle Beiter, and Ferdinando Fioretto. A fairness analysis on private aggregation of teacher ensembles. *arXiv preprint arXiv:2109.08630*, 2021.
 - [50] Akshaj Kumar Veldanda, Ivan Brugere, Jiahao Chen, Sanghamitra Dutta, Alan Mishler, and Siddharth Garg. Fairness via in-processing in the over-parameterized regime: A cautionary tale with mindiff loss. *Transactions on Machine Learning Research*, 2023.
 - [51] Qizhe Xie, Zihang Dai, Yulun Du, Eduard Hovy, and Graham Neubig. Controllable invariance through adversarial feature learning. In *Advances in Neural Information Processing Systems*, 2017.
 - [52] Samuel Yeom, Irene Giacomelli, Matt Fredrikson, and Somesh Jha. Privacy risk in machine learning: Analyzing the connection to overfitting. In *IEEE Computer Security Foundations Symposium*, pages 268–282, 2018.
 - [53] Richard Zemel, Yu Wu, Kevin Swersky, Toniann Pitassi, and Cynthia Dwork. Learning fair representations. In *International Conference on Machine Learning*, 2013.
 - [54] Runtian Zhai, Chen Dan, Zico Kolter, and Pradeep Ravikumar. Understanding why generalized reweighting does not improve over erm. 2023.
 - [55] Brian Hu Zhang, Blake Lemoine, and Margaret Mitchell. Mitigating unwanted biases with adversarial learning. In *AAAI/ACM Conference on AI, Ethics, and Society*, AIES '18, page 335–340, 2018.
 - [56] Benjamin Zi Hao Zhao, Aviral Agrawal, Catisha Coburn, Hassan Jameel Asghar, Raghav Bhaskar, Mohamed Ali Kaafar, Darren Webb, and Peter Dickinson. On the (in)feasibility of attribute inference attacks on machine learning models. In *IEEE European Symposium on Security and Privacy*, pages 232–251, 2021.
 - [57] Han Zhao, Jianfeng Chi, Yuan Tian, and Geoffrey J Gordon. Trade-offs and guarantees of adversarial representation learning for information obfuscation. In *Advances in Neural Information Processing Systems*, volume 33, pages 9485–9496, 2020.
 - [58] Elena Zheleva and Lise Getoor. To join or not to join: the illusion of privacy in social networks with mixed public and private user profiles. In *International*

APPENDIX

We provide more details about the notations (Appendix A, plots for distinguishability in predictions (Section B), proofs and empirical results for EGD (Appendix C) and AdvDEBIAS (Appendix D), proof for showing EGD + EQODDS is not aligned (Appendix E), and finally impact of $\mathcal{Adv}$'s distribution on attack success.

A NOTATIONS

We introduce some notations from probability theory which use in the paper. For a set A , the set of subsets of A is given by $\mathcal{P}(A)$. Each element $a \in \mathcal{P}(A)$ is such that $a \subset A$. A tribe $\mathcal{A}$ is a subset of $\mathcal{P}(A)$ that contains: $\emptyset$, A , and is stable by complementary and countable union. Then, we call $(A, \mathcal{A})$ a *measure space*. A measure d is a function $d: \mathcal{A} \rightarrow [0, +\infty]$ such that $d(\emptyset) = 0$ and $d(\bigcup_{i \in \mathbb{N}} A_i) = \sum_{i \in \mathbb{N}} d(A_i)$ for any $(A_1, A_2, \dots) \in \mathcal{A}^{\mathbb{N}}$ with $\forall (i, j) A_i \cap A_j = \emptyset$. We then call $(A, \mathcal{A}, d)$ a *measurable space*. Any function mapping A to B is called a *measurable function* if $\forall b \in \mathcal{B} f^{-1}(b) \in \mathcal{A}$ and we note $f: (A, \mathcal{A}) \rightarrow (B, \mathcal{B})$ or $f: (A, \mathcal{A}, d) \rightarrow (B, \mathcal{B})$.

In the special case where $d(A) = 1$ we call d a *probability measure*. We then call $(A, \mathcal{A}, d)$ a *probability space* and the measurable functions on this space are *random variables*.

$\hat{S} = 1_{[0.5, 1]} \circ \text{farg} \circ \text{ftrg} \circ X$ translates to S is equal to the composition of four functions: the random variable X , ftrg , farg and the indicator function of the set $[0.5, 1]$. We summarize all important notations used in our paper in Table 3.

Table 3: Summary of notations used in the paper.

Notation	Meaning
$\mathcal{Adv}$	Adversary
ftrg	Target model being attacked
$\text{ftrg} \circ X$ or $\text{ftrg}(X(\omega))$	Predictions
$\hat{Y}_h(\omega)$	Prediction (Hard label)
$\hat{Y}_s(\omega)$	Prediction (Soft label)
farg	$\mathcal{Adv}$'s Attack model
farg_{disc}	Discriminator network for AdvDEBIAS
$\mathcal{D}_{tr}$	Data used to train the target model
$\mathcal{D}_{te}$	Data used to test the target model
$\mathcal{D}_{aux}$	Auxiliary data available to the adversary
$\mathcal{D}_{aux}^{tr}$	$\mathcal{Adv}$'s dataset to train attack model
$\mathcal{D}_{aux}^{te}$	$\mathcal{Adv}$'s dataset to evaluate attack model
v	Threshold on farg 's output
X	Random variable of non-sensitive attributes
Y	Random variable of classification labels
S	Random variable of sensitive attributes
$X(\omega), Y(\omega), S(\omega)$	Specific instances parameterized by ω
$(\Omega, \mathcal{T}, \mathcal{P})$	Probability space
$(E, \mathcal{U})$	Measurable space
$\mathcal{B}$	Borel tribe (σ -algebra)

B PREDICTION DISTINGUISHABILITY

To better understand the impact of bias in $\mathcal{D}_{tr}$ on predictions, we plot the conditional densities of $\text{ftrg} \circ X$ for Race and Sex (each taking values $S = 0$ and $S = 1$) in Figure 10. We observe that $\text{ftrg}(X(\omega))$ are distinguishable for different values of $S(\omega)$, even when it is not included in the input. For CENSUS, the distributions for

both Race and Sex corresponding to the minority group (e.g., blacks and females) have a larger peak for lower output probability values. This indicates that the classifier is likely to predict <50K salary for non-white and females compared to members of the majority group. For COMPAS, ftrg is likely to predict males and blacks to re-offend more compared to females or whites. Furthermore, in MEPS the distributions look similar but the use of medical resources is lower for blacks and females. Finally for LFW, males and blacks are likely to be predicted as being >35. To account for the skew in predictions and class imbalance, we want to use an adaptive threshold.

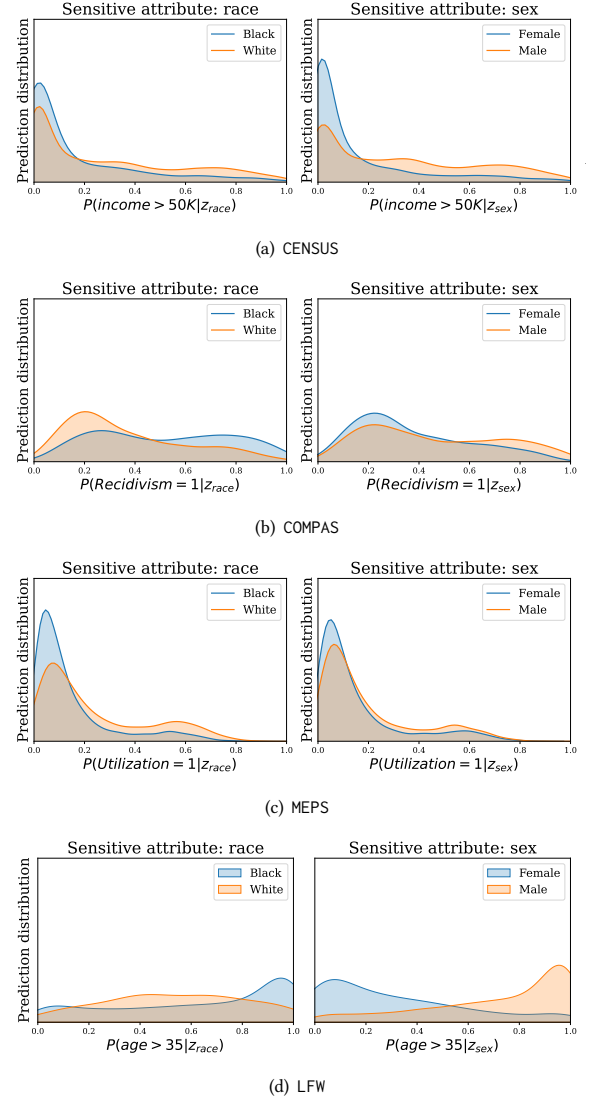


Figure 10: Distinguishable output predictions for two sub-groups identified by Race and Sex. $\mathcal{Adv}$ exploits this to infer $S(\omega)$ for an arbitrary input data record.

C EGD + DEMPAR

We first present the proof for the Theorem 6.1. We then present empirical results to the success of ADAPTAIA showing that f_{trg} trained with EGD + DEMPAR is fair compared to the baseline as a sanity check. Finally, we present the impact on f_{trg} 's utility on using EGD + DEMPAR.

Theorem 6.1. The maximum balanced accuracy achievable by AH is equal to $\frac{1}{2}(1 + \text{DEMPAR_level of } f_{trg})$.

PROOF. The set B of function from $\{0, 1\}$ to $\{0, 1\}$ contains four elements: $b_0 = 0$, $b_1 = id$, $b_2 = 1 - id$ and $b_3 = 1$, where $\forall x, id(x) = x$. For every $b \in B$ the balanced AIA accuracy is $BA(b) = \frac{1}{2}(P(b \circ \hat{Y} = 0|S = 0) + P(b \circ \hat{Y} = 1|S = 1))$. We have $BA(b_0) = BA(b_3) = \frac{1}{2}$, hence, we can discard those elements when solving the attack optimisation problem. This problem writes $\max_{b \in B} BA(b) = \max(BA(b_1), BA(b_2))$. We remark that $b_1 \circ \hat{Y} = \hat{Y}$ and $b_2 \circ \hat{Y} = 1 - \hat{Y}$. Hence,

$$\begin{aligned} BA(b_1) &= \frac{1}{2}(P(\hat{Y} = 0|S = 0) + P(\hat{Y} = 1|S = 1)) \\ &= \frac{1}{2}(1 + P(\hat{Y} = 1|S = 1) - P(\hat{Y} = 1|S = 0)) \\ BA(b_2) &= \frac{1}{2}(1 + P(\hat{Y} = 1|S = 0) - P(\hat{Y} = 1|S = 1)) \end{aligned}$$

Thus,

$$\begin{aligned} \max_{b \in B} BA(b) &= \frac{1}{2} \left(1 + \max \left(\begin{array}{l} P(\hat{Y} = 0|S = 0) - P(\hat{Y} = 1|S = 1) \\ P(\hat{Y} = 1|S = 0) - P(\hat{Y} = 1|S = 1) \end{array} \right) \right) \\ &= \frac{1}{2} (1 + |P(\hat{Y} = 1|S = 1) - P(\hat{Y} = 1|S = 0)|) \end{aligned}$$

□

Additional Results: ADAPTAIA-H. We present additional results for COMPAS and LFW evaluating the effectiveness of EGD + DEMPAR against ADAPTAIA-H. Similar to Section 6, we observe that the success of ADAPTAIA-H decreases on using EGD + DEMPAR compared to Baseline (Figure 11). Additionally, the theoretical bound on attack accuracy (Theoretical) matches with the empirical results (Empirical).

Additional Results: Impact on Utility. We now present the impact on f_{trg} 's utility on using EGD + DEMPAR for COMPAS and LFW (Figure 12). We find that the utility degrades on using EGD + DEMPAR which is in line with findings from prior work [1]. In other words, group fairness comes at the cost of accuracy.

Additional Results: Fairness. For COMPAS and LFW, we present the DEMPAR-level with and without training f_{trg} with EGD + DEMPAR (Figure 13). We observe that f_{trg} with EGD + DEMPAR has significantly lower DEMPAR-level which is closer to zero as compared to Baseline. Hence, EGD + DEMPAR is effective to achieve group fairness.

D ADVDEBIAS

We first present the proof of Theorem 7.1 followed by results showing that models trained with AdvDEBIAS is indeed fair as a sanity check. Finally, we show the impact of using AdvDEBIAS on f_{trg} 's utility.

We present the theorem and proof which bounds AIA accuracy to random guess on using AdvDEBIAS. We remark that the definition 2.1 of DEMPAR can be written synthetically as the following

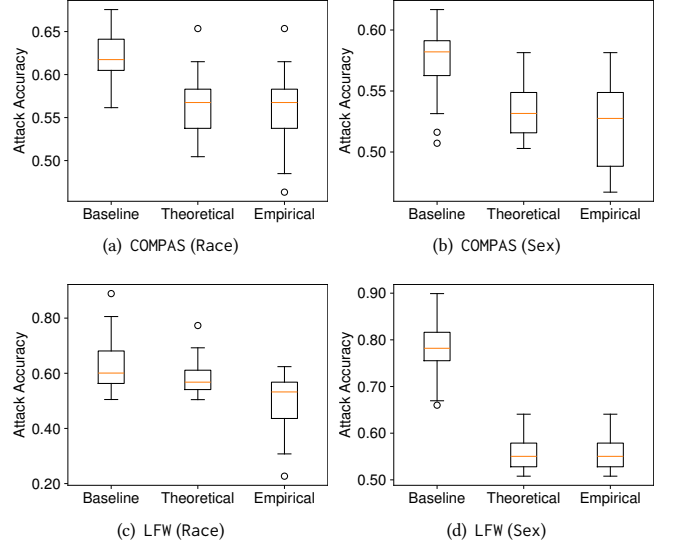


Figure 11: For ADAPTAIA-H, we observe that EGD reduces the attack accuracy to random guess (~50%).

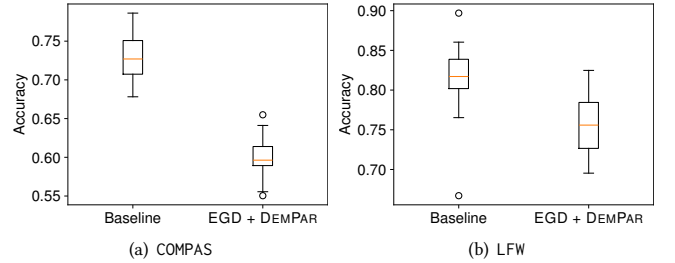


Figure 12: Utility degradation for EGD: We observe a statistically significant drop in f_{trg} 's accuracy on using EGD + DEMPAR which matches the observation from prior work [1].

property: $P_{\hat{Y},S} = P_{\hat{Y}} \otimes P_S$. Where $P_{\hat{Y}} \otimes P_S$ is the product measure defined as the unique measure on $\mathcal{P}(\mathcal{Y}) \times \mathcal{P}(\mathcal{S})$ such that $\forall y \in \mathcal{P}(\mathcal{Y}) \forall s \in \mathcal{P}(\mathcal{S}) \quad P_{\hat{Y}} \otimes P_S(y \times s) = P_{\hat{Y}}(y)P_S(s)$. This definition of DEMPAR is equivalent to definition 2.1 for binary labels and sensitive attribute but more general because when $\hat{Y}$ is not binary as in soft labels, this new definition is well defined. We write formally

Definition D.1. $\hat{Y}$ satisfies extended DEMPAR for S if and only if: $P_{\hat{Y},S} = P_{\hat{Y}} \otimes P_S$.

We remark that we can not derive a quantity similar to DEMPAR-level with this definition but this extended DEMPAR assures indistinguishability of the sensitive attribute when looking at the soft labels. We have the following theorem:

Theorem 7.1. The following propositions are equivalent

- $\hat{Y}$ satisfies extended DEMPAR for S
- The balanced accuracy of ADAPTAIA-S is $\frac{1}{2}$

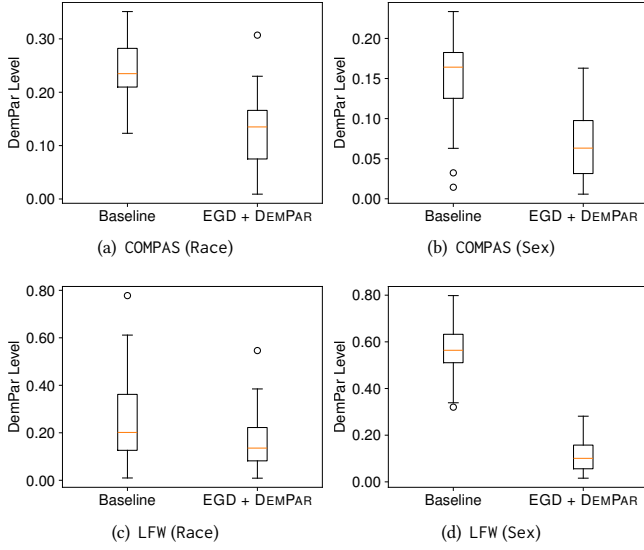


Figure 13: DEMPAR-Level for EGD: We observe that DEMPAR-Level is lower for EGD than the baseline indicating f_{trg} is fair after EGD.

PROOF.

$$\begin{aligned}
& \forall a P(\hat{Y} \in a^{-1}(\{0\})|S=0) + P(\hat{Y} \in a^{-1}(\{1\})|S=1) = 1 \\
& \Leftrightarrow \forall a P(\hat{Y} \in a^{-1}(\{0\})|S=0) = P(\hat{Y} \in a^{-1}(\{0\})|S=1) \\
& \Leftrightarrow \forall a P(\hat{Y} \in A)|S=0) = P(\hat{Y} \in A|S=1) \\
& \Leftrightarrow P_{\hat{Y},S} = P_{\hat{Y}} \otimes P_S
\end{aligned}$$

□

Adversarial Debiasing aims to imposing $P_{\hat{Y},S} = P_{\hat{Y}} \otimes P_S$ hence Adversarial Debiasing mitigates ADAPTAIA-S.

Additional Results: ADAPTAIA-S. We present additional results for COMPAS and LFW in Figure 14 showing that AdvDEBIAS is effective to mitigate ADAPTAIA-S consistent with the results in Section 7.

Additional Results: ADAPTAIA-H. Since, AdvDEBIAS reveals soft labels, we can convert them into hard labels to evaluate against ADAPTAIA-H. We present the evaluation for all the datasets in Figure 15. We observe that AdvDEBIAS can successfully lower the attack accuracy of ADAPTAIA-H. Additionally, we note that the theoretical bound on attack accuracy matches with the empirical attack accuracy.

Additional Results: Impact on Utility. We now present the impact on f_{trg} 's utility on using AdvDEBIAS on remaining datasets: COMPAS and LFW. Similar to results in Section 7, we observe a drop in accuracy in Figure 16 on using AdvDEBIAS which is a known trade-off observed in prior works.

Additional Results: Fairness. For COMPAS and LFW, we measure DEMPAR-level with and without AdvDEBIAS (Figure 17). Similar to results in Section 7, we note that there is a decrease in DEMPAR-level on using AdvDEBIAS indicating that AdvDEBIAS is effective in achieving group fairness.

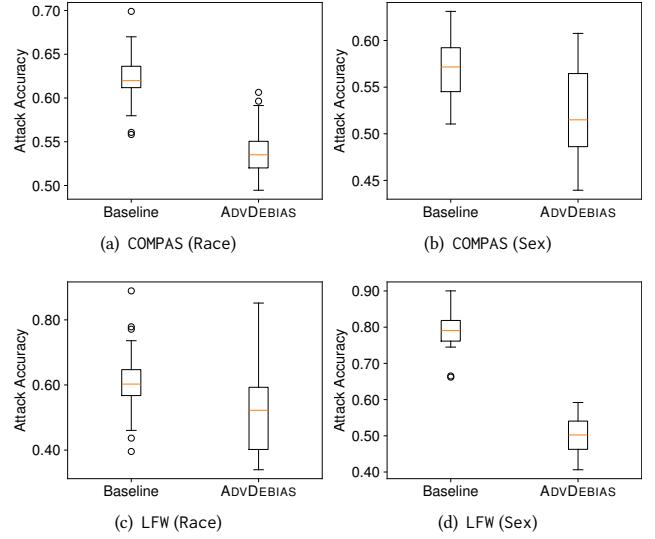


Figure 14: We observe that AdvDEBIAS reduces the attack accuracy to random guess ($\sim 50\%$).

E EGD + EQODDS

In this section, we theoretically show that EQODDS cannot mitigate ADAPTAIA-H and by consequence ADAPTAIA-S.

Theorem E.1. If $\hat{Y}$ satisfies EQODDS for Y and S then the balanced accuracy of ADAPTAIA-H is $\frac{1}{2}$ iff Y is independent of S or $\hat{Y}$ is independent of Y .

Theorem E.1. If $\hat{Y}$ satisfies EQODDS for Y and S then the balanced accuracy of ADAPTAIA-H is $\frac{1}{2}$ if and only if Y is independent of S or $\hat{Y}$ is independent of Y .

PROOF. Let f_{att} be the attack model trained for AS: $\hat{S} = a \circ \hat{Y}$. By the total probability formula

$$\begin{aligned}
P(\hat{S} = 0|S=0) &= P(\hat{S} = 0|S=0, Y=0)P(Y=0|S=0) \\
&\quad + P(\hat{S} = 0|S=0, Y=1)P(Y=1|S=0)
\end{aligned}$$

and as well

$$\begin{aligned}
P(\hat{S} = 1|S=1) &= P(\hat{S} = 1|S=1, Y=0)P(Y=0|S=1) \\
&\quad + P(\hat{S} = 1|S=1, Y=1)P(Y=1|S=1)
\end{aligned}$$

Then we substitute those terms in the definition of the balanced accuracy of the target model.

$$\begin{aligned}
& \frac{P(\hat{S} = 0|S=0) + P(\hat{S} = 1|S=1)}{2} \\
&= \frac{1}{2} + \frac{1}{2} (P(Y=0|S=0) - P(Y=0|S=1)) \\
&\quad \left(P(\hat{Y} \in f_{att}^{-1}(\{1\})|S=1, Y=0) - P(\hat{Y} \in f_{att}^{-1}(\{1\})|S=1, Y=1) \right)
\end{aligned}$$

The balanced accuracy is equal to 0.5 if and only if $P(Y=0|S=0) = P(Y=0|S=1)$ or $\forall f_{att} P(\hat{Y} \in f_{att}^{-1}(\{1\})|S=1, Y=0) = P(\hat{Y} \in f_{att}^{-1}(\{1\})|S=1, Y=1)$. The first term indicates that Y is independent of S and the second term indicates that $S=1$ the f_{trg} random guess utility. We can do the same computing for $S=0$ and obtain a similar conclusion. □

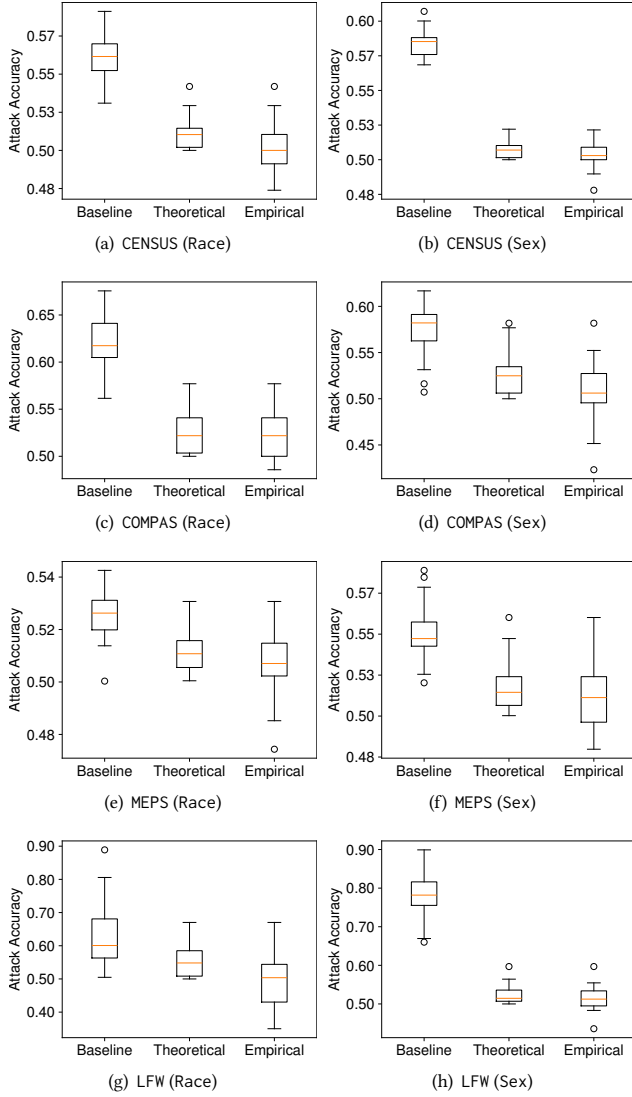


Figure 15: For ADAPTAIA-H, we observe that ADVDEBIAS reduces the attack accuracy to random guess ($\sim 50\%$).

Those two conditions are unlikely to happen in the real-world. The condition of Y being independent of S was not observed for our datasets. We evaluate $|P(Y = 0|S = 0) - P(Y = 0|S = 1)|$ where a high value indicates Y and S are dependent. For Race and Sex, we found these values to be 0.05 and 0.27 (COMPAS), 0.20 and 0.13 (CENSUS) and 0.07 and 0.13 (MEPS) respectively. Further, the independence between $\hat{Y}$ and Y means that f_{trg} has random guess utility. Hence, in practice, EQODDS aligns by reducing the risk to AIAs but does not *perfectly align* as seen in DEMPAR by reducing AIAs to random guessing. The choice of fairness metric is important for EGD for perfect alignment.

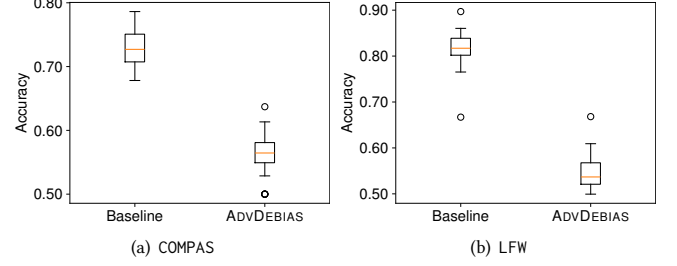


Figure 16: Utility degradation for AdvDEBIAS: We observe a statistically significant drop in f_{trg} 's accuracy on using AdvDEBIAS.


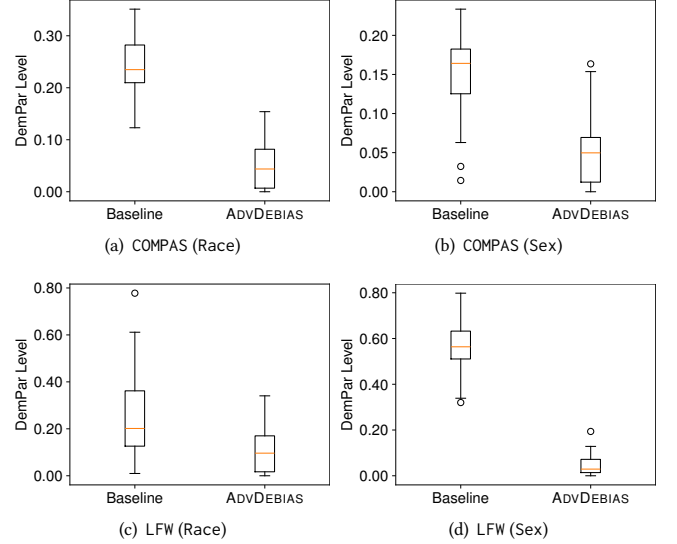


Figure 17: DEMPAR-Level for AdvDEBIAS: We observe that DEMPAR-Level is lower for AdvDEBIAS indicating f_{trg} is fair.


F IMPACT OF $\mathcal{A}_{adv}$ 'S $\mathcal{D}_{aux}$ DISTRIBUTION

Recall from Section 4, the distribution of $\mathcal{D}_{aux}$ is the same as $\mathcal{D}_{tr}$. However, in practice, $\mathcal{A}_{adv}$ can sample $\mathcal{D}_{aux}$ from a different distribution. To evaluate this, we consider CENSUS but from different US states by using [10]. We evaluate the success of ADAPTAIA-H and ADAPTAIA-S against EGD, ADVDEBIAS and a baseline without any fairness specific algorithm for different samples of $\mathcal{D}_{aux}$. We trained f_{trg} on the CENSUS data of Alabama and then we set $\mathcal{D}_{aux}$ to be every other state one after the other. That way we obtain an attack balanced accuracy per state.


To evaluate the shift of distribution from Alabama' CENSUS to the other state, we use the quality report provided by the Synthetic Data Vault [41]. This score leverages multiple statistical metrics to evaluate how close two distributions are. We then scale this score in $[0, 1]$: a score of 1 indicates no shift while a score of 0 indicates the farther away state from Alabama in terms of distribution.

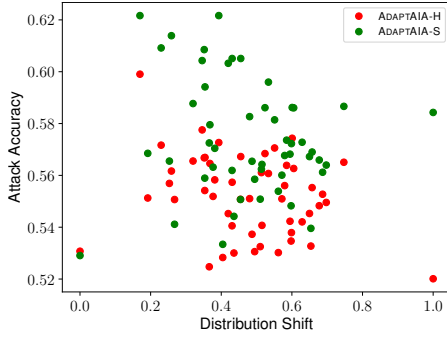

(a) Baseline

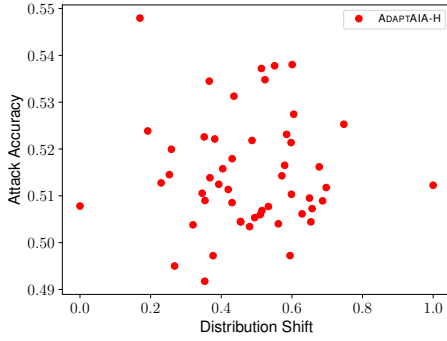

(b) EGD + DEMPAR

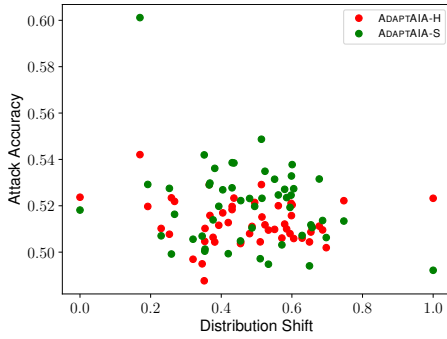

(c) ADVDEBIAS

Figure 18: Impact on attack success of distribution shift between the training set of the target model, $\mathcal{D}_{tr}$, and the auxiliary knowledge used by the adversary to conduct the attack, $\mathcal{D}_{aux}$ (CENSUS dataset).

We present our results in Figure 18. As expected, we observe that EGD and ADVDEBIAS are still successful in mitigating ADAPTAIA-H and ADAPTAIA-S regardless of $\mathcal{A}dv$'s $\mathcal{D}_{aux}$ distribution.