Wood traceability system using blockchain and zero-knowledge proof

K. Shibano¹, T. Nakajima² and G. Mogi¹

Department of Technology Management for Innovation, The University of Tokyo, Tokyo, Japan Department of Forest Science, The University of Tokyo, Tokyo, Japan E-mail: shibano@tmi.t.u-tokyo.ac.jp

Summary: The system proposed in this study uses zero-knowledge proof (ZKP) to verify the traceability of wood recorded in a public blockchain. Wood is a byproduct of several states, ranging from standing trees to logs, lumber, and wood products (hereinafter "wood objects"). The advantage of using the blockchain for record keeping is that participants can freely record the information at their discretion, without any restrictions. However, the openness of the blockchain may allow a malicious third party to introduce disinformation. In this study, we employ ZKP and near-field communication (NFC) chips to eliminate the possibility of disinformation introduction. ZKP is used to prove/validate changes in the state of wood objects, and the unique nonce associated with that state is encrypted and recorded on an NFC chip. The nonce is concealed and id of the wood object is defined as hash value of this nonce. We developed a prototype system based on an Android application and an Ethereum smart contract. We confirm that wood traceability and verification can be performed using the prototype system.

Keywords: blockchain, traceability, supply chain management, zero-knowledge proof, NFC, wood, logs, lumber.

1. Introduction

In this study, we propose a traceability system for trees, logs, lumber, and final wooden products based on a public blockchain and zero-knowledge proof (ZKP). The blockchain has the advantage of allowing any user to keep records on it without restrictions. Furthermore, because records can be kept semipermanently, it is possible to avoid the loss of existing tree records. However, because anyone can input a record on the blockchain, there is a possibility that third parties will record malicious disinformation. For example, if there is a very expensive tree, a person may wish to mislead others by claiming that his log was generated by that tree. ZPK can be used to verify which trees are used to make wood and which wood products are made from which wood, eliminating the possibility of disinformation. This can be done by using only the records on the blockchain. We have developed a prototype system using an Android application and an Ethereum smart contract to verify its operation.

End users will be able to confirm the origin of wood products using the proposed system. This may provide high added value that could not be realized until now. For example, a good-luck charm for academic success in school made from a tree on the campus of the same university may have a high added value. It would also help to reduce illegal timber.

2. Related studies

Several wood traceability systems that use blockchain have been proposed. Figorilli et al. (2018) use RFID, the blockchain, and a client-server application to implement a wood traceability system [1]. Cueva-Sánchez et al. (2020) propose a system that uses Hyperledger Fabric to eliminate illegal wood in the wood supply chain. They developed web and mobile applications [2]. There exists wood traceability

system using not only blockchain but also ZKP. Xue et al. (2022) propose ZKP for a public blockchain-based system to prove transactions while ensuring privacy protection [3]. Baliyanet et al. (2021) propose a highly transparent system that utilizes blockchain and RFID for general supply chain management systems. It prevents fraud by having the Law Enforcing Agency assess transactions. They mention wood traceability as an area of application [4]. Further details on blockchain-based wood traceability systems can be found in He and Turner (2022) [5]. The novelty of this study is that it uses ZKP to prove traceability. Traceability can be verified by the information in the blockchain only.

3. Zero-knowledge proof

ZKP is a protocol that allows a prover to tell a verifier that a proposition is true without conveying any knowledge other than that the proposition is true. We use zkSNARKs, a noninteractive zero-knowledge proof protocol used in many blockchain applications. The process to be proven has inputs and outputs and is converted into a circuit. Then, a trusted setup ceremony is performed to generate proving and verification keys. The prover generates a witness using the circuit, the proving key, and input. The verifier can confirm that the prover used the correct value for the private input using the verification key for the proof and public output. The public output is the output of the process and the value of the public input.

4. System overview

In this system, historical state records of wood supply chains, such as trees, logs, lumber, and wood products (hereinafter "wood objects") can be verified by referring to only blockchain records. A supply chain record has a tree structure and the state changes in one direction. We assume there are two users of the

proposed system: a prover and a verifier. The prover is a wood object producer or processor, and the verifier is a consumer. The prover uses an Android application to record unique information of the wood object on a near-field communication (NFC) chip and generate a proof of ZKP. The NFC chip is attached to the corresponding wood object, and a proof of ZKP is simultaneously recorded to the blockchain when information is recorded on the NFC chip. The verifier can verify the wood object's traceability by verifying the proof. When writing to the blockchain, the signature is also recorded, allowing verification of who wrote the record. The key pair of the private and public keys of elliptic curve cryptography is stored in the Android application and can be used for signing and encryption/decryption. The Elliptic Curve Digital Signature Algorithm (ECDSA) is used for signatures, and the Elliptic Curve Integrated Encryption Scheme (ECIES) is used for public key cryptography.

5. Design of Android application and developing environment

The prototype system comprises an Android application, an Ethereum blockchain, and an NFC chip.

In this system, we use circom and snarkjs [6] for ZKP as libraries to implement. snarkjs [6] is used in the Android application to generate proof. The circuit and proving key data loaded in snarkjs are generated previously in the PC using circom, whose ZKP scheme is Plonk. Since it is a JavaScript library, it cannot be run directly in the application. A web server is set up within the application and accessed via WebView. web3j [7] connects to the Ethereum blockchain.

Key pairs associated with Ethereum's externally owned accounts are used for keys related to ECDSA and ECIES. The private key is stored in the application's storage area, bouncycastle [8] is used as the ECIES library, and web3j is used for the ECDSA library.

The Ethereum smart contract only records data for which the ECDSA signature and the proof of ZKP have been verified, and the ZKP verification contract is the snarkis output.

The development environment is Ryzen 3600, 16 GB RAM (Windows 10), the Android device is Pixel3a (Android 12), the Ethereum blockchain is built locally using Ganache [9], and the NFC chip is MIFARE Classic 1k. Fig. 1 shows the Android device and NFC chip used in the development.




Fig. 1 Android device and NFC chip

6. Proof of traceability by zero-knowledge proof

A random number called "nonce" is encrypted and recorded on the NFC chip with its id. Each wood object *w* has a unique id created, as expressed in (1),

$$id_w = hash(nonce_w). (1)$$

Ids are used to identify wood objects and are related to other metadata in or outside the blockchain. When running a proof/verification process, an error occurs if the id and nonce of the previous wood object state p is not available. In this process, the public input is the id of p, the private input is p-nonce and wnonce, the main process is the calculation of the hash value, and the output is the id of w. The flow of the process is shown in (2). If w is a tree, p-nonce is assigned to 0, and p-id is assigned to a hash value of 0. Process (2) is converted into a circuit using circom [6]. Proving and verification keys are generated based on the circuit. The circuit data and the verification key are built into the Android application. The verification process using the verification key can be performed using an Ethereum smart contract.

```
function CalculateID (
  public input p_id,
  private input p_nonce,
  private input w_nonce) {
  p_hash = hash(p_nonce);
  p_eq = p_hash == p_id;
  w_hash = hash(w_nonce);

  return w_hash * p_eq;
}
```

After a nonce is generated using the prover's Android device, it is recorded on an NFC chip and

then discarded. ECIES encryption is performed using the public key in the device, and the encrypted nonce is recorded on the NFC chip with the id. Therefore, once a nonce is written on the NFC chip, only the prover can decrypt it by reading the NFC chip. To generate an id of wood objects without trees, the parent's nonce is required. The device that recorded prestate in the NFC chip can read and decrypt nonce on that NFC chip. That nonce is received separately from that device, and along with its generated nonce, the public output and proof are generated in the process (2) and recorded in the blockchain. A QR

code is used for transmitting the previous id and nonce between Android devices.

The sequence of all process is shown in Fig. 2. This shows an example that a log is generated from a tree. The first row shows initial setup procedure on PC. Output results are a circuit file and proving and verification keys. The circuit file and proving key are built-in Android application. The verification key is used for smart contract in the blockchain. The second and third rows show how to record the information of the wood objects in the blockchain using Android application.

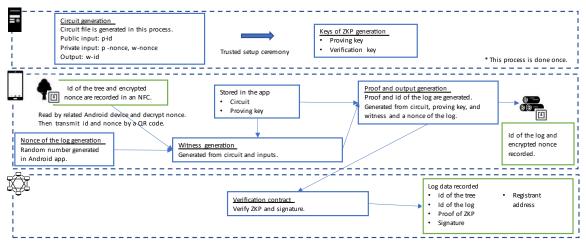


Fig. 2 Schematic of the process flow, from tree to log

7. Prototype experiment

We confirmed that the developed prototype system works correctly. We have simulated a scenario where we cut down a tree and generated a log from it. We conducted two tests: (A) whether the NFC chip can be attached to an actual tree and remain without peeling off over a long period of time and (B) whether verification using the application worked properly.

(A) To check whether it is safe to leave the NFC chip on the tree, it was taped to a tree in a forest managed by the University of Tokyo. We confirmed that it remained there for 6 months without incident (Fig. 3).



Fig. 3 A tree with an NFC chip

(B) Next, we confirmed that only records verified by ECDSA signature and ZKP are recorded in the Ethereum blockchain. There are two Android devices: one for the tree and another for the log. The device for the tree read data from the NFC chip, decrypts nonce, and transmitted the tree nonce to the device for the log by a QR code on the app. The log device generated a new nonce and id of the log. Then, this device generates an id and an encrypted value of the new nonce to a new NFC chip. The proof and public output were recorded in the blockchain.

Table 1 shows data recorded in the blockchain. Each record contains *w*-id, id of its previous wood object, or *p*-id, the proof of ZKP, ECDSA signature, and address of Ethereum. In the first row, the value of *p*-id is a hash value of 0. *w*-id of the first row and *p*-id of the second row is the same. For these two records, the verification of ZKP proof and the ECDSA signature was confirmed in the smart contract, proving that the nonce value of the previous wood object is known to the recorder when generating the second line's record. The ECDSA signature guarantees that the owner of the address performs this process. In other words, it verifies the traceability of a tree object and the recorder's address using only the information recorded in the blockchain.

w -	p -	Proof of ZKP	Signatu	Regist
id	id		re	ant

370043 348918 027287 066100 639847 7613861 878055 352655 522655 52367 691329 159298 675	117302 513592 867237 311414 660957 059014 501703 650945 782888 424869 790425 860339 22425	0x 1442a6.394b656ea3774badd991drbid97f4f33dd5169a2011024 fafeb5772dd1f417ae1a4c6cd7a9116a1d9945c73abcddaf4f28d4 fafeb502023023dca1cbede56248db373-348d601290f656947abcddaf4f128d4 fafe502023023dca1cbede56248db373-3486d601290f656947a 80ccdc60dbc143edb3ccbcc5c5cdbb9d7e18dbac873174668b1998 80ccdc60dbc143edb3ccbc5c5cdbb9d7e18dbac873174668b1998 80cdc60dbc143edb3ccbc5cdb49db7e18dbac873174668b1998 80cdc60dbc143edb3ccbc5cdb49db3ccbc50sfadb363e3e48b853f76d 80cdc60dbc142db3ccbc5cdb49db3ccbc5cdb49db3ccbc8858db76db69db369db69db69db69db69db69db69db69db69db69db	0xa9f3dc7267 c499am7b435b 25c0896374a6 c9ac2af279c8 4db590b7cfe5 ce89a40135s ce49a40135s c	0xed883ff9c af287b84e4a de743d5587 d5532b7e4e
190607 493880 360917 070689 790927 013615 590905 99095 116413 289679 611404 98538	370043 348918 027287 066100 639847 781847 103961 878055 352655 234170 159298 675	0x.238/2a027-ead674e.5a7d890481667974d887649380e.5cd1f4c6 341558824c7ce110c754f7521666d16663fata.21051a5aba46137 541558824c7ce110c754f7521666d16663fata.21051a5aba46137 540502c563f3754606972b167.cd70c9be0thcfabarbathechci 182 4a71512bacd586355c6d41953172e)1490206567898c054d61108 4b90th 798-4d3350c68b002f1614991a464ba462s1_ac4642d 153464c70134125588cb772d6c13536135c0555556d040108 153464c70134125588cb772d6c13536135c0555556d040108 153464c70134125588cb772d6c13536135c0555556d040108 153464c70134125588cb772d6c13536135c05526534ba40372d6c40486264048628181829998c2.2e91866490t6-262877248570h6 24266604688c28818289998c2.2e91866490t6-262877248570h6 24266604688c28818289998c2.2e91866490t6-262877248570h6 24266604688c28818289998c2.2e91866490t6-262877248570h6 24266604688c28181829998c2.2e91866490t6-262877248570h6 24266604688c281818289998c2.2e91866905672627485724850h6 242666066686782212739184664965092612016470648656220 17cecl 2177396da635468666995-3489899494827186788046744 265660678c2048061666677153659666677152512646529 153685716448536746065234c042045576467392046285276860469 265660678c20480616666786467864665270652686469 265660678624669678646786469667866667857152666679 265660678624696786469678646678646678667462866466666786466678666746786466667866678	0x68ce9dt0326 6600f10bbccd 3767fear/Tra2 3205c2df8898 1fabics99a07f 421c35d9080 2755d36babd43 1b193bf121a0 db08a1f327f9 8967c41c	0xab00c6d6 2d94976c50 6d602c3190 8tb89d8651 c2

Table 1 Examples of records recorded in the blockchain

Generally speaking, ZKP proof generation requires much computation and is time-consuming. In the circuit of this study, the number of constraints is 731. We measured the time required to generate proof on an Android device and found that the average time for ten trials was 5,858.6 milliseconds. Pixel3a is a middle-class device several years old, and this time is considered sufficient for practical use.

The gas consumption for the smart contract was 1,030,996 [gas], 10 trials on average, approximately 40.2 USD in terms of gas prices in October 2022 (1 gas = 30 gwei, 1 Ether = 1,300 USD) [10][11]. The transaction cost is high because of the many processes involved in the smart contract, such as verifying ZKP and signatures and registering information.

8. Future work

This study's system only records the traceability relationship of wood objects in the blockchain. However, it is crucial to record additional information associated with each *w*-id; for example, GPS location information, pictures of wood objects, and tree species. Adding such information to traceability will increase its utility. To make it persistent, we plan to record additional information in a distributed database, such as IPFS.

To reduce transaction costs, we consider using another blockchain compatible with EVM.

We should also confirm whether this system can be used without problems for actual lumber processors. We plan to assess this with Japanese companies.

Although this system is applied to the traceability of wood in this study, it can be applied to the traceability of all products with the same relationships. We study what products and goods the system can be applied to and what value it might generate.

9. Conclusions

In this study, we proposed a method for verifying wood traceability using blockchain, NFC chips, and zero-knowledge proof. We constructed a prototype system and confirmed that wood traceability verification can be performed accurately. This system is a sample application of ZKP using an Android application and the Ethereum blockchain, and we hope this study's results will help develop applications using ZKP.

Acknowledgments

This work has been supported by Endowed Chair for Blockchain Innovation and the Mohammed bin Salman Center for Future Science and Technology for Saudi–Japan Vision 2030 (MbSC2030) at The University of Tokyo.

References

[1]. S. Figorilli, et al. A blockchain implementation prototype for the electronic open source traceability of wood along the whole supply chain. *Sensors* 18 (9), 3133, 2018.

[2]. J. J. Cueva-Sánchez, A. J. Coyco-Ordemar, and W. Ugarte. A blockchain-based technological solution to ensure data transparency of the wood supply chain. 2020 IEEE ANDESCON, 2020.

[3]. Y. Xue, and J. Wang. Design of a blockchain-based traceability system with a privacy-preserving scheme of zero-knowledge proof. *Security and Communication Networks* 2022, 2022.

[4]. A. Baliyan, K. S. Kaswan, Akansha, and N. Mittal. Blockchain assembled supply chains to foster secure trading using distributed ledger. 2021 9th International Conference on Reliability, Infocom Technologies and Optimization (Trends and Future Directions)(ICRITO), 2021.

[5]. Z. He, and P. Turner. Blockchain Applications in forestry: a systematic literature review. *Applied Sciences* 12 (8), 3723, 2022.

[6]. Iden3 docs, (https://docs.iden3.io/).

[7]. Web3j: Web3 Java Ethereum Dapp API, (https://github.com/web3j/web3j).

[8]. Bouncycastle,

(https://www.bouncycastle.org/java.html).

[9]. Ganache, (https://trufflesuite.com/ganache/).

[10]. Etherscan Ethereum Gas Tracker (https://etherscan.io/gastracker).

[11]. Coinmarketcap Ethereum (https://coinmarketcap.com/currencies/ethereum/).