# Learn from Yesterday: A Semi-Supervised Continual Learning Method for Supervision-Limited Text-to-SQL Task Streams

# Yongrui Chen<sup>1</sup>, Xinnan Guo<sup>1</sup>, Tongtong Wu<sup>1,2</sup>, Guilin Qi<sup>1</sup>, Yang Li<sup>3</sup>, Yang Dong<sup>4</sup>

<sup>1</sup>School of Computer Science and Engineering, Southeast University

<sup>2</sup>Department of Data Science & AI, Monash University

<sup>3</sup>Alibaba Group

<sup>4</sup>Ant Group

yrchen@seu.edu.cn, guoxinnan0727@163.com, wutong8023@seu.edu.cn, tongtong.wu@monash.edu

yrchen@seu.edu.cn, guoxinnan0727@163.com, wutong8023@seu.edu.cn, tongtong.wu@monash.edu gqi@seu.edu.cn, ly200170@alibaba-inc.com, dongyang1231@gmail.com

#### **Abstract**

Conventional text-to-SQL studies are limited to a single task with a fixed-size training and test set. When confronted with a stream of tasks common in real-world applications, existing methods struggle with the problems of insufficient supervised data and high retraining costs. The former tends to cause overfitting on unseen databases for the new task, while the latter makes a full review of instances from past tasks impractical for the model, resulting in forgetting of learned SQL structures and database schemas. To address the problems, this paper proposes integrating semi-supervised learning (SSL) and continual learning (CL) in a stream of text-to-SQL tasks and offers two promising solutions in turn. The first solution VANILLA is to perform self-training, augmenting the supervised training data with predicted pseudo-labeled instances of the current task, while replacing the full volume retraining with episodic memory replay to balance the training efficiency with the performance of previous tasks. The improved solution SFNET takes advantage of the intrinsic connection between CL and SSL. It uses in-memory past information to help current SSL, while adding high-quality pseudo instances in memory to improve future replay. The experiments on two datasets shows that SFNET outperforms the widelyused SSL-only and CL-only baselines on multiple metrics.

# Introduction

Relational databases (RDs) store a vast amount of today's information and provide the foundation for applications such as customer relationship management (Anshari et al. 2019), financial markets (Lewis et al. 2017), and medical records (Wang, Shi, and Reddy 2020). Text-to-SQL technology trains a parser to translate natural language problems into machine-readable SQL programs, providing an ideal way for non-technical users to easily interact with their data stored in RDs. Current research on text-to-SQL has covered single-table (Zhong, Xiong, and Socher 2017), multitable (Yu et al. 2018), and conversation (Yu et al. 2019a) scenarios, with a common assumption that the size of training and testing data does not change over time. Unfortunately, in real-world applications, new databases are always emerging to adapt to changing circumstances (e.g., new diseases, adjusted financial policies), thus continuously generating new

Copyright © 2022, Association for the Advancement of Artificial Intelligence (www.aaai.org). All rights reserved.




Figure 1: Mutual promotion of SSL and CL. Sup denotes labeled data, Unsup denotes unlabeled data, green cylindrical denotes the database against the task.

tasks for the parser. Although machine learning-based text-to-SQL methods have achieved state-of-the-art (SOTA) performance, they suffer from the following two challenges in the face of rapidly growing tasks.

1) Limited supervised data. For a new text-to-SQL task against unseen databases, it is often impractical to annotate sufficient SQL labels for training in a short period of time, resulting in parsers that are prone to overfitting. 2) Costly full volume retraining. Considering a new task, an intuitive idea is to train the model from scratch on all seen tasks. Unfortunately, the computational cost of such retraining is unaffordable due to the increasing size of pre-trained models, even with limited training data (Wu et al. 2022). Assuming that there are K tasks and the average training time of one task is  $T_{\rm avg}$ , the total time of full volume retraining on these K tasks is  $T = K(K+1)T_{\rm avg}/2$ . When K is large, the squared relationship makes T intolerable.

Existing works provide ideas to address these two challenges separately. First, *semi-supervised learning* (SSL) (Guo et al. 2022) can compensate for the lack of supervised data by mining the potential value of NLQs without SQL labels. Second, *continuous learning* (CL) (Li, Qu, and Haffari 2021) provides an alternative cost-effective train-

ing paradigm without using all instances of previous tasks. However, both of them focuses on one of the challenges but ignores the impact of the other. For text-to-SQL task streams, it remains a pressing issue to address both challenges simultaneously.

In this paper, we propose to integrate SSL and CL to solve the supervision-limited text-to-SQL task stream. We first give a VANILLA solution in which the parser applies self-training to predict pseudo-labeled instances to improve generalization to the current task (SSL) while replaying small portions of past instances stored in memory to alleviate forgetting of previous tasks (CL). Despite its simplicity, VANILLA has experimentally proven to be sufficient to outperform most SSL-only and CL-only methods in text-to-SQL task streams. Thereafter, we further hypothesize that SSL and CL can boost each other. On the one hand, some instances in previous tasks can supply valuable information to SSL for predicting pseudo-labels of unlabeled instances. As shown in Figure 1(a), although instances A and B are associated with different databases, Perpetrator and Race\_track, respectively, the target SQL of A is similar to that of B. The parser might learn from A on how to predict the pseudo-label of B. On the other hand, high-quality pseudo-labeled instances can also enrich the memory of past tasks. In the three tasks shown in Figure 1(b), the pseudo instances can supplement the supervised-only memories in terms of both RD schemas and SQL keywords. Motivated by this, we propose the soft fusion network (SFNET), which applies a teacher-student framework to separately cope with SSL and CL processes. Specifically, TEACHER is committed to the optimum on each single task via self-training, while STUDENT learns the pseudo labels predicted by TEACHER on all seen tasks via replaying to achieve the optimum on the entire task stream. To utilize the mutual promotion of CL and SSL, SFNET performs dual sampling: when training TEACHER, past instances relevant to the current task are used to prompt the SSL process; when training STUDENT, both labeled and unlabeled instances of previous tasks are sampled to guarantee complete memory for replay. Comprehensive experiments on two text-to-SQL benchmarks show that our SFNet further improves on the VANILLA solution, achieving SOTA results on multiple metrics. In summary, the contributions of this paper include:

- We propose a VANILLA solution that combine SSL and CL to solve the problem of supervision-limited text-to-SQL task stream. To the best of our knowledge, this is the first time that the two technologies have been integrated in text-to-SQL.
- Based on the VANILLA solution, we propose an improved solution SFNET that applies a teacher-student framework to isolate the different optimization goals of SSL and CL, and employs a dual sampling strategy to exploit their mutual facilitation.
- We covert two mainstream text-to-SQL datasets into the form of task streams and conduct comprehensive experiments. Our methods outperform the existing CL-only and SSL-only competitors and achieves SOTA performance on multiple metrics.

# **Preliminaries**

### A Base Text-to-SQL Parser

Given an NLQ q and a schema  $\mathcal{S}=(\mathcal{C},\mathcal{T})$  for an RD, conventional text-to-SQL aims to generate a SQL program y by

$$y = \mathcal{F}_{\theta}(q, \mathcal{S}),\tag{1}$$

where  $\mathcal{S}$  consists of columns  $\mathcal{C} = \{c_1,...,c_{|\mathcal{C}|}\}$ , tables  $\mathcal{T} = \{t_1,...t_{|\mathcal{T}|}\}$ , and  $\mathcal{F}_{\theta}$  denotes a parser with parameters  $\theta$ . Most SOTA text-to-SQL parsers for the single task (Guo et al. 2019; Wang et al. 2020a; Cao et al. 2021) represent the desired y as an abstract syntax tree (AST)  $\mathcal{Z}_y$  via a context-free grammar and adopt a sequence-to-sequence architecture (Luong, Pham, and Manning 2015) to synthesize  $\mathcal{Z}_y$ . To make a fair comparison between different learning algorithms, we built a robust parser  $\mathcal{F}_{\theta}$  along their lines.

**Encoder** An strong table pre-trained model GRAPPA (Yu et al. 2021) is employed to encode q and S into a sequence of contextual word representations,  $\mathbf{q}$  and  $\mathbf{S}$ . It was pre-trained on an 866.5k table-text corpus, being injected with structural properties common to the semantic parsing of tables.

**Decoder** A *long short-term memory* (LSTM) network is used as a decoder to synthesize  $\mathcal{Z}_y$  by generating a sequence of actions  $Z(y) = \{z_1, z_2...z_{|Z(y)|}\}$ . These actions determine the SQL skeleton and the used schemas according to a top-down grammar, SEMQL (Guo et al. 2019). In particular, the probability of  $\mathcal{Z}_y$  is estimated by

$$P(\mathcal{Z}_y|\mathbf{q}, \mathbf{S}, \theta) = \prod_{j=1}^{|Z(y)|} P(z_j|\mathbf{q}, \mathbf{S}, z_{< j}, \theta), \qquad (2)$$

where  $z_j$  is the j-th action.  $P(z_j|q,\mathcal{S},z_{< j})$  denotes the predicted probability of  $z_j$ , determined by the normalized inner product of the hidden state  $\mathbf{h}_j$  of the LSTM and the embeddings of candidate actions.

# **Problem Formulation**

In our scenarios,  $\mathcal{F}_{\theta}$  is trained continually by a sequence of K distinct tasks  $\{\mathcal{D}^1, \mathcal{D}^2, ..., \mathcal{D}^K\}$ . Each task  $\mathcal{D}^i$  consists of a labeled training set  $\mathcal{A}^i = \{a_1^i..., a_{|\mathcal{A}^i|}^i\}$ , a validation set  $\mathcal{D}_{\text{valid}}^i$ , and a test set  $\mathcal{D}_{\text{test}}^i$ , where each training instance  $a_k^i = (q_k^i, \mathcal{S}_k^i, \tilde{y}_k^i)$  has a gold SQL program  $\tilde{y}_k^i$  as the label. Considering the limited supervision, we let  $|\mathcal{A}^i|$  far smaller than the size of the general text-to-SQL datasets. In addition, we also assume that there is an unlabeled set  $\mathcal{U}^i = \{u_1^i...,u_{|\mathcal{U}^i|}^i\}$  for  $\mathcal{D}^i$ , where  $u_k^i = (q_k^i,\mathcal{S}_k^i)$  does not have gold SQL labels. Different tasks depend on different RDs, i.e., for  $\forall \mathcal{D}^i, \forall \mathcal{D}^j$ , if  $i \neq j$ , then  $S(\mathcal{D}^i) \cap S(\mathcal{D}^j) = \emptyset$ , where  $S(\mathcal{D}^i)$  denotes the set of corresponding RDs. Our final goal is to make  $\mathcal{F}_{\theta}$  achieve a good SQL generation accuracy on each  $\mathcal{D}_{\text{test}}^i$  after the training of all K tasks.

#### **A Vanilla Solution**

We start with a VANILLA solution to overcome the challenges of training  $\mathcal{F}_{\theta}$  on  $\{\mathcal{D}^1, \mathcal{D}^2, ..., \mathcal{D}^K\}$ , consisting of *in-task self-training* and *cross-task episodic memory replay*. Figure 2 shows its entire architecture.




Figure 2: Architecture of our proposed VANILLA solution.

# **In-task Self-training**

As a classical SSL method, *self-training* (ST) uses the model's predictions to product pseudo-labeled data to augment the limited supervision (the first challenge). Inspired by this, during the learning of task  $\mathcal{D}^i$ , we adopt a two-stage strategy to improve the generalization capability of  $\mathcal{F}_{\theta}$ .

**Warm Start** In the first stage,  $\mathcal{F}_{\theta}^{i}$  is trained on labeled set  $\mathcal{A}^{i}$  for multiple epochs to fully understand  $\mathcal{D}^{i}$ , thus guaranteeing the quality of the first batch of pseudo labels predicted by  $\mathcal{F}_{\theta}^{i}$ . Specifically, for each labeled instance  $a_{k}^{i}=(q_{k}^{i},\mathcal{S}_{k}^{i},\tilde{y}_{k}^{i})\in\mathcal{A}^{i}$ , the loss is calculated by a log-likelihood,

$$\mathcal{L}(a_k^i; \theta^i) = -\sum_{j=1}^{|Z|} \log P(\tilde{z}_j | \mathbf{q}_k^i, \mathbf{S}_k^i, z_{< j}^i, \theta^i).$$
 (3)

**Self-updating** In the second stage,  $\mathcal{F}_{\theta}^{i}$  is trained on  $\mathcal{A}^{i} \cup \mathcal{U}^{i}$ . At each epoch, it first predicts a SQL program  $\hat{y}_{k}$  for each unlabeled instance  $u_{k}^{i} \in \mathcal{U}^{i}$  to a pseudo-labeled instance  $p_{k}^{i} = (q_{k}^{i}, \mathcal{S}_{k}^{i}, \hat{y}_{k}^{i})$ . Random k instances  $p_{k}^{i}$  are selected to compose the pseudo-label set  $\mathcal{P}^{i}$ . Subsequently,  $\mathcal{F}_{\theta}$  is updated by optimizing

$$\mathcal{L}_{ST}(\mathcal{A}^i \cup \mathcal{P}^i; \theta^i) = \sum_{a_k^i \in \mathcal{A}^i} \mathcal{L}(a_k^i; \theta^i) + \sum_{p_k^i \in \mathcal{P}^i} \mu_k \mathcal{L}(p_k^i; \theta^i),$$
(4)

where  $\mu_k = P(\mathcal{Z}_y|\mathbf{q},\mathbf{S},\theta)$  is the confidence score to evaluate the contribution of each  $p_k^i$  to the loss.

#### **Cross-task Episodic Memory Replay**

Considering the second challenge,  $\mathcal{F}_{\theta}$  cannot be retrained with the full set of previous instances when a new task is encountered. This also brings up a new problem of catastrophic forgetting (CF), i.e.,  $\mathcal{F}_{\theta}$  forgets the past tasks after learning the new ones. Fortunately, *episodic memory replay* (EMR) can balance the efficiency and CF by allowing the model to review a portion of the experienced instances. In addition, compared with other gradient-based CL methods (Kirkpatrick et al. 2016; Lopez-Paz and Ranzato 2017), EMR is well suited for the text-to-SQL task with complex labels Z(y) because of its simple process. Therefore, we add the following process along with ST.

**Memory Construction** As a preparation, we construct a fixed-size memory  $\mathcal{M}^i = \{m_1^i, m_2^i, ..., m_{|\mathcal{M}^i|}^i\}$  associated with each  $\mathcal{D}^i$  to store a small number of replay instances, where  $m_k^i = (q_k^i, \mathcal{S}_k^i, \tilde{y}_k^i)$  is sampled by from  $\mathcal{A}^i$ . This setup




Figure 3: Architecture of our proposed SFNET.

is practical for text-to-SQL parsers because they have difficulty recalling information from the past except for reusing the instances stored in memory.

**Replay Loss** Concretely, whenever  $\mathcal{F}_{\theta}^{i}$  performs self-training,  $\mathcal{L}_{\text{EMR}}$ , the loss of all replayed instances stored in  $\mathcal{M}^{1}$  to  $\mathcal{M}^{i-1}$ , is added to  $\mathcal{L}_{\text{ST}}$ ,

$$\mathcal{L}_{\text{EMR}}(\mathcal{M}^j; \theta^i) = \sum_{j=1}^{i-1} \sum_{m_k^j \in \mathcal{M}^j} \mathcal{L}(m_k^j; \theta^i).$$
 (5)

Following the common practice, at the end of the training of  $\mathcal{D}^i$ , we randomly select a M labeled instances from  $\mathcal{A}^i$  and store them in  $\mathcal{M}^i$  for replay in future tasks.

#### **Soft Fusion Network**

Figure 3 shows the architecture of our proposed SFNET, which is an improved version of VANILLA. Since SSL is dedicated to the optimization of a single (current) task, while CL is more concerned with the overall performance of all tasks, SFNET applies a *Teacher-Student Framework* (TS) to perform them separately. It composes of two base parsers, TEACHER  $\mathcal{F}_{\text{tea}}$  for SSL and STUDENT  $\mathcal{F}_{\text{stu}}$  for CL. During the task  $D^i$ , both  $\mathcal{F}^i_{\text{tea}}$  and  $\mathcal{F}^i_{\text{stu}}$  are initialized from  $\mathcal{F}^{i-1}_{\text{stu}}$  but with separate parameter updates during each task. To drive the mutual promotion of SSL and CL (Figure 1), SFNET uses *dual sampling* that contains two different strategies to augment the training data of  $\mathcal{F}^i_{\text{tea}}$  and  $\mathcal{F}^i_{\text{stu}}$ , respectively.

#### **Teacher-Student Framework**

**TEACHER Parser** The sole goal of  $\mathcal{F}^i_{\text{tea}}$  is to offer correct pseudo labels of the current task  $\mathcal{D}^i$  via the in-task ST. Therefore, it only focuses on  $\mathcal{D}^i$  and is allowed to forget past tasks that is not associated with  $\mathcal{D}^i$ . In contrast, previous instances relevant to  $\mathcal{D}^i$  can be highlighted in order to deepen  $\mathcal{F}^i_{\text{tea}}$ 's understanding of  $\mathcal{D}^i$ . To achieve this goal, during the ST, we refer to EMR to replay the appropriate instances having potential prompts. In particular, when observing each task  $\mathcal{D}^i$ , N labeled instances relevant to  $\mathcal{D}^i$  are drawn from  $\bigcup_{k=1}^{i-1} \mathcal{A}^k \cup \mathcal{P}^k$  to compose the memory  $\mathcal{M}^i_{\text{tea}} = \{m^i_1...,m^i_N\}$ . We call this step *prompt sampling* and detail it in the subsequent section. Thereafter,  $\mathcal{F}^i_{\text{tea}}$  follows Vanilla to perform in-task ST except that it replaces  $\mathcal{L}_{\text{ST}}$  in self-updating with the following loss,

$$\mathcal{L}_{\text{tea}}(\theta_{\text{tea}}^i) = \mathcal{L}_{ST}(\mathcal{A}^i \cup \mathcal{P}^i; \theta_{\text{tea}}^i) + \sum_{m_k^i \in \mathcal{M}_{\text{tea}}^i} \mathcal{L}(m_k^i; \theta_{\text{tea}}^i). \tag{6}$$

When the training converges,  $\mathcal{F}_{\text{tea}}^i$  is considered to be approaching the optimum of  $\mathcal{D}^i$ . Note that the cost here is that  $\mathcal{F}_{\text{tea}}^i$  may forget some key information of  $\mathcal{D}^1...,\mathcal{D}^{i-1}$ .

**STUDENT Parser** Assuming that trained  $\mathcal{F}^i_{\text{tea}}$  is an expert proficient in  $\mathcal{D}^i$ , then the task stream could theoretically provide K experts for  $\mathcal{D}^1...,\mathcal{D}^K$ . Intuitively, if a parser can inherit the capabilities of all these experts, then it will be overall optimal of the entire task stream. Our  $\mathcal{F}^i_{\text{stu}}$  aims to be such a parser that for each task  $\mathcal{D}^j$   $(1 \leq j \leq i)$  learns from the pseudo-labeled instances  $\mathcal{P}^j$  generated by the trained  $\mathcal{F}^j_{\text{tea}}$  in addition to the original  $\mathcal{A}^j$ . Considering the training efficiency, our practice is that using cross-task EMR during the learning of each  $\mathcal{D}^i$ . Concretely, the loss of  $\mathcal{F}^i_{\text{stu}}$  contains 1) the task loss on  $\mathcal{D}^i$  and 2) the replay loss on  $\mathcal{D}^1...,\mathcal{D}^{i-1}$ ,

$$\mathcal{L}_{\text{stu}}(\theta_{\text{stu}}^{i}) = \sum_{x_{k}^{i} \in \mathcal{A}^{i} \cup \mathcal{P}^{i}} \mathcal{L}(x_{k}^{i}; \theta_{\text{stu}}^{i}) + \mathcal{L}_{\text{EMR}}(\mathcal{M}_{\text{stu}}^{j}; \theta_{\text{stu}}^{i}), \tag{7}$$

where the replayed instances  $\mathcal{M}_{\mathrm{stu}}^j = \{m_1^j...,m_M^j\}$   $(1 \leq j \leq i)$  are sampled from  $\mathcal{A}^j \cup \mathcal{P}^j$  via review sampling (detailed in the next section). The sampled instances are diversified in both the SQL skeleton and the RD schema so that  $\mathcal{F}_{\mathrm{stu}}^i$  can recall complete information about past tasks.

#### **Dual Sampling**

# Prompt Sampling x

Algorithm 1 details the process of prompt sampling (PS). First,  $\mathrm{TOPK}(\mathcal{R}, \Omega, \tilde{N})$  denotes that selecting  $\tilde{N}$  instances  $x_j$  from  $\mathcal{R} = \bigcup_{k=1}^{i-1} \mathcal{A}^k \cup \mathcal{P}^k$  to form a temporary memory  $\tilde{\mathcal{M}}_{\mathrm{tea}}$  according to the relevance score  $\Omega = \{\omega(x_1), ..., \omega(x_{|\mathcal{R}|})\}$ ,

$$\omega(x_j) = \max_{x_l \in \mathcal{U}^i} d_{\operatorname{sch}}(x_l, x_j), \tag{8}$$

where  $d_{\rm sch}(x_l,x_j)=\sqrt{\sum_{\psi\in\Psi}(\mathbf{v}_\psi^l-\mathbf{v}_\psi^j)^2}$  denotes the distance of  $x_l$  and  $x_j$  on the schemas  $\mathcal{S}^k$  and  $\mathcal{S}^j$ . Here  $\Psi$  is the vocabulary of schema tokens and  $\mathbf{v}\in\mathbb{R}^{|\Psi|}$  is the hash vector of  $\mathcal{S}$ . Specifically, if the token  $\psi$  exists in y, then  $\mathbf{v}_\psi$  is 1, otherwise it is 0. Thereafter,  $\tilde{\mathcal{M}}_{\rm tea}$  is partitioned into n clusters with structure distance  $d_{\rm stru}$  to meet the diversity of SQL skeletons.  $d_{\rm stru}$  is formally similar to  $d_{\rm sch}$ , but replacing  $\Psi$  with the SQL keywords vocabulary  $\Phi$  (including GROUP BY, LIMIT, etc.). The reason for using hashing techniques for  $d_{\rm stru}$  and  $d_{\rm sch}$  is to simplify the process. More complex distance metrics are left for future work. Finally, the central instance of each cluster is selected to compose  $\mathcal{M}_{\rm tea}$ . Note that although our PS requires re-traversing all past instances for each new task, its time is only a fraction of the total time of SFNET in our experiments.

**Review Sampling** Review sampling (RS) is an advanced version of the random sampling in cross-task EMR of VANILLA. The most significant difference between them is that RS samples pseudo-labeled instances  $\mathcal{P}^i$  in addition to  $\mathcal{A}^i$ , where the labels of each  $p \in \mathcal{P}^i$  is predicted by  $\mathcal{F}^i_{\text{tea}}$  via the in-task ST. In this way, the resulting memory is augmented, allowing  $\mathcal{F}^i_{\text{stu}}$  to recall the task  $\mathcal{D}^i$  more fully. Naturally, we would like sampled instances to be representative of  $\mathcal{D}^i$  in terms of both SQL skeletons and RD schemas.

# Algorithm 1: Prompt Sampling

**Require:** Past labeled instances set  $\mathcal{R} = \bigcup_{k=1}^{i-1} \mathcal{A}^k \cup \mathcal{P}^k$ , current unlabeled set  $\mathcal{U}^i$ , score  $\Omega = \{\omega(x_1),...,\omega(x_{|\mathcal{R}|})\}$ 

- 1:  $\mathcal{M}_{\text{tea}} \leftarrow \text{TopK}(\mathcal{R}, \Omega, N), \mathcal{M}_{\text{tea}} \leftarrow \emptyset$
- 2: Partition  $\tilde{\mathcal{M}}_{\text{tea}}$  into N clusters, denoted as C, with the SQL structure distance metric  $d_{\text{stru}}$
- 3: for  $c_j \in C$  do
- 4:  $\mathcal{M}_{\text{tea}} \leftarrow \mathcal{M}_{\text{tea}} \cup \{(q^*, \mathcal{S}^*, y^*)\}$ , where  $(q^*, \mathcal{S}^*, y^*)$  is closest to the center of cluster  $c_i$
- 5: end for
- 6: **return**  $\mathcal{M}_{\text{tea}}$




Figure 4: Statistics of each task in WikiSQL and Spider.

Thus, we define a combined distance  $d(x_1, x_2) = d_{\text{stru}} * d_{\text{sch}}$  and use it to partition  $\mathcal{A}^i \cup \mathcal{P}^i$  into M clusters. Here we use the product in order to balance the weights of  $d_{\text{stru}}$  and  $d_{\text{sch}}$ . Consistent with PS, the result  $\mathcal{M}^j_{\text{stu}}$  consists of all central instances of the cluster, which can be considered as the representative of  $\mathcal{D}^i$ .

# **Experiments**

#### **Experimental Setup**

Datasets To evaluate our proposed methods, we construct two task streams using the following two text-to-SQL datasets: WikiSQL<sup>1</sup> (Zhong, Xiong, and Socher 2017) contains more than 20k tables collected from Wikipedia and 80,654 NLO-SQL instances. Each instance corresponds to only a single table and the structure of the target SQL is relatively simple. **Spider**<sup>2</sup> (Yu et al. 2018) contains 8,659 training instances across 146 RDs in total, and covers a wide range of domains, including flights, geography, movies, and more. Unlike WikiSQL, it instance corresponds to an RD containing multiple tables, and the target SQL may have a complex syntax. Following the problem formulation before, we divided each dataset into 10 tasks based on the domain of RD, and set the size of  $A^i$  for most tasks to less than 500. To provide a stable initialization for all compared baselines, we choose the task with the largest  $A^i$  as the first task. Refer to the practice in SSL (Guo et al. 2022), we let most  $\mathcal{U}^i$  be larger than  $\mathcal{A}^i$ . In addition, (Yu et al. 2018) has pointed out that a good text-to-SQL method must have the ability to resolve zero-shot RDs. Thus, we guarantee that  $\mathcal{D}_{\text{test}}^i$  has RDs

<sup>&</sup>lt;sup>1</sup>https://github.com/salesforce/WikiSQL

<sup>&</sup>lt;sup>2</sup>https://yale-lily.github.io//spider

TD 11 1	г	1, 6		1.1 1	1.
Table 1:	Experimental	recults for	comparison	with b	naselines
Table 1.	LAPCITICITUAL	1 Courts 101	Companison	WILLIE	Juscillius.

Method	Spider				WikiSQL			
Method	$\overline{ACC_a}$	$ACC_w$	BWT	FWT	ACC <sub>a</sub>	$ACC_w$	BWT	FWT
FINE-TUNE	47.5	45.5	-11.3	38.4	69.8	69.2	-1.5	63.0
SELF-TRAINING (Goldwasser et al. 2011)	48.3	46.6	-10.9	40.4	70.4	69.9	-3.3	63.5
SETNET (Wang et al. 2020b)	47.8	46.1	-14.6	41.6	70.7	70.2	-2.1	61.8
MST-SQL (Guo et al. 2022)	49.6	47.3	-6.6	40.7	70.7	70.1	-1.7	61.7
EWC (Kirkpatrick et al. 2016)	48.3	47.2	-7.9	38.4	70.0	69.6	-2.0	61.4
HAT (Serrà et al. 2018)	49.4	47.7	-8.4	39.3	70.0	69.6	-1.4	61.8
EMR (Wang et al. 2019)	50.1	49.1	-3.2	40.3	71.1	70.7	-2.2	63.1
EMAR (Han et al. 2020)	50.3	49.6	-4.6	40.4	70.8	70.5	-1.5	62.7
APPER (Mi et al. 2020)	50.7	49	-7.7	40.0	70.2	69.9	-3.0	62.7
TOTAL-RECALL (Li, Qu, and Haffari 2021)	53.4	51.6	-5.1	40.3	71.5	71.1	-2.1	62.7
VANILLA	53.9	52.9	-4.0	40.6	72.2	71.9	-2.0	64.0
SFNET	56.0	53.6	-1.0	45.9	<b>73.6</b>	73.3	-2.3	65.6
ORACLE (all tasks w/o Unsup.)	62.9	63.4	5.2	48.7	73.1	72.7	2.6	64.2

or tables that are not seen in  $A^i$ . Detailed statistics of our split datasets are illustrated in Figure 4.

**Evaluation Metrics** Following previous works (Wang et al. 2019; Li, Qu, and Haffari 2021), we adopt four metrics to evaluate the performance of the methods: 1) ACC<sub>a</sub> =  $\frac{1}{K} \sum_{i=1}^{K} acc_{i,K}$ ; 2) ACC<sub>w</sub> =  $acc_{\mathcal{D}_{\text{lest}}^{(1:K)}}$ ; 3) k < i: BWT =  $\frac{1}{K-1} \sum_{i=1}^{K-1} acc_{i,K} - acc_{i,i}$ ; 4) FWT =  $\frac{1}{K-1} \sum_{i=2}^{K} acc_{i,i-1} - \bar{b}_i$ , where  $acc_{i,j}$  denotes the test accuracy on  $\mathcal{D}_{\text{test}}^i$  after the training of  $\mathcal{D}^j$  and  $\bar{b}_i$  denotes the test accuracy on  $\mathcal{D}_{\text{test}}^i$  at random initialization. The first two metrics mainly measure the comprehensive performance of parsers. The BWT measures forgetting of past tasks, while the FWT measures zero-shot performance on new tasks.

**Implementation Details** Our method ran on one Tesla A100 Super GPUs. We use pre-trained GRAPPA-Large as the encoder and *K-medoids* as the clustering algorithm by default. The hyper-parameters were set as follow: (1) The maximum sizes of memory  $\mathcal{M}_{\text{tea}}^i$  and  $\mathcal{M}_{\text{stu}}^i$  were set to 30% of  $|\mathcal{D}_{\text{train}}^i|$ . (2) The learning rate is set to  $2\times 10^{-5}$  for GRAPPA and  $4\times 10^{-4}$  for other modules. All our datasets and codes are publicly available<sup>3</sup>.

Baselines FINE-TUNE is an naïve baseline that uses only labeled data to fine-tune the model for the new task based on the previous model. Self-training (Goldwasser et al. 2011), SETNET (Wang et al. 2020b), and MST-SQL (Guo et al. 2022) composes the SSL-only baselines that also fine-tune the model based on the previous model but utilize both unlabeled and labeled data, where SETNET and MST-SQL apply mean-teacher and meta-learning to improve the generalization capability, respectively. The CL-only baselines consists of EWC (Kirkpatrick et al. 2016), HAT (Serrà et al. 2018), EMR (Wang et al. 2019), EMAR (Han et al. 2020), APPER (Mi et al. 2020), and TOTAL-RECALL (Li,

Qu, and Haffari 2021). EWC uses regularization to constrain the learning of the current task. HAT applies a task-specific mask to guide each task. EMAR improves EMR with the constructed prototypes to avoid overfitting to memory. ARPER adds EWC regularization to the EMR loss and designs a priority-based sampling method. TOTAL-RECALL performs memory replay with a sampling method that balances the distribution of parsed actions and trains the semantic parser with a two-stage update strategy. Here we did not compare with GEM (Lopez-Paz and Ranzato 2017) because its desired GPU memory is too large to run on our device. Finally, we set an approximate upper boundary ORACLE that uses the *full volume retraining*, i.e., for each task  $\mathcal{D}^i$ , the parser is trained by the combined data of all  $\mathcal{A}^j$  (1 < j < i).

#### **Overall Results**

The experimental results are shown in Table 1. The gap between FINE-TUNE and ORACLE on WikiSQL are not as large as on Spider because the multiple tables and complex SQL syntax makes Spider more challenging. Despite the simplicity of the VANILLA process, it outperforms all the baselines in terms of ACC<sub>a</sub> and ACC<sub>w</sub>. More excitingly, our proposed SFNET further improves its ACC<sub>a</sub> by 1.4% (WikiSQL) and 2.1% (Spider), and achieves SOTA performance in almost all metrics on two datasets. Although SFNET does not perform best on WikiSQL in terms of BWT, it still shows the competitiveness with other methods and brings significant overall improvements on strong TOTAL RECALL by 2.1% in ACC<sub>a</sub>. The SSL-only methods improve the overall performance of FINE-TUNE using the information provided by unsupervised data, while they perform poorly in fighting against the CF (-10.9% and -14.6%). MST-SQL achieves better results, probably because of its meta-learning that captures common features across tasks. The replay-based EMR, EMAR, and TOTAL RECALL perform better than other CLonly methods on BWT, which proves that past instances may be more important to overcome the CF of the text-to-SQL

<sup>3</sup>https://github.com/Bahuia/SSCL-Text2SQL

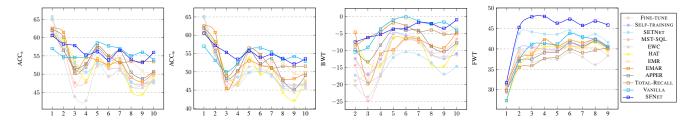


Figure 5: ACC<sub>a</sub>, ACC<sub>w</sub>, BWT, FWT till the seen tasks on Spider after learning on each task sequentially.

Table 2: Ablation study results of SFNET

Setting	Spider				WikiSQL				
Setting	A	W	В	F	A	W	В	F	
SFNET	56.0	54.1	-1.0	45.9	73.6	73.3	-2.3	65.6	
w/o $\mathcal{F}_{ ext{tea}}^i$	54.5	52.5	-4.0	42.9	72.0	71.6	-1.3	63.7	
w/o $\mathcal{F}_{\mathrm{stu}}^{i}$	50.4	48.2	-7.2	45.1	71.6	72.7	-2.0	63.5	
Combine $\mathcal{F}_{tea}^i$ & $\mathcal{F}_{stu}^i$	54.8	53.0	-3.0	43.6	71.7	71.3	-2.0	62.9	
w/o PS	53.7	52.9	-1.1	41.8	70.4	70.0	-4.6	62.6	
RS only using $\mathcal{A}^i$	54.2	51.4	-0.9	43.1	71.4	71.0	-2.8	62.7	

parser. Although TOTAL RECALL benefits from its fine-grained semantic parsing sampling algorithm to achieve a best results of the baselines, its results are still limited by ignoring unsupervised information. Unlike them, our SFNET deeply integrates SSL and CL and leads them to reinforce each other, thus achieving overall excellent results.

#### **Detailed Results and Analysis**

**Results till the Seen Tasks** Figure 5 shows the results of four metrics till the seen tasks on Spider after learning one each task. We can see that our proposed SFNET (blue) is always more stable than the other baselines in all metrics and this stability becomes more pronounced as the number of tasks grows. In terms of BWT and FWT, the improvement brought by SFNET is more significant, which proves the effectiveness of our fusion manner to SSL and CL, not only alleviating forgetfulness of past tasks, but also improving the generalization capability for zero-shot RDs. Notice that the performance of almost all methods in BWT improves slightly as the number of tasks increases. This may be related to the combined generalization of text-to-SQL tasks, i.e., the parser might resolve the few instances that were previously incorrectly predicted with the SQL fragments learned in the new task. Building on this foundation, our SFNET further exacerbates this trend using PS.

**Ablation Test** To explore the contributions of each component of our proposed SFNET, we compared the performance of the following settings:

- w/o  $\mathcal{F}_{\text{tea}}^i$  We remove  $\mathcal{F}_{\text{tea}}^i$  and in-task ST to verify the contribution of SSL;
- w/o F<sup>i</sup><sub>stu</sub> We remove F<sub>stu</sub> and cross-task EMR, and only use F<sub>tea</sub> to predict, to evaluate the contribution of CL;
- Combine  $\mathcal{F}_{\text{tea}}^i$  &  $\mathcal{F}_{\text{stu}}^i$  We merged  $\mathcal{F}_{\text{tea}}$  and  $\mathcal{F}_{\text{stu}}$  into a single parser to assess the necessity of the TS framework.

Table 3: ACC<sub>a</sub> (A), ACC<sub>w</sub> (W), BWT (B), and FWT (F) of SFNET with different sampling strategies.

Methods		Spi	der		WikiSQL				
Wiethous	A	W	В	F	A	W	В	F	
RANDOM	53.2	52.7	-2.2	41.3	72.2	71.8	-3.0	62.9	
SCHEMA Sim.	54.3	53.2	-1.0	45.0	72.8	72.4	-2.0	63.9	
RANDOM	52.3	51.4	-3.3	41.5	71.5	71.1	-1.8	64.6	
FSS	52.6	51.9	-2.0	42.0	72.3	72.1	-2.0	64.7	
Prior	52.6	51.1	-4.0	42.0	71.9	71.3	-1.5	64.1	
BALANCE	52.0	49.6	-2.4	41.1	71.9	71.4	-2.8	64.3	
LFS	52.4	51.2	-6.3	40.4	72.1	71.6	-2.2	63.5	
DLFS	52.8	51.9	-1.5	40.5	72.2	71.9	-2.7	64.7	
SCHEMA Clus.	54.9	53.3	-1.1	43.8	72.3	71.8	-2.1	64.1	
Dual Sampling	55.7	54.1	-1.0	45.9	73.6	73.3	-2.3	65.6	

- w/o PS We remove the prompt sampling to evaluate the improvements brought to SSL by past information.
- **RS only using**  $A^i$ ; We review the sampling using only the labeled set  $A^i$  to assess the improvement of CL by pseudo-supervision information.

Table 2 shows the ACC<sub>a</sub> (A), ACC<sub>w</sub> (W), BWT (B), and FWT (F) of different settings. Our SFNET equipped with all modules performs best in terms of ACC<sub>a</sub> and FWT. Its non-negligible improvements in overall performance allow us to overlook the minor shortcomings in BWT. By removing  $\mathcal{F}_{\text{tea}}^i$ , ACC<sub>a</sub> decreases by 1.6% on WikiSQL and 1.5% for Spider, which proves that the value of the unsupervised information. Discarding  $\mathcal{F}_{\mathrm{stu}}^i$  leads to a decrease in terms of ACC<sub>a</sub> (-2.0% & -5.4%) because of the forgetting of previous tasks. The performance drop (-1.9% & -1.2%) brought by abandoning the TS framework demonstrates the necessity of handling SSL and CL separately. On both datasets, removing PS results in an absolute decrease in all metrics. This reveals that the relevant information from past tasks can prompt the SSL process of current task. In particular, the drop in FWT on Spider (-4.1%) is more significant, probably due to the fact that Spider can provide information not only on the RD schema but also on the SQL structure. The degradation in ACC<sub>a</sub> aspect when using only  $A^i$  and not  $P^i$  in the RS process reflects that the SSL results can also contribute to the CL process.

**Impact of Sampling Methods** To further evaluate our proposed PS and RS, we replace them with some other existing sampling strategies. For prompt sampling, we replace it RANDOM and SCHEMA Sim., where the former randomly




Figure 6: Average training time of each method on one task.

samples training instances and the latter only selects the topk instances by schema similarity  $\omega(x)$  without using  $d_{\text{stru}}$  to clustering. For review sampling, we replace it with the sampling strategies widely-used in CL, including FSS (Wang et al. 2019; Aljundi et al. 2019), LFS (Li, Qu, and Haffari 2021), PRIOR (Mi et al. 2020), and BALANCE (Jian, Yi, and Zhang 2022), and our defined SCHEMA Clus., which performs clustering only uses  $d_{\mathrm{sch}}.$  Here, SCHEMA Sim. and SCHEMA Clus. are used to evaluate the contribution of the diverse SQL structures to the performance. From Table 3 we can see that our dual sampling outperforms all other baselines on both datasets in terms of ACC<sub>a</sub> and ACC<sub>w</sub>. More importantly, the improvements over SCHEMA Sim. and SCHEMA Clus. in terms of FWT reveals the fact that for text-to-SQL, diverse SQL structures in the training data are useful for the parser to generate unseen SQL programs.

Training Time Analysis The average training times of different methods on each task are depicted in Figure 6. EMR and EMAR are slower than other CL-only methods like HAT and EWC because they need to replay the past instances during the training. Similarly, SSL-only methods predicts pseudo-labels on unsupervised data to augment the training data, and thus also require longer training time. In addition, the training process of MST-SQL is exceptionally time-consuming because it requires the construction of multiple sets of meta-learning tasks with possible data duplication. Notably, our SFNET contains the training process for both models and utilizes both unsupervised and replayed instances, while it takes only half of the time used by ORACLE that does not uses unsupervised data. Moreover, although our PS accesses the full amount of past data each time, the fast hashing strategy makes it take only about 1/6 of the total time SFNET uses.

#### **Related Work**

**Text-to-SQL** Research on text-to-SQL can be roughly divided into three directions. The first one is the single-table task represented by WIKISQL (Zhong, Xiong, and Socher 2017), whose target SQL programs contain only simple syntaxes. The SOTA methods (Hwang et al. 2019; Chen et al. 2021a; Xu et al. 2022) of WIKISQL typically treat the problem as several subtasks and leverage *multi-task learning* to solve them. The second direction is a cross-domain multitable scenario represented by SPIDER (Yu et al. 2018). Its

target programs cover a variety of complicated SQL syntaxes including GROUP BY and nested queries, to better meet the needs of real-world applications. In this scenario, most SOTA parsers (Guo et al. 2019; Wang et al. 2020a; Cao et al. 2021) apply top-down grammar-based decoding, which is consistent with our work. The last one is a conversational task, such as SPARC (Yu et al. 2019b) and CoSQL (Yu et al. 2019a), forcing the parser to learn to consider the context information when generating SQL in a multi-turn dialogue (Zhang et al. 2019; Zheng et al. 2022).

SSL in Semantic Parsing Multiple classical methods have been applied to address the challenge of lack of annotation for semantic parsing, such as SVM (Kate and Mooney 2007), *self-training* (Goldwasser et al. 2011), *dual learning* (Chen et al. 2021b), *auto-encoder* (Yin et al. 2018), and *mean-teacher* (Wang et al. 2020b). We finally adopted self-training in the proposed solutions for simplicity. Unlike previous methods, we propose relevance sampling to utilize the continual scenario to boost the performance of SSL.

CL in Semantic Parsing There is relatively little work that applies CL to semantic parsing. (Lialin et al. 2020) and (Li, Qu, and Haffari 2021) apply EWC (Kirkpatrick et al. 2016) and EMR (Wang et al. 2019), respectively, to handle the task stream of traditional semantic parsing benchmarks. Different from them, our method focuses on text-to-SQL with larger application scenarios and further argument the memories in the continual process using unsupervised data.

Semi-supervised Continual Learning Recent SSCL methods (Brahma, Verma, and Rai 2021; Luo et al. 2022; Smith et al. 2021; Wang et al. 2021) have focused on image classification tasks. They are either based on backbone models widely used in Computer Vision (e.g., generative adversarial networks) or on gradient prediction which is computationally expensive and therefore not suitable for Natural Language Processing tasks with large-scale pre-trained models. In contrast, our research is dedicated to obtaining a simple and efficient method for text-to-SQL within the allowed time-space overhead.

#### Conclusion

In this paper, we presented two methods that integrates *semi-supervised learning* (SSL) and *continual learning* (CL) to address the problem of supervision-limited text-to-SQL task stream. The first approach combines self-training and episodic memory replay to enhance supervision while balancing training efficiency and performance of the overall task stream. The improved method SFNET drives the intrinsic connection between CL and SSL by using inmemory past information to help current SSL, while adding high-quality pseudo instances in memory to improve future replay. The experiments on two benchmarks shows that indicate that our method provide a promising way for supervision-limited text-to-SQL task stream. In future work, we will try to introduce *prompt learning* into the continual process to augment supervision and alleviate forgetting.

# References

- Aljundi, R.; Lin, M.; Goujaud, B.; and Bengio, Y. 2019. Gradient based sample selection for online continual learning. In Wallach, H. M.; Larochelle, H.; Beygelzimer, A.; d'Alché-Buc, F.; Fox, E. B.; and Garnett, R., eds., Advances in Neural Information Processing Systems 32: Annual Conference on Neural Information Processing Systems 2019, NeurIPS 2019, December 8-14, 2019, Vancouver, BC, Canada, 11816–11825.
- Anshari, M.; Almunawar, M. N.; Lim, S. A.; and Al-Mudimigh, A. 2019. Customer relationship management and big data enabled: Personalization & customization of services. *Applied Computing and Informatics*, 15(2): 94–101.
- Brahma, D.; Verma, V. K.; and Rai, P. 2021. Hypernetworks for Continual Semi-Supervised Learning. *CoRR*, abs/2110.01856.
- Cao, R.; Chen, L.; Chen, Z.; Zhao, Y.; Zhu, S.; and Yu, K. 2021. LGESQL: Line Graph Enhanced Text-to-SQL Model with Mixed Local and Non-Local Relations. In Zong, C.; Xia, F.; Li, W.; and Navigli, R., eds., *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing, ACL/IJCNLP 2021, (Volume 1: Long Papers), Virtual Event, August 1-6, 2021, 2541–2555. Association for Computational Linguistics.*
- Chen, Y.; Guo, X.; Wang, C.; Qiu, J.; Qi, G.; Wang, M.; and Li, H. 2021a. Leveraging Table Content for Zero-shot Text-to-SQL with Meta-Learning. In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2-9, 2021*, 3992–4000. AAAI Press.
- Chen, Z.; Chen, L.; Li, H.; Cao, R.; Ma, D.; Wu, M.; and Yu, K. 2021b. Decoupled Dialogue Modeling and Semantic Parsing for Multi-Turn Text-to-SQL. In Zong, C.; Xia, F.; Li, W.; and Navigli, R., eds., *Findings of the Association for Computational Linguistics: ACL/IJCNLP 2021, Online Event, August 1-6, 2021*, volume ACL/IJCNLP 2021 of *Findings of ACL*, 3063–3074. Association for Computational Linguistics.
- Goldwasser, D.; Reichart, R.; Clarke, J.; and Roth, D. 2011. Confidence Driven Unsupervised Semantic Parsing. In Lin, D.; Matsumoto, Y.; and Mihalcea, R., eds., *The 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies, Proceedings of the Conference, 19-24 June, 2011, Portland, Oregon, USA*, 1486–1495. The Association for Computer Linguistics.
- Guo, J.; Zhan, Z.; Gao, Y.; Xiao, Y.; Lou, J.; Liu, T.; and Zhang, D. 2019. Towards Complex Text-to-SQL in Cross-Domain Database with Intermediate Representation. In Korhonen, A.; Traum, D. R.; and Màrquez, L., eds., *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, 4524–4535. Association for Computational Linguistics.

- Guo, X.; Chen, Y.; Qi, G.; Wu, T.; and Xu, H. 2022. Improving Few-Shot Text-to-SQL with Meta Self-Training via Column Specificity. In Raedt, L. D., ed., *Proceedings of the Thirty-First International Joint Conference on Artificial Intelligence, IJCAI 2022, Vienna, Austria, 23-29 July 2022*, 4150–4156. ijcai.org.
- Han, X.; Dai, Y.; Gao, T.; Lin, Y.; Liu, Z.; Li, P.; Sun, M.; and Zhou, J. 2020. Continual Relation Learning via Episodic Memory Activation and Reconsolidation. In Jurafsky, D.; Chai, J.; Schluter, N.; and Tetreault, J. R., eds., *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020*, 6429–6440. Association for Computational Linguistics.
- Hwang, W.; Yim, J.; Park, S.; and Seo, M. 2019. A Comprehensive Exploration on WikiSQL with Table-Aware Word Contextualization. *CoRR*, abs/1902.01069.
- Jian, Y.; Yi, J.; and Zhang, L. 2022. Adaptive Feature Generation for Online Continual Learning from Imbalanced Data. In Gama, J.; Li, T.; Yu, Y.; Chen, E.; Zheng, Y.; and Teng, F., eds., Advances in Knowledge Discovery and Data Mining 26th Pacific-Asia Conference, PAKDD 2022, Chengdu, China, May 16-19, 2022, Proceedings, Part I, volume 13280 of Lecture Notes in Computer Science, 276–289. Springer.
- Kate, R. J.; and Mooney, R. J. 2007. Semi-Supervised Learning for Semantic Parsing using Support Vector Machines. In Sidner, C. L.; Schultz, T.; Stone, M.; and Zhai, C., eds., Human Language Technology Conference of the North American Chapter of the Association of Computational Linguistics, Proceedings, April 22-27, 2007, Rochester, New York, USA, 81–84. The Association for Computational Linguistics.
- Kirkpatrick, J.; Pascanu, R.; Rabinowitz, N. C.; Veness, J.; Desjardins, G.; Rusu, A. A.; Milan, K.; Quan, J.; Ramalho, T.; Grabska-Barwinska, A.; Hassabis, D.; Clopath, C.; Kumaran, D.; and Hadsell, R. 2016. Overcoming catastrophic forgetting in neural networks. *CoRR*, abs/1612.00796.
- Lewis, R.; McPartland, J.; Ranjan, R.; et al. 2017. Blockchain and financial market innovation. *Economic Perspectives*, 41(7): 1–17.
- Li, Z.; Qu, L.; and Haffari, G. 2021. Total Recall: a Customized Continual Learning Method for Neural Semantic Parsers. In Moens, M.; Huang, X.; Specia, L.; and Yih, S. W., eds., *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing, EMNLP 2021, Virtual Event / Punta Cana, Dominican Republic, 7-11 November, 2021*, 3816–3831. Association for Computational Linguistics.
- Lialin, V.; Goel, R.; Simanovsky, A.; Rumshisky, A.; and Shah, R. 2020. Update frequently, update fast: Retraining semantic parsing systems in a fraction of time. *arXiv* preprint *arXiv*:2010.07865.
- Lopez-Paz, D.; and Ranzato, M. 2017. Gradient Episodic Memory for Continual Learning. In Guyon, I.; von Luxburg, U.; Bengio, S.; Wallach, H. M.; Fergus, R.; Vishwanathan, S. V. N.; and Garnett, R., eds., *Advances in Neural Information Processing Systems 30: Annual Conference on Neural*

- Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, 6467–6476.
- Luo, Y.; Wong, Y.; Kankanhalli, M. S.; and Zhao, Q. 2022. Learning to Predict Gradients for Semi-Supervised Continual Learning. *CoRR*, abs/2201.09196.
- Luong, M.-T.; Pham, H.; and Manning, C. D. 2015. Effective Approaches to Attention-based Neural Machine Translation. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, 1412–1421.
- Mi, F.; Chen, L.; Zhao, M.; Huang, M.; and Faltings, B. 2020. Continual Learning for Natural Language Generation in Task-oriented Dialog Systems. In Cohn, T.; He, Y.; and Liu, Y., eds., *Findings of the Association for Computational Linguistics: EMNLP 2020, Online Event, 16-20 November 2020*, volume EMNLP 2020 of *Findings of ACL*, 3461–3474. Association for Computational Linguistics.
- Serrà, J.; Suris, D.; Miron, M.; and Karatzoglou, A. 2018. Overcoming Catastrophic Forgetting with Hard Attention to the Task. In Dy, J. G.; and Krause, A., eds., *Proceedings of the 35th International Conference on Machine Learning, ICML 2018, Stockholmsmässan, Stockholm, Sweden, July 10-15, 2018*, volume 80 of *Proceedings of Machine Learning Research*, 4555–4564. PMLR.
- Smith, J.; Balloch, J.; Hsu, Y.; and Kira, Z. 2021. Memory-Efficient Semi-Supervised Continual Learning: The World is its Own Replay Buffer. In *International Joint Conference on Neural Networks, IJCNN 2021, Shenzhen, China, July 18-22, 2021*, 1–8. IEEE.
- Wang, B.; Shin, R.; Liu, X.; Polozov, O.; and Richardson, M. 2020a. RAT-SQL: Relation-Aware Schema Encoding and Linking for Text-to-SQL Parsers. In Jurafsky, D.; Chai, J.; Schluter, N.; and Tetreault, J. R., eds., *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics, ACL 2020, Online, July 5-10, 2020, 7567–7578*. Association for Computational Linguistics.
- Wang, H.; Xiong, W.; Yu, M.; Guo, X.; Chang, S.; and Wang, W. Y. 2019. Sentence Embedding Alignment for Lifelong Relation Extraction. In Burstein, J.; Doran, C.; and Solorio, T., eds., *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, 796–806. Association for Computational Linguistics.
- Wang, L.; Yang, K.; Li, C.; Hong, L.; Li, Z.; and Zhu, J. 2021. ORDisCo: Effective and Efficient Usage of Incremental Unlabeled Data for Semi-Supervised Continual Learning. In *IEEE Conference on Computer Vision and Pattern Recognition, CVPR 2021, virtual, June 19-25, 2021*, 5383–5392. Computer Vision Foundation / IEEE.
- Wang, P.; Shi, T.; and Reddy, C. K. 2020. Text-to-SQL generation for question answering on electronic medical records. In *Proceedings of The Web Conference* 2020, 350–361.
- Wang, X.; Sun, H.; Qi, Q.; and Wang, J. 2020b. SETNet: A Novel Semi-Supervised Approach for Semantic Parsing. In Giacomo, G. D.; Catalá, A.; Dilkina, B.; Milano, M.; Barro,

- S.; Bugarín, A.; and Lang, J., eds., ECAI 2020 24th European Conference on Artificial Intelligence, 29 August-8 September 2020, Santiago de Compostela, Spain, August 29 September 8, 2020 Including 10th Conference on Prestigious Applications of Artificial Intelligence (PAIS 2020), volume 325 of Frontiers in Artificial Intelligence and Applications, 2236–2243. IOS Press.
- Wu, T.; Caccia, M.; Li, Z.; Li, Y.-F.; Qi, G.; and Haffari, G. 2022. Pretrained Language Model in Continual Learning: A Comparative Study. In *International Conference on Learning Representations*.
- Xu, K.; Wang, Y.; Wang, Y.; Wang, Z.; Wen, Z.; and Dong, Y. 2022. SeaD: End-to-end Text-to-SQL Generation with Schema-aware Denoising. In Carpuat, M.; de Marneffe, M.; and Ruíz, I. V. M., eds., *Findings of the Association for Computational Linguistics: NAACL 2022, Seattle, WA, United States, July 10-15, 2022*, 1845–1853. Association for Computational Linguistics.
- Yin, P.; Zhou, C.; He, J.; and Neubig, G. 2018. StructVAE: Tree-structured Latent Variable Models for Semi-supervised Semantic Parsing. In Gurevych, I.; and Miyao, Y., eds., *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics, ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 1: Long Papers*, 754–765. Association for Computational Linguistics.
- Yu, T.; Wu, C.; Lin, X. V.; Wang, B.; Tan, Y. C.; Yang, X.; Radev, D. R.; Socher, R.; and Xiong, C. 2021. GraPPa: Grammar-Augmented Pre-Training for Table Semantic Parsing. In 9th International Conference on Learning Representations, ICLR 2021, Virtual Event, Austria, May 3-7, 2021. OpenReview.net.
- Yu, T.; Zhang, R.; Er, H.; Li, S.; Xue, E.; Pang, B.; Lin, X. V.; Tan, Y. C.; Shi, T.; Li, Z.; Jiang, Y.; Yasunaga, M.; Shim, S.; Chen, T.; Fabbri, A. R.; Li, Z.; Chen, L.; Zhang, Y.; Dixit, S.; Zhang, V.; Xiong, C.; Socher, R.; Lasecki, W. S.; and Radev, D. R. 2019a. CoSQL: A Conversational Text-to-SQL Challenge Towards Cross-Domain Natural Language Interfaces to Databases. In Inui, K.; Jiang, J.; Ng, V.; and Wan, X., eds., *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, 1962–1979. Association for Computational Linguistics
- Yu, T.; Zhang, R.; Yang, K.; Yasunaga, M.; Wang, D.; Li, Z.; Ma, J.; Li, I.; Yao, Q.; Roman, S.; Zhang, Z.; and Radev, D. R. 2018. Spider: A Large-Scale Human-Labeled Dataset for Complex and Cross-Domain Semantic Parsing and Text-to-SQL Task. In Riloff, E.; Chiang, D.; Hockenmaier, J.; and Tsujii, J., eds., *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Brussels, Belgium, October 31 November 4, 2018*, 3911–3921. Association for Computational Linguistics.
- Yu, T.; Zhang, R.; Yasunaga, M.; Tan, Y. C.; Lin, X. V.; Li, S.; Er, H.; Li, I.; Pang, B.; Chen, T.; Ji, E.; Dixit, S.; Proctor, D.; Shim, S.; Kraft, J.; Zhang, V.; Xiong, C.; Socher, R.; and Radev, D. R. 2019b. SParC: Cross-Domain Semantic Parsing in Context. In Korhonen, A.; Traum, D. R.; and

Màrquez, L., eds., *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers,* 4511–4523. Association for Computational Linguistics.

Zhang, R.; Yu, T.; Er, H.; Shim, S.; Xue, E.; Lin, X. V.; Shi, T.; Xiong, C.; Socher, R.; and Radev, D. R. 2019. Editing-Based SQL Query Generation for Cross-Domain Context-Dependent Questions. In Inui, K.; Jiang, J.; Ng, V.; and Wan, X., eds., *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, 5337–5348. Association for Computational Linguistics.

Zheng, Y.; Wang, H.; Dong, B.; Wang, X.; and Li, C. 2022. HIE-SQL: History Information Enhanced Network for Context-Dependent Text-to-SQL Semantic Parsing. In Muresan, S.; Nakov, P.; and Villavicencio, A., eds., *Findings of the Association for Computational Linguistics: ACL 2022, Dublin, Ireland, May 22-27, 2022*, 2997–3007. Association for Computational Linguistics.

Zhong, V.; Xiong, C.; and Socher, R. 2017. Seq2SQL: Generating Structured Queries from Natural Language using Reinforcement Learning. *CoRR*, abs/1709.00103.