

A Survey on Conversational Search and Applications in Biomedicine

Naga Sai Krishna Adatrao
Kennesaw State University
Kennesaw, Georgia, USA
nadatrao@students.kennesaw.edu

Gowtham Reddy Gadireddy
Kennesaw State University
Kennesaw, Georgia, USA
ggadired@students.kennesaw.edu

Jiho Noh
Kennesaw State University
Kennesaw, Georgia, USA
jnoh3@kennesaw.edu

ABSTRACT

This paper aims to provide a radical rundown on Conversation Search (ConvSearch), an approach to enhance the information retrieval method where users engage in a dialogue for the information-seeking tasks. In this survey, we predominantly focused on the human interactive characteristics of the ConvSearch systems, highlighting the operations of the action modules, likely the Retrieval system, Question-Answering, and Recommender system. We labeled various ConvSearch research problems in knowledge bases, natural language processing, and dialogue management systems along with the action modules. We further categorized the framework to ConvSearch and the application is directed towards biomedical and healthcare fields for the utilization of clinical social technology. Finally, we conclude by talking through the challenges and issues of ConvSearch, particularly in Bio-Medicine. Our main aim is to provide an integrated and unified vision of the ConvSearch components from different fields, which benefit the information-seeking process in healthcare systems.

CCS CONCEPTS

• **Conversational Information Retrieval** → IR Systems; Dialogue Management Systems; QA and Knowledge Base; • **Bio** → Bio ConvSearch.

KEYWORDS

Information Retrieval, Conversational Search, Question Answering, Knowledge Base, Dialogue Management Systems, Query Performance Prediction, Recommender Systems, Biomedical ConvSearch, Privacy Concerns

1 INTRODUCTION

1.1 Information-Seeking Process

The information-seeking process via human-computer interactions has become more “interactive” than ever before. For instance, modern web search engines provide features like *query suggestions* that attempt to specify the user’s original search intent, *featured snippets* provide relevant text snippets that may directly answer the user’s query, and *knowledge panels* that presents pertinent information to a query in a structured format. According to a market research company [62], 65% of middle-aged adults speak to their voice-enabled devices at least once a day, which requires conversational features. Designing the features of **Conversational Search (ConvSearch)** has recently become a more critical factor in developing information retrieval (IR) systems and advances in natural language understanding.

The lexical definition of *conversation* is the act of interchanging thoughts, information, etc., by spoken words between multiple parties. We apply the exact definition to the ConvSearch systems and focus on the properties of conversation that include (1) the use of natural language, (2) multi-turn interactions, and (3) the aspect of the information-seeking process.

1.2 History of Conversational Search

The idea of designing a search engine that allows users or the system to interact with the other party through dialog to seek users’ information needs is not a new thing. Croft and Thompson [17] stated that “the IR system should enter into the dialogue with a user to verify inferred concepts and request more information on domains that are not well specified.” From the late 1990s, researchers studied concrete methodologies to implement dialogue components for IR [7] and recommendation systems [28]. Recently, Croft [16] stresses on the importance of user-system interaction in the information-seeking scenario, particularly in the limited-bandwidth environments provided by mobile devices and voice-based assistants.

The volume of scientific literature on ConvSearch has grown exponentially in the last two years (2021-22). Research topics expanded towards multi-modality search [55] and conversational agents for information-seeking in pharmacologic knowledge bases [61], and so on.

2 BACKGROUND

In the frame of the information-seeking process, IR is closely related to recommender systems and question-answering systems. This section discusses the shared objectives and differences between these related research topics.

2.1 Information Retrieval

Conventional IR systems evaluate ad-hoc queries with documents based on a lexical exact-match model such as BM25 [70] and query likelihood models. Typically, a user specifies the information need with a single query that initiates a search. Then the user receives the system-computed list of relevant items and determines whether to accept the results or refine the initial query for a follow-up search. That sequence completes one session of the information retrieval process.

ConvSearch differs from conventional IR systems in their interaction mode; ConvSearch allows users to describe their information needs in a less strict natural language format. During the conversation, the system can request for additional information from the

user when the system’s understanding of the initial query is *uncertain*. The effort to communicate back and forth to reduce the uncertainty characterizes the conversational search systems.

2.2 Recommender Systems

Recommender systems (RecSys) qualify available items (e.g., products, documents) and make suggestions that may suit the user’s expectations or information needs. A recommender system computationally models users’ expectations, preferences, item features, and interactions between users and items. Unlike IR, RecSys does not require a user query; suggestions can be made based on item features, user profiles, or interactions.

Recently, conversational approaches to recommender systems (ConvRecSys) allow personalized recommendations through natural language dialog with users, which has become a trending research topic. Notably, the research focuses include (1) refining a user’s preference by clarifying preferred item features via conversation [90, 100, 102] and (2) natural language understanding and generation in a conversational RecSys context [46, 80].

2.3 Question-Answering

Within the fields of IR and NLP, question-answering (QA) is the task of computationally answering questions posed by humans in natural language. Like ConvRecSys, Conversational Question-Answering (ConvQA) emphasizes the multi-turn dialogue interactions between users and the system.

Due to the shared objectives between QA and IR, many QA techniques and benchmarks are adapted in the IR research; both systems are expected to respond to the user’s information needs. For example, differing from IR, QA seeks to find relevant passages from a document collection or infer over a knowledge graph to answer a question. On the other hand, IR considers a set of relevant documents an answer to the user’s query.

ConvQA takes a more vital role in ConvSearch because we aim to provide integrated and dynamic system responses in ConvSearch. In that scenario, a direct answer to a user’s query (e.g., a factoid question) is a desirable system response.

2.4 Scope of Survey

2.4.1 Interactive Information Retrieval. ConvSearch is interactive information retrieval (IIR) because of the mixed-initiative communication between the user and the system [66]. From the Human-Computer Interaction (HCI) perspective, the medium of IIR communication can be non-verbal (e.g., gestures as sensory or images/videos as visual) or verbal (e.g., spoken as audio or written as textual). We consider speech a verbal communication that requires recognition and translation into text [15, 52] for text-based information retrieval systems. This survey will mainly focus on verbal communication, as Anand et al. [3] described a conversational search system as an IIR system with speech and language processing capabilities. According to human principles, the interactions should be developed on the emotion of the dialogue. Hence, the challenge is to recognize the emotion behind the state of dialogue the user drops, especially in bio-conversational search systems. The intent of the patient is necessary to be taken into consideration. Ren and She [69] illustrated the Conversational Emotion Recognition

that can be achieved by self-attention mechanism with an external knowledge base.

2.4.2 Task-Oriented Conversation. ConvSearch is a task-oriented dialogue system where the task is specific to IR. So, ConvSearch has the inherent problems of dialogue systems, such as dealing with phenomena like anaphora (use of a word whose interpretation depends upon another expression in context) and ellipsis (omission or suppression of words that appeared earlier) [85] or modeling and controlling dialogue structure [13].

This survey highlights the research efforts on dialogue systems with IR capabilities. However, we do not exclude the approaches toward questions-answering and recommendation tasks.

2.4.3 Inclusion and Exclusion. This paper surveys recent advances in ConvSearch technologies and their applications in the biomedical domain. Section 3 portrays ConvSearch as an elaboration process in the information-seeking process, which attempts to maximize the certainty to users’ information needs. In Section 4, we dissect conversational search systems and present representative research efforts on each component of the conceptual architecture, such as conversational QA, recommender systems, and knowledge bases. In Section 5, we demonstrate information-seeking applications in the biomedical domain. In addition, we discuss the aims of biomedical conversational search systems, likely semantic representations, trustworthiness, and personalization issues.

We identified relevant works by first querying several scholarly document search systems (i.e., Google Scholar, Semantic Scholar, arXiv, Citeseer, and ResearchGate) with commonly used keywords for conversational search and related research areas, such as “conversational search,” “ConvSearch,” “conversational information retrieval,” and “CIR search.” For biomedical applications, we used keywords such as “biomedical information retrieval” and “biomedical document search.” Further, we expanded the collection by manually selecting representative and relevant papers cited from the documents we have already collected. We have collected 346 citations, and approximately half of the documents are considered in this study for review.

3 INFORMATION SEEKING PROCESS

This section contextualizes the role of conversation in the theme of the information-seeking process. Table 1 presents the staged process of information-seeking activity in particular to information retrieval systems. We adopt a model of information-seeking behavior proposed by Kuhlthau [42]. Her model comprise six stages: initiation, selection, exploration, formulation, collection, and presentation. From the information retrieval perspectives, we modified it to a simple four-staged process: initiation, mutual understanding, elaboration, and presentation. The following subsections explain each stage and demonstrate examples.

3.1 Initiation

In the *initiation* stage, a user begins a search process by recognizing the means of communication for their information-seeking activities. The user interface plays a vital role in this stage and the following *presentation* stage as well. First, interface recognition aids in the users’ expression of their information needs. Users formulate

	I. Initiation	II. Understanding	III. Elaboration	IV. Presentation
Means of communication	- search box - hierarchical trees - form-based interface - chatbox	- initial user query - system response	- query expansion - relevance feedback - visualization - conversation	- retrieval results - answers to questions - recommendations
Interactions		Q_0 and A_1	$R_1, A_2R_2, \dots, A_{k-1}R_{k-1}$	A_k
Understanding user intents	uncertain	----->		certain

Table 1: Information seeking process : Conversation as a mean of clarifying user’s information need and adding details to the query.

a query, select appropriate information sources, filter results by specific options using facets, and later review the search results in the presentation stage.

A standard interface for search engines is an ad-hoc search box that allows a single query string from a user. Typically, users write a short sequence of keywords that describes their information needs. The system may provide query suggestions in this search box, but we consider it as an *elaboration* action in the following stage.

The emergence of conversational systems demands a different mode of communication, such as voice user interfaces (VUIs) or chatbots [29, 48]. As we defined the two characteristics of ConvSearch, this conversational interface has two attributes: the use of natural language and multi-turn interactions.

3.2 Mutual Understanding

Provided with the interface features, a user and the system first attempt to explore the topic of interest in the search space. In this stage, a user specifies the information needs, and the system reveals what is available in the data collection. We assume that users may not be familiar with the searching task and even unclear about the target information due to the misconception of the topics or the data collection itself. Depending on the search system, users endeavor to find the best query by which the system can retrieve relevant data and satisfy the user. The system analyzes the initial query utilizing various NLP and IR techniques such as query prediction [72] and query expansion [57]. Then, the system can ask for clarification or return the initial retrieval results upon the analysis.

3.3 Elaboration

Elaboration is an iterative process, often illustrated as a loop between a user and the system in IR process diagrams. The outcome of the interaction is a refined query. We narrow down the search focus through the interactions between a user and the system in this stage. We add additional information to a user query (e.g., query expansion) or reformulate a query given by the user’s feedback (e.g., explicit/implicit relevance feedback). We also consider interactions using visual aids as an elaboration action. We aim to leverage **conversations** for the elaboration task toward conversational search systems.

3.4 Presentation

The presentation stage is highly linked with communication and the initiation stage. The scope of user interfaces for search has been expanded recently, including textual and audio/video communications, which requires the system to accommodate different interfaces, such as multi-modal (e.g., a conversation using visual information), multi-dimensional (e.g., knowledge panel), and interactive (e.g., visual analytics), including conversational agents (e.g., chatbots).

The content of search responses should also contain answers to questions and recommendations. As the search systems become more flexible with their communication strategies, systems response should include the retrieval results and other types of interactions. This demand creates another set of challenges in search system design.

4 CONVERSATIONAL SEARCH

In many real-world information-seeking scenarios, seekers lack detailed knowledge of the underlying information sources. Consequently, a query formulation effort (“an intelligent guess”) primarily relies on the user’s prior knowledge. However, ConvSearch changes this scenario according to the initiatives and user intents to make information more accessible and satisfying in retrieval practice [97].

Suppose the goal of ConvSearch aims at satisfying a user’s information needs in a sequence (S) of multi-turn dialogue between the system and a user.

$$S = Q_0, (A_1R_1, A_2R_2, \dots, A_{k-1}R_{k-1}), A_k$$

A conversation is initiated by a user’s first attempt to express his/her information needs (Q_0); This can be a keyword-based query or a complete interrogative sentence. The conversation continues with multiple pairs of a system-oriented action (A_i) and the user’s response (R_i). The goal of ConvSearch is to satisfy the user with ($A_k | A_1, \dots, A_{k-1}$) and ideally terminate the conversation when the user is satisfied with A_k .

We do not strictly define or categorize system actions (A_i). Still, we include at least the following action types: $A_i \in \{D_R, D_S, q, r\}$, where D_R is a set of relevant data items, D_S is a recommendation with suggested items, q is a question for search-oriented clarification, and r is pertinent information to any of the previous user-initiated questions (e.g., a direct answer or a textual snippet that

can contain an answer to $R_{<i}$). The user can provide further information (r) to a question or take the initiative to ask a follow-up question (q): $R_i \in \{q, r\}$

Figure 1 illustrates the architecture of a ConvSearch system, which consists of three components: (1) a dialogue management system (DMS), (2) online action modules, and (3) offline knowledge-base modules. DMS coordinates the conversation between the system and the user. The two most essential features of DMS are *query understanding* and *response generation*. For example, DMS might involve in a process for specifying the user’s intent by generating a clarifying question. The query understanding module analyzes the initial retrieval results and the user query to predict if it is necessary to ask a clarifying question. The response generation module determines how to form a question and executes it.

Online action modules operate a system action requested by DMS, which consists of three modules: information retrieval system, question-answering, and recommender system. ConvSearch systems allow queries in a more natural format such as a complete question sentence, which makes the question-answering feature a crucial module in developing ConvSearch systems. Furthermore, the ConvSearch system should also work as a recommender system to let users explore available data items present in the database and possible search options. We conceive an architecture of ConvSearch systems which comprises two important system action modules and the information retrieval system.

4.1 Dialogue Management System

Dialogue Management Systems (DMS) engage in conversational interactions between a user and the system, primarily concerned with understanding a user’s intent and generating an appropriate system action to it. Typically, DMS consists of two modules: *dialogue state tracking* and *dialogue policy*.

With the IR-oriented DMS, the retrieval task is tracked in the form of the belief state to represent the user’s information needs throughout the conversation. Methods utilizing structured states, such as frame-based slot filling approaches [27], are widely adopted in task-oriented dialogue systems. Unfortunately, this pre-defined slot/value pair structure is considered unsuitable for open-domain conversational search systems [14].

One of the main challenges of *dialogue state tracking* (DST) is identifying entities across a multi-turn conversation, which consequently poses a conversational query reformulation (CQR) problem such as coreference resolution and query expansion [68]. Researchers attempted to resolve the ambiguity issues in a local query by adding keywords from its session (including answers to any queries) or prior knowledge [64, 94]. Recently, leveraging neural networks for predicting slot values has been a general approach to the DST problems [5, 30, 53].

Dialogue policy (DP) is a function that decides how the system responds to the user’s previous utterances. Rather strict belief state representation is not suitable for the ConvSearch systems. Hence, DP is expected to be a more versatile and flexible learning system with a high priority because the ConvSearch systems integrate subsystems in IR/QA/RecSys/KB/NLP.

In general, DP should select the most effective action to minimize uncertainty, which is the ultimate goal of the ConvSearch

systems. More specifically, Penha et al. [60] listed fifteen sub-goals (e.g., query disambiguation from IR, intent/domain prediction from DMS, MRC from NLP, etc.) and categorized them into two groups: information-need elucidation and information presentation, which correspond to our last two stages in the information-seeking pipeline (i.e., elaboration and presentation). The action set has no standardized scheme. For example, depending on the search goals, we can suggest actions for each stage as follows: $\{\text{clarify, elicit, interpret}\}$ for elaboration and $\{\text{provide results, recommend, summarize, explain}\}$ for presentation.

Query Performance Prediction (QPP) is one of the IR evaluation methods actively studied over the past two decades. QPP estimates the effectiveness of the retrieval results without using human relevance judgments. QPP has become more critical in the context of ConvSearch because it can be a significant factor in dialogue policy learning [71]. Pal and Ganguly [59] proposed a method that involves shifting a window of terms through a conversation and score the segments using QPP. Recent studies focus on using neural approaches such as using a pre-trained language model for QPP [4].

4.1.1 Conversational Query Understanding (CQU). A query understanding module is expected to transform textual data (i.e., query) into semantic representations by inferring the user’s intent using various NLP techniques, including deep learning methods. When it becomes Conversational Query Understanding (CQU), we can formulate this problem as context-aware query reformulation. Essentially, the goal is to construct a conversational query that precisely encodes the user’s information needs. Researchers have made significant progress on related tasks, including user intent prediction and query disambiguation.

The challenges in CQU originated in the unclearness of user utterances due to anaphora and ellipsis. Hence, the query reformulation process, such as coreference resolution and query expansion, is a necessary feature regardless of the type and modality of the search. We consider these problems critical sub-tasks of dialogue management systems. Recently proposed methods commonly leverage neural network models to accomplish these tasks. Yu et al. [96] proposed a visual-aware pronoun coreference resolution method between a dialogue and an image. Lin et al. [44] enhanced a neural query rewriting module using term importance estimation for conversational passage retrieval tasks.

4.1.2 System Response Generation. *Response Generator* elicits outputs by converting structured data into natural language utterances, representing NLG task engines. The output should contain various linguistic components, such as function words and punctuations. Gatt and Krahmer [23] categorized the linguistic realization into three different approaches: (1) human-crafted templates (2) human-crafted grammar-based systems, and (3) corpus-based statistical approaches.

Mikolov et al. [51] introduced the recurrent neural network approach for training a language model. A similar approach was advanced by Wen et al. [88, 89] with an LSTM-based structure to NLG. Subsequently, according to the dialogue policy, the challenges in NLG (e.g., information omitting and duplicating problems in surface realization) are addressed by gating the input vector of LSTM-based

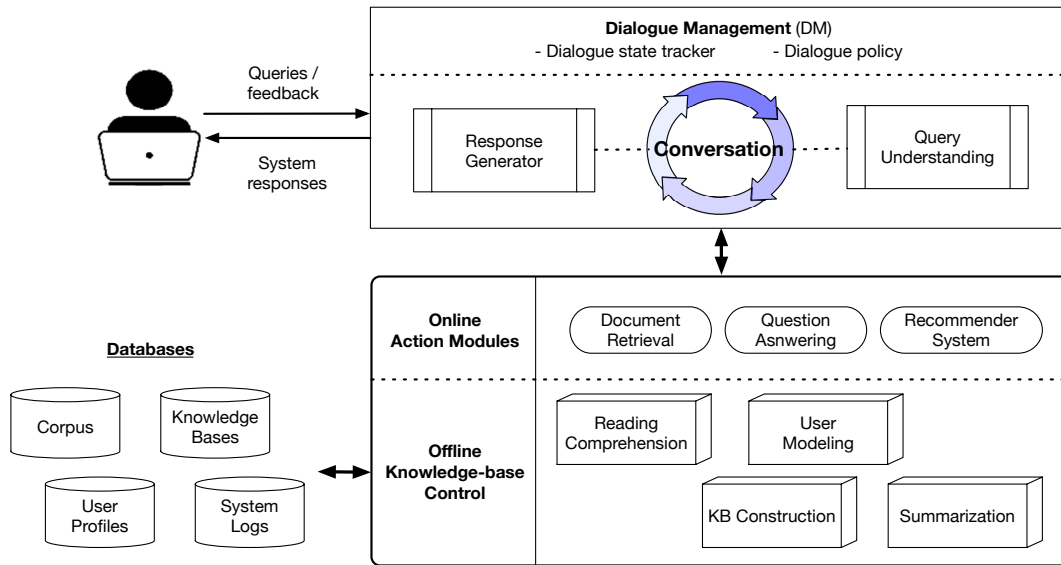


Figure 1: The architecture of a conversational search system: Dialogue Management System (DMS) coordinates the conversation between the system and user. Online Action Modules operate an action requested by DMS and Offline KB Modules prepare information to support the online system actions.

structure [82, 89]. Recently, Dudy et al. [20] highlighted the relevance as in IR to be a crucial measure for designing text-generating tasks.

4.2 Knowledge Base

Designing and constructing a knowledge base (KB) is crucial in developing a ConvSearch system. KB represents a knowledge model of the search system, which may integrate different elements such as words, concepts, or entities, and their predicates. Typically, KBs are modeled employing taxonomy or ontology, structured in relational databases or knowledge graphs (KG). Recent research studies explore the efficacy of using KBs embedded in a semantic vector space using neural networks. The following highlights some of the use cases of various knowledge models.

The most dominant use case of KB in the information-seeking process is question-answering. KBQA (QA over KB) is to elicit answers to given questions using the semi-structured relationships between entities, and this field has been studied actively [21]. In essence, KB in IR exploits the semantic regularities among data elements (e.g., concepts, documents), and researchers have recently leveraged deep learning to learn the regularities. For example, Lukovnikov et al. [47] trained an NN model to rank subject-predicate pairs to retrieve relevant facts for a given question. Shen et al. [75] tackled the coreference resolution problem in semantic parsing, utilizing a large-scale knowledge base such as DBpedia [43] and Wikidata [84].

KB involves in every aspect of ConvSearch. Agarwal et al. [1] incorporate a multi-modal knowledge base in generating system responses related to product-specific attributes, whereby a response can be a mixture of textual and visual information. Gaur et al. [24] utilize a knowledge graph to generate information-seeking

questions. Clearly, KB can improve the NLP [87] and recommendation [101] modules in conversational search systems.

4.3 Question-Answering

The properties of QA and IR overlap with information-seeking perspectives. A subtle difference between them is that IR considers a set of relevant documents to answer the user’s question. In contrast, QA provides more specific information to a question, such as factoids, a list of entities, definitions, relationships, etc., Recently, QA captured more attention due to the increased interest in conversational aspects of the information-seeking process. There are two types of approaches in QA: Machine Reading Comprehension (MRC) [11, 73] and Knowledge Graph-based Question-Answering (KGQA) [6]. ConvQA follows the same approaches. In this paper, we highlight two aspects of QA in IR. Firstly, the research efforts to address the challenges in ConvQA, and secondly, Biomedical QA (BQA) and its applications.

In ConvQA, the user’s questions are not in a full-fledged interrogative sentence. Inherently, search systems are demanded to resolve more complex linguistic problems of conversations [22]. Query rewriting is an approach to replenish the partial view of a user’s information need by identifying repeated or omitted mentions and replacing them with more specific words [83]. Christmann et al. [12] proposed a method to better understand users’ incomplete questions in terms of fact-centric entities and predicates over a knowledge graph, automatically inferring missing or ambiguous pieces in a conversation. Gao et al. [22] proposed a generative model that maps incomplete utterances to logical forms, which can be executed on a knowledge base in searching for answers. Qu et al. [65] focused more on the positional information of conversation history.

They proposed an MRC model with the history attention mechanism to demonstrate the importance of positional information of utterances in conversation modeling.

Our underlying hypothesis is that we can improve information retrieval quality by judicious use of QA systems to find items containing clues to answer user questions and queries. It is imperative to automatically construct and maintain domain-specific knowledge bases along with a corpus and exploit them in ConvSearch.

4.4 Recommender Systems

Recommender Systems (RecSys) and IR have similar goals; both return a list of relevant items. However, the goals are slightly different in that IR attempts to find the best item for the given query. In contrast, recommender systems allow exploration of the search space to find the available items from different perspectives. Like other information-seeking fields, RecSys started employing conversational approaches (ConvRecSys) that enable interactions to refine the understanding of users' preferences [32].

The most crucial task in RecSys is user modeling regardless of the methods: collaborative filtering or content-based filtering. Learning user preferences or degree of expertise should be a desired attribute of the conversational search systems. With user modeling, a system can provide tailored search results and recommendations. Indeed, this personalization can raise privacy and opacity concerns [86] since users do not have direct access to the information collected by the system. Nevertheless, the techniques for ConvRecSys are gaining more attention due to the shared tasks with IR and the benefits of providing recommendations in the information-seeking process.

Recommendations can improve search experiences in various aspects: (1) The system can select high-quality items based on other measures beyond their content-based features. (2) Recommendations also provide intuitive explanations that help humans understand why certain items are recommended [98]. (3) Ultimately, recommendations provide multi-dimensional views of the targeted information. For example, scholarly document search engines (e.g., Semantic Scholar) recommend highly related citations to a research topic of interest. We can recommend items such as citation [33], publication venue [49], authors to follow, and even queries. A query suggestion technique like "People Also Ask" recommends the relevant alternative queries that lead to a different set of search results.

4.5 Evaluation

Although the evaluation component is not shown in Figure 1, the study of evaluation methodology in ConvSearch is vital and still needs to be explored to a full extent. ConvSearch differs from traditional IR systems in that it involves multi-turn interactions (e.g., sessions) using more likely well-formed natural language questions. Traditional evaluation methods (based on the Cranfield paradigm) focus on computing scores to a single query that essentially indicate how many relevant items are found and are positioned higher in a ranked list of results (e.g., precision, recall, and their variants).

There exists a line of work investigating the evaluation methods for interactive IR. Earlier, Carterette et al. [10] proposed dynamic test collections to systematically evaluate interactivity using click information and time spent reading documents. Jiang et al.

[34] developed evaluation methods for voice-activated intelligent assistants in terms of user utility in speech recognition and intent classification. However, these approaches do not directly measure the performance of search-oriented conversational interactions.

Zhang et al. [99] generalized IR evaluation metrics as search simulation using the notions of interaction reward and cost; for example, precision can be defined as the ratio of interaction reward and cost. Lipani et al. [45] developed an offline evaluation framework of ConvSearch based on the idea of "subtopics" that models novelty and diversity in search and recommendation. Specifically, they defined an evaluation metric called Expected Conversation Satisfaction (ECS) which estimates conversation satisfaction over many simulated dialogues. Various attempts have been made to assess ConvSearch systems in multiple dimensions, including user intent prediction [63], next question prediction [95], user satisfaction prediction [79], sub-goals prediction as appeared in the TREC Conversational Assistant Track [19].

5 AIMS OF BIOMEDICAL CONVSEARCH

To an increasing extent, people utilize search engines to seek health advice [18]; either to extract up-to-date clinical knowledge or to elicit self-diagnosis to their medical queries before reaching a doctor. Moreover, the journal published by Koman et al. [39] concluded that the data-seeking agents assist the growing world but mentioned a few challenges likely, performance of accessing accurate information, bio-data integrity, and data miss-use. However, the conversational system acts as social technology, which figured as the significant approach for social distance clinical treatment in this recent COVID-19 pandemic [78]. In this scenario, ConvSearch can aid in the information-seeking process by providing means of iterative and interactive communication.

This section shares the latest development in conversational search, especially in the biomedical and healthcare domains. We highlight diverse and inclusive examples (beyond the IR perspectives) that portray the aims of ConvSearch in the biomedical domains.

5.1 Semantic Information Retrieval

Most of the users searching for biomedical information may not be able to provide precise scientific terms to express their information needs. Though the terminology has been given righteously, there would be an occurrence of vocabulary mismatch and semantic gaps.

As the biomedical knowledge to be expressed in a query becomes more complex and sophisticated, researchers propose various data structures and language standards. For example, researchers model semantics using subject-predicate-object triples in SemMedDB [37], entity sets for search [74], a graph of contextualized concepts in SemEHR [91], dense vectors in the vector space model [67], or biological modeling languages such as BEL [76].

Kiesel et al. [36] stressed the importance of meta-information in conversational search systems, which provides contextualized support in document retrieval. The meta-information concepts include document length, cognitive search intents, credibility, and extra-topical dimensions such as geographical and temporal information. Although it is a very early stage to assess the efficacy of conversational interfaces for semantic IR, Preininger et al. [61]

demonstrated that users prefer using a conversational agent to seek a certain type of information in a pharmacologic knowledge base, such as administration, intravenous compatibility, drug class, and pharmacokinetics.

5.2 Knowledge Base of Biomedical Data

To achieve Bio-Conversational search system, the knowledge base has to be related to the health base information. The required information can be gathered from various popular healthcare resources, Pubmed datasets, HealthData.gov, NICHD, National Library of Medicine datasets, and Hugging-Face datasets. Further, these datasets were molded into a structural manner to develop meta paths without any ambiguity or uncertainty to achieve QA framework. The construction of graph representations assists the database mechanism in developing a meta-path structural way to retrieve the necessary information. Constructing the structural information and improving the accuracy with semantic correlations between modalities is discussed by Xiao and Zhou [93] according to Attention-based Generative Adversarial Hashing) GAH model. In medical surveillance, for retrieving biological information Medical Knowledge Graph (MKG) gives a lift to BioConv systems in constructing structural knowledge. During the process of extracting information, to avoid noise and faulty outcomes of the data Wu et al. [92] proposed a hybrid neural network model with multi-head attention enhanced with Graph Convolution Networks (GCN), which captures complex relations and illustrates the certain necessary meta-paths to extract bio-information.

5.3 Biomedical Question-Answering and Conversational Agents

Regarding biomedical information-seeking problems, the most actively studied fields are question-answering (BQA) and conversational agents (healthcare chatbots). One of the early BQA systems is *AskHERMES* [9], which allows physicians to write a question in natural language and navigate possible answer sentences to meet their information needs. BQA is an essential task for clinical decision support and personal health information seeking, which has been extensively studied. Interested readers can refer to Jin et al. [35]’s survey, highlighting recent developments and approaches to BQA.

Another popular adaptation is using conversational agents (i.e., chatbots) to support sociopsychological health interventions [31]. Kretschmar et al. [41] discussed the strength and limitations of using chatbots in mental health support. Kowatsch et al. [40] demonstrated the potential of chatbots as a social mediator between healthcare professionals, patients, and family members. Physicians perceive conversational agents as a practical and innovative tool when seeking information in general; However, physicians emphasize the significance of obtaining specific and trustworthy answers [39]. Developing systems with the properties of interpretability and privacy-preserving mechanisms is a crucial topic in biomedical ConvSearch [2, 8].

5.4 Personalization

Information seekers with different backgrounds and degrees of domain knowledge may express different information needs with

the same query. Search engines should comprehend the underlying search intents by understanding the user’s preference in context. Personalization is a process of dynamically changing the information access and content, interface, and search functionality to tailor search outcomes for a user’s information need. In a broader scope, personalization in healthcare includes personalized medicine [77] and services like education and therapy [26].

There exist many concerns regarding personalization in the information-seeking scenario. As pointed out by Kocaballi et al. [38], most ConvSearch systems with a personalization feature are implemented without theoretical or evidence-based support, which can cause patient safety, privacy, and fairness issues. Personalization in ConvSearch is also prone to amplifying bias [25], such as filtering results by information sources and reducing the diversity, which is a potential violation of the usability principles [56].

5.5 Trustworthiness and Privacy Concerns

Recently, more attention has been directed to trustworthiness and privacy issues in deep learning technologies, such as the knowledge transfer mechanism behind the pre-trained language models (PLM). For example, word embeddings obtained from a publicly available PLM (e.g., BERT) can easily produce unwanted outcomes due to the unclear definition of similarity in the feature vector space. As Noh and Kavuluru [58] pointed out, PLMs may not be able to distinguish words in the same context, which can be a critical issue in natural language understanding/generation in biomedical applications. For example, words in antonym relationships (e.g., high/low blood pressure, opioid and nonopioid) or disease-symptom relationships (e.g., pharyngitis and sore throats) may have similar semantic representations.

To address this problem, a rapidly growing body of work focuses on analyzing the knowledge captured by PLM. A typical approach is probing via prompt engineering, which utilizes standardized biomedical vocabularies and ontologies. Commonly used benchmarks for probing biomedical knowledge include BioLAMA [81] and MedLAMA [50]. Another focus is the privacy leakage issue with PLM. Nakamura et al. [54] examine the privacy risk of language models pretrained with a document collection containing sensitive personal information. Using deep learning techniques is inevitable in ConvSearch systems, requiring more research to examine the potential pitfalls of transferring knowledge from other information sources.

6 CONCLUSION

Our survey summarizes current research on conversational search (ConvSearch). We have built our work on major components in ConvSearch and focused on the operation of dialogue and conversational interactions. Further, we have collaborated our work in the biomedical and healthcare domains to establish an ideology of social technology. The application of ConvSearch in the bio-field would bring a drastic change in the social world.

The emerging field of ConvSearch is adopting ideas from already established areas such as QA, RecSys, DS, and NLP, and the degree of integration is coarse at this stage (c.f., Fig. 2). For an instance, current ConvSearch research is heavily skewed towards QA; it should be supported by diverse set of language understanding techniques

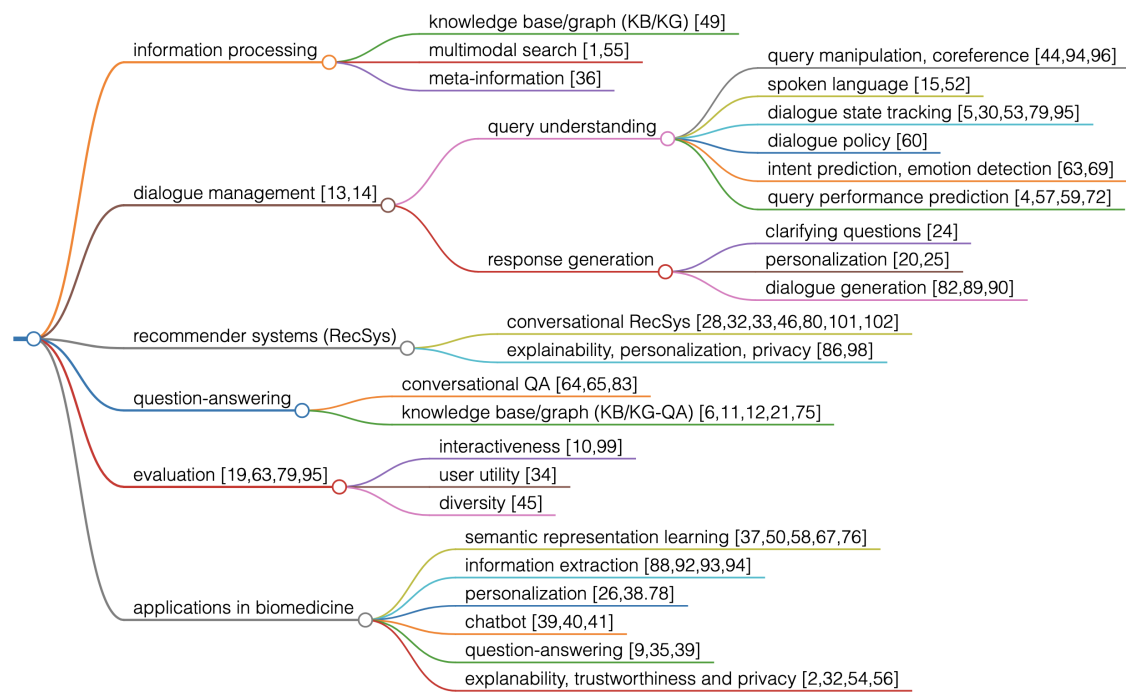


Figure 2: ConvSearch Research Sub-tasks

such as reasoning over knowledge derived from an information source utilizing knowledge bases. Consequently, policy learning acting as a ‘control tower’ takes a vital role in the future development of ConvSearch systems. More researchers should focus on improving the integrated system of various methodologies from different fields.

REFERENCES

- [1] Shubham Agarwal, Ondrej Dusek, Ioannis Konstas, and Verena Rieser. 2018. A Knowledge-Grounded Multimodal Search-Based Conversational Agent. In *SCAI@EMNLP*. <https://doi.org/10.48550/arXiv.1810.11954>
- [2] Lamia Alam and Shane T. Mueller. 2021. Examining the effect of explanation on satisfaction and trust in AI diagnostic systems. *BMC Medical Informatics and Decision Making* 21 (2021). <https://doi.org/10.1186/s12911-021-01542-6>
- [3] Avishek Anand, Lawrence Cavedon, Hideo Joho, Mark Sanderson, and Benno Stein. 2019. Conversational Search (Dagstuhl Seminar 19461). *Dagstuhl Reports* 9 (2019), 34–83. <https://doi.org/10.4230/DagRep.9.11.34>
- [4] Negar Arabzadeh, Maryam Khodabakhsh, and Ebrahim Bagheri. 2021. BERT-QPP: Contextualized Pre-trained transformers for Query Performance Prediction. *Proceedings of the 30th ACM International Conference on Information & Knowledge Management* (2021). <https://doi.org/10.1145/3459637.3482063>
- [5] Vevake Balaraman, Seyedmostafa Sheikhalishahi, and Bernardo Magnini. 2021. Recent Neural Methods on Dialogue State Tracking for Task-Oriented Dialogue Systems: A Survey. In *SIGDIAL*.
- [6] Hannah Bast and Elmar Haussmann. 2015. More Accurate Question Answering on Freebase. *Proceedings of the 24th ACM International Conference on Information and Knowledge Management* (2015). <https://doi.org/10.1145/2806416.2806472>
- [7] Nicholas J. Belkin, Colleen Cool, Adelheit Stein, and Ulrich Thiel. 1995. Cases, scripts, and information-seeking strategies: On the design of interactive information retrieval systems. *Expert Systems With Applications* 9 (1995), 379–395. [https://doi.org/10.1016/0957-4174\(95\)00011-W](https://doi.org/10.1016/0957-4174(95)00011-W)
- [8] Miles Brundage, Shahar Avin, Jasmine Wang, Haydn Belfield, Gretchen Krueger, Gillian K. Hadfield, Heidy Khlaaf, Jingying Yang, Helen Toner, Ruth Fong, Tegan Maharaj, Pang Wei Koh, Sara Hooker, Jade Leung, Andrew Trask, Emma Bluemke, Jonathan Lebensbold, Cullen O’Keefe, Mark Koren, Theo Ryyffel, J. B. Rubinovitz, Tamay Besiroglu, Federica Carugati, Jack Clark, Peter Eckersley, Sarah de Haas, Maritza L. Johnson, Ben Laurie, Alex Ingerman, Igor Krawczuk, Amanda Askill, Rosario Cammarota, Andrew J. Lohn, David Krueger, Charlotte Stix, Peter Henderson, Logan Graham, Carina Prunkl, Bianca Martin, Elizabeth Seger, Noa Zilberman, Se’an ’O h’Eigeartaigh, Frens Kroeger, Girish Sastry, Rebecca Kagan, Adrian Weller, Brian Tse, Elizabeth Barnes, Allan Dafoe, Paul Scharre, Ariel Herbert-Voss, Martijn Rasser, Shagun Sodhani, Carrick Flynn, Thomas Krendl Gilbert, Lisa Dyer, Saif Khan, Yoshua Bengio, and Markus Anderljung. 2020. Toward Trustworthy AI Development: Mechanisms for Supporting Verifiable Claims. *ArXiv abs/2004.07213* (2020). <https://doi.org/10.48550/arXiv.2004.07213>
- [9] Yonggang Cao, F. Liu, Pippa M Simpson, Lamont D. Antieau, Andrew S. Bennett, James J. Cimino, John W. Ely, and Hong Yu. 2011. AskHERMES: An online question answering system for complex clinical questions. *Journal of biomedical informatics* 44 2 (2011), 277–88. <https://doi.org/10.1016/j.jbi.2011.01.004>
- [10] Ben Carterette, Ashraf Bah Rabiou, and Mustafa Zengin. 2015. Dynamic Test Collections for Retrieval Evaluation. *Proceedings of the 2015 International Conference on The Theory of Information Retrieval* (2015).
- [11] Danqi Chen, Adam Fisch, Jason Weston, and Antoine Bordes. 2017. Reading Wikipedia to Answer Open-Domain Questions. In *ACL*. <https://doi.org/10.18653/v1/P17-1171>
- [12] Philipp Christmann, Rishiraj Saha Roy, Abdalghani Abujabal, Jyotsna Singh, and Gerhard Weikum. 2019. Look before you Hop: Conversational Question Answering over Knowledge Graphs Using Judicious Context Expansion. *Proceedings of the 28th ACM International Conference on Information and Knowledge Management* (2019). <https://doi.org/10.1145/3357384.3358016>
- [13] Gavin E. Churcher, Eric Atwell, and Clive Souter. 1997. Dialogue Management Systems: a Survey and Overview.
- [14] Philip R. Cohen. 2020. Back to the Future for Dialogue Research. In *AAAI*.
- [15] Fabio A. Crestani. 2002. Spoken query processing for interactive information retrieval. *Data Knowl. Eng.* 41 (2002), 105–124. [https://doi.org/10.1016/S0169-023X\(02\)00024-1](https://doi.org/10.1016/S0169-023X(02)00024-1)
- [16] W. Bruce Croft. 2019. The Importance of Interaction for Information Retrieval. *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval* (2019). <https://doi.org/10.1145/3331184.3331185>
- [17] W. Bruce Croft and R. H. Thompson. 1987. I 3 R: a new approach to the design of document retrieval systems. *Journal of the Association for Information Science and Technology* 38 (1987), 389–404. [https://doi.org/10.1002/\(SICI\)1097-4571\(198711\)38:6<389::AID-ASI>3.0.CO;2-4](https://doi.org/10.1002/(SICI)1097-4571(198711)38:6<389::AID-ASI>3.0.CO;2-4)

- [18] Sebastian Cross, Ahmed Mourad, G. Zuccon, and Bevan Koopman. 2021. Search Engines vs. Symptom Checkers: A Comparison of their Effectiveness for Online Health Advice. *Proceedings of the Web Conference 2021* (2021). <https://doi.org/10.1145/3442381.3450140>
- [19] Jeffrey Dalton, Chenyan Xiong, and Jamie Callan. 2020. TREC CAsT 2019: The Conversational Assistance Track Overview. *ArXiv abs/2003.13624* (2020).
- [20] Shiran Dudy, Steven Bedrick, and Bonnie Lynn Webber. 2021. Refocusing on Relevance: Personalization in NLG. In *EMNLP*. <https://doi.org/10.18653/v1/2021.emnlp-main.421>
- [21] Bin Fu, Yunqi Qiu, Chengguang Tang, Yang Li, Haiyang Yu, and Jian Sun. 2020. A Survey on Complex Question Answering over Knowledge Base: Recent Advances and Challenges. *ArXiv abs/2007.13069* (2020). <https://doi.org/10.48550/arXiv.2007.13069>
- [22] Jianfeng Gao, Michel Galley, Lihong Li, et al. 2019. Neural approaches to conversational ai. *Foundations and trends® in information retrieval* 13, 2-3 (2019), 127–298. <https://doi.org/10.18653/v1/P18-5002>
- [23] Albert Gatt and Emiel Kraahmer. 2018. Survey of the state of the art in natural language generation: Core tasks, applications and evaluation. *Journal of Artificial Intelligence Research* 61 (2018), 65–170. <https://doi.org/10.1613/jair.5477>
- [24] Manas Gaur, Kalpa Gunaratna, Vijay Srinivasan, and Hongxia Jin. 2021. ISEQ: Information Seeking Question Generation using Dynamic Meta-Information Retrieval and Knowledge Graphs. *ArXiv abs/2112.07622* (2021). <https://doi.org/10.48550/arXiv.2112.07622>
- [25] Emma J. Gerritse, Faegheh Hasibi, and Arjen P. de Vries. 2020. Bias in Conversational Search: The Double-Edged Sword of the Personalized Knowledge Graph. *Proceedings of the 2020 ACM SIGIR on International Conference on Theory of Information Retrieval* (2020). <https://doi.org/10.1145/3409256.3409834>
- [26] Suparna Ghanvatkar, Atreyi Kankanhalli, and Vaibhav Rajan. 2019. User Models for Personalized Physical Activity Interventions: Scoping Review. *JMIR mHealth and uHealth* 7 (2019). <https://doi.org/10.2196/11098>
- [27] David Goddeau, Helen M. Meng, Joseph Polifroni, Stephanie Seneff, and Senis Busayapongchai. 1996. A form-based dialogue manager for spoken language applications. *Proceeding of Fourth International Conference on Spoken Language Processing, ICSLP '96 2* (1996), 701–704 vol.2. <https://doi.org/10.1109/ICSLP.1996.607458>
- [28] Mehmet H. Göker and Cynthia A. Thompson. 2000. The Adaptive Place Advisor: A Conversational Recommendation System.
- [29] Allen L. Gorin, Giuseppe Riccardi, and Jeremy H. Wright. 1997. How may I help you? *Speech Commun.* 23 (1997), 113–127. [https://doi.org/10.1016/S0167-6393\(97\)00040-X](https://doi.org/10.1016/S0167-6393(97)00040-X)
- [30] Michael Heck, Carel van Niekerk, Nurul Lubis, Christian Geishauer, Hsien-Chin Lin, Marco Moresi, and Milica Gavsic. 2020. TripPy: A Triple Copy Strategy for Value Independent Neural Dialog State Tracking. *ArXiv abs/2005.02877* (2020). <https://doi.org/10.48550/arXiv.2005.02877>
- [31] Anna Henschel, Guy Laban, and Emily S. Cross. 2021. What Makes a Robot Social? A Review of Social Robots from Science Fiction to a Home or Hospital Near You. *Current Robotics Reports* (2021), 1–11. <https://doi.org/10.1007/s43154-020-00035-0>
- [32] D. Jannach, Ahtsham Manzoor, Wanling Cai, and Li Chen. 2021. A Survey on Conversational Recommender Systems. *ACM Computing Surveys (CSUR)* 54 (2021), 1 – 36. <https://doi.org/10.48550/arXiv.2004.00646>
- [33] Chanwoo Jeong, Sion Jang, Hyuna Shin, Eunjeong Lucy Park, and Sungchul Choi. 2020. A context-aware citation recommendation model with BERT and graph convolutional networks. *Scientometrics* (2020), 1–16. <https://doi.org/10.48550/arXiv.1903.06464>
- [34] Jiepu Jiang, Ahmed Hassan Awadallah, R. Jones, Umut Ozertem, Imed Zitouni, Ranjitha Gurunath Kulkarni, and Omar Zia Khan. 2015. Automatic Online Evaluation of Intelligent Assistants. *Proceedings of the 24th International Conference on World Wide Web* (2015).
- [35] Qiao Jin, Zheng Yuan, Guangzhi Xiong, Qian Yu, Huaiyuan Ying, Chuanqi Tan, Mosha Chen, Songfang Huang, Xiaozhong Liu, and Sheng Yu. 2022. Biomedical Question Answering: A Survey of Approaches and Challenges. *ACM Computing Surveys (CSUR)* 55 (2022), 1 – 36. <https://doi.org/10.48550/arXiv.2102.05281>
- [36] Johannes Kiesel, Lars Meyer, Martin Potthast, and Benno Stein. 2021. Meta-Information in Conversational Search. *ACM Transactions on Information Systems (TOIS)* 39 (2021), 1 – 44. <https://doi.org/10.1145/3468868>
- [37] Halil Kilicoglu, Dongwook Shin, Marcelo Fiszman, Graciela Rosembat, and Thomas C. Rindfleisch. 2012. SemMedDB: a PubMed-scale repository of biomedical semantic predications. *Bioinformatics* 28 23 (2012), 3158–60. <https://doi.org/10.1093/bioinformatics/bts591>
- [38] Ahmet Baki Kocaballi, Shlomo Berkovsky, Juan Carlos Quiroz, Liliana Laranjo, Huang Ly Tong, Dana Rezaadegan, Agustina Briatore, and Enrico W. Coiera. 2019. The Personalization of Conversational Agents in Health Care: Systematic Review. *Journal of Medical Internet Research* 21 (2019). <https://doi.org/10.2196/15360>
- [39] Jason Koman, Khristina Fauvelle, Stéphane Schuck, Nathalie Texier, and Adel Mebarki. 2020. Physicians’ Perceptions of the Use of a Chatbot for Information Seeking: Qualitative Study. *Journal of Medical Internet Research* 22 (2020). <https://doi.org/10.2196/15185>
- [40] Tobias Kowatsch, Theresa Schachner, Samira Harperink, Filipe Barata, Ullrich Dittler, Grace Xiao, Catherine Stanger, Florian v Wangenheim, Elgar Fleisch, Helmut Oswald, and Alexander Möller. 2021. Conversational Agents as Mediating Social Actors in Chronic Disease Management Involving Healthcare Professionals, Patients, and Family Members: Intervention Design and Results of a Multi-site, Single-arm Feasibility Study. *Journal of medical Internet research* (2021). <https://doi.org/10.2196/25060>
- [41] Kira Kretzschmar, Holly Tyroll, Gabriela Pavarini, Arianna Manzini, and Iliina Singh. 2019. Can Your Phone Be Your Therapist? Young People’s Ethical Perspectives on the Use of Fully Automated Conversational Agents (Chatbots) in Mental Health Support. *Biomedical Informatics Insights* 11 (2019). <https://doi.org/10.1177/117822619829083>
- [42] Carol Collier Kuhlthau. 2004. *Seeking meaning: A process approach to library and information services*. Vol. 2. Libraries Unlimited Westport, CT.
- [43] Jens Lehmann, Robert Isele, Max Jakob, Anja Jentzsch, Dimitris Kontokostas, Pablo N. Mendes, Sebastian Hellmann, Mohamed Morsey, Patrick van Kleef, S. Auer, and Christian Bizer. 2015. DBpedia – A large-scale, multilingual knowledge base extracted from Wikipedia. *Semantic Web* 6 (2015), 167–195. <https://doi.org/10.3233/SW-140134>
- [44] Sheng-Chieh Lin, Jheng-Hong Yang, Rodrigo Nogueira, Ming-Feng Tsai, Chuan-Ju Wang, and Jimmy Lin. 2021. Multi-stage conversational passage retrieval: An approach to fusing term importance estimation and neural query rewriting. *ACM Transactions on Information Systems (TOIS)* 39, 4 (2021), 1–29. <https://doi.org/10.48550/arXiv.2005.02230>
- [45] Aldo Lipani, Ben Carterette, and Emine Yilmaz. 2021. How Am I Doing?: Evaluating Conversational Search Systems Offline. *ACM Transactions on Information Systems (TOIS)* 39 (2021), 1 – 22.
- [46] Zeming Liu, Haifeng Wang, Zheng-Yu Niu, Hua Wu, Wanxiang Che, and Ting Liu. 2020. Towards Conversational Recommendation over Multi-Type Dialogs. In *ACL*. <https://doi.org/10.18653/v1/2020.acl-main.98>
- [47] Denis Lukovnikov, Asja Fischer, Jens Lehmann, and S. Auer. 2017. Neural Network-based Question Answering over Knowledge Graphs on Word and Character Level. *Proceedings of the 26th International Conference on World Wide Web* (2017). <https://doi.org/10.1145/3038912.3052675>
- [48] Michael F. McTear. 2016. The Rise of the Conversational Interface: A New Kid on the Block?. In *FETLT*. https://doi.org/10.1007/978-3-319-69365-1_3
- [49] Eric Medvet, Alberto Bartoli, and Giulio Piccinin. 2014. Publication Venue Recommendation Based on Paper Abstract. *2014 IEEE 26th International Conference on Tools with Artificial Intelligence* (2014), 1004–1010. <https://doi.org/10.1109/ICTAL.2014.152>
- [50] Zaiqiao Meng, Fangyu Liu, Ehsan Shareghi, Yixuan Su, Charlotte Collins, and Nigel Collier. 2022. Rewire-then-Probe: A Contrastive Recipe for Probing Biomedical Knowledge of Pre-trained Language Models. *ArXiv abs/2110.08173* (2022).
- [51] Tomas Mikolov, Martin Karafiát, Lukás Burget, Jan Honza Cernocký, and Sanjeev Khudanpur. 2010. Recurrent neural network based language model. In *INTERSPPEECH*.
- [52] Antonio Moreno-Daniel, Sarangarajan Parthasarathy, Biing-Hwang Juang, and Jay G. Wilpon. 2007. Spoken Query Processing for Information Retrieval. *2007 IEEE International Conference on Acoustics, Speech and Signal Processing - ICASSP '07 4* (2007), IV–121–IV–124. <https://doi.org/10.1109/ICASSP.2007.367178>
- [53] Nikola Mrksic, Diarmuid Ó Séaghdha, Blaise Thomson, Milica Gasic, Pei hao Su, David Vandyke, Tsung-Hsien Wen, and Steve J. Young. 2015. Multi-domain Dialog State Tracking using Recurrent Neural Networks. In *ACL*. <https://doi.org/10.3115/v1/P15-2130>
- [54] Yuta Nakamura, Shouhei Hanaoka, Yukihiro Nomura, Naoto Hayashi, Osamu Abe, Shuntaro Yada, Shoko Wakamiya, Eiji Aramaki The University of Tokyo, Nara Institute of Science, Technology, The Department of Radiology, The University of Tokyo Hospital, The Department of Radiology, and Preventive Medicine. 2021. KART: Privacy Leakage Framework of Language Models Pre-trained with Clinical Records. *ArXiv abs/2101.00036* (2021).
- [55] Liqiang Nie, Fangkai Jiao, Wenjie Wang, Yinglong Wang, and Qi Tian. 2021. Conversational Image Search. *IEEE Transactions on Image Processing* 30 (2021), 7732–7743.
- [56] Jakob Nielsen. 1994. Enhancing the explanatory power of usability heuristics. In *CHI '94*. <https://doi.org/10.1145/191666.191729>
- [57] Rodrigo Nogueira, Wei Yang, Jimmy J. Lin, and Kyunghyun Cho. 2019. Document Expansion by Query Prediction. *ArXiv abs/1904.08375* (2019).
- [58] Jiho Noh and Ramakanth Kavuluru. 2021. Improved Biomedical Word Embeddings in the Transformer Era. *Journal of biomedical informatics* (2021), 103867.
- [59] Dipasree Pal and Debasis Ganguly. 2021. Effective Query Formulation in Conversation Contextualization: A Query Specificity-based Approach. *Proceedings of the 2021 ACM SIGIR International Conference on Theory of Information Retrieval* (2021). <https://doi.org/10.1145/3471158.3472237>
- [60] Gustavo Penha, Alex Bălan, and Claudia Hauff. 2019. Introducing MANtIS: a novel Multi-Domain Information Seeking Dialogues Dataset. *ArXiv*

- abs/1912.04639 (2019). <https://doi.org/10.48550/arXiv.1912.04639>
- [61] Anita M. Preinerger, Bedda L. Rosario, Adam M Buchold, Jeff Heiland, Nawshin Kutub, Bryan Bohanan, Brett R. South, and Gretchen Purcell Jackson. 2021. Differences in information accessed in a pharmacologic knowledge base using a conversational agent vs traditional search methods. *International journal of medical informatics* 153 (2021), 104530. <https://doi.org/10.1016/j.ijmedinf.2021.104530>
- [62] PricewaterhouseCoopers. 2021. Consumer intelligence series: Prepare for the Voice Revolution. <https://www.pwc.com/us/en/services/consulting/library/consumer-intelligence-series/voice-assistants.html>
- [63] Chen Qu, Liu Yang, W. Bruce Croft, Yongfeng Zhang, Johanne R. Trippas, and Minghui Qiu. 2019. User Intent Prediction in Information-seeking Conversations. *Proceedings of the 2019 Conference on Human Information Interaction and Retrieval* (2019).
- [64] Chen Qu, Liu Yang, Minghui Qiu, W. Bruce Croft, Yongfeng Zhang, and Mohit Iyyer. 2019. BERT with History Answer Embedding for Conversational Question Answering. *Proceedings of the 42nd International ACM SIGIR Conference on Research and Development in Information Retrieval* (2019). <https://doi.org/10.1145/3331184.3331341>
- [65] Chen Qu, Liu Yang, Minghui Qiu, Yongfeng Zhang, Cen-Chieh Chen, W. Bruce Croft, and Mohit Iyyer. 2019. Attentive History Selection for Conversational Question Answering. *Proceedings of the 28th ACM International Conference on Information and Knowledge Management* (2019). <https://doi.org/10.1145/3357384.3357905>
- [66] Filip Radlinski and Nick Craswell. 2017. A Theoretical Framework for Conversational Search. *Proceedings of the 2017 Conference on Conference Human Information Interaction and Retrieval* (2017). <https://doi.org/10.1145/3020165.3020183>
- [67] Majid Rastegar-Mojarad, Ravikumar Komandur Elayavilli, Yanshan Wang, Sijia Liu, Feichen Shen, and Hongfang Liu. 2017. Semantic Information Retrieval : Exploring Dependency and Word Embedding Features in Biomedical Information Retrieval.
- [68] Pushpendre Rastogi, Arpit Gupta, Tongfei Chen, and Lambert Mathias. 2019. Scaling Multi-Domain Dialogue State Tracking via Query Reformulation. In *NAACL*. <https://doi.org/10.18653/v1/N19-2013>
- [69] Fuji Ren and Tianhao She. 2021. Utilizing External Knowledge to Enhance Semantics in Emotion Detection in Conversation. *IEEE Access* 9 (2021), 154947–154956. <https://doi.org/10.1109/ACCESS.2021.3128277>
- [70] Stephen E. Robertson and Hugo Zaragoza. 2009. The Probabilistic Relevance Framework: BM25 and Beyond. *Found. Trends Inf. Retr.* 3 (2009), 333–389.
- [71] Haggai Roitman, Shai Erera, and Guy Feigenblat. 2019. A Study of Query Performance Prediction for Answer Quality Determination. *Proceedings of the 2019 ACM SIGIR International Conference on Theory of Information Retrieval* (2019). <https://doi.org/10.1145/3341981.3344219>
- [72] Dwaipayan Roy, Debasis Ganguly, Mandar Mitra, and G. Jones. 2019. Estimating Gaussian mixture models in the local neighbourhood of embedded word vectors for query performance prediction. *Inf. Process. Manag.* 56 (2019), 1026–1045. <https://doi.org/10.1016/j.ipm.2018.10.009>
- [73] Minjoon Seo, Aniruddha Kembhavi, Ali Farhadi, and Hannaneh Hajishirzi. 2017. Bidirectional Attention Flow for Machine Comprehension. *ArXiv abs/1611.01603* (2017). <https://doi.org/10.48550/arXiv.1611.01603>
- [74] Jiaming Shen, Jinfeng Xiao, Xinwei He, Jingbo Shang, Saurabh Sinha, and Jiawei Han. 2018. Entity Set Search of Scientific Literature: An Unsupervised Ranking Approach. *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval* (2018). <https://doi.org/10.48550/arXiv.1804.10877>
- [75] Tao Shen, Xiubo Geng, Tao Qin, Daya Guo, Duyu Tang, Nan Duan, Guodong Long, and Daxin Jiang. 2019. Multi-Task Learning for Conversational Question Answering over a Large-Scale Knowledge Base. In *EMNLP*. <https://doi.org/10.48550/arXiv.1910.05069>
- [76] Ted Slater. 2014. Recent advances in modeling languages for pathway maps and computable biological networks. *Drug discovery today* (2014), 193–8. <https://doi.org/10.1016/j.drudis.2013.12.011>
- [77] Benjamin Stark, Constanze Knahl, Mert Aydin, and Karim O. Elish. 2019. A Literature Review on Medicine Recommender Systems. *International Journal of Advanced Computer Science and Applications* (2019). <https://doi.org/10.14569/ijacsa.2019.0100802>
- [78] Zhaoyuan Su, John Alexis Schneider, and Sean D. Young. 2021. The Role of Conversational Agents for Substance Use Disorder in Social Distancing Contexts. *Substance Use & Misuse* 56 (2021), 1732 – 1735. <https://doi.org/10.1080/10826084.2021.1949609>
- [79] Yang Sun, Liangqing Wu, Shuangyong Song, Xiaoguang Yu, Xiaodong He, and Guohong Fu. 2022. Tracking Satisfaction States for Customer Satisfaction Prediction in E-commerce Service Chatbots. In *COLING*.
- [80] Yueming Sun and Yi Zhang. 2018. Conversational Recommender System. *The 41st International ACM SIGIR Conference on Research & Development in Information Retrieval* (2018). <https://doi.org/10.48550/arXiv.1806.03277>
- [81] Mujeeb Sung, Jinhyuk Lee, Sean S. Yi, Minji Jeon, Sungdong Kim, and Jaewoo Kang. 2021. Can Language Models be Biomedical Knowledge Bases? *ArXiv abs/2109.07154* (2021).
- [82] Van-Khanh Tran and Le-Minh Nguyen. 2017. Semantic Refinement GRU-Based Neural Language Generation for Spoken Dialogue Systems. In *PACLING*. <https://doi.org/10.48550/arXiv.1706.00134>
- [83] Svitlana Vakulenko, S. Longpre, Zhucheng Tu, and R. Anantha. 2021. Question Rewriting for Conversational Question Answering. *Proceedings of the 14th ACM International Conference on Web Search and Data Mining* (2021). <https://doi.org/10.48550/arXiv.2004.14652>
- [84] Denny Vrandečić and Markus Kröttsch. 2014. Wikidata: a free collaborative knowledgebase. *Commun. ACM* 57 (2014), 78–85. <https://doi.org/10.1145/2629489>
- [85] Marilyn A. Walker and Steve Whittaker. 1990. Mixed Initiative in Dialogue: An Investigation into Discourse Segmentation. In *ACL*. <https://doi.org/10.3115/981823.981833>
- [86] Cong Wang, Yifeng Zheng, Jinghua Jiang, Jinghua Jiang, and Kui Ren. 2018. Toward Privacy-Preserving Personalized Recommendation Services. *Engineering* 4 (2018), 21–28. <https://doi.org/10.1016/j.eng.2018.02.005>
- [87] Dongsheng Wang, Qiuchi Li, Lucas Chaves Lima, Jakob Grue Simonsen, and Christina Lioma. 2019. Contextual Compositionality Detection with External Knowledge Bases and Word Embeddings. *Companion Proceedings of The 2019 World Wide Web Conference* (2019). <https://doi.org/10.1145/3308560.3316584>
- [88] Tsung-Hsien Wen, Milica Gasic, Dongho Kim, Nikola Mrksic, Pei hao Su, David Vandyke, and Steve J. Young. 2015. Stochastic Language Generation in Dialogue using Recurrent Neural Networks with Convolutional Sentence Reranking. *ArXiv abs/1508.01755* (2015). <https://doi.org/10.48550/arXiv.1508.01755>
- [89] Tsung-Hsien Wen, Milica Gasic, Nikola Mrksic, Pei hao Su, David Vandyke, and Steve J. Young. 2015. Semantically Conditioned LSTM-based Natural Language Generation for Spoken Dialogue Systems. In *EMNLP*. <https://doi.org/10.48550/arXiv.1508.01745>
- [90] Ga Wu and Kai Luo. 2019. Deep Language-based Critiquing for Recommender Systems. <https://doi.org/10.1145/3298689.3347009>
- [91] Honghan Wu, Giulia Toti, Katherine I. Morley, Zina M. Ibrahim, Amos A. Folarin, Richard G. Jackson, Ismail Emre Kartoglu, Asha Agrawal, Clive Stringer, Darren Gale, Genevieve Gorrell, Angus Roberts, Matthew T. M. Broadbent, Robert J Stewart, and Richard J. B. Dobson. 2018. SemEHR: A general-purpose semantic search system to surface semantic data from clinical notes for tailored care, trial recruitment, and clinical research*. *Journal of the American Medical Informatics Association : JAMIA* 25 (2018), 530 – 537. <https://doi.org/10.1101/235622>
- [92] Jialun Wu, Ruonan Zhang, Tieliang Gong, Yang Liu, Chunbao Wang, and Chen Li. 2021. BioIE: Biomedical Information Extraction with Multi-head Attention Enhanced Graph Convolutional Network. In *2021 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*. 2080–2087. <https://doi.org/10.1109/BIBM52615.2021.9669650>
- [93] Jianqiong Xiao and Xiaoqing Zhou. 2022. Attention-based Generative Adversarial Hashing for Cross-modal Retrieval. In *2022 IEEE 10th Joint International Information Technology and Artificial Intelligence Conference (ITAIIC)*, Vol. 10. 1885–1889. <https://doi.org/10.1109/ITAIIC54216.2022.9836826>
- [94] Jheng-Hong Yang, Sheng-Chieh Lin, Chuan-Ju Wang, Jimmy J. Lin, and Ming-Feng Tsai. 2019. Query and Answer Expansion from Conversation History. In *TREC*.
- [95] Liu Yang, Hamed Zamani, Yongfeng Zhang, J. Guo, and W. Bruce Croft. 2017. Neural Matching Models for Question Retrieval and Next Question Prediction in Conversation. *ArXiv abs/1707.05409* (2017).
- [96] Xintong Yu, Hongming Zhang, Yangqiu Song, Yan Song, and Changshui Zhang. 2019. What You See is What You Get: Visual Pronoun Coreference Resolution in Dialogues. In *EMNLP*. <https://doi.org/10.48550/arXiv.1909.00421>
- [97] Hamed Zamani, Johanne R. Trippas, Jeffrey Dalton, and Filip Radlinski. 2022. Conversational Information Seeking. *ArXiv abs/2201.08808* (2022).
- [98] Yongfeng Zhang and Xu Chen. 2020. Explainable Recommendation: A Survey and New Perspectives. *Found. Trends Inf. Retr.* 14 (2020), 1–101. <https://doi.org/10.1561/15000000066>
- [99] Yinan Zhang, Xueqing Liu, and ChengXiang Zhai. 2017. Information Retrieval Evaluation as Search Simulation: A General Formal Framework for IR Evaluation. *Proceedings of the ACM SIGIR International Conference on Theory of Information Retrieval* (2017).
- [100] Xiaoxue Zhao, Weinan Zhang, and Jun Wang. 2013. Interactive collaborative filtering. *Proceedings of the 22nd ACM international conference on Information & Knowledge Management* (2013). <https://doi.org/10.1145/2505515.2505690>
- [101] Kun Zhou, Wayne Xin Zhao, Shuqing Bian, Yuanhang Zhou, Ji rong Wen, and Jingsong Yu. 2020. Improving Conversational Recommender Systems via Knowledge Graph based Semantic Fusion. *Proceedings of the 26th ACM SIGKDD International Conference on Knowledge Discovery & Data Mining* (2020). <https://doi.org/10.48550/arXiv.2007.04032>
- [102] Jie Zou, Yifan Chen, and E. Kanoulas. 2020. Towards Question-based Recommender Systems. *Proceedings of the 43rd International ACM SIGIR Conference on Research and Development in Information Retrieval* (2020). <https://doi.org/10.1145/3397271.3401180>