

# Data Privacy Protection in DeFi Protocols

Jiawei Zhu  
mc15057@um.edu.mo  
University of Macau  
Macao, China

Zhuangtong Huang  
mc15059@um.edu.mo  
University of Macau  
Macao, China

Yixin Xu  
mc25968@um.edu.mo@um.edu.mo  
University of Macau  
Macao, China

Jerome Yen  
jeromeyen@um.edu.mo  
University of Macau  
Macao, China

Ye Wang  
wangye@um.edu.mo  
University of Macau  
Macao, China

## ABSTRACT

With the development of decentralized finance (DeFi), the inherent limitations caused by the blockchain system have come to the surface. Because recorded data on the blockchain is available to system participants, DeFi protocols may not collect the private data of users. Otherwise, the information leakage may result in serious financial losses or cause legal issues. Therefore, DeFi protocols could hardly offer different users customized solutions, and the capital utilization is limited. To address this challenge in DeFi, we propose a solution, which is a trustful protocol that allows users to provide personal private data to DeFi protocols without worrying that such information would be disclosed. By implementing asymmetric encryption, zero-knowledge proof, and homomorphic encryption, we ensure that users' data will not be controlled by any centralized authorities and avoid potential financial losses or legal disputes due to information leakage. We further discuss the application scenarios of financial data privacy protection in public blockchain DeFi ecosystems and cross-border financial applications, such as credit aggregation.

## CCS CONCEPTS

• Security and privacy → Privacy protections; • Applied computing → Electronic data interchange.

## KEYWORDS

Decentralized finance, financial privacy, privacy protections, blockchain

### ACM Reference Format:

Jiawei Zhu, Zhuangtong Huang, Yixin Xu, Jerome Yen, and Ye Wang. 2022. Data Privacy Protection in DeFi Protocols. In *Proceedings of ACM Conference (Conference'17)*. ACM, New York, NY, USA, 7 pages. <https://doi.org/10.1145/nnnnnnn.nnnnnnn>

## 1 INTRODUCTION

With the digital transformation in different sectors of the society, especially the financial markets, that generate massive amounts

of personal data, technologies that support big data analyses have been widely applied to the financial sector to increase its efficiency and effectiveness of its operation to increase revenue and profit. Financial institutions utilize the private data of clients for the purposes such as targeted marketing, credit score assessment, and risk based lending cost estimation. Using personal data not only helps clients receiving customized services but also supports financial institutions in increasing their profits by providing more suitable products or services. Consequently, an increasing number of financial institutions actively collect, analyze, and utilize users' private data [18].

Although collecting personal data is advantageous for the financial market, private data leakage has become a pervasive issue due to inadequate privacy protection provided by financial institutions. For instance, because of the leakage of personal identity information, the financial loss of identity fraud in the USA has reached 24 billion USD in 2021 [17]. Almost 90% of identity fraud is related to financial activities. Therefore, the protection of private data has become crucial in the financial industry, and several countries have issued data protection laws, such as the General Data Protection Regulation (GDPR) of the European Union [1, 19, 20].

As a fast-growing type of financial services, decentralized finance (DeFi) refers to financial applications developed on the blockchain system in the form of smart contracts. The market size of DeFi surpassed 100 billion USD in 2021 [5]. Because DeFi is fully developed on the blockchain systems, data privacy protection has become a significant issue. Once private information is recorded on the blockchain, it becomes available to the public. Therefore, it is challenging to upload confidential information on the blockchain.

Because of the concerns about using private data, the fund efficiency in DeFi is limited. DeFi protocols can hardly obtain private data and provide customized solutions to users, which reduces capital utilization. Even if DeFi users would like to provide personal information, there still remains a threat that the information might be used illegally.

In this paper, we aim at addressing the challenge of utilizing private data in DeFi without privacy disclosure. We model the problem as that the DeFi protocol could use the personal data of users on public blockchain, while no entity could obtain the complete information about the user, including the identity of the user and the exact asset information, during the entire process.

We propose a solution by introducing three stakeholders, i.e., trusted sources, a zero-knowledge proof service provider (ZKPSP), and a relay. We utilize asymmetric encryption, homomorphic

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than ACM must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from [permissions@acm.org](mailto:permissions@acm.org).

Conference'17, July 2017, Washington, DC, USA

© 2022 Association for Computing Machinery.

ACM ISBN 978-x-xxxx-xxxx-x/YY/MM... \$15.00

<https://doi.org/10.1145/nnnnnnn.nnnnnnn>

encryption, and zero-knowledge proof technology in the system to realize privacy-preserving. The system works in two phases. In the uploading asset phase, DeFi users submit requests to trusted sources to upload the certification of their asset to the blockchain system. Then, the relayer will use a homomorphic encryption function to compute encrypted asset information and record it on the blockchain. In the asset verification phase, the DeFi protocol sends messages to ZKPSP to require a statement of users' assets that is enough for them to determine whether to update the services with the user or not. Then ZKPSP returns a ZKP result based on the asset information recorded on the blockchain. The DeFi protocol can verify whether users' assets satisfy the statement with the ZKP result and further determine whether to update the service with the DeFi user. We ensure that during the entire information processing period, any entity cannot match the identity information of the DeFi user and his exact asset information, which provides the complete protection of data privacy. Meanwhile, the DeFi protocol can obtain minimal personal private data, which is enough for them to improve market efficiency.

Our research work is the first to implement both financial information verification and data privacy protection in DeFi. Our research addresses current limitations in the use of personal private data in DeFi, and may further encourage innovative DeFi applications by utilizing private user data from both on-chain and off-chain sources.

We organize this paper as follows. Section 2 provides an overview of related work on blockchain privacy. Section 3 introduces the cryptography primitives that we used in this research work. In Section 4, we describe the system design and provide security proofs. Finally, we discuss the potential application scenarios of our system and describe the significance of our research in Section 5. This paper concludes with some discussion about the limitation of our research and some potential research directions for those who are interested in such area.

## 2 RELATED WORK

In this section, we review prior research related to the financial privacy protection problem that we intend to solve. We start by reviewing prior technical solutions that protect user privacy in the blockchain systems, i.e., zero-knowledge proofs. Then, we show different scenarios requiring privacy protection on blockchain. Finally, we compare our work with prior work that also explored the privacy protection issues in DeFi.

A zero-knowledge proof is a method through which one party (the prover) can demonstrate to another party (the verifier) that a particular statement is true without disclosing any further information [6]. Buenz et al. [2] introduced the short zero-knowledge proofs without a trusted setup for the blockchain applications. Parno et al. [10] proposed the zero-knowledge succinct non-interactive argument of knowledge (zkSNARK) scheme to improve the computation efficiency of zero-knowledge proofs. Later, Sasson et al. [16] developed decentralized anonymous payment systems with a strong privacy guarantee using zkSNARK.

The privacy-preserving technologies have been applied to many different applications on blockchain. For instance, in supply chain marketplaces, providers want to disclose as much information as

possible about their skills in order to match buyers' requests while also keeping confidentiality for certain encounters. Therefore, prior studies investigated protecting both provider and buyers' privacy on blockchain-based supply chain marketplaces [3, 9, 15]. Similarly, in medical industry, blockchain has been used for sharing health records of patients among different hospitals and physicians. Previous work has developed privacy-preserving protocols that guarantee the privacy of patients while sharing medical records stored on blockchain [4, 8, 11].

There are also prior work explored the privacy protection issue in DeFi. Pauwels et al. [12] proposed a system, zkKYC, that addresses the challenges of the protection of user privacy together with the regulatory needs of anti-money laundering (AML) and know your customer (KYC). This solution was first proposed in offchain scenarios to satisfy the regulatory requirements of KYC and AML without disclosing any of the user's privacy, and then was implemented on blockchain systems for DeFi applications [13]. However, there is a centralized actor in this system kept all information of users and is controlled by the government. Therefore, the zkKYC system may not avoid the potential issues caused by information leakage, and financial privacy is not secured in the system. In contrast, we propose a decentralized solution in this paper, where any system participant cannot recover the complete information of users, which ensures financial privacy in the presence of potential information leakage.

Another related work focuses on utilizing users' private data with confidentiality and integrity. Zhang et al. proposed a solution with decentralized oracles (DECO) [21]. DECO can provide the outcome of a market operation with zero-knowledge proof without revealing the specifics of the transaction. However, DECO is not designed for financial scenarios, and it may not integrate user data from multiple sources and conduct computation confidentially. Our system aims to address this issue by introducing an additional homomorphic encryption scheme to improve system availability for different financial scenarios.

## 3 CRYPTOGRAPHY BASIS

In this section, we provide the background knowledge of a series of cryptography primitives.

### 3.1 Asymmetric Key Encryption

An asymmetric encryption scheme consists of a pair of keys, i.e., public key  $pk$  and private key  $sk$ , an encryption function  $Encrypt()$ , and a decryption function  $Decrypt()$ . The public key  $pk$  is open to participant in the system, while the private key  $sk$  is confidential by the holder of the encryption scheme.

Given a plaintext  $m$ , the encryption function will output a ciphertext  $C$  with the public key  $pk$ , i.e.,  $C = Encrypt(m, pk)$ . Then the ciphertext  $C$  can only be decrypted by  $Decrypt()$  and the private key  $sk$ ,  $m = Decrypt(C, sk)$ .

One of the most famous asymmetric key encryption algorithm is RSA algorithm. [14]

### 3.2 Homomorphic Encryption

Homomorphic encryption refers to a cryptographic method which allows user to perform algebraic computation with encrypted data,

and the decrypted result is identical to the output which is calculated by the plaintext of data.

A homomorphic encryption scheme consists of a pair of keys, i.e., public key  $pk$  and private key  $sk$ , an encryption function  $Encrypt()$ , a decryption function  $Decrypt()$ , and a pair of computation functions, i.e., original function  $f()$ , and homomorphic encryption function  $Hom_f$ .

Firstly, suppose  $m_1$  and  $m_2$  represent the original messages, which are the plaintexts. And  $f(m_1, m_2)$  represents the result of calculation performed in the plaintexts.

The plaintexts can be encrypted by the encryption function  $Encrypt()$ , resulting in the ciphertexts  $C_1$  and  $C_2$ .

$$C_1 = Encrypt(m_1, pk), C_2 = Encrypt(m_2, pk).$$

Then it comes to where the homomorphic encryption is performed.  $C_3$  represents the result of algebraic computation of ciphertexts  $C_1$  and  $C_2$  through homomorphic encryption  $Hom_f$ .

$$C_3 = Hom_f(C_1, C_2, pk).$$

The homomorphic encryption scheme ensures that the calculation results of the plaintexts  $m_1$  and  $m_2$  can be decrypted from the calculation results of the ciphertexts  $C_1$  and  $C_2$  by the decryption function  $Decrypt()$ .

$$Decrypt(C_3, sk) = f(m_1, m_2)$$

Homomorphic encryption was first proposed by Rivest et al [14]. For both privacy-sensitive and computation-intensive tasks, the original data can be encrypted with homomorphic encryption and the computation can be performed in form of ciphertexts.

### 3.3 Zero-knowledge Proof (ZKP)

In Zero-knowledge Proof scheme, there are basically two entities, a prover  $\mathcal{P}$  and a verifier  $\mathcal{V}$ . Zero-knowledge Proof refers to a cryptographic method that the prover  $\mathcal{P}$  can prove a statement to convince the verifier  $\mathcal{V}$  without disclosing any related information apart from the statement itself is true [7].

A zero-knowledge proof includes a proof generation function  $Generation()$  and a proof verification function  $Verification()$ . The input of proof generation is a statement or question, represented by  $Q$ . After the prover  $\mathcal{P}$ 's implementing  $Generation(Q)$  function, a zero-knowledge proof  $P$  is generated. The verifier  $\mathcal{V}$  will be able to know the output in form of *True* or *False* after performing  $Verification(P)$ .

## 4 PROTOCOL

In this section, we first describe the privacy problem that we investigate in this work and then introduce the participants of the system. After that, a thorough process is presented along with system security proof.

### 4.1 Problem Statement

In this subsection, we provide a formal description of the stakeholders involved in the financial data security scenarios in DeFi, i.e., users and DeFi protocols, and the privacy concerns between users and DeFi protocols.

- **User.** A user is anyone who wants to bring proof of their asset information that is not available or public on the blockchain into DeFi. The asset information includes but is not limited to off-chain assets and assets on another blockchain system.

Regarding privacy concerns, the user is unwilling to reveal the exact value of their asset information and link it to their on-chain address.

- **DeFi Protocol.** A DeFi protocol can refer to lending, derivatives, or other on-chain protocols. The DeFi protocol can utilize the information of users' assets to improve market efficiencies, such as by adjusting mortgage rates and commissions. Moreover, because of the concerns of information leakage in the DeFi protocol, the DeFi protocol does not access the exact value of users' asset information. For example, the DeFi protocol may only acquire the range of the user's asset information.

Informally, the privacy protection can be abstracted as the question of how to record users' assets value on-chain for verification, without divulging the precise asset information to the public.

### 4.2 System Participants

We propose a solution of financial privacy problem on DeFi by introducing a system with three participants: trusted sources, a ZKP service provider, and relayers.

- **Trusted sources.** A trusted source is a high-level and abstract participant who provides the asset information of the user in form of an exact number, which represents a proof. It can be bank, notary office or other third-party authorities. In our system, there can be several trusted sources that are independent.
- **Relayer.** The relayer is responsible for calculating the ciphertext output of homomorphic encryption, given two ciphertexts as input. The relayer has a pair of public and private keys, which refer to  $pk_R$  and  $sk_R$ , respectively.
- **Zero-knowledge proof service provider (ZKPSP).** The ZKPSP generates a zero-knowledge proof to prove that the user's asset value is within a specific range, without disclosing the exact value. The ZKPSP has a pair of public and private keys, which refer to  $pk_Z$  and  $sk_Z$  respectively.


Besides, each DeFi protocol has a pair of public and private keys. We denote them as  $pk_D$  and  $sk_D$  respectively.

### 4.3 Workflow

In what follows, we present the workflow of our financial privacy system on DeFi. The entire workflow can be divided into two phases: uploading asset information, where the user uploads private data to the blockchain system, and asset verification, where the DeFi protocol acquires the asset information by interacting with the financial privacy system on the blockchain.

**4.3.1 Uploading Asset Information.** We first describe the workflow when users would like to upload their asset information to the blockchain (cf. Figure 1). Once the asset information is recorded on the blockchain, the information will be available to all system participants (cf. Figure 2). Therefore, we consider uploading the asset information in ciphertext, ensuring that the sensitive data will not be disclosed.

- **Request Initialization.** The first step of uploading the asset information is to initiate a request. For instance, a user, caller Alice, submits an initialization request to the trusted sources.

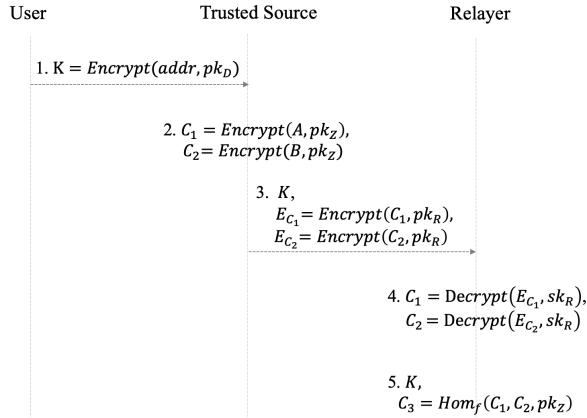


**Figure 1: The Workflow of uploading asset information.** This phases has three steps: Firstly the user encrypts its address to  $K$  with DeFi protocol’s public key  $pk_D$ . Secondly, trusted sources provide the data of the user’s asset  $A$  and  $B$ , and encrypt them with ZKPSP’s public key  $pk_Z$  to get  $C_1$  and  $C_2$ .  $C_1$  and  $C_2$  are then encrypted with the relayer’s public key  $pk_R$  to  $E_{C_1}$  and  $E_{C_2}$ . Trusted sources send  $K$ ,  $E_{C_1}$  and  $E_{C_2}$  to the blockchain. Thirdly, the relay reads  $E_{C_1}$  and  $E_{C_2}$  from blockchain and decrypts them with its private key  $sk_R$  to obtain  $C_1$  and  $C_2$  and performs homomorphic encryption function  $Hom_f$  to obtain  $C_3$ . The relay sends  $C_3$  and  $K$  to the blockchain finally.


Because Alice does not want to disclose her address on the blockchain, she uses the public key  $pk_D$  provided by the DeFi protocol that she would like to interact with to encrypt her blockchain address and gets the encrypted address  $K$ .

- **Encryption Preparation.** Alice submits her requests to two independent, trusted sources with her encrypted address,  $K$ . Because the encrypted address is also unique, the trusted sources can make sure that Alice does not upload her asset information to two different blockchain addresses. The trusted sources encrypt the original data of Alice’s asset, i.e.,  $A$  and  $B$ , with the public key provided by the ZKPSP, i.e.,  $pk_Z$ , and get two encrypted asset information,  $C_1$  and  $C_2$ , respectively. The trusted sources then encrypt  $C_1$  and  $C_2$  with the public key provided by the relay, i.e.,  $pk_R$ , and obtain  $E_{C_1}$  and  $E_{C_2}$ , respectively. After that, the trusted sources upload the encrypted asset information, i.e.,  $E_{C_1}$  and  $E_{C_2}$ , along with  $K$  to the relay through the blockchain system.
- **Homomorphic Encryption.** The last step of uploading asset information is to compute the value of the user’s asset based on the ciphertext provided by trusted sources. The relay downloads the encrypted asset information  $E_{C_1}$  and  $E_{C_2}$  from blockchain and decrypts them with its own private key  $sk_R$  to obtain  $C_1$  and  $C_2$ . Then, the relay performs the homomorphic encryption function  $Hom_f$  to obtain  $C_3$ . Then the relay uploads  $C_3$  and  $K$  to the blockchain.

4.3.2 *Asset Verification.* Once the user’s asset information is on the blockchain, DeFi protocols can verify whether the user’s asset

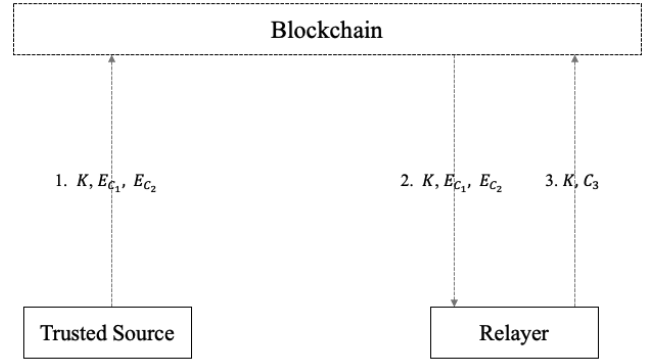


**Figure 2: Information reading and writing onto the blockchain during uploading asset information.** Trusted sources upload  $K$ ,  $E_{C_1}$  and  $E_{C_2}$  to the blockchain. Later, the relay reads these ciphertexts, and uploads  $C_3$  after performing homomorphic encryption. All the information is recorded on the blockchain for tamper-resistance and traceability purposes.

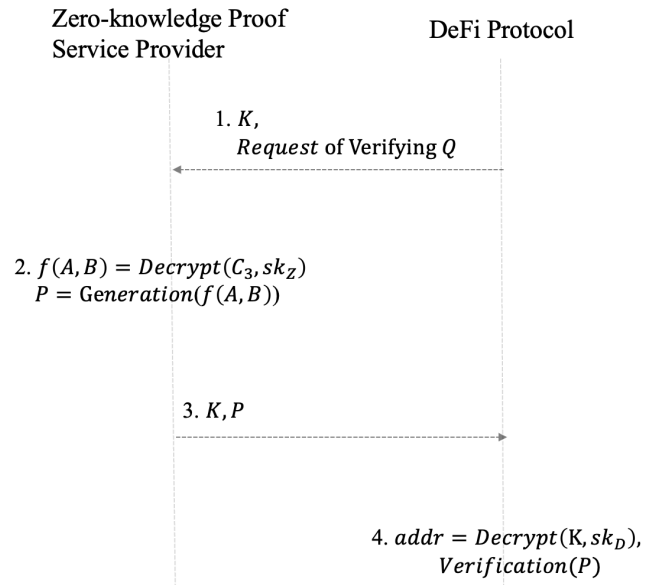

**Figure 3: The workflow of asset verification.** This phase has four steps: Firstly, the DeFi protocol sends a request of verifying  $Q$  along with  $K$  to ZKPSP. After that, ZKPSP, as a prover  $\mathcal{P}$ , reads  $C_3$  from blockchain and decrypts it with its private key  $sk_Z$  to get the result of asset data addition, generating a zero-knowledge proof of that result to prove that it is in a particular range. Then ZKPSP sends the zero-knowledge proof and  $K$  to the blockchain. Finally, the DeFi protocol, as a verifier  $\mathcal{V}$ , verifies this proof and then decrypts  $K$  with its own private key  $sk_D$ . After that, the DeFi protocol can link the proof with user.

information satisfies their requirements for adjusting the financial services. Note that the asset verification step is not automated, while users have to interact with the DeFi protocol to require such verification. We present the workflow of the asset verification in Figure 3 and demonstrate the information exchange between stakeholders and the blockchain system during the asset verification phase in Figure 4.

- **Proof Request.** The asset verification phase is initialized by the DeFi protocol. It will first specify the encrypted address of the user that interacts with the DeFi protocol, i.e.,  $K$ , and the statement of the asset information that the DeFi protocol requests, i.e.,  $Q$ .
- **Zero-knowledge Proof Generation.** After receiving the request of asset verification from the DeFi protocol, ZKPSP starts a ZKP procedure. ZKPSP plays as the prover in the ZKP scheme and decrypts  $C_3$  with its private key  $sk_Z$  to get the computation result of asset information. Then, ZKPSP generates a ZKP  $P$ , based on the asset information  $f(A, B)$  and the statement  $Q$  provided by the DeFi protocol. Then, ZKPSP sends the ZKP result  $P$  and the encrypted user address  $K$  to the DeFi protocol within the blockchain system.
- **Zero-knowledge Proof Verification and Financial Services Update.** After receiving the ZKP result  $P$  provided by the ZKPSP, the DeFi protocol can verify the proof with the *Verification()* function. Then, the DeFi protocol decrypts the user's encrypted address with its own private key  $sk_D$  to identify the user and updates the financial services it provides to the user. Until then, the DeFi protocol utilizes the financial information of the user without disclosing the privacy of the user on the blockchain.

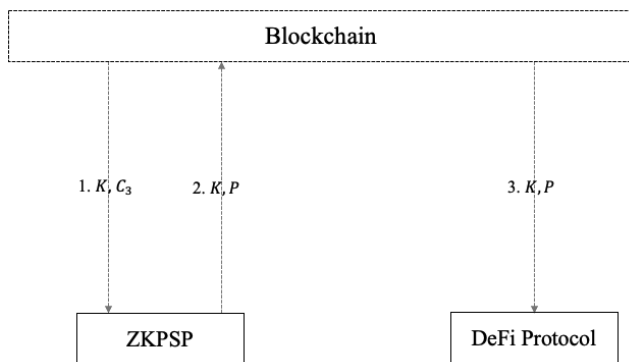

**Figure 4: Information reading and writing onto the blockchain in the asset verification phase.** As mentioned in Figure 3, ZKPSP downloads  $K$  and  $C_3$ , and uploads  $K$  and the zero-knowledge proof  $P$  after generating the proof. Then, the DeFi protocol reads  $K$  and  $P$  from blockchain. All the information is recorded on the blockchain for tamper-resistance and traceability purposes.

#### 4.4 Security Proof

After describing the workflow of the proposed system, we discuss the proof of security of the system. We show that any system participant cannot recover the exact financial information of a certain DeFi user. In other words, no entity can match the blockchain address and the financial information of a user by the information that they have and the public information recorded on the blockchain. This ensures the financial privacy of users. In particular, if the information kept by any system participant has been disclosed, the users will not be under threat because of the disclosure incident of financial privacy.

- **Trusted Source.** Trusted sources have the information of users asset. However, trusted sources only know the encrypted user address  $K$  on the blockchain, which is encrypted by DeFi protocol's public key  $pk_D$ . The trusted sources are able to recover the user address on the blockchain only if they can break the asymmetric key encryption performed by the user. The security of the user financial privacy at the trusted sources is ensured by the asymmetric key encryption scheme used by the DeFi protocol.
- **Relayer.** The relayer is responsible for performing homomorphic encryption. From the relayer's perspective, it receives  $E_{C_1}$  and  $E_{C_2}$  from the trusted sources, and decrypts them to  $C_1$ ,  $C_2$  and  $C_3$  as the ciphertexts of homomorphic encryption. However, all of these ciphertexts were encrypted by ZKPSP's public key  $pk_Z$ , which can only be decrypted by ZKPSP's private key  $sk_Z$ . So the relayer is unable to know the plaintext of  $C_1$ ,  $C_2$  and  $C_3$ .
- **ZKP Service Provider.** ZKPSP generates a zero-knowledge proof to prove the statement of the user asset information. It receives  $C_3$  and the encrypted address  $K$  from the relayer. Since  $K$  is encrypted by the DeFi protocol's public key  $pk_D$ , ZKPSP will not be able to decrypt it only if it breaks the asymmetric key encryption scheme. Therefore, ZKPSP cannot figure out the exact asset value that belongs to a certain user on the blockchain.
- **DeFi Protocol.** The DeFi protocol receives the ZKP result  $P$  from ZKPSP. Although the DeFi protocol knows the address of the user on the blockchain, it does not know the exact information of the user's asset, unless it can break the ZKP scheme. Therefore, the security of the user financial privacy at the DeFi protocol is ensured by the zero-knowledge proof scheme used by ZKPSP.

During the entire process of data transmission, each entity in the system only gets very limited parts of the messages and won't be able to infer the complete information of users, given these limited messages.

## 5 DISCUSSION

In this section, we discuss the application scenarios where private data can be utilized for improving DeFi protocols. We mainly focus on two categories of protocols: public blockchain DeFi and cross-border financial applications.

## 5.1 DeFi Applications on Public Blockchain

Risk control is one of the essential tasks in mechanism design for financial applications. Most DeFi protocols, such as lending protocols, rely on over-collateralization to ensure system stability. However, such a mechanism significantly influences capital efficiency. For instance, institutions with good reputations cannot get a reasonably low mortgage rate when they conduct on-chain operations with DeFi lending protocols, although they have better credit than most individual DeFi users. With our solution, it is able to introduce real-world credit ratings into the DeFi on public blockchain systems with privacy-preserving.

By integrating credit ratings with personal assets not reserved in the DeFi protocol or certain blockchain addresses, users' collateral rates can be greatly decreased, and collateral-free lending may even become possible. Besides, the governance of the DeFi protocol can propose and vote on a set of criteria that specify the potential benefits based on users' credit ratings.

Apart from the DeFi lending protocols, data privacy protection can also be used in non-fungible token (NFT) market design. With the credit rating system, installment purchases of NFT are possible. For instance, when users want to buy an NFT but have limited cash, they can provide credit verification to the artists or galleries to pre-purchase the NFT and make installments.

In summary, our solution helps users avoid over-collateralization and thereby increases capital efficiency of DeFi on public blockchain systems. Moreover, credit ratings allow DeFi protocols to assess risk, increasing their ability of risk control.

## 5.2 Cross-border Financial Application

As our work realize both private information verification and privacy protection, it can also be used in centralized scenarios such as cross-border data transfer. From the consideration of national data security and the protection of personal privacy, most countries have relevant laws to restrict cross-border data transmission. However, this is contrary to globalization, as the development of cross-border trade requires the exchange of cross-border data.

For instance, in cross-border e-commerce, information exchange and qualification verification only happen online, which is insufficient and costly. With our solution, sellers in cross-border e-commerce can provide encrypted information to demonstrate the authenticity of their qualifications, which could be more in line with compliance requirements.

In cross-border borrowing markets, the loan rates vary across different areas. Users would like to utilize the difference in rates to reduce their costs. However, cross-border borrowing can hardly be realized nowadays because the transmission of personal data is strictly limited in cross-border scenarios. It is very challenging for banks to evaluate a user's credit rating in other areas. Our system offers a possibility to realize such information transmission under governance. The data transmitted in the system is confidential, while sensible data is not available to external parties.

We noted that cross-border activities might involve the issue of different jurisdictions. How to implement technologies, such as cross-chain, to address such issues is still not clear. Although the implementation of cross-border borrowing services is highly dependent on laws and regulations, our system still provides a

solution to realize data privacy protection in cross-border financial applications.

## 6 CONCLUSION

This paper explores an essential but unsolved question: how to utilize the private data of users while privacy-preserving in DeFi? By introducing three internal stakeholders, our system balances the need for private data for DeFi protocols and the need for privacy protection for DeFi users. Based on our proposed solution, future development could adopt more advanced financial technologies requiring data in the DeFi ecosystem.

## REFERENCES

- [1] Douglas W Arner, Dirk A Zetsche, Ross P Buckley, and Rolf H Weber. 2020. The future of data-driven finance and RegTech: lessons from EU big bang II. *Stan. J. Bus. & Fin.* 25 (2020), 245.
- [2] Benedikt Bünz, Jonathan Bootle, Dan Boneh, Andrew Poelstra, Pieter Wuille, and Greg Maxwell. 2018. Bulletproofs: Short proofs for confidential transactions and more. In *2018 IEEE symposium on security and privacy (SP)*. IEEE, 315–334.
- [3] Shuchih Ernest Chang, Yi-Chian Chen, and Ming-Fang Lu. 2019. Supply chain re-engineering using blockchain technology: A case of smart contract based tracking process. *Technological Forecasting and Social Change* 144 (2019), 1–11.
- [4] Shekha Chentharra, Khandakar Ahmed, Hua Wang, Frank Whittaker, and Zhenxiang Chen. 2020. Healthchain: A novel framework on privacy preservation of electronic health records using blockchain technology. *Plos one* 15, 12 (2020), e0243043.
- [5] Raynor de Best. 2022. TVL (total value locked) in Decentralized Finance (DeFi) on the Ethereum blockchain from August 2017 to May 17, 2022. <https://www.statista.com/statistics/1237821/defi-market-size-value-crypto-locked-usd/>
- [6] Uriel Feige, Amos Fiat, and Adi Shamir. 1988. Zero-knowledge proofs of identity. *Journal of cryptography* 1, 2 (1988), 77–94.
- [7] Shafi Goldwasser, Silvio Micali, and Charles Rackoff. 1989. The knowledge complexity of interactive proof systems. *SIAM Journal on computing* 18, 1 (1989), 186–208.
- [8] Shirin Hasavari and Yeong Tae Song. 2019. A secure and scalable data source for emergency medical care using blockchain technology. In *2019 IEEE 17th International Conference on Software Engineering Research, Management and Applications (SERA)*. IEEE, 71–75.
- [9] Varun Madathil, Alessandra Scafuro, Kemafor Anyanwu, Sen Qiao, Akash Pateria, and Binil Starly. 2022. Preserving Buyer-Privacy in Decentralized Supply Chain Marketplaces. *Cryptology ePrint Archive* (2022).
- [10] Bryan Parno, Jon Howell, Craig Gentry, and Mariana Raykova. 2013. Pinocchio: Nearly practical verifiable computation. In *2013 IEEE Symposium on Security and Privacy*. IEEE, 238–252.
- [11] Sudarshan Parthasarathy, Akash Harikrishnan, Gautam Narayanan, Kunwar Singh, et al. 2021. Secure distributed medical record storage using blockchain and emergency sharing using multi-party computation. In *2021 11th IFIP International Conference on New Technologies, Mobility and Security (NTMS)*. IEEE, 1–5.
- [12] Pieter Pauwels. 2021. zkKYC: A solution concept for KYC without knowing your customer, leveraging self-sovereign identity and zero-knowledge proofs. *Cryptology ePrint Archive* (2021).
- [13] Pieter Pauwels, Joni Pirovich, Peter Braunz, and Jack Deeb. 2022. zkKYC in DeFi: An approach for implementing the zkKYC solution concept in Decentralized Finance. *Cryptology ePrint Archive* (2022).
- [14] Ronald L Rivest, Adi Shamir, and Leonard Adleman. 1978. A method for obtaining digital signatures and public-key cryptosystems. *Commun. ACM* 21, 2 (1978), 120–126.
- [15] Shubham Sahai, Nitin Singh, and Pankaj Dayama. 2020. Enabling privacy and traceability in supply chains using blockchain and zero knowledge proofs. In *2020 IEEE International Conference on Blockchain (Blockchain)*. IEEE, 134–143.
- [16] Eli Ben Sasson, Alessandro Chiesa, Christina Garman, Matthew Green, Ian Miers, Eran Tromer, and Madars Virza. 2014. Zerocash: Decentralized anonymous payments from bitcoin. In *2014 IEEE symposium on security and privacy*. IEEE, 459–474.
- [17] Help Net Security. 2022. Traditional identity fraud losses soar, totalling 52 billion in 2021. <https://www.helpnetsecurity.com/2022/04/05/traditional-identity-fraud-losses/>
- [18] Avandhar Subrahmanyam. 2019. Big data in finance: Evidence and challenges. *Borsa Istanbul Review* 19, 4 (2019), 283–287.
- [19] Ralf Syddekum. 2018. Can consumers bank on financial services being secure with GDPR? *Computer Fraud & Security* 2018, 6 (2018), 11–13.
- [20] Dirk Zetsche, Douglas Arner, Ross Buckley, and Rolf Weber. 2020. The evolution and future of data-driven finance in the EU. *Common Market Law Review* 57

- (2020), 331–360.
- [21] Fan Zhang, Deepak Maram, Harjasleen Malvai, Steven Goldfeder, and Ari Juels. 2020. Deco: Liberating web data using decentralized oracles for tls. In *Proceedings*

*of the 2020 ACM SIGSAC Conference on Computer and Communications Security*. 1919–1938.