Game Implementation: What Are the Obstructions?

Jiehua Chen, Sebastian Vincent Haydn, Negar Layegh Khavidaki, Sofia Simola, Manuel Sorge

TU Wien

{jiehua.chen, seyedehngar.khavidaki, sofia.simola, manuel.sorge}@tuwien.ac.at, e51832021@student.tuwien.ac.at

Abstract

In many applications, we want to influence the decisions of independent agents by designing incentives for their actions. We revisit a fundamental problem in this area, called GAME IMPLEMENTATION: Given a game in standard form and a set of desired strategies, can we design a set of payment promises such that if the players take the payment promises into account, then all undominated strategies are desired? Furthermore, we aim to minimize the cost, that is, the worst-case amount of payments.

We study the tractability of computing such payment promises and determine more closely what obstructions we may have to overcome in doing so. We show that GAME IM-PLEMENTATION is NP-hard even for two players, solving in particular a long open question (Eidenbenz et al. 2011) and suggesting more restrictions are necessary to obtain tractability results. We thus study the regime in which players have only a small constant number of strategies and obtain the following. First, this case remains NP-hard even if each player's utility depends only on three others. Second, we repair a flawed efficient algorithm for the case of both small number of strategies and small number of players. Among further results, we characterize sets of desired strategies that can be implemented at zero cost as a kind of stable core of the game.

1 Introduction

Nudge theory (Thaler and Sunstein 2008), gamification (Hamari 2019), and the design of blockchain systems (Buterin et al. 2020) are just a few areas in which we apply incentives in order to coax agents towards behaving in a desirable way. In these general settings, agents select strategies on their own volition, but we may add incentives (or incur penalties) that increase (resp. decrease) the salience or utility of particular strategies in situations of our choice. The goal is to implement a desired set of strategies or strategy profiles, that is, to ensure that undesired strategies entail smaller utility than desired ones.

With the advent of blockchain systems, we feel that this topic has gained renewed relevance. First, the design of a blockchain system itself, such as Bitcoin or Ethereum, involves the design of a protocol that rewards intended behavior (e.g., validating transactions by mining blocks for block rewards in Bitcoin) or penalizes unintended behavior (e.g., by slashing the stake of validators that deviate from a consensus in the recent upgrade of Ethereum). The latter is a form of enforcing the existence of a Schelling point via incentives. Second, there are now base-layer systems like Ethereum in place that allow world-wide consistent generalpurpose computations and thus the straightforward creation of new moneys (called tokens) that can be made to behave in new ways: generated, burned, exchanged, locked, etc. Thus an immense design space for incentive-based protocols was opened up and we witness its continued exploration. For just a few examples consider stablecoins, that is, tokens that use incentive-based mechanisms to try and reflect the value of some underlying security (Maker DAI, Terra USD, FRAX Shares, and many more)¹ or incentive-based consensus mechanisms for adjudication, moderation, and transferring real-world information onto blockchains (such as Kleros, UMA, Chainlink oracles, and again many more)².

In all of the above design problems, there are independent actors that we want to incentivize to behave in a certain desired way. A fundamental underlying problem herein is GAME IMPLEMENTATION (Monderer and Tennenholtz 2004), stated as follows: We are given a game in standard form (a set of players, strategies for each player, and their utility) and for each player a set of desired strategies. We want to specify a set of payment promises that define for each strategy profile (a tuple specifying one strategy per player) a payment promise to each player. These payment promises shall implement our desired sets of strategies, that is, when taking the payments into account, no player wants to play an undesired strategy. In technical terms, each strategy that is not dominated by any other strategy is desired (see Section 2 for the formal definitions).³ Furthermore, we want to minimize the *cost* of the implementation, that is, the amount paid in the worst case. More precisely, we want to minimize, over all strategy profiles that consist of undominated strategies, the sum of payment promises to all players.

¹See https://makerdao.com/en/whitepaper/, https://terra.money/Terra_White_paper.pdf, and https://docs.frax.finance/overview.

²See https://kleros.gitbook.io/docs/, https://docs.umaproject.org/, and https://chain.link/whitepaper.

³We focus here only on pure strategies. Furthermore, GAME IMPLEMENTATION indeed is to implement a set of strategy profiles rather than a set of strategies for each player. Implementing sets of strategies corresponds to implementing so-called rectangular strategy profiles, see the formal definitions in Section 2.

In this work, we explore the question "How difficult is it to implement a desired set of strategies?"

Contribution. We obtain the following results. We first show that GAME IMPLEMENTATION is NP-hard, even if there are only two players and even if our budget for the cost is 0 (Theorem 3.1). This strengthens two results by Deng, Tang, and Zheng (2016) who showed that GAME IM-PLEMENTATION is NP-hard for six players, and that GAME IMPLEMENTATION is NP-hard for two players and mixed strategies, both with positive budgets.⁴ We note that hardness for mixed-strategies or positive budgets is less surprising because there are a priori more possibilities for encoding combinatorial structure into the solutions. Instead, our reduction shows that the difficulty lies already and mainly in selecting, for each undesired strategy x, a desired strategy that dominates x.

We then study a variant of GAME IMPLEMENTATION that was supposedly more tractable (Monderer and Tennenholtz 2004), called EXACT GAME IMPLEMENTATION: In addition to requiring undominated strategies to be desired, we require that all desired strategies are undominated. We show that also this a priori simpler-looking problem is NP-hard even for two players (Theorem 5.1); this answers an open question by Eidenbenz et al. (2011). Indeed Monderer and Tennenholtz (2004) gave a polynomial-time algorithm for EXACT GAME IMPLEMENTATION which was shown to produce suboptimal results by Eidenbenz et al. (2011).

The above hardness results do not apply in scenarios in which players have only a small constant number of strategies to choose from. We hence consider this regime next. If both the number of players and the number of strategies are small constants, then the only part of the input that may be of unbounded size are the quantities specified in the utility functions. Eidenbenz et al. (2011) showed that in this case EXACT GAME IMPLEMENTATION can be solved efficiently; however, as we observe here there is a flaw in the algorithm. We simplify the algorithm and repair the flaw for a large though not universal class of games, providing the first non-trivial algorithm for implementing strategies that is formally proven to be correct (Theorem 6.7).

As we increase the number of players, the size of the input (the number of utility values we have to specify) scales exponentially in the number of players (and strategies). A common way to deal with this explosion is to instead consider the relevant special case of graphical games (Kearns, Littman, and Singh 2001), where the players are situated in a graph and the utility of a player depends only on its neighbors. We hence study this case next, that is, GAME IMPLEMENTATION on graphical games with small constant number of strategies per player. We show that even the case where each player's utility depends only on three others and each player has only two strategies remains NP-hard (Theorem 4.1). As the case where each player has only one strategy is trivial, a promising future direction is

to consider the case where each player depends only on two others or tree-structured games.

Finally, before discovering the NP-hardness of GAME IM-PLEMENTATION we believed that zero-cost implementation could be solved efficiently. As a tool towards this we characterized strategy sets that can be implemented at cost 0 as a form of stable core of the game or, alternatively, as a form of generalized Nash equilibrium. We believe that this characterization is of independent interest, in particular because it generalizes the result of Monderer and Tennenholtz (2004) that states that Nash equilibria can be implemented at cost 0. Moreover, it captures a fundamental property of self-enforcing sets of strategies, such as morality, which we are not aware of having been formally defined before.

Further related work. Implementation theory (Maskin 1999; Maskin and Sjöström 2002) generally studies the implementation of social-choice rules with incentives and it is impossible to give an overview over the large body of work here. Conitzer and Sandholm (2014) studied the complexity of implementing social-choice rules. The main difference to GAME IMPLEMENTATION is that the payment promises to the players that we may choose from are restricted and given in the input. Such restrictions give significantly more leeway for designing hardness reductions. Brill, Freeman, and Conitzer (2015) considered a problem related to GAME IMPLEMENTATION in which some of the utility values are missing and we are to complete the missing values, possibly with negative ones. The goal is to ensure that strategies participating in some Nash equilibrium are desired. In GAME IMPLEMENTATION we have much more freedom in designing our solutions. Wooldridge et al. (2013) studied implementation questions for Boolean games, that is, where the strategies of the players correspond to a selection of truth values of some variables intrinsic to the game. They aimed at implementing Boolean formulas on the variables in some or all Nash equilibria. Because of the relation to Boolean satisfiability, implementation for Boolean games is situated higher in the polynomial hierarchy. Zero-cost implementation has been studied for routing games by Moscibroda and Schmid (2009). They gave bounds on the difference between anarchistic equilibria and those achievable by zero-cost implementation. Finally, Letchford and Conitzer (2010); Deng and Conitzer (2017, 2018) considered the complexity of committing to certain behaviors as a way for one player to change the outcome of a game to his favor.

2 Preliminaries

Throughout, for $t \in \mathbb{N}$ we use [t] to denote the set $\{1, 2, \ldots, t\}$.

A game G is a tuple $(N, \mathcal{X}, \mathcal{U})$ where N is the set of players; usually N = [n]. We specify for each player $i \in N$ a set X_i of strategies available to i. Then the set \mathcal{X} equals $X_1 \times X_2 \times \ldots \times X_n$. We call elements of \mathcal{X} strategy profiles. Finally, $\mathcal{U} = \{U_1, U_2, \ldots, U_n\}$, where each U_i is a function $\mathcal{X} \to \mathbb{R}$, called utility function for player i.

As a notational shorthand, for any $i \in N$ we use \mathcal{X}_{-i} to denote $X_1 \times X_2 \times \ldots \times X_{i-1} \times X_{i+1} \times \ldots \times X_n$. We

⁴Monderer and Tennenholtz (2004) claimed NP-hardness of GAME IMPLEMENTATION, but the proof was erroneous (Eidenbenz et al. 2011).

sometimes write the value of a utility function U_i such that the strategy played by player *i* comes first in the argument of U_i and the remaining strategies second. That is, if some strategy profile $x \in \mathcal{X}$ consists of strategy $x_i \in X_i$ of player *i* and a tuple $x_{-i} \in X_{-i}$ of remaining strategies, we write $U_i(x_i, x_{-i})$ for U(x). However, if there are only two players, then the first argument x of $U_i(x, y)$ always refers to the strategy of player 1 and the second argument y always refers to the strategy of player 2.

Let $x, y \in X_i$ be two strategies of player *i*. We say that x dominates y if for each $x_{-i} \in \mathcal{X}_{-i}$ we have $U_i(x, x_{-i}) \ge U_i(y, x_{-i})$ and there exists $x_{-i} \in \mathcal{X}_{-i}$ such that $U_i(x, x_{-i}) > U_i(y, x_{-i})$.⁵ We say that $x \in X_i$ is undominated if no other strategy of player *i* dominates x. For each player $i \in N$ we denote by X_i^* the set of undominated strategies in X_i . For a game G, by \mathcal{X}_G^* we denote the set of strategy profiles that consist entirely of undominated strategies, that is, $\mathcal{X}_G^* = X_1^* \times X_2^* \times \ldots \times X_n^*$. We omit the index G if it is clear from the context.

Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game. We now define the modified game obtained from G after additional payments are promised to the players. A *payment promise* to player i in G is a function $\mathcal{X} \to \mathbb{R}$, usually denoted by V_i . A *payment promise* for game G is the Cartesian product of the payment promises of the players: $\mathcal{V} \coloneqq V_1 \times \ldots V_n$. The *modified game* $G[\mathcal{V}]$ obtained from G with a payment promise \mathcal{V} is the game $(N, \mathcal{X}, [\mathcal{U} + \mathcal{V}])$, wherein $[\mathcal{U} + \mathcal{V}] \coloneqq \{[U_i + V_i] \mid i \in N\}$ and for $i \in N$ function $[U_i + V_i]$ is defined as $[U_i + V_i](x) \coloneqq U_i(x) + V_i(x)$ for all $x \in \mathcal{X}$. The *cost* $cost(\mathcal{V})$ of a payment promise \mathcal{V} is $\max_{x \in \mathcal{X}_G[\mathcal{V}]} \sum_{i \in N} V_i(x)$.

We consider the following decision problem and say that a payment promise \mathcal{V} as below *implements* \mathcal{O} .

GAME IMPLEMENTATION

Instance: A game G = (N, X, U), a set of desired strategy profiles O ⊆ X, and a real δ ∈ ℝ_{≥0}.
Question:: Is there a payment promise V such that cost(V) ≤ δ and X^{*}_{G[V]} ⊆ O?

The following is a variant of GAME IMPLEMENTATION where we want to a given set of strategy profiles to be undominated and say that a payment promise V as below *implements* O *exactly*.

EXACT GAME IMPLEMENTATION

Instance: A game $G = (N, \mathcal{X}, \mathcal{U})$, a set of desired strategy profiles $\mathcal{O} \subseteq \mathcal{X}$, and a real $\delta \in \mathbb{R}_{>0}$.

Question:: Is there a payment promise \mathcal{V} such that $\operatorname{cost}(\mathcal{V}) \leq \delta$ and $\mathcal{X}^{\star}_{G[\mathcal{V}]} = \mathcal{O}$?

We give an example in Section 2.2.

We mainly focus on the special case where the strategy profile sets \mathcal{O} are rectangular. A strategy profile set \mathcal{Y} for a game with player set N is *rectangular* if for each $i \in N$ there is $Y_i \subseteq X_i$ such that $\mathcal{Y} = Y_1 \times Y_2 \times \ldots \times Y_n$. All our hardness results indeed hold even for rectangular strategy profile sets \mathcal{O} .

Graphical games. For a more succinct representation we also use the concept of a *graphical game*. This is a tuple (G, H), where $G = (N, \mathcal{X}, \mathcal{U})$ is a game and H an undirected graph with vertex set N and edge set E. Let us use $N_H(i)$ to denote the neighborhood of a vertex $i \in N$, i.e., the set of all the vertices that are adjacent to i. For every $i \in N$, the utility function U_i and the potential payment promise V_i map from $X_i \times X_{j_1} \times \cdots \times X_{j_k}$ to \mathbb{R} , where j_1, \ldots, j_k is an arbitrary but fixed ordering of $N_H(i)$. In other words, the utility of player i only depends on its own actions and the actions of its neighbors in H. The *degree* of (G, H) is $\max_{i \in N} |N_H(i)|$.

Properties of the domination relation. We now describe a few simple properties of the dominance relation, which are useful in our proofs.

Observation 2.1. Domination is transitive.

Proof. Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game. Assume that for player $i \in N$ and three strategies $x, y, z \in X_i$, strategy x dominates y and y dominates z. Then, for every $x_{-i} \in \mathcal{X}_{-i}$, $U_i(x, x_{-i}) \geq U_i(y, x_{-i}) \geq U_i(z, x_{-i})$. We also have that there is an $x'_{-i} \in \mathcal{X}_{-i}$ such that $U_i(x, x'_{-i}) > U_i(y, x'_{-i})$. Therefore $U_i(x, x'_{-i}) > U_i(y, x'_{-i}) \geq U_i(z', x_{-i})$, so x dominates z.

Observation 2.2. Domination is asymmetric. In other words, if x dominates y, then y does not dominate x.

Proof. Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game. Assume, towards a contradiction, that for player $i \in N$ there are two strategies $x, y \in X_i$ such that x dominates y and y dominates z. Then, for every $x_{-i} \in \mathcal{X}_{-i}$, it holds that $U_i(x, x_{-i}) \geq U_i(y, x_{-i})$ and $U_i(y, x_{-i}) \geq U_i(x, x_{-i})$. Thus we have that $U_i(x, x_{-i}) = U_i(y, x_{-i})$ holds for every $x_{-i} \in \mathcal{X}_{-i}$. However, this means that there exists no $x'_{-i} \in \mathcal{X}_{-i}$ such that $U_i(x, x'_{-i}) > U_i(y, x'_{-i})$, a contradiction to x dominating y.

Observation 2.3. *Every dominated strategy is dominated by some undominated strategy.*

Proof. Assume, towards a contradiction, that for a player $i \in N$ there is a dominated strategy $x \in X_i$ that is not dominated by any undominated strategy. This implies that the strategy $y \in X_i$ that dominates x is in turn dominated by some other strategy $z \in X_i$. By transitivity of domination z dominates x and because x is not dominated by any undominated strategy, z is also dominated. By asymmetry of domination, x, y and z are all distinct. By repeating this argument, we obtain that x is dominated by an infinite number of strategy profiles, a contradiction to the number of strategy profiles being finite.

This immediately implies the following observation:

Observation 2.4. *The set of undominated strategies is nonempty.*

⁵This notion of domination is commonly referred to as weak domination. Alternative notions of domination are also studied, such as strict domination in which we require $U_i(x, x_{-i}) > U_i(y, x_{-i})$ for all $x_{-i} \in \mathcal{X}_{-i}$. In keeping with the literature on implementation (Eidenbenz et al. 2011; Deng, Tang, and Zheng 2016) we focus on weak domination; the results are usually transferable.




Table 1: The utility matrix from the example in Section 2.2. The first entry is the utility of p_1 and the second the utility of p_2 .




Table 2: The utility matrix from the example in Section 2.2 after adding the payment promises \mathcal{V} . The utility in red is V_2 .

2.1 Comment on NP-containment of GAME IMPLEMENTATION

Previously it was claimed that a payment promise is a certificate showing that GAME IMPLEMENTATION is in NP (Deng, Tang, and Zheng 2016). However, without further argument it is not clear that the payment promise can be encoded with polynomial bits in the input length since it consists of arbitrary reals. We do conjecture GAME IMPLEMENTATION (and indeed EXACT GAME IMPLEMENTATION) to be contained in NP but since there is currently no published proof, we refrain from claiming NP-completeness.

2.2 Example

In this section we provide an example of GAME IMPLEMEN-TATION to give the reader more intuition of the problem.

Consider a 2-player game with the set of players $N = \{p_1, p_2\}$. Player p_1 has the strategy set $X_1 = \{s_1, s_2, s_3\}$ and p_2 has $X_2 = \{t_1, t_2\}$. Let us define the utility function of p_1 as:

$$U_1(s_1, t_1) = 1, \quad U_1(s_1, t_2) = 1, \\ U_1(s_2, t_1) = 2, \quad U_1(s_2, t_2) = 0, \\ U_1(s_3, t_1) = 0, \quad U_1(s_3, t_2) = 1, \end{cases}$$

and the utility function of p_2 as:

$$U_2(s_1, t_1) = 1, \quad U_2(s_1, t_2) = 1, \\ U_2(s_2, t_1) = 1, \quad U_2(s_2, t_2) = 1, \\ U_2(s_3, t_1) = 0, \quad U_2(s_3, t_2) = 0.$$

We visualize the utility functions in Table 1. We can see that no matter what p_2 plays, strategy s_1 is as good as strategy s_3 for player p_1 , i.e., the utility that p_1 gets by playing s_1 is at least as high as that by playing s_3 . Additionally, if p_2 plays t_1 , then the utility that p_1 gets by playing s_1 rather than s_3 is strictly higher. Thus, s_1 dominates s_3 for p_1 , and

| | | Player p_2 | |
|--------------|-------|--------------|-------|
| | | t_1 | t_2 |
| | s_1 | 1 + 1, 1 | 1, 1 |
| Player p_1 | s_2 | 2, 1 + 0.1 | 0, 1 |
| | s_3 | 0,0 | 1, 0 |

Table 3: The utility matrix from the example in Section 2.2 after adding the payment promises \mathcal{V} . The utility in blue is V'_2 .

so s_3 is dominated. Since no other strategy dominates s_1 , strategy s_1 is undominated.

The strategy s_2 is also undominated, because neither s_1 nor s_3 dominates it: We can see that $U_1(s_2, t_1) > U_1(s_1, t_1)$, so it is impossible that for every $t_i \in X_2, U_1(s_1, t_i) \ge U_1(s_2, t_i)$, which is one of the requirements for s_1 dominating s_2 . The same reasoning precludes s_3 from dominating s_1 . Summarizing, the set of undominated strategies for p_1 is $X_1^* = \{s_1, s_2\}$.

For player p_2 , it holds that $U_2(s, t_1) = U_2(s, t_2)$ for every $s \in X_1$. This means that neither of them dominates the other one. Thus, the set of undominated strategies for player p_2 is $X_2^{\star} = \{t_1, t_2\}$. The set of undominated strategy profiles is $\mathcal{X}^{\star} = \{s_1, s_2\} \times \{t_1, t_2\}$.

Assume that we want to implement the strategy profile set $\mathcal{O} = O_1 \times O_2$, where $O_1 = \{s_1, s_3\}$ and $O_2 = \{t_1\}$.

Because $s_2 \notin O_1$ but s_2 is undominated, we need to use some strategy in O_1 to dominate s_2 . If we promise p_1 utility 1 extra when he plays s_1 and p_2 plays t_1 , then strategy s_1 dominates s_2 . In other words, we construct our payment promise function for p_1 as

$$V_1(x,y) = \begin{cases} 1, \text{ if } x = s_1, y = t_1 \\ 0, \text{ otherwise.} \end{cases}$$

The payment promise for p_1 is in green in Table 2. As for player p_2 , we must make t_1 dominate t_2 . If we promise

$$V_2(x,y) = \begin{cases} 0.1, \text{ if } x = s_1, y = t_1, \\ 0, \text{ otherwise,} \end{cases}$$

then t_1 will dominate t_2 ; see the promise in red in Table 2. Let \mathcal{V} denote the set of payment promises, i.e., $\mathcal{V} = \{V_1, V_2\}$. Then, \mathcal{V} implements \mathcal{O} because $X_1^* = \{s_1\}$ and $X_2^* = \{t_1\}$ and thus $\mathcal{X}_{G[\mathcal{V}]}^* = X_1^* \times X_2^*$ satisfies $\emptyset \neq \mathcal{X}_{G[\mathcal{V}]}^* \subseteq \mathcal{O}$. Note that, since $X_1^* \neq O_1$, this implementation is not exact. The cost of the implementation is $\operatorname{cost}(\mathcal{V}) = \max_{x \in \mathcal{X}_{G[\mathcal{V}]}^*} \sum_{i \in N} V_i(x) = V_1(s_1, t_1) + V_2(s_1, t_1) = 1.1$.

However, instead of paying player p_2 an extra utility of 0.1 when he plays t_1 and player p_1 plays s_1 , we can also pay p_2 an extra utility of 0.1 when player p_1 plays s_2 and player p_2 pays t_1 . That is,

$$V_2'(x,y) = \begin{cases} 0.1, \text{ if } x = s_2, y = t_1, \\ 0, \text{ otherwise;} \end{cases}$$

see the **blue** payment promise in Table 3.

The payment promise for player p_1 remains the same. Let \mathcal{V}' denote the promise payment, i.e., $\mathcal{V}' = \{V_1, V_2'\}$. Then,

one can verify that \mathcal{V}' also implements \mathcal{O} with $\mathcal{X}_{G[\mathcal{V}']}^{\star} =$ $\{s_1\} \times \{t_1\}$. But, now the cost of the implementation is only

$$\cot(\mathcal{V}') = \max_{x \in \mathcal{X}_{G[\mathcal{V}']}^{\star}} (V_1(x) + V_2'(x))$$
$$= V_1(s_1, t_1) + V_2'(s_1, t_1)$$
$$= 1 + 0 = 1.$$

GAME IMPLEMENTATION is NP-hard for 3 **Two Players and Zero Budget**

In this section we prove that GAME IMPLEMENTATION is NP-hard even in the very restricted case where we have two players and the budget is zero.

Theorem 3.1. GAME IMPLEMENTATION is NP-hard, even for two players and cost at most 0.

We reduce from the following NP-hard problem (Schaefer 1978):

EXACT COVER BY 3-SETS

Instance: An integer \hat{n} , a collection of elements $\mathcal{A} = \{a_0, \ldots, a_{3\hat{n}-1}\}$ and a collection of sets $\mathcal{C} = \{C_0, \ldots, C_{3\hat{n}-1}\}$ such that $C_j \subset \mathcal{A}$ and $|C_j| = 3$ for every $j \in \{0, \dots, 3\hat{n} - 1\}$ and every element $a_i \in \mathcal{A}$ appears in exactly three sets, i.e., $|\{C \in \mathcal{C} | a_i \in C\}| = 3$ for every $a_i \in \mathcal{A}$.

Question:: Is there an *exact cover* of A, i.e., a collection $\mathcal{S} \subset \mathcal{C}$ s.t. $|\mathcal{S}| = \hat{n}$ and $\mathcal{A} = \bigcup_{C \in \mathcal{S}} C$?

Let $\mathcal{I} = (\hat{n}, \mathcal{A}, \mathcal{C})$ be an instance of EXACT COVER BY 3-SETS. We create an instance \mathcal{I}' of GAME IMPLEMENTA-TION with two players p_1 and p_2 . Let $X_1 = X_2 = \mathcal{A} \cup \{c_i^{a_i} \mid i \}$ $C_j \in \mathcal{C}, a_i \in C_j$ and $O_1 = O_2 = \{c_j^{a_i} \mid C_j \in \mathcal{C}, a_i \in \mathcal{C}\}$ C_i . For each element $a_i \in \mathcal{A}$ and each set $C_i \in \mathcal{C}$ with $a_i \in C_j$, we define the utilities as

$$\begin{split} &U_1(a_i, c_j^{a_i}) = 2 \quad U_1(a_i, c_j^{a_n}) = 1 \\ &U_1(c_j^{a_i}, c_j^{a_i}) = 2 \quad U_1(c_j^{a_i}, c_j^{a_n}) = 1 \text{ where } a_n \in C_j \setminus a_i. \end{split}$$

Throughout, we take i + 1 and i - 1 modulo $3\hat{n}$. For each $a_i \in \mathcal{A}$ and each set $C_p \in \mathcal{C}$ such that $a_{i-1} \in C_p$, we define $U_2(c_p^{a_{i-1}}, a_i) = 1$. For $a_i \in \mathcal{A}$ and each set $C_p, C_j \in \mathcal{C}$ (not necessarily distinct) such that $a_{i-1} \in C_p$ and $a_i \in C_j$, define $U_2(c_p^{a_{i-1}}, c_j^{a_i}) = 1$. The undefined utilities are 0 and the budget δ is also 0. The utilities of p_1 and p_2 are shown in Table 4.

Before continuing with the proof, let us explain some intuition. Let $a_i \in \mathcal{A}$ and denote the sets containing a_i as $C_{i,1}, C_{i,2}, C_{i,3}$. The utilities of value 2 for p_1 enforce that for every $a_i \in \mathcal{A}$ exactly one of the strategies $c_{i,1}^{a_i}, c_{i,2}^{a_i}, c_{i,3}^{a_i}$ can be undominated for p_2 : To dominate a_i for p_1 with, say, $c_{i,2}^{a_i}$, we must promise a positive amount for playing $c_{i,2}^{a_i} \label{eq:constraint}$ whenever p_2 plays $c_{i,3}^{a_i}$ or $c_{i,1}^{a_i}$. Thus we must have that neither of those latter strategies is undominated for p_2 in order to stay within the budget.

The utilities of value 1 for p_1 enforce consistency, i.e., if $a_s \in \mathcal{A}$ is covered by C_r , then every $a_i \in C_r$ must also be covered by C_r . If $c_r^{a_s}$ is undominated for p_2 , then if we were to dominate $a_i \in C_r$ with $c_{i,2}^{a_i}$ where $C_{i,2} \neq C_r$, we would

have to promise $c_{i,2}^{a_i}$ to pay at least 1 when p_2 plays $c_r^{a_s}$. But since these are both undominated strategies, we would exceed the budget.

The utilities for p_2 enforce that we cover every element $a_i \in \mathcal{A}$. Player p_1 always tries to match the element p_2 is playing, whereas p_2 tries to be one ahead. This prevents the two players from picking some element $a_n \in \mathcal{A}$ and only playing the strategies related to that.

Formally, we claim that \mathcal{I} is a positive instance of EXACT COVER BY 3-SETS if and only if \mathcal{I}' is a positive instance of GAME IMPLEMENTATION.

For the forwards direction, assume that $(\hat{n}, \mathcal{A}, \mathcal{C})$ admits an exact cover S. For each element $a_i \in A$ and two distinct sets $C_j, C_p \in \mathcal{C}$ with $a_i \in C_j \cap C_p$, where $C_j \in \mathcal{S}$ and for each element $a_n \in C_j$, we define $V_1(c_j^{a_i}, c_p^{a_n}) = \infty$. For each element $a_i \in \mathcal{A}$ and two distinct sets $C_j, C_p \in \mathcal{C}$ with $a_i \in C_j \in \mathcal{S}$, while $a_{i-1} \in C_p$ but $C_p \notin \mathcal{S}$, we define $V_2(c_p^{a_{i-1}}, c_i^{a_i}) = \infty$. To show this is a valid implementation, we will observe that $\mathcal{X}^* \subseteq \mathcal{O}$ and $\operatorname{cost}(\mathcal{V}) = 0$.

Claim 3.2. Since S is an exact cover, for every $a_i \in A$ there is exactly one $C_j \in C$ such that $a_i \in C_j$. For such a_i, C_j and for every $C_l \in \mathcal{C} \setminus \{C_j\}$ such that $a_i \in C_l$, we have that $c_j^{a_i}$ dominates both a_i and every $c_l^{a_i}$ for both p_1 and p_2 .

Proof of Claim 3.2. Observe that for p_1 , a_i dominates $c_i^{a_i}$ for every $C_j \in \mathcal{C}$ where $a_i \in C_j$ in G. Since S is an exact cover, no $C_l \in \mathcal{C} \setminus \{C_j\}$ such that $a_i \in C_l$ is in S. Therefore payment promise V_1 is 0 when p_1 plays $c_l^{a_n}$. Thus a_i also dominates $c_l^{a_i}$ in $G[\mathcal{V}]$. Because dominance is transitive (Observation 2.1), it is enough to show that $c_i^{a_i}$ dominates a_i .

To see that $c_i^{a_i}$ dominates a_i for p_1 , we show that the payoff for playing $c_i^{a_i}$ is always higher than or equal to that of playing a_i .

Case 1: p_2 plays $c_j^{a_i}$. Then, $[U_i + V_i](c_j^{a_i}, c_j^{a_i}) = 2 = [U_i + V_i](a_i, c_j^{a_i})$.

Case 2: p_2 plays $c_l^{a_i}$ for some $C_l \in \mathcal{C} \setminus \{C_j\}$ such that $a_i \in C_l$.

Then, since a_i is covered by C_j , we know that $C_l \notin S$. Therefore, $[U_1 + V_1](c_j^{a_i}, c_l^{a_i}) = \infty > 2 = [U_1 + V_1](c_j^{a_i}, c_l^{a_i}) = \infty$ $V_1](a_i, c_l^{a_i}).$

Case 3: p_2 plays $c_j^{a_n}$ for some $a_n \in C_j \setminus \{a_i\}$. Then, $[U_1 + V_1](c_i^{a_i}, c_i^{a_n}) = 1 = [U_1 + V_1](a_i, c_i^{a_n}).$

Case 4: p_2 plays $c_l^{a_n}$ for some $a_n \in \mathcal{A} \setminus \{a_i\}, C_l \in \mathcal{C} \setminus$ $\{C_j\}$ where $a_i, a_n \in C_l$. Then, since element a_i is covered by C_j we know that $C_l \notin \mathcal{S}$. Therefore $[U_1 + V_1](c_i^{a_i}, c_l^{a_n}) = \infty > 1 =$ $[U_1 + V_1](a_i, c_l^{a_n}).$

Case 5: p_2 plays $c_l^{a_n}$ for some $a_n \in \mathcal{A} \setminus \{a_i\}, C_l \in \mathcal{C} \setminus$ $\{C_j\}$, where $a_i \notin C_l, a_n \in C_l$. Then, $[U_1 + V_1](c_j^{a_i}, (a_n, C_l)) = 0 = [U_1 + U_1](c_j^{a_i}, (a_n, C_l))$ $V_1](a_i, (a_n, C_l)).$

Case 6: p_2 plays $a_n \in \mathcal{A}$ (a_i, a_n not necessarily distinct). Then, $[U_1 + V_1](c_i^{a_i}, a_n) = 0 = [U_1 + V_1](a_i, a_n)$

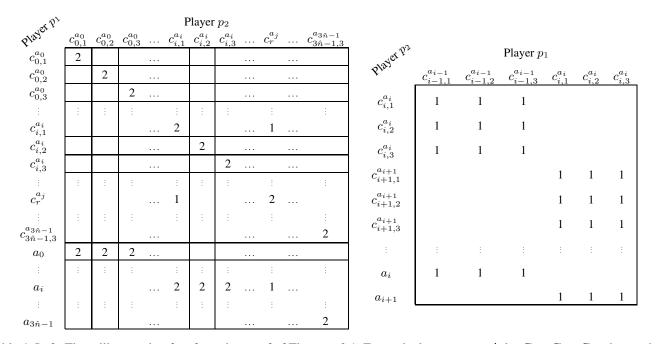


Table 4: Left: The utility matrix of p_1 from the proof of Theorem 3.1. For each element $a_{\ell} \in \mathcal{A}$, let $C_{\ell,1}, C_{\ell,2}, C_{\ell,3}$ denote the sets containing it. We assume that $C_{i,1} = C_r$ for some r and thus $a_i \in C_r$. Columns corresponding to strategies a_i for p_2 are omitted: their values are 0. Right: The utility matrix of p_2 from the proof of Theorem 3.1.

In all cases, the new utility of $c_j^{a_i}$ is higher than or equal to the utility of a_i , and in the Cases 2 and 4 the utility is strictly higher. Thus $c_j^{a_i}$ dominates a_i for p_1 .

Let $a_i \in \mathcal{A}$. Observe that in G, p_2 obtains the same utility for every strategy relating to a_i . Formally, for every $s, t \in A_i^* \coloneqq \{a_i\} \cup \{c_j^{a_i} \mid C_j \in \mathcal{C}, a_i \in C_j\}, U_2(x,s) = U_2(x,t)$ where $x \in X_1$ is an arbitrary strategy. The payment promise V_2 is non-zero only for $c_j^{a_i}$, where $C_j \in \mathcal{S}$. Since \mathcal{S} is an exact cover, no $C_l \in \mathcal{C} \setminus \{C_j\}$ such that $a_i \in C_l$ is in \mathcal{S} . Therefore payment promise V_2 is 0 for every strategy in $a_i^* \in A_i^* \setminus \{c_j^{a_i}\}$. It follows that for every $x, y \in A_i^* \setminus \{c_j^{a_i}\}, U_2(x, s) = U_2(x, t)$ for every $x \in X_1$.

Thus, to show case for p_2 , it suffices to show that $c_j^{a_i}$ dominates an arbitrary $a_i^* \in A_i^* \setminus \{c_j^{a_i}\}$.

- **Case 1:** p_1 plays $c_p^{a_{i-1}}$ for some $C_p \in S$ such that $a_{i-1} \in C_p$. Then, $[U_2 + V_2](c_p^{a_{i-1}}, c_j^{a_i}) = 1 = [U_2 + V_2](c_p^{a_{i-1}}, a_i^*)$
- Case 2: p_1 plays $c_p^{a_{i-1}}$ for some $C_p \in \mathcal{C} \setminus \mathcal{S}$ such that $a_{i-1} \in C_p$. Then, $[U_2 + V_2](c_p^{a_{i-1}}, c_j^{a_i}) = \infty > 1 = [U_2 + V_2](c_p^{a_{i-1}}, a_i^*)$
- **Case 3:** p_1 **plays** $c_p^{a_n}$ for some $a_n \in C_p \setminus \{a_{i-1}\} \in C$. If $C_p \notin S$, $V_2(c_p^{a_n}, c_j^{a_i}) = \infty$, otherwise $V_2(c_p^{a_n}, c_j^{a_i}) = 0$. In both cases, $[U_2 + V_2](c_p^{a_n}, c_j^{a_i}) \ge 0 = [U_2 + V_2](c_p^{a_n}, a_i^*)$
- **Case 4:** p_1 plays some $a_i \in \mathcal{A}$.

Then,
$$[U_2 + V_2](a_j, c_j^{a_i}) = 0 = [U_2 + V_2](a_j, a_i^*)$$

In all above cases, the new utility of $c_j^{a_i}$ is higher than the utility of a_i^* , and in case 2 the utility of $c_j^{a_i}$ is strictly higher.

Thus $c_j^{a_i}$ dominates every $a_i^* \in A_i^*$. This concludes the proof.

Since the set of undominated strategies is non-empty (Observation 2.4), Claim 3.2 implies that for every $i \in [2]$, $X_i^* \subseteq \{c_j^{a_i} \mid C_j \in S, a_i \in C_j\}$ as all other strategies are dominated. Therefore $\mathcal{X}^* \subseteq \{c_j^{a_i} \mid C_j \in S, a_i \in C_j\} \times \{c_j^{a_i} \mid C_j \in S, a_i \in C_j\} \subseteq \mathcal{O}$, as required. For every $j \in [2]$, we have that $V_j(s_1, s_2) > 0$ only when s_1 or s_2 is in $\{c_j^{a_i} \mid C_j \notin S, a_i \in C_j\}$. Since none of these strategies is in $X_{j'}^*$, we have that $\operatorname{cost}(\mathcal{V}) = \max_{x \in \mathcal{X}_{G[\mathcal{V}]}^*} \sum_{i \in [2]} V_i(x) = 0$, as required.

For the backwards direction, assume that we have a payment promise \mathcal{V} such that $cost(\mathcal{V}) = 0$ and $\mathcal{X}^* \subseteq \mathcal{O}$ in the modified game $G[\mathcal{V}]$.

Claim 3.3. Let $C_j \in \mathcal{C}$, $a_i \in \mathcal{A}$. If $c_j^{a_i} \in X_2^*$, then in $G[\mathcal{V}]$ (i) $c_j^{a_i} \in X_1^*$, (ii) $c_j^{a_i}$ dominates a_i for p_1 , (iii) $c_l^{a_i} \notin X_2^*$ where $C_l \in \mathcal{C} \setminus \{C_j\}$, $a_i \in C_l$. Proof of Claim 3.3. We first show (i). Since \mathcal{V} imple-

Proof of Claim 3.3. We first show (1). Since \mathcal{V} implements \mathcal{O} , by Observation 2.3 there is an undominated strategy that dominates a_i for p_1 . For a strategy $s \in X_1^*$ to dominate a_i for p_1 we need that $V_1(s, c_j^{a_i}) \geq U_1(a_i, c_j^{a_i}) - U_1(s, c_j^{a_i}) = 2 - U_1(s, c_j^{a_i})$. Because s is undominated, $(s, c_j^{a_i}) \in \mathcal{X}_{G[\mathcal{V}]}^*$. By the definition of cost, we have that $0 \geq \operatorname{cost}(\mathcal{V}) = \max_{x \in \mathcal{X}_{G[\mathcal{V}]}^*} \sum_{i \in [2]} V_i(x) \geq V_1(s, c_j^{a_i})$. By combining these, we obtain that $U_1(s, c_j^{a_i}) \geq 2$. The only

strategy for p_1 that satisfies this condition is $c_j^{a_i}$. Since $c_j^{a_i}$ dominates a_i , (ii) follows directly.

To prove (iii), assume that both $c_j^{a_i}$ and $c_l^{a_i}$ are undominated for p_2 . By (i) and (ii), strategy $c_j^{a_i}$ dominates a_i for p_1 and $c_j^{a_i}$ is undominated. Thus $[U_1 + V_1](c_j^{a_i}, c_l^{a_i}) \ge U_1(a_i, c_l^{a_i}) = 2$. From $U_1(c_j^{a_i}, c_l^{a_i}) = 0$ it follows that $V_1(c_j^{a_i}, c_l^{a_i}) \ge 2$. But since $c_j^{a_i}$ is undominated for p_1 and $c_l^{a_i}$ for p_2 , $(c_j^{a_i}, c_l^{a_i}) \in \mathcal{X}^*$ and thus $cost(\mathcal{V}) = \max_{x \in \mathcal{X}^*} \sum_{i \in [2]} V_i(x) \ge V_1(c_j^{a_i}, c_l^{a_i}) = 2$ which a contradiction to $cost(\mathcal{V}) = 0$.

Claim 3.4. Let $C_j \in \mathcal{C}, a_i \in \mathcal{A}$. If $c_j^{a_i} \in X_1^*$, then $c_l^{a_{i+1}} \in X_2^*$ for some $C_l \in \mathcal{C}$ such that $a_{i+1} \in C_l$.

Proof of Claim 3.4. Since \mathcal{V} is a valid solution, by Observation 2.3, there is an undominated strategy $s \in X_2^*$ that dominates a_{i+1} for p_2 . For s to dominate a_{i+1} we need that $[U_2 + V_2](c_j^{a_i}, s) \geq U_2(c_j^{a_i}, a_{i+1}) = 1$.

Because s is undominated, $(c_j^{a_i}, s) \in \mathcal{X}_{G[\mathcal{V}]}^{\star}$. Therefore $0 \ge \operatorname{cost}(\mathcal{V}) = \max_{x \in \mathcal{X}_{G[\mathcal{V}]}^{\star}} \sum_{i \in [2]} V_i(x) \ge V_2(c_j^{a_i}, s)$. From this follows that $U_2(c_j^{a_i}, s) \ge 1$. The only strategies for p_2 that satisfy this condition are $c_l^{a_{i+1}}$ where $C_l \in \mathcal{C}$ such that $a_{i+1} \in C_l$.

We know from the definition of valid implementation that $X_2^* \neq \emptyset$. Therefore there is some $C_j \in \mathcal{C}, a_i \in C_j$ such that $c_j^{a_i} \in X_2^*$. By Claim 3.3(i) $c_j^{a_i} \in X_1^*$. By Claim 3.4 $c_p^{a_{i+1}} \in X_2^*$ for some $C_p \in \mathcal{C}$ such that $a_{i+1} \in C_p$. By repeating this argumentation $3\hat{n}$ times, we obtain that for every $a_{i'} \in \mathcal{A}$, there is $C_{j'} \in \mathcal{C}$ such that $a_{i'} \in C_{j'}, c_{j'}^{a_{i'}} \in X_2^*$.

This shows that $S := \{C_j \mid C_j \in C, \exists a_i \in A, \text{ s.t. } c_j^{a_i} \in X_2^*\}$ covers A. To show S is an exact cover, we must show that if $C_j \in S$ and $a_i \in C_j$ then for every $C_l \in C \setminus \{C_j\}$ such that $a_i \in C_l$, we have that $C_l \notin S$.

Assume, towards a contradiction, that some $a_i \in \mathcal{A}$ is covered twice, i.e., there are $C_j, C_l \in \mathcal{S}$ where $a_i \in C_j \cap C_l$. By Claim 3.3(iii) we cannot have both $c_j^{a_i} \in X_2^*$ and $c_l^{a_i} \in X_2^*$. Therefore, without loss of generality, assume that $c_j^{a_i} \in X_2^*$ and $c_l^{a_n} \in X_2^*$ for some $a_n \in C_l \setminus \{a_i\}$. Then by Claim 3.3(ii) $c_j^{a_i}$ dominates a_i for p_1 . Moreover, $[U_1 + V_1](c_j^{a_i}, c_l^{a_n}) \ge U_1(a_i, c_l^{a_n}) = 1$ because $a_i, a_j \in C_l$.

Because $U_1(c_j^{a_i}, c_l^{a_n}) = 0$, we have $V_1(c_j^{a_i}, c_l^{a_n}) \ge 1$. By Claim 3.3(i) we have that $c_j^{a_i} \in X_1^*$ and we have assumed that $c_l^{a_n} \in X_2^*$. Thus $\operatorname{cost}(\mathcal{V}) \ge V_1(c_j^{a_i}, c_l^{a_n}) \ge 1 > 0$, a contradiction. Therefore each element $a_i \in \mathcal{A}$ is covered exactly once, and \mathcal{S} is an exact cover. This finishes the proof of Theorem 3.1.

4 GAME IMPLEMENTATION is NP-hard for Max. Degree Three and Two Strategies

In all earlier reductions, the number of strategies per player has been unbounded. In this section we show that in graphical games even bounding the number of strategies and the degree of players together does not help to lower the complexity. **Theorem 4.1.** GAME IMPLEMENTATION is NP-hard, even on graphical games of degree three, where each player has at most two strategies.

Proof. To show NP-hardness we reduce from EXACT COVER BY 3-SETS. Let $(\hat{n}, \mathcal{A}, \mathcal{C})$ be an instance of EXACT COVER BY 3-SETS. We construct an instance $(N, \mathcal{X}, \mathcal{U}, \mathcal{O}, \delta)$ of graphical GAME IMPLEMENTATION in the following way: Let $N \coloneqq \mathcal{A} \cup \mathcal{C}$ be the set of players, let $X_i = \{T_i, F_i\}$ be the set of strategies for player $i \in N$.

Construct the underlying graph $H \coloneqq (N, E)$, where $E \coloneqq \{\{a_i, C_j\} \mid C_j \in C, a_i \in C_j\}$. It is easy to see that H has degree 3. Throughout this proof, for an element $a_i \in A$, let us denote the sets that include it as C_i^1, C_i^2, C_i^3 in an arbitrary but fixed order. When defining utility functions, if the utility of the player does not depend on the strategy played by some other player, the strategy of this player is omitted from the function arguments.

For each element $a_i \in \mathcal{A}$, we define

$$U_{a_i}(T_{C_i^1}, T_{C_i^2}, T_{C_i^3}, F_{a_i}) = U_{a_i}(F_{C_i^1}, F_{C_i^2}, F_{C_i^3}, F_{a_i})$$

= $U_{a_i}(T_{C_i^1}, T_{C_i^2}, F_{C_i^3}, F_{a_i}) = U_{a_i}(T_{C_i^1}, F_{C_i^2}, T_{C_i^3}, F_{a_i})$
= $U_{a_i}(F_{C_i^1}, T_{C_i^2}, T_{C_i^3}, F_{a_i}) = 1$

The undefined combinations pay out 0. For every $C_j \in C$, U_{C_j} is 0 for every strategy profile.

For every $a_i \in \mathcal{A}$ the set of desired outcomes is $O_{a_i} = \{T_{a_i}\}$. For every $C_j \in \mathcal{C}, O_{C_j} = X_{C_j}$

It remains to show that there is an exact cover of A if and only if (G, \mathcal{O}, δ) is a positive instance of GAME IMPLE-MENTATION.

For the forwards direction, assume that $(\hat{n}, \mathcal{A}, \mathcal{C})$ admits an exact cover S.

For each element $a_i \in \mathcal{A}$, we define

$$\begin{split} V_{a_i}(T_{C_i^1}, T_{C_i^2}, T_{C_i^3}, T_{a_i}) &= \infty, \\ V_{a_i}(T_{C_i^1}, T_{C_i^2}, F_{C_i^3}, T_{a_i}) &= \infty, \\ V_{a_i}(T_{C_i^1}, F_{C_i^2}, T_{C_i^3}, T_{a_i}) &= \infty, \\ V_{a_i}(F_{C_i^1}, T_{C_i^2}, T_{C_i^3}, T_{a_i}) &= \infty, \text{ and } \\ V_{a_i}(F_{C_i^1}, T_{C_i^2}, T_{C_i^3}, T_{a_i}) &= \infty. \end{split}$$

For each set $C_j \in S$, let $V_{C_j}(T_{C_j}) = \frac{\delta}{3n}$ and for $C_l \in C \setminus S$, let $V_{C_l}(F_{C_l}) = \frac{\delta}{3n}$.

It is easy to see that for all $a_i \in \mathcal{A}$, T_{a_i} dominates F_{a_i} in $G[\mathcal{V}]$ and thus $X_{a_i}^* = \{T_{a_i}\} = O_{a_i}$. For every $C_j \in \mathcal{S}$, we have $X_{C_j}^* = \{T_{C_j}\}$ and for every $C_l \in \mathcal{C} \setminus \mathcal{S}$ we have $X_{C_l}^* = \{F_{C_l}\}$. Because $O_{C_j} = X_{C_i}$ for every $C_j \in \mathcal{C}$, we trivially have that $X_{C_j}^* \subseteq O_{C_j}$.

It remains to show that $cost(\mathcal{V}) \leq \delta$.

Observe that for every $a_i \in \mathcal{A}$, $V_{a_i}(x)$ is 0 for every strategy profile x in which exactly one of its set players C_i^j plays $T_{C_i^j}$. Because S is an exact cover, we have that for every $a_i \in \mathcal{A}$ exactly one $C_j \in \{C_i^1, C_i^2, C_i^3\}$ is in S and has T_{C_j} as its sole undominated strategy, whereas the others have the corresponding F-strategies as their sole undominated strategies. Therefore $V_{a_i}(x) = 0$ for every $x \in \mathcal{X}^*$ and we get that $\max_{x \in \mathcal{X}^*} (\sum_{i \in N} V_i(x)) = \max_{x \in \mathcal{X}^*} \sum_{C_j \in \mathcal{C}} V_{C_j}(x) \leq \sum_{C_j \in \mathcal{C}} \frac{\delta}{3n} = \delta$

Since for each player i, the set of undominated strategies for him is non-empty and a subset of O_i and we do not exceed the budget, we have a positive instance of GAME IMPLEMENTATION.

Next we prove the backwards direction, namely that if (G, \mathcal{O}, δ) is a positive instance of GAME IMPLEMENTA-TION, then $(\hat{n}, \mathcal{A}, \mathcal{C})$ admits an exact cover.

Assume (G, \mathcal{O}, δ) be a positive instance of GAME IM-PLEMENTATION, i.e., there exists a payoff function \mathcal{V} , s.t. in the game $((N, \mathcal{X}, \mathcal{U} + \mathcal{V}), H)$ the following holds:

$$\emptyset \neq \mathcal{X}_i^* \subseteq O_i \quad \forall i \in N, \text{ and}$$
$$\max_{x \in \mathcal{X}^\star} \sum_{i \in N} V_i(x) \leq \delta$$

We prove this with the following two claims:

Claim 4.2. For every $a_i \in \mathcal{A}, x \in \mathcal{X}^*_{G[\mathcal{V}]}$ exactly one $C_j \in \{C_i^1, C_i^2, C_i^3\}$ plays T_{C_i} in x.

Proof of Claim 4.2. For $a_i \in \mathcal{A}$, strategy T_{a_i} dominates F_{a_i} in $G[\mathcal{V}]$. Every strategy profile $x_{-a_i} \in \mathcal{X}_{-a_i}$ that does not have exactly one $C_j \in \{C_i^1, C_i^2, C_i^3\}$ playing T_{C_j} , has that $U_{a_i}(x_{-a_i}, F_{a_i}) - U_{a_i}(x_{-a_i}, T_{a_i}) = 1$. Thus $V_{a_i}(x_{-a_i}, T_{a_i}) \geq 1 > \delta$ and therefore $(x_{-a_i}, T_{a_i}) \notin \mathcal{X}^*$.

Claim 4.3. For all $C_j \in C$ either $X_{C_j}^* = \{T_{C_j}\}$ or $X_{C_j}^* = \{F_{C_j}\}$.

Proof of Claim 4.3. Assume towards a contradiction that there is $C_j \in C$ s.t. $\mathcal{X}_{C_j}^* = \{T_{C_j}, F_{C_j}\}$. Let $a_i \in C_j$. Assume $x \in \mathcal{X}^*$ is an undominated strategy profile where C_j plays T_{C_j} . Because T_{C_j} is undominated and every player has at least one undominated strategy, such an x exists. By Claim 4.2, we know that of the players $\{C_i^1, C_i^2, C_j\}$ (we assume, without loss of generality, that $C_i^3 = C_j$) exactly one plays its T-strategy, so C_i^1 and C_i^2 play their F-strategies. Thus $F_{C_i^1} \in X_{C_i^1}^*$ and $F_{C_i^2} \in X_{C_i^2}^*$. Since C_j has both T_{C_j} and F_{C_j} in its set of undominated strategies, there is $x' \in \mathcal{X}^*$ where $\{C_i^1, C_i^2, C_j\}$ play $\{F_{C_i^1}, F_{C_i^2}, F_{C_j}\}$, a contradiction to Claim 4.2.

We create a set cover $S = \{C_j \in C \mid X_{C_j}^* = \{T_{C_j}\}\}$. By Claims 4.2–4.3, for every $a_i \in A$ there is exactly one $C_j \in S$ such that $a_i \in C_j$. Thus, S is an exact cover of A.

5 EXACT GAME IMPLEMENTATION is NP-hard

The complexity of EXACT GAME IMPLEMENTATION has so far been open. In this section we show that it is NP-hard even when we have only two identical players.

Theorem 5.1. EXACT GAME IMPLEMENTATION is NPhard, even for two players and rectangular desired strategyprofile sets. *Proof.* We give a reduction from the NP-hard 3-COLORING problem (Garey and Johnson 1979) in which are a graph H and need to decide whether H can be *properly colored* with three colors. That is, whether we can assign each vertex exactly one color such that no two adjacent vertices receive the same color.

Given an instance H of 3-COLORING we proceed as follows to construct an instance of EXACT GAME IM-PLEMENTATION that consists of a game $G = (N, \mathcal{X}, \mathcal{U})$, a rectangular strategy profile set \mathcal{O} , and the real budget $\delta = 1$. There are two players, that is, $N = \{1, 2\}$. The sets of strategies of the two players are identical, that is, $\mathcal{X} = X_1 \times X_2$ and $X_1 = X_2$. Thus, we only describe X_1 . For each vertex in $V(H) \subseteq X_1$. We call these vertex strategies. Furthermore, for each combination of a color $c \in [3]$ and a vertex $v \in V(H)$ there is a strategy $(v, c) \in X_1$. We call these color-choice strategies, and we use C to denote the set of color-choice strategies, that is, $C = \{(v, c) \mid v \in$ $V(H) \land c \in [3]\}$. Finally, we have a set D of 3n dummy strategies. Overall, $X_1 = X_2 = V(H) \cup C \cup D$.

The strategies to implement are exactly the color-choice strategies, that is, $O_1 = O_2 = C$ and $\mathcal{O} = O_1 \times O_2$. Intuitively, the strategy (v, c) in O_1 that dominates strategy v after promising payments shall correspond to choosing color c for vertex v.

The utility functions are symmetric, that is, for each $x \in X_1 = X_2$ and $y \in X_2 = X_1$ we have $U_1(x, y) = U_2(y, x)$. Thus, we only describe U_1 explicitly. Moreover, we only give the non-zero values of U_1 , all values not explicitly mentioned are 0. First, for each pair $(v, c_1), (v, c_2)$ of color-choice strategies that correspond to the same vertex $v \in V(H)$ we put

$$U_1((v,c_1),(v,c_2)) = \begin{cases} 3, c_1 = c_2 \\ 2, & c_1 \neq c_2. \end{cases}$$
 Second,

for each pair $(u, c_1), (v, c_2)$ of color-choice strategies that correspond to two adjacent vertices $u, v \in V(H)$ we put $U_1((u, c_1), (v, c_2)) = U_1((v, c_1), (u, c_2)) =$ $\int 1, c_1 = c_2$ Third, for each system strategy used each

 $\begin{cases} 1, c_1 = c_2 \\ 2, c_1 \neq c_2. \end{cases}$ Third, for each vertex strategy v and each

color-choice strategy (v, c) corresponding to v we put $U_1(v, (v, c)) = 3$. Fourth, for each vertex strategy u and each color-choice strategy (u, c) corresponding to a neighbor $u \in N_H(v)$ of v we put $U_1(v, (u, c)) = 2$. Finally, for each color-choice strategy $x \in X_1$ we pick a distinct dummy strategy $y \in X_2$ and put $U_1(x, y) = 1$. This concludes the description of the EXACT GAME IMPLEMENTATION instance $\mathcal{I} = (G, \mathcal{O}, \delta)$ where $G = (N, \mathcal{X}, \mathcal{U})$ and $\delta = 1$.

Intuitively, the players are highly incentivized to play vertex strategies because of the values $U_1(v, (v, c)) = 3$. In order to dominate a vertex strategy v, we need to pick a color-choice strategy corresponding to that vertex v because in order to make a different strategy dominate v we would exceed the budget of 1. The values $U_1((v, c_1), (v, c_2))$ will enforce that both players select the same color for each vertex. Afterwards, if two adjacent vertices u, v would receive the same color c then the values $U_1((u, c), (v, c)) = 1 =$ $U_2((u, c), (v, c))$ enforce that we would have to pay both players: These two color-choice strategies would have to dominate u (for player 1) and v (for player 2), respectively, and we have $U_1(u, (v, c)) = 2 = U_2((u, c), v)$.

We now show the correctness, that is, \mathcal{I} is a yes-instance if and only if H is 3-colorable.

Assume first that H admits a proper 3-coloring $\phi: V(H) \rightarrow [3]$. We define the following payment promises V_1, V_2 . The promises are symmetric, that is, for each $x \in X_1 = X_2$ and $y \in X_2 = X_1$ we have $V_1(x, y) = V_2(y, x)$. Thus we only define V_1 explicitly. For each vertex $v \in V(H)$ let $c = \phi(v)$ and for each $d \in [3] \setminus \{c\}$ put $V_1((v, c), (v, d)) = 1$. Furthermore, for each neighbor $u \in N_H(v)$ put $V_1((v, c), (u, c)) = 1$. This concludes the description of V_1 (and of V_2) and thus the set \mathcal{V} of payment promises. We claim that \mathcal{O} is implemented in $G[\mathcal{V}]$, that is, $\mathcal{X}_{G[\mathcal{V}]}^* = \mathcal{O}$.

First, we show that for each player $i \in N$ all strategies outside of O_i are dominated by a strategy inside O_i . By symmetry, it suffices to consider player 1. Observe that each dummy strategy y is dominated since player 1 never obtains a nonzero payoff for playing y. Consider a vertex strategy $v \in X_1$. We claim that v is dominated by $(v, \phi(v)) \in X_1$. Indeed, the only non-zero payoff obtained by player 1 for v under $[U_1 + V_1]$ is when player 2 plays a color-choice strategy. For each $c \in [3]$ we have $[U_1 + V_1](v, (v, c)) =$ $3 = [U_1 + V_1]((v, c), (v, c))$, and thus if the color-choice strategy corresponds to v then (v, c) is at least as good as v for player 1. Furthermore, for each neighbor $u \in N_H(v)$ and each $c \in [3]$ we have $[U_1 + V_1](v, (u, c)) = 2 =$ $[U_1 + V_1]((v, c), (u, c))$. Thus, also if the color-choice strategy of player 2 does not correspond to v, then (v, c) is at least as good as v for player 1. Finally, there is a distinct dummy strategy $d \in D$ for which $[U_1 + V_1](v, d) = 0 < 0$ $1 = [U_1 + V_1]((v, c), d)$. Thus, in this case (v, c) is strictly better than v, meaning that, indeed, (v, c) dominates v.

To show the claim it remains to show that all strategies in O_1 are undominated. This, however, is obvious because O_1 is exactly the set of color-choice strategies and each such strategy x has a distinct dummy strategy d such that for all other strategies $z \in X_1$ we have $U_1(x, d) = 1 > 0 =$ $U_1(z, d)$. Thus, indeed, \mathcal{O} is implemented in $G[\mathcal{V}]$. Thus the claim holds, that is, \mathcal{O} is implemented in $G[\mathcal{V}]$.

It remains to show that the cost of \mathcal{V} is at most 1. Consider a strategy profile (x, y); we show that the sum of payment promises amount to at most 1. If x or y is a vertex strategy there are 0 promises to both players. Thus, consider the case where x and y are color-choice strategies, say x = (u, c)and y = (v, d). By the definition of V_1 and V_2 we have nonzero promises only if either (1) u = v or (2) u and v are neighbors. In case (1), we have promised payment 1 to player 1 only if $c = \phi(v)$ and d is some other color, and to player 2 only if $d = \phi(v)$ and c is some other color. Hence, the promises sum to at most 1. In case (2), we have promised payment 1 to player 1 only if $d = c = \phi(v)$ and to player 2 only if $d = c = \phi(u)$. Thus, also in this case the promises sum to at most 1. Thus, indeed the cost of \mathcal{V} is at most 1. It follows that \mathcal{I} is a yes-instance.

Assume now that \mathcal{I} is a yes-instance and let $\mathcal{V} = \{V_1, V_2\}$ be a witnessing set of payment promises. Consider player 1.

Since \mathcal{O} is implemented in $G[\mathcal{V}]$, each strategy in V(H) is dominated by a color-choice strategy (u, c) in $O_1 = C$. Furthermore, since for each $c' \in [3]$ we have $U_1(v, (v, c')) = 3$ the strategy (u, c) dominating v must obtain a payoff of at least 3, that is, $[U_1 + V_1]((u, c), (v, c')) \geq 3$. Since the budget is 1, we have for each $c' \in [3]$ that $U_1((u, c), (v, c')) \geq 2$. Thus, u = v. Hence, each vertex strategy v is dominated for player 1 by a color-choice strategy (v, c) corresponding to v. By an analogous argument, each vertex strategy v is dominated for player 2 by a color-choice strategy (v, c) corresponding to v.

We now show that for each vertex strategy v the two color-choice strategies dominating v for the two players coincide. Assume to get a contradiction that there is a vertex v such that v is dominated for player 1 by (v, c_1) and v is dominated for player 2 by (v, c_2) such that $c_1 \neq c_2$. Observe that

$$U_1((v, c_1), (v, c_2)) = 2 = U_2((v, c_1), (v, c_2)).$$

However, since

$$U_1(v, (v, c_2)) = 3 = U_2((v, c_1), v)$$

we thus have

$$V_1((v, c_1), (v, c_2)) \ge 1 \le V_2((v, c_1), (v, c_2))$$

i.e., the payment promises sum up to 2 which is a contradiction to our budget being 1. Thus, each vertex strategy is dominated by the same color-choice strategy for both players.

For each $v \in V(H)$ define $\phi(v) = c$ where c is such that v is dominated by (v, c) (for both players). Observe that ϕ is total. We claim that ϕ is a proper coloring of H. For a contradiction, assume that this is not the case, that is, there are two neighbors u, v in H such that $\phi(u) = \phi(v) = c$. Recall that $U_1(v, (u, c)) = 2$. By definition of ϕ , for player 1 vertex strategy v is dominated by (v, c). Furthermore, $U_1((v, c), (u, c)) = 1$ and, since (v, c)dominates v, we have $V_1((v,c),(u,c)) \ge 1$. Analogously, $U_2((v,c), u) = 2$ and, for player 2, vertex strategy u is dominated by (u, c). Furthermore, $U_2((v, c), (u, c)) = 1$ and thus $V_2((v,c),(u,c)) \ge 1$. This is a contradiction to the fact that the cost for strategy profile ((v, c), (u, c))is 1. Thus, indeed ϕ assigns no two vertices the same color, meaning that it is a proper three-coloring of H.

6 Correction to Algorithm for EXACT GAME IMPLEMENTATION

Eidenbenz et al. (2011) gave an algorithm which on input of a game G and a desired strategy-profile region \mathcal{O} , finds the minimum δ such that (G, \mathcal{O}, δ) is a positive instance of EXACT GAME IMPLEMENTATION. This is Algorithm 1 in (Eidenbenz et al. 2011), which for completeness is presented in Algorithm 1.

The algorithm fails to give an exact implementation when a strategy in O_i dominates some other strategy in O_i for a player *i*. We show an example where it fails and provide a fix for a class of games which we refer to as equitable games.

Algorithm 1: Algorithm for Exact *k*-Implementation by Eidenbenz et al. (2011). Note that (Eidenbenz et al. 2011) use *k* for the budget instead of δ .

| | :- | | • A same C and a restangular region () with | | |
|----|--|------|---|--|--|
| | п | iput | : A game G and a rectangular region \mathcal{O} with | | |
| | | | $\mathcal{O}_{-i} \subset \mathcal{X}_{-i} orall i.$ | | |
| | output : $k^*(\mathcal{O})$. | | | | |
| 1 | $V_i(x) \coloneqq 0, W_i(x) \coloneqq 0 \ \forall \ i \in N, o_i \in O_i$ | | | | |
| 2 | 2 $V_i(o_i, \bar{o}_{-i}) \coloneqq \infty \forall i \in N, o_i \in O_i, \bar{o}_{-i} \in X_i \setminus O_i$ | | | | |
| 3 | 3 compute X^* | | | | |
| 4 | 4 return ExactK (V, n) | | | | |
| 5 | d | ef E | xactK(<i>V</i> , <i>i</i>): | | |
| | input : Payment V, current player i | | | | |
| | output : $k^*(\mathcal{O})$ for $G(V)$ | | | | |
| 1 | | | $ X_i^{\star}(V) \setminus O_i > 0$ then | | |
| 2 | | | $s \coloneqq$ any strategy in $X_i^{\star}(V) \setminus O_i; \ k_{best} \coloneqq \infty$ | | |
| 3 | | | foreach $o_i \in O_i$ do | | |
| 4 | | | foreach $o_{-i} \in \mathcal{O}_{-i}$ do | | |
| 5 | | | $W_i(o_i, o_{-i}) := \max(0, U_i(s, o_{-i}) -$ | | |
| | | | $(U_i(o_i, o_{-i}) + V_i(o_i, o_{-i})))$ | | |
| 6 | | | $k \coloneqq \texttt{ExactK}(\mathcal{V} + \mathcal{W}, i)$ | | |
| 7 | | | if $k < k_{best}$ then | | |
| 8 | | | $k_{best} \coloneqq k$ | | |
| 9 | | | for each $o_{-i} \in \mathcal{O}_{-i}$ do | | |
| 10 | | | $W_i(o_i, o_{-i}) \coloneqq 0$ | | |
| 11 | | | return k _{best} | | |
| 12 | | e | lse | | |
| 13 | | | if $i > 1$ then | | |
| 14 | | | return ExactK ($V, i-1$) | | |
| 15 | | | else | | |
| 16 | | | return $\max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o)$ | | |

To see that the algorithm does not always construct a correct payment promise \mathcal{V} , consider a 2-player instance where player 1 and player 2 both have two strategies $\{s_1, s_2\}$. Let us define the utility functions for both players $i \in [2]$ as

$$U_i(s_1, s_1) = 2 \qquad U_i(s_2, s_1) = 1 U_i(s_1, s_2) = 1 \qquad U_i(s_2, s_2) = 0.$$

Let $O_1 = \{s_1, s_2\}$ and $O_2 = \{s_1\}$.

We can see that for both players s_1 dominates s_2 , so $X_i^* = \{s_1\}$ for all $i \in [2]$. Because $|X_i^* \setminus O_i| = 0$ for all $i \in [2]$, the check on line (1) of Algorithm 1 from (Eidenberz et al. 2011) is always false and the algorithm returns that \mathcal{O} can be implemented exactly with cost 0. However, V_1 constructed by the Algorithm is 0 everywhere, and thus $O_1 \neq X_1^*$, meaning this is not an exact implementation of \mathcal{O} .

Towards a correction, if we can find for every pair (i, o_i) of a player $i \in N$ and desired strategy $o_i \in O_i$ at least one distinct undesired strategy profile $x_{-i}^{o_i}$, such that $(o_i, x_{-i}) \notin O$, or in other words, if

$$|O_i| \le |(X_1 \times X_2 \times \ldots \times X_{i-1} \times X_{i+1} \times \ldots \times X_n) \setminus (O_1 \times O_2 \times \ldots \times O_{i-1} \times O_{i+1} \times \ldots \times O_n)|, \quad (1)$$

then we can make certain that no strategy in O_i dominates another strategy in O_i . Let us call a game for which, for every $i \in N$, Equation (1) holds *equitable*.

We start by showing that, if a game is equitable then, we can translate every non-exact implementation to an exact implementation, where the cost is bounded by the worst-case payment over \mathcal{O} in the initial implementation.

Algorithm 2: Minimum cost exact implementation

```
input : A game G = (N, \mathcal{X}, \mathcal{U}) and a rectangular
                         strategy profile region \mathcal{O} = O_1 \times \cdots \times O_n.
     output : A payment promise \mathcal{V} and \delta \geq 0 such that \mathcal{V}
                         implements \mathcal{O} and \max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o) = \delta is
                         smallest possible.
 1 foreach i \in N do
              foreach mapping F_i: X_i \setminus O_i \to O_i do
 2
\begin{array}{c|c} 1 & \text{for each mapping } I_i \cdot X_i \setminus C_i \to C_i \\ 3 & V^{F_i} \leftarrow \text{ComputeV}(F_i, X_i, O_i) \\ 4 & \delta \leftarrow \infty; \mathcal{V} \leftarrow (0, \dots, 0); \\ 5 & \text{for each } F = (F_1, \dots, F_n) \in \mathcal{F} \text{ do} \\ 6 & \delta^F \leftarrow \max_{o \in \mathcal{O}} \sum_{i \in N} V^{F_i}(o); \\ \hline \\ & \mathbf{a} \in F \leftarrow S^F_i \in S^F_i \times \mathcal{V} \leftarrow F_i \\ \end{array}
             if \delta^F < \delta then \delta \leftarrow \delta^F; \mathcal{V} \leftarrow F;
 7
 s foreach i \in N do
              foreach o_i \in O_i do
 9
                for each x_{-i} \in \mathcal{X} - i \setminus \mathcal{O}_{-i} do V_i(o_i, x_{-i}) \leftarrow \infty;
10
11 return \delta, \mathcal{V}
12 def ComputeV (F_i, X_i, O_i):
              foreach o_i \in O_i do
13
                       foreach o_{-i} \in \mathcal{O}_{-i} do
14
                               if F_i^{-1}(o_i) \neq \emptyset then
15
                                V_i(o_i, o_{-i}) \leftarrow \max\{0,
16
                                 \max_{x_i \in F_i^{-1}(o_i)} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i}) \};
17
                                else V_i(o_i, o_{-i}) \leftarrow 0;
18
19 return V_i
```

Throughout this section, let \mathcal{F} denote the Cartesian product of the possible functions from $X_i \setminus O_i$ to O_i for every player, i.e., $\mathcal{F} = (X_1 \setminus O_1 \to O_1) \times \cdots \times (X_n \setminus O_n \to O_n)$. **Theorem 6.1.** Let $G = (N, \mathcal{X}, \mathcal{U})$ be an equitable game and $\mathcal{O} \subset \mathcal{X}$ a rectangular strategy profile region. Let \mathcal{V} implement \mathcal{O} (not necessarily exactly) and let $\delta = \max_{o \in \mathcal{O}} \sum_{i \in N}$. Then the payment promise \mathcal{V}^* defined below implements \mathcal{O} exactly and with $\operatorname{cost}(\mathcal{V}^*) = \delta$. Let $M = U_{max} + \delta + 1$ with $U_{max} = \max_{i \in N, x \in X} U_i(x)$, *i.e.*, U_{max} is the maximum amount any player may receive in utility. For every $i \in N$, $o_i \in O_i$, pick a distinct strategy profile $x_{-i}^{o_i}$ such that $(o_i, x_{-i}) \notin \mathcal{O}$. Since G is equitable, we can choose a distinct profile for every $i \in N$, $o_i \in O_i$.

To define \mathcal{V}^* , for every $i \in N$, $o_i \in O_i$ put

$$V_{i}^{*}(x_{i}, x_{-i}) = \begin{cases} V_{i}(o_{i}, x_{-i}), & \text{if } x_{-i} \in \mathcal{O}_{-i} \\ M + 1 - U_{i}(x_{i}, x_{-i}), & \text{if } x_{-i} = x_{-i}^{x_{i}} \\ M - U_{i}(x_{i}, x_{-i}), & \text{otherwise.} \end{cases}$$

$$If x_{i} \in X_{i} \setminus O_{i}, \text{ then } V^{*}(x_{i}, x_{-i}) = 0 \text{ for every } x_{-i} \in \mathcal{X}_{-i}.$$

$$(2)$$

The idea behind the payments is to enforce that every desired strategy has one undesired strategy profile where they are the best possible option. This prevents any other strategy from dominating it.

Suppose \mathcal{V} implements \mathcal{O} , i.e., $\mathcal{X}^{\star}_{G[\mathcal{V}]} \subseteq \mathcal{O}$.

Assume, towards a contradiction that $\mathcal{O} \neq \mathcal{X}^{\star}_{G[\mathcal{V}^*]}$.

First assume that $\mathcal{O} \supset \mathcal{X}^*_{G[\mathcal{V}^*]}$. Therefore there is a player $i \in N$ that has a desired strategy $o_i \in O_i$, which is dominated by some strategy $x_i \in X_i$. Note that x_i may be in O_i . Since x_i dominates o_i , we know that for every strategy profile $x_{-i} \in \mathcal{X}_{-i}$ we have that $[U_i + V_i^*](x_i, x_{-i}) \geq 0$

 $[U_i + V_i^*](o_i, x_{-i})$. We proceed in two cases:

- **Case 1:** $x_i \in O_i$. We have that $[U_i + V_i^*](x_i, x_{-i}^{o_i}) = M < M + 1 = [U_i + V_i^*](o_i, x_{-i}^{o_i})$, so x_i cannot dominate o_i .
- **Case 2:** $x_i \in X_i \setminus O_i$. For every $x_{-i} \in \mathcal{X}_{-i} \setminus \mathcal{O}_{-i}$, $V_i^*(x_i, x_{-i}) = 0$ and $V_i^*(o_i, x_{-i}) \ge M - U_i(o_i, x_{-i})$. Therefore $[U_i + V_i^*](x_i, x_{-i}) = U(x_i, x_{-i}) < M \le [U_i + V_i^*](o_i, x_{-i})$, so x_i cannot dominate o_i .

Thus we have that $\mathcal{O} \subset \mathcal{X}_{G[\mathcal{V}^*]}^*$. There thus is a player $i \in N$ strategy $x_i \in X_i \setminus O_i$ such that x_i is undominated under $G[\mathcal{V}^*]$. We know that x_i is dominated by some desired strategy $o_i \in X_i^* \subseteq O_i$ under $G[\mathcal{V}]$, but is not longer dominated by o_i in $G[\mathcal{V}^*]$. That means there exists a $x_{-i} \in \mathcal{X}_{-i}$ such that $[U_i + V_i^*](x_i, x_{-i}) > [U_i + V_i^*](o_i, x_{-i})$, but $[U_i + V_i](x_i, x_{-i}) \leq [U_i + V_i](o_i, x_{-i})$. We proceed in two cases.

- **Case 1:** $x_{-i} \in \mathcal{O}_{-i}$. In this case $V_i^*(x_i, x_{-i}) = 0$ and $V_i^*(o_i, x_{-i}) = V_i(o_i, x_{-i})$. By the definition of V_i^* and the assumption that o_i dominates x_i in $G[\mathcal{V}]$ we have that $[U_i + V_i^*](o_i, x_{-i}) = [U_i + V_i](o_i, x_{-i}) \ge [U_i + V_i](x_i, x_{-i}) \ge U_i(x_i, x_{-i}) = [U_i + V_i^*](x_i, x_{-i})$. This is a contradiction to the assumption $[U_i + V_i^*](x_i, x_{-i}) > [U_i + V_i^*](o_i, x_{-i})$.
- **Case 2:** $x_{-i} \in \mathcal{X}_{-i} \setminus \mathcal{O}_{-i}$. We have that $[U_i + V_i^*](o_i, x_{-i}) \ge M$ and $V_i^*(x_i, x_{-i}) = 0$, therefore $[U_i + V_i^*](o_i, x_{-i}) \ge M > U_i(x_i, x_{-i}) = [U_i + V_i^*](x_i, x_{-i})$, a contradiction to the assumption $[U_i + V_i^*](x_i, x_{-i}) > [U_i + V_i^*](o_i, x_{-i})$.

Therefore $\mathcal{X}_{G[\mathcal{V}^*]}^{\star} = \mathcal{O}$.

Last we show that $\operatorname{cost}(\mathcal{V}) = \delta$. We have shown that $\mathcal{X}^{\star}_{G[\mathcal{V}^*]} = \mathcal{O}$ and constructed \mathcal{V}^* so that $V_i^*(o) = V_i(o)$ for every $o \in \mathcal{O}, i \in N$. Therefore $\max_{o \in \mathcal{O}} \sum_{i \in N} V_i^*(o) = \max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o) = \delta$, as required. Next we show that Algorithm 1 by Eidenbenz et al. (2011) identifies a payment promise \mathcal{V} which minimizes $\max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o)$. To make the analysis of the algorithm easier, we have made a simplified version of their algorithm, which is shown in Algorithm 2.

6.1 Correctness of Our Simplified Algorithm

We start by showing some properties of the algorithm.

Observation 6.2. Let \mathcal{V} be a payment promise returned by Algorithm 2. Then for every player $i \in N$, undesired strategy $x_i \in X_i \setminus O_i$, strategy profile $x_{-i} \in \mathcal{X}_{-i}$, $V_i(x_i, x_{-i}) = 0$.

Proof. We initially set $V_i = 0$ for every $i \in N$. It is straightforward to observe that for every undesired strategy $x_i \in X_i \setminus O_i$ and a strategy profile $x_{-i} \in \mathcal{X}_{-i}$, $V_i(x_i, x_{-i})$ is never modified.

Claim 6.3. Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game and \mathcal{O} a rectangular desired strategy profile. Algorithm 2 returns \mathcal{V}, δ such that \mathcal{V} implements \mathcal{O} and $\max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o) = \delta$.

Proof of Claim 6.3. Consider \mathcal{V} returned from Algorithm 2. Lines (8) - (10) enforce that for every $i \in N, o_i \in O_i, x_{-i} \in O_i$ $\begin{aligned} &\mathcal{X}_{-i} \setminus \mathcal{O}_{-i}, V_i(o_i, x_{-i}) = \infty. \text{ Lines (5)-(7) enforce that there} \\ &\text{ is } (F_1, \ldots, F_n) \in \mathcal{F} \text{ such that for every } i \in N, (o_i, o_{-i}) \in \\ &\mathcal{O}, \ V_i(o_i, o_{-i}) = \max\{0, \max_{x_i \in F_i^{-1}(o_i)} U_i(x_i, o_{-i}) - \\ &U_i(o_i, o_{-i})\}. \end{aligned}$

Consider an arbitrary player $i \in N$ and an arbitrary undesired strategy $x_i \in X_i \setminus O_i$.

For each $o_{-i} \in \mathcal{O}_{-i}$ we have that $[U_i+V_i](F_i(x_i), o_{-i}) \ge U_i(F_i(x_i), o_{-i}) + U_i(x_i, o_{-i}) - U_i(F_i(x_i), o_{-i}) = U_i(x_i, o_{-i})$. By Observation 6.2, $[U_i + V_i](x_i, o_{-i}) = U_i(x_i, o_{-i})$. Thus $[U_i + V_i](F_i(x_i), o_{-i}) \ge [U_i + V_i](x_i, o_{-i})$.

For every $x_{-i} \in \mathcal{X}_{-i} \setminus \mathcal{O}_{-i}$ we have that $[U_i + V_i](F_i(x_i), x_{-i}) = \infty > U_i(x_i, x_{-i}) = [U_i + V_i](x_i, x_{-i})$. As we have for every $x_{-i} \in \mathcal{X}_{-i}$ that $[U_i + V_i](F_i(x_i), x_{-i}) \ge [U_i + V_i](x_i, x_{-i})$ and the inequality is strict when $x_{-i} \notin \mathcal{O}_{-i}$, $F_i(x_i)$ dominates x_i . As this holds for an arbitrary $i, x_i, \mathcal{X}_{G[\mathcal{V}]}^* \subseteq \mathcal{O}$.

In line (5) we set $\delta \coloneqq \max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o)$, so this part is trivially true.

Claim 6.4. Let $F = (F_1, \ldots, F_n) \in \mathcal{F}$ be arbitrary. For every $o \in \mathcal{O}$, Algorithm 2 returns a δ such that $\delta \leq \max\{0, \max_{(o_i, o_{-i}) \in \mathcal{O}} \sum_{i \in N} \max_{x_i \in F_i^{-1}(o_i)} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i})\}.$

Proof of Claim 6.4. Consider line (5) of Algorithm 2. For a given $F \in \mathcal{F}$, there is an iteration of the algorithm where the variable \mathbf{F} coincides with F. In that iteration, we have that $\delta^F = \max_{o \in \mathcal{O}} \sum_{i \in N} V^{F_i}(o)$, where $V^{F_i}(o_i, o_{-i}) = \max\{0, \max_{x_i \in F_i^{-1}(o_i)} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i})\}$. Thus δ^F satisfies $\delta^F \leq \max\{0, \max_{(o_i, o_{-i}) \in \mathcal{O}} \sum_{i \in N} \max_{x_i \in F_i^{-1}(o_i)} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i})\}$.

The loop on lines (5) - (7) finishes with either variable $\delta = \delta^F$ or $\delta = \delta' \leq \delta^F$. As δ is returned with no further modification, this concludes the proof.

With these properties, we can prove the following of Algorithm 1 from (Eidenbenz et al. 2011):

Lemma 6.5. Given a game $G = (N, \mathcal{X}, \mathcal{O})$ and a desired rectangular strategy profile region $\mathcal{O} \subseteq \mathcal{X}$, Algorithm 2 correctly returns the smallest $\delta \ge 0$ such that there is a payment promise \mathcal{V} for which $\max_{o \in O} \sum_{i \in N} V_i(o) \le \delta$ and $\mathcal{X}^*_{G[\mathcal{V}]} \subseteq \mathcal{O}$.

Proof of Lemma 6.5. By Claim 6.3 we know that Algorithm 2 returns a payment promise \mathcal{V} that implements \mathcal{O} and $\delta = \max_{o \in \mathcal{O}} \sum_{i \in N} V_i$.

It remains to show that if there is a payment promise \mathcal{V} and $\delta \geq 0$ with $\max_{o \in \mathcal{O}} \sum_{i \in N} V_i(o) \leq \delta$ such that \mathcal{V} satisfies $\mathcal{X}^*_{G[\mathcal{V}]} \subseteq \mathcal{O}$, the algorithm returns some $\delta' \leq \delta$.

Assume that \mathcal{V} satisfies $\mathcal{X}_{G[\mathcal{V}]}^{\star} \subseteq \mathcal{O}$. Then, for every $i \in N, x_i \in X_i \setminus O_i$ there is at least one desired strategy $o_i \in O_i$ such that o_i dominates x_i for player i. Let $\hat{F}_i : X_i \to O_i$ be a function that encodes this, i.e., $\hat{F}(x_i)$ is an arbitrary but fixed strategy in O_i that dominates x_i for player i.

Claim 6.6. For each player $i \in N$ and each $(o_i, o_{-i}) \in O$

$$V_i(o_i, o_{-i}) \ge \max_{x_i \in X_i \setminus O_i, \hat{F}_i(x_i) = o_i} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i}).$$

If $\{\hat{F}_i(x_i) \mid x_i \in X_i \setminus O_i\} = \emptyset$, then instead $V_i(o_i, o_{-i}) \ge 0$.

Proof of Claim 6.6. Since $\hat{F}_i(x_i)$ dominates x_i , we have for all $o_{-i} \in O_{-i}$ that $V_i(\hat{F}_i(x_i), o_{-i}) \geq U_i(x_i, o_{-i}) - U_i(\hat{F}_i(x_i), o_{-i})$. By considering this from the point of view of $F(x_i) \coloneqq o_i$, we obtain $V_i(o_i, o_{-i}) \geq \max_{x_i \in X_i \setminus O_i, \hat{F}_i(x_i) = o_i} U_i(x_i, o_{-i}) - U_i(o_i, o_{-i})$.

Let δ' be the return value of Algorithm 2 and \mathcal{V}' the payment promise constructed by it. By Claim 6.6 and Claim 6.4 we obtain that $\delta' = \max_{o \in \mathcal{O}} \sum_{i \in N} V'_i(o) \leq \max_{o \in \mathcal{O}} \sum_{i \in N} \max_{x_i \in X_i \setminus O_i, \hat{F}_i(x_i) = o_i} U_i(x_i, o_{-i}) - U_i(\hat{F}_i(x_i), o_{-i}) \leq \max_{o \in \mathcal{O}} V_i(o_i, o_{-i}) = \delta$, as required.

We obtain the following:

Theorem 6.7. For a given equitable game $G = (N, \mathcal{X}, \mathcal{U})$ and a set of desired strategy profiles $\mathcal{O} \subseteq \mathcal{X}$, the smallest $\delta \ge 0$ such that (G, \mathcal{O}, δ) is a positive instance of EX-ACT GAME IMPLEMENTATION can be identified in time $O(|\mathcal{O}| \max_{i \in N} (n|O_i|^{|X_i \setminus O_i|} |\mathcal{O}||X_i \setminus O_i| + |O_i|^{n|X_i \setminus O_i|})).$

Proof. By Lemma 6.5 Algorithm 2 correctly returns the minimum $\delta \geq 0$ such that there is a payment promise \mathcal{V} for which $\max_{o \in O} \sum_{i \in N} \mathcal{V}_i(o) \leq \delta$ and $\mathcal{X}^{\star}_{G[\mathcal{V}]} \subset \mathcal{O}$. By Theorem 6.1, we can translate this to an exact implementation of \mathcal{O} with cost δ .

For a given F_i, X_i, O_i , ComputeV iterates over \mathcal{O} in lines (13)-(14). The max-operation on line (17) iterates at worst over $X_i \setminus O_i$. Thus ComputeV takes $O(|\mathcal{O}||X_i \setminus O_i|)$ time.

Line (1) iterates over every player $i \in N$ and Line (2) every function from $X_i \setminus O_i \to O_i$, which there are $|O_i|^{|X_i \setminus O_i|}$. Therefore lines (1)-(3) take $O(\max_{i \in N} n |O_i|^{|X_i \setminus O_i|} |\mathcal{O}||X_i \setminus O_i|)$ time.

Lines (5)-(7) iterate over \mathcal{F} and performs a computation over \mathcal{O} . The time-complexity is thus $O(\max_{i \in N} |O_i|^{n|X_i \setminus O_i|} |\mathcal{O}|).$

The remaining algorithm iterates over \mathcal{X} . Thus the total time complexity is $O(|\mathcal{O}| \max_{i \in N} (n|O_i|^{|X_i \setminus O_i|} |\mathcal{O}||X_i \setminus O_i| + |O_i|^{n|X_i \setminus O_i|}))$.

7 Characterization of Cost-0 Implementation

In this section we characterize rectangular strategy profiles $\mathcal{P} = P_1 \times P_2 \times \ldots \times P_n$ that can be implemented at zero cost. We call such profiles promise-Nash equilibrium (PNE). The naming comes from two considerations. First, if each player *i* has only one strategy in P_i , then a PNE is equivalent to a Nash equilibrium. Second, a PNE encapsulates the notion that no player *i* has an incentive to switch towards a strategy outside of P_i provided that each other player *j* plays only strategies in P_j . We believe this notion to be of independent interest because it models situations in which

certain types of strategies may be off limits for, e.g., moral reasons. Using PNE may thus enable studying the price (or value) of morality and similar ideas. Formally:

Definition 7.1. Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game. A rectangular strategy profile region $P_1 \times \cdots \times P_n \subset X_1 \times \cdots \times X_n$ is a *promise-Nash equilibrium (PNE)* if

$$\forall i \in N, \forall x_i \in X_i \setminus P_i \exists p_i \in P_i: \\ \forall p_{-i} \in P_{-i}: \quad U_i(p_i, p_{-i}) \ge U_i(x_i, p_{-i}).$$

We observe the following.

Theorem 7.2. Let $G = (N, \mathcal{X}, \mathcal{U})$ be a game. A rectangular strategy profile region $\mathcal{P} = P_1 \times \cdots \times P_n \subset X_1 \times \cdots \times X_n$ can be implemented with cost 0 if and only if \mathcal{P} is a promise-Nash equilibrium.

In fact, this theorem has an interpretation in the morality setting mentioned above: Let a profile \mathcal{P} consist only of moral strategies and no amoral ones. Then \mathcal{P} is a PNE if and only if morality is incentivized without any incentives having to actually be realized. In other words, morality is self-enforcing if and only if it constitutes a PNE.

Proof of Theorem 7.2. Assume first that \mathcal{P} can be implemented at cost 0. Let \mathcal{V} be a corresponding payment promise. We aim to show that \mathcal{P} is a PNE. Consider a player $i \in N$ and a strategy $x_i \in X_i \setminus P_i$. Since \mathcal{V} implements \mathcal{P} , there is a strategy x'_i that dominates x_i in $G[\mathcal{V}]$. Furthermore, by transitivity of domination we may assume that $x'_i \in P_i$. Since the cost of \mathcal{V} is 0 we have for each $p_{-i} \in \mathcal{P}_{-i}$ that $V_i(x'_i, p_{-i}) = 0$. However, since x'_i dominates x_i we have $[U_i + V_i](x'_i, p_{-i}) \geq [U_i + V_i](x_i, p_{-i})$. Thus, necessarily $U_i(x'_i, p_{-i}) \geq U_i(x_i, p_{-i})$. Thus, we may take x'_i to be the strategy p_i promised to exist by the definition of PNEs. Thus, \mathcal{P} indeed is a PNE.

Now assume that \mathcal{P} is a PNE. We define the following payment promise \mathcal{V} . For each $i \in N$, each $p_i \in P_i$ and each $x_{-i} \in \mathcal{X}_{-i} \setminus \mathcal{P}_{-i}$ we put $V_i(p_i, x_{-i}) = \infty$. All other values of V_i are 0. Observe that all non-zero payment promises are for strategy profiles that include at least one strategy not in some P_j . Thus, if we can show that for each player $j \in N$ it is the case that each strategy $x_j \in X_j \setminus P_j$ is not undominated, then the cost of \mathcal{V} is 0.

Consider a player $i \in N$ and a strategy $x_i \in X_i \setminus P_i$. We claim that x_i is not undominated. By the definition of a PNE, there exists a strategy $p_i \in P_i$ such that $\forall p_{-i} \in P_{-i} : U_i(p_i, p_{-i}) \ge U_i(x_i, p_{-i})$. By definition of \mathcal{V} we thus have $[U_i + V_i](p_i, p_{-i}) \ge [U_i + V_i](x_i, p_{-i})$. Furthermore, by definition of \mathcal{V} we have for each $x_{-i} \in \mathcal{X}_{-i} \setminus \mathcal{P}_{-i}$ that $[U_i + V_i](p_i, x_{-i}) = \infty > [U_i + V_i](x_i, x_{-i})$. Thus indeed p_i dominates x_i .

It follows that indeed the cost of \mathcal{V} is 0. Furthermore, \mathcal{V} implements \mathcal{P} by the domination relations shown above.

Acknowledgments

Jiehua Chen and Sofia Simola are supported by the Vienna Science and Technology Fund (WWTF), grant number VRG18-012. Manuel Sorge acknowledges funding by the Alexander von Humboldt Foundation.

References

Brill, M.; Freeman, R.; and Conitzer, V. 2015. Computing the Optimal Game. In *Proceedings of the 2nd Workshop on Exploring Beyond the Worst Case in Computational Social Choice*, 1–8.

Buterin, V.; Reijsbergen, D.; Leonardos, S.; and Piliouras, G. 2020. Incentives in Ethereum's hybrid Casper protocol. *International Journal of Network Management*, 30(5).

Conitzer, V.; and Sandholm, T. W. 2014. Complexity of Mechanism Design. Technical report, arXiv.

Deng, Y.; and Conitzer, V. 2017. Disarmament Games. In Singh, S.; and Markovitch, S., eds., *Proceedings of the Thirty-First AAAI Conference on Artificial Intelligence, February 4-9, 2017, San Francisco, California, USA*, 473–479.

Deng, Y.; and Conitzer, V. 2018. Disarmament Games With Resource. In McIlraith, S. A.; and Weinberger, K. Q., eds., *Proceedings of the Thirty-Second AAAI Conference on Artificial Intelligence (AAAI 2018)*, 981–988. AAAI Press.

Deng, Y.; Tang, P.; and Zheng, S. 2016. Complexity and Algorithms of K-implementation. In *Proceedings of the 15th International Conference on Autonomous Agents and Multiagent Systems (AAMAS '16)*, 9.

Eidenbenz, R.; Pignolet, Y. A.; Schmid, S.; and Wattenhofer, R. 2011. Cost and complexity of harnessing games with payments. *International Game Theory Review*, 13(01): 13–44.

Garey, M. R.; and Johnson, D. S. 1979. *Computers and Intractability: A Guide to the Theory of NP-Completeness*. W. H. Freeman.

Hamari, J. 2019. *Gamification*, 1–3. John Wiley & Sons, Ltd.

Kearns, M. J.; Littman, M. L.; and Singh, S. 2001. Graphical Models for Game Theory. In Breese, J. S.; and Koller, D., eds., *Proceedings of the 17th Conference in Uncertainty in Artificial Intelligence (UAI '01)*, 253–260. Morgan Kaufmann.

Letchford, J.; and Conitzer, V. 2010. Computing optimal strategies to commit to in extensive-form games. In *Proceedings of the 11th ACM conference on Electronic commerce (EC '10)*, 83–92. Association for Computing Machinery.

Maskin, E. 1999. Nash Equilibrium and Welfare Optimality. *Review of Economic Studies*, 66(1): 23–38.

Maskin, E.; and Sjöström, T. 2002. *Implementation Theory*, volume 1 of *Handbook of Social Choice and Welfare*, 237–288. Elsevier.

Monderer, D.; and Tennenholtz, M. 2004. K-Implementation. *Journal of Artificial Intelligence Research*, 21: 37–62.

Moscibroda, T.; and Schmid, S. 2009. On Mechanism Design without Payments for Throughput Maximization. In *Proceedings of the 28th IEEE International Conference on Computer Communications (INFOCOM 2009)*, 972–980. Schaefer, T. J. 1978. The Complexity of Satisfiability Problems. In *Proceedings of the Tenth Annual ACM Symposium on Theory of Computing (STOC '78)*, 216–226.

Thaler, R. H.; and Sunstein, C. R. 2008. *Nudge: Improving Decisions about Health, Wealth, and Happiness.* Yale University Press.

Wooldridge, M.; Endriss, U.; Kraus, S.; and Lang, J. 2013. Incentive engineering for Boolean games. *Artificial Intelligence*, 195: 418–439.