

# CROSS-MODAL MUTUAL LEARNING FOR CUED SPEECH RECOGNITION

Lei Liu<sup>1</sup>, Li Liu<sup>1,\*</sup>

<sup>1</sup>Shenzhen Research Institute of Big Data, The Chinese University of Hong Kong, Shenzhen, China

## ABSTRACT

Automatic Cued Speech Recognition (ACSR) provides an intelligent human-machine interface for visual communications, where the Cued Speech (CS) system utilizes lip movements and hand gestures to code spoken language for hearing-impaired people. Previous ACSR approaches often utilize direct feature concatenation as the main fusion paradigm. However, the asynchronous modalities (*i.e.*, lip, hand shape and hand position) in CS may cause interference for feature concatenation. To address this challenge, we propose a transformer based cross-modal mutual learning framework to prompt multi-modal interaction. Compared with the vanilla self-attention, our model forces modality-specific information of different modalities to pass through a modality-invariant codebook, collating linguistic representations for tokens of each modality. Then the shared linguistic knowledge is used to re-synchronize multi-modal sequences. Moreover, we establish a novel large-scale multi-speaker CS dataset for Mandarin Chinese. To our knowledge, this is the first work on ACSR for Mandarin Chinese. Extensive experiments are conducted for different languages (*i.e.*, Chinese, French, and British English). Results demonstrate that our model exhibits superior recognition performance to the state-of-the-art by a large margin.

**Index Terms**— Cued Speech, Multi-Modal, Transformer

## 1. INTRODUCTION

Cued Speech (CS) [1, 2] is an efficient communication system for hearing impaired people, which leverages lip motions and hand gestures into visual cues. As shown in Figure 1, hand shapes and positions are the supplementary to alleviate the visual ambiguity of similar labial shapes caused by lip reading (*e.g.*, [p] and [b]). Taking lip and hand as two distinct modalities, Automatic Cued Speech Recognition (ACSR) aims to recognize the multi-modal inputs into linguistic text. The main challenge for ACSR is the natural asynchrony between lip-hand movements, *i.e.*, the fingers generally move faster than lips to prepare the next phoneme in a CS system, called hand preceding phenomenon [3].

Existing researches mainly assumed lip-hand movements are synchronous by default, thus tended to extract discrimi-

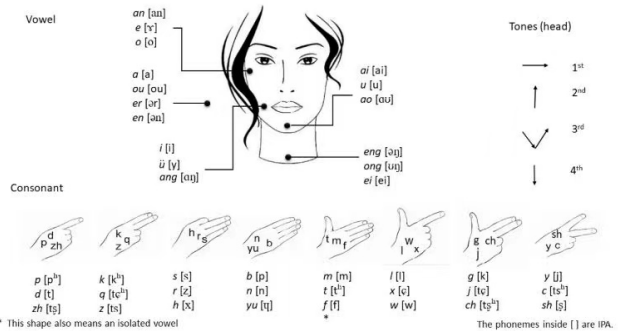
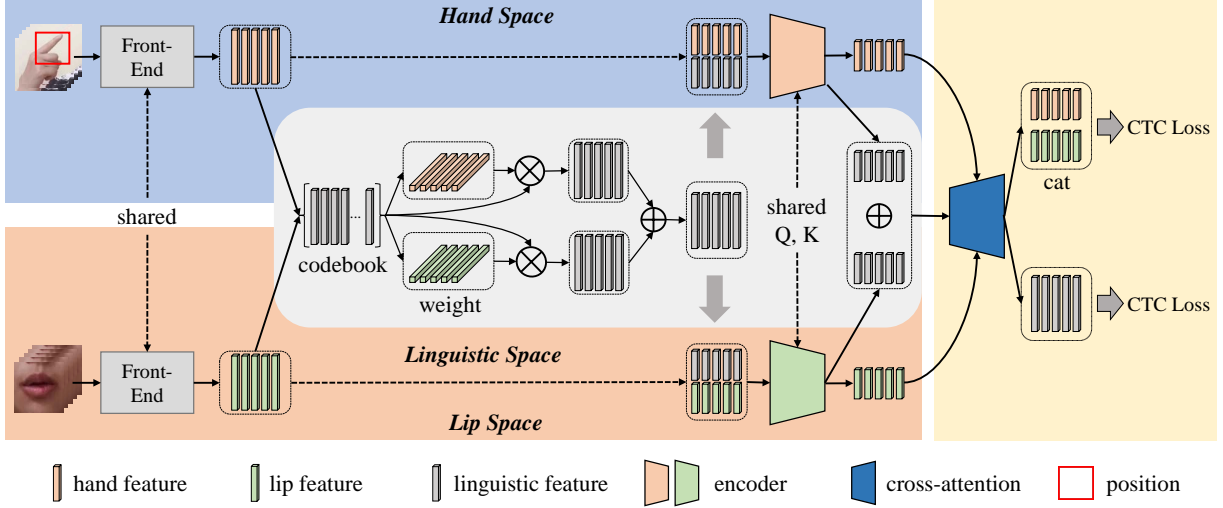


Fig. 1. The Mandarin Chinese CS system (from [4]).

native representations and directly concatenate the high-level features of multi-modal inputs. For example, [5] utilized artificial marks to obtain regions of interests (ROIs) and directly concatenated features of lip and hand. MSHMM [6] merged different features by giving weights for different CS modalities. These methods simply exploit feature concatenation as the fusion strategy while ignoring the asynchronous issue, as well as recent knowledge distillation based method [7]. To handle asynchronous modalities in the ACSR task, a re-synchronization procedure [3] was proposed to align visual features using the prior of hand preceding time, which is derived from the statistical information of CS speakers. However, such prior is dependent on speakers and datasets, which is difficult to generalize to different languages. Therefore, there still lacks of effective and flexible fusion strategies for asynchronous CS modalities. Besides, by taking into account the context relationships of phonemes in long-time CS videos, it would be desirable to capture global dependency [8] over dynamic longer context for solving the above cross-modal fusion task, which could further enhance the interaction of multi-modal sequences in CS. Moreover, previous ACSR task generally utilized phoneme-level annotations on two small scale datasets in French and British English.

In this study, we firstly establish a novel large-scale multi-speaker CS video dataset for Mandarin Chinese. Then we propose a novel transformer based cross-modal mutual learning framework (see Figure 2) to prompt cross-modal information interaction, which achieves feature fusion based on the aligned modalities with the long-time dependencies. In

\* Corresponding author.



**Fig. 2.** The proposed framework for ACSR. A shared front-end is deployed to extract frame-wise features for each modality and a codebook is to generate modality-invariant linguistic features shared by different modalities. Then a modality-specific encoder is to capture long-time temporal dependencies, where encoders of different modalities share query and key weights for interactions. Referring to linguistic information, cross-modal alignment is conducted for visual representations.

particular, a pre-trained front-end is used to extract frame-wise representations. Then a multi-modal encoder with sharing query and key weights is used to enhance cross-modal interactions. To capture modality-invariant information, our method forces visual representations of different modalities to pass through a linguistic codebook, requiring the model to collate a compact linguistic representation for tokens of each modality. Then linguistic knowledge is exploited to align different modalities based on the cross-attention mechanism.

In summary, the key contributions are: (1) We propose a novel transformer to prompt cross-modal mutual learning for ACSR task based on re-asynchronous modalities with long-time dependencies. Notably, this is the first work that only requires sentence-level annotations to handle asynchronous issue, unlike previous methods relying phoneme-level annotations. (2) We propose to collate a modality-invariant shared representation for multi-modal tokens to obtain linguistic information, which is utilized to guide the alignments for multi-modal data stream. (3) To the best of knowledge, this is the first work on ACSR for Mandarin Chinese. Extensive experiments on three CS benchmarks (*i.e.*, Chinese, French, and British English) demonstrate that our model significantly outperform the state-of-the-art (SOTA).

## 2. METHODOLOGY

### 2.1. Problem Formulation

Given a CS dataset of  $N$  quadruples  $\mathcal{D} = \{(x_i^l, x_i^g, x_i^p, y_i)\}_{i=1}^N$ , corresponding to the lip, hand shape, hand position, and sentence-level label sequences. Our target is to learn lin-

guistic information represented by multi-modal data stream, where lip and hand sequences are complementary to each other as different modalities. Our proposed mutual learning framework is shown in Figure 2.

### 2.2. Cross-Modal Mutual Learning

**Front-end.** The front-end adopts a modified ResNet-18 [9] where the first layer is replaced by a 3D convolutional layer with a kernel size  $5 \times 3 \times 3$ . The features at the penultimate layer are squeezed along the spatial dimension by global average pooling, resulting in modality-specific features, *i.e.*,  $\mathbf{z}^l, \mathbf{z}^g, \mathbf{z}^p \in \mathcal{R}^d$  for lip, hand shape, and hand position, where  $d$  is the feature dimension. Element-wise addition operation  $\oplus$  is conducted to fuse features of hands via  $\mathbf{z}^h = \mathbf{z}^g \oplus \mathbf{z}^p$ . To be simplified, we denote  $m \in \{l, h\}$  as lip ( $l$ ) and hand ( $h$ ) modalities in the following section, respectively.

**Modality-Invariant Linguistic Codebook.** To perform ACSR over lip and hand modalities, we aim to extract modality-invariant linguistic representation from the visual features  $\mathbf{z}^l$  and  $\mathbf{z}^h$ . Inspired by [10], we propose to learn a CS codebook to extract linguistic information shared by lip and hand sequences. To this end, an embedding layer is exploited to obtain linguistic basis of cued speech codes. Given the codebook base set  $\mathbf{D} = \{b_i\}_{i=1}^n$ , where  $b_i \in \mathcal{R}^d$  and  $n$  is the total number of bases. To derive linguistic information, we compute the dot products of the frame-wise visual features ( $\mathbf{z}^l$  or  $\mathbf{z}^h$ ) with all bases of  $\mathbf{D}$ , and apply a softmax function to obtain the normalized weights. This produces the modality-invariant linguistic representations:

$$\mathbf{v}^m = \text{softmax}(\mathbf{D}\mathbf{z}^m)\mathbf{D}, \quad (1)$$

where  $m \in \{l, h\}$  and linguistic representation is the weighted sum of the bases and the dot product denotes pairwise similarity between  $\mathbf{z}^l$  (or  $\mathbf{z}^h$ ) and each basis of  $\mathbf{D}$ .

**Multi-Modal Encoder.** Given the visual and linguistic representations for lip and hand stream, we aim to force the model to emphasize the temporal information in both modality-invariant and modality-specific flows. Hence, we restrict the cross-modal interactions along with the full sequence to capture long-time dependencies. Formally, we concatenate the visual and linguistic features into a single sequence as:

$$\mathbf{u}^m = [\mathbf{z}^m || \hat{\mathbf{v}}^m], \quad \text{where} \quad \hat{\mathbf{v}}^m = g(\mathbf{v}^m, \mathbf{E}_{\text{ling}}^{\text{sub}}), \quad (2)$$

where  $m \in \{l, h\}$  and  $[\cdot || \cdot]$  denotes the frame-wise concatenation of the tokens between  $\mathbf{z}^l$  (or  $\mathbf{z}^h$ ) and  $\hat{\mathbf{v}}^l$  (or  $\hat{\mathbf{v}}^h$ ). We use the projection  $\mathbf{E}_{\text{ling}}^{\text{sub}}$  to reduce the dimension of linguistic representations, which can decrease the computation complexity of pairwise attention. The multi-modal encoder stacks a series of vanilla transformer layers, where each modality has its own dedicated value parameters (*i.e.*,  $\theta_v^l$  and  $\theta_v^h$ ), and shared query  $\theta_q$  and key  $\theta_k$  parameters. Each lip (hand) token can attend to all other lip (hand) and linguistic tokens via self-attention:

$$\mathbf{u}_{L+1}^m = \text{Transformer}(\mathbf{u}_L^m; \theta_q, \theta_k, \theta_v^m), \quad (3)$$

where  $m \in \{l, h\}$  and  $L$  denotes  $L$ -th transformer layer with vanilla self-attention blocks. This layer allows the information exchanging between visual and linguistic tokens.

We can generalise this model by allowing to free interactions between lip and hand modalities, which is achieved by sharing modality information using compact linguistic vectors. The tokens at layer  $L$  are calculated as:

$$\mathbf{z}_{L+1}^m || \hat{\mathbf{v}}_{L+1}^m = \text{Transformer}(\mathbf{z}_L^m, \hat{\mathbf{v}}_L^{\text{fsn}}; \theta_q, \theta_k, \theta_v^m), \quad (4)$$

$$\hat{\mathbf{v}}_L^{\text{fsn}} = \frac{1}{2}(\hat{\mathbf{v}}_L^l + \hat{\mathbf{v}}_L^h),$$

where  $m \in \{l, h\}$ . Since multi-modal attention flows must pass through the shared tight fused linguistics,  $\mathbf{z}^l$  and  $\mathbf{z}^h$  can exchange information via  $\mathbf{v}^{\text{fsn}}$  within a transformer layer. Thus the model can enhance the cross-modal interactions by using shared linguistic information for the ACSR task.

**Visual-Linguistic Alignment.** To alleviate the naturally asynchronous issue in CS, we aim to integrate aligned information from multiple modalities using cross-attention mechanism. Given the encoded representations of the multi-modal encoder, *i.e.*,  $\mathbf{z}^l$ ,  $\mathbf{z}^h$ , and  $\mathbf{v}^{\text{fsn}}$ , the fused linguistic information  $\hat{\mathbf{v}}^{\text{fsn}}$  can be the reference to align lip and hand sequences, since linguistic knowledge is shared by both modalities. We first recover the tight linguistic representation  $\hat{\mathbf{v}}^{\text{fsn}}$  into the original dimension:

$$\mathbf{v}^{\text{fsn}} = g(\hat{\mathbf{v}}^{\text{fsn}}, \mathbf{E}_{\text{ling}}^{\text{up}}), \quad (5)$$

where  $\mathbf{E}_{\text{ling}}^{\text{up}}$  is a linear projection. The cross-attention layer is:

$$\mathbf{z}_{L+1}^m = \text{Cross-Transformer}(\mathbf{z}_L^m, \mathbf{v}^{\text{fsn}}; \theta_{q,k,v}). \quad (6)$$

Here, the vanilla cross-attention operation is employed with the shared query, key, and value weights for lip and hand, allowing the multi-modal streams to align with modality-invariant linguistic information. The final fused representation  $\mathbf{z}^{\text{fsn}}$  is obtained by the frame-wise concatenation of  $\mathbf{z}^l$  and  $\mathbf{z}^h$  as  $\mathbf{z}^{\text{fsn}} = [\mathbf{z}^l || \mathbf{z}^h]$ .

**Objective Function.** Connectionist Temporal Classification (CTC) loss [11] shows superior performance for speech recognition tasks. Given the input  $\mathbf{x}$  and target sequence  $\mathbf{y}$ , CTC computes the negative log likelihood of the posterior by summing the probabilities over valid alignment set  $\mathcal{A}_{\mathbf{x},\mathbf{y}}$ :

$$-\ln p(\mathbf{y} | \mathbf{z}) = -\ln \sum_{A \in \mathcal{A}_{\mathbf{x},\mathbf{y}}} \prod_{t=1}^T p_t(a_t | \mathbf{z}), \quad (7)$$

where  $T$  is the target length. In this work, we utilize a hybrid CTC architecture to force prediction consistency between visual and linguistic representations:

$$\mathcal{L}_{\text{hyb}} = -\ln p(\mathbf{y} | \mathbf{z}^{\text{fsn}}) - \ln p(\mathbf{y} | \mathbf{v}^{\text{fsn}}), \quad (8)$$

where visual and linguistic representation corresponds to the same target sequence.

### 3. EXPERIMENTS

**Datasets.** Three datasets are used to evaluate the performance of the proposed method, including French CS [1], British English CS [12], and the newly collected Mandarin Chinese CS. The details of public CS datasets can refer to Table 1.

**Implementations.** The transformer is randomly initialized while the front-end is initialized using weights pretrained on ImageNet. The multi-modal encoder uses 3 self-attention blocks, where the other settings are the same as [8]. The Adam optimizer with  $\beta_1 = 0.9$ ,  $\beta_2 = 0.98$  and  $\epsilon = 0.05$  is used for end-to-end training. The mini-batch size is set as 1. The learning rate increases linearly with the first 4000 steps, yielding a peak learning rate and then decreases proportionally to the inverse square root of the step number. The whole network is trained for 50 epochs.

**Protocols.** The training and test set is randomly split as 4 : 1 without repeated sentences. All methods are evaluated in character error rate (CER) and word error rate (WER) to evaluate the recognition ability on phoneme and word levels.

#### 3.1. Experimental Results

**Chinese CS Dataset.** As shown in Table 2, our method achieves SOTA results compared with baseline, *i.e.*, 9.7% CER in the single-speaker setting and 24.5% CER in the multi-speaker setting. JLF [7] is the previous SOTA method using LSTM, which performs worse than self-attention based approaches. Previous methods still suffer from the asynchronous issue in Chinese CS. Our method can further improve the recognition accuracy via multi-modal alignment.

**Table 1.** The details of CS datasets with different languages.

Dataset	French	British		Chinese	
#Speaker	1	1	5	1	4
#Sentence	238	97	390	1000	4000
#Phoneme	35	44	44	40	40
#Gesture	8	8	8	8	8
#Position	5	4	4	5	5

**Table 2.** Performance comparison on Chinese CS dataset.

Dataset	Chinese			
#Speaker	single		multiple	
Metrics	CER	WER	CER	WER
CNN + LSTM [13]	55.4	92.8	61.4	96.1
CNN + CTC [9]	35.6	78.3	41.9	83.4
JLF + COS + CTC [7]	33.5	67.1	68.2	98.1
Self-attention [8]	26.1	61.8	38.8	78.6
Ours	<b>9.7</b>	<b>24.1</b>	<b>24.5</b>	<b>54.5</b>


**Table 3.** Performance comparison on British and French CS dataset. JLF3 is the previous SOTA. WER is unavailable due to lacking of word-level annotations.

Dataset	French	British	
#Speaker	single	single	multiple
CNN-HMM [6]	38.0	-	-
Fully Conv [13]	29.2	36.3	-
CNN + LSTM [13]	33.4	43.6	-
Transformer [13]	37.5	39.8	-
Student CE [7]	35.6	47.5	37.7
JLF1 [7]	27.5	38.5	34.3
JLF2 [7]	27.5	36.9	31.5
JLF3 [7]	25.8	35.1	30.3
Ours	<b>24.9</b>	<b>33.6</b>	<b>29.2</b>

We notice that multi-speaker task is more difficult than single-speaker one due to domain adaption issue.

**French&British CS Dataset.** As shown in Table 3, our method can achieve best results on both French and British CS datasets, outperforming previous SOTA method JLF. Compared with LSTM and vanilla transformer, our method benefits from the aligned modalities and can capture effective long-time dependency via multi-modal interaction. The performance improvement is small due to the small data scale of these datasets. The experimental results indicates the effectiveness of the proposed method on small scale datasets.

**Confusion Matrix.** The confusion matrices of our method and vanilla self-attention is shown in Figure 3. It is observed that vanilla self-attention exhibits a ambiguous diagonal line,

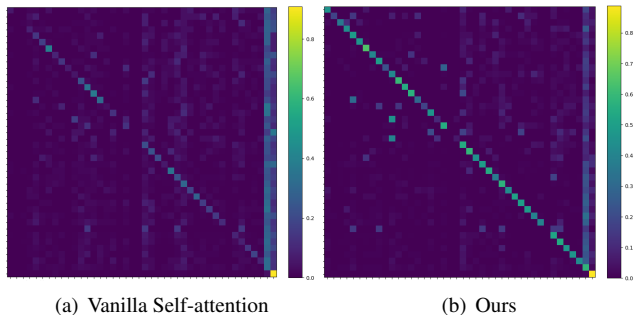**Fig. 3.** Confusion matrix on Chinese CS dataset. Rows are groundtruths and columns are predictions.**Table 4.** Ablation Studies. “VLA” means concatenating aligned top-layer features using codebook. “Concat” means directly concatenating top-layer features without VLA.

Dataset	Chinese			
#Speaker	single		multiple	
Metrics	CER	WER	CER	WER
CNN + Concat	35.6	78.3	41.9	83.4
Self-attention + Concat	26.1	61.8	38.8	78.6
Ours + VLA	<b>9.7</b>	<b>24.1</b>	<b>24.5</b>	<b>54.5</b>

while our method yields a clearer diagonal line, which indicates the superior class-wise results of our method. There exists some confusing results for several phonemes caused by some similar hand shapes, *e.g.*,  $[r]$  and  $[h]$ .

**Ablation Studies.** Table 4 exhibits the ablation studies with and without the proposed multi-modal encoder or visual-linguistic alignment (VLA). Using VLA for feature fusion can outperform traditional direct feature concatenation without codebook. The best results can be obtained by combining both the multi-modal encoder and VLA. Besides, it is observed that our method also exhibits better performance than CNN and vanilla self-attention models.

## 4. CONCLUSIONS

In this work, we proposed a cross-modal mutual learning framework for cued speech recognition. We presented a multi-modal transformer to capture long-time dependencies for both lip and hand sequences, which transforms modality-specific information into modality-invariant linguistic features via a linguistic codebook. Then modality-invariant features can be used to guide the cross-modal alignment via the cross-attention operation. The experiments demonstrated that our approach can achieve SOTA results on the CS recognition. As for future work, we will be engaged in improving the CS model by decreasing the sentence-level errors.

## 5. REFERENCES

- [1] Li Liu, Gang Feng, and Denis Beutemps, “Automatic temporal segmentation of hand movements for hand positions recognition in french cued speech,” in *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2018, pp. 3061–3065.
- [2] Takenori Yoshimura, Tomoki Hayashi, Kazuya Takeda, and Shinji Watanabe, “End-to-end automatic speech recognition integrated with ctc-based voice activity detection,” in *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2020, pp. 6999–7003.
- [3] Li Liu, Gang Feng, Denis Beutemps, and Xiao-Ping Zhang, “Re-synchronization using the hand preceding model for multi-modal fusion in automatic continuous cued speech recognition,” *IEEE Transactions on Multimedia*, vol. 23, pp. 292–305, 2020.
- [4] Li Liu and Gang Feng, “A pilot study on mandarin chinese cued speech,” *American Annals of the Deaf*, vol. 164, no. 4, pp. 496–518, 2019.
- [5] Panikos Heracleous, Denis Beutemps, and Norihiro Hagita, “Continuous phoneme recognition in cued speech for french,” in *2012 Proceedings of the 20th European Signal Processing Conference (EUSIPCO)*. IEEE, 2012, pp. 2090–2093.
- [6] Li Liu, Thomas Hueber, Gang Feng, and Denis Beutemps, “Visual recognition of continuous cued speech using a tandem cnn-hmm approach,” in *Interspeech*, 2018, pp. 2643–2647.
- [7] Jianrong Wang, Ziyue Tang, Xuwei Li, Mei Yu, Qiang Fang, and Li Liu, “Cross-modal knowledge distillation method for automatic cued speech recognition,” p. 2986–2990, 2021.
- [8] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin, “Attention is all you need,” *Advances in neural information processing systems*, vol. 30, 2017.
- [9] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun, “Deep residual learning for image recognition,” in *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 770–778.
- [10] Chih-Chun Yang, Wan-Cyuan Fan, Cheng-Fu Yang, and Yu-Chiang Frank Wang, “Cross-modal mutual learning for audio-visual speech recognition and manipulation,” in *Proceedings of the 36th AAAI Conference on Artificial Intelligence, Vancouver, BC, Canada, 2022*, vol. 22.
- [11] Pingchuan Ma, Stavros Petridis, and Maja Pantic, “Investigating the lombard effect influence on end-to-end audio-visual speech recognition,” *Proc. Interspeech 2019*, pp. 4090–4094, 2019.
- [12] Sanjana Sankar, Denis Beutemps, and Thomas Hueber, “Multistream neural architectures for cued speech recognition using a pre-trained visual feature extractor and constrained ctc decoding,” in *ICASSP 2022-2022 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, 2022, pp. 8477–8481.
- [13] Katerina Papadimitriou and Gerasimos Potamianos, “A fully convolutional sequence learning approach for cued speech recognition from videos,” in *2020 28th European Signal Processing Conference (EUSIPCO)*. IEEE, 2021, pp. 326–330.