

Sometimes Two Irrational Guards are Needed

Lucas Meijer, Tillmann Miltzow

Abstract

In the art gallery problem, we are given a closed polygon P , with rational coordinates and an integer k . We are asked whether it is possible to find a set (of guards) G of size k such that any point $p \in P$ is seen by a point in G . We say two points p, q see each other if the line segment pq is contained inside P . It was shown by Abrahamsen, Adamaszek, and Miltzow that there is a polygon that can be guarded with three guards, but requires four guards if the guards are required to have rational coordinates. In other words, an optimal solution of size three might need to be irrational. We show that an optimal solution of size two might need to be irrational. Note that it is well-known that any polygon that can be guarded with one guard has an optimal guard placement with rational coordinates.

Hence, our work closes the gap on when irrational guards are possible to occur.

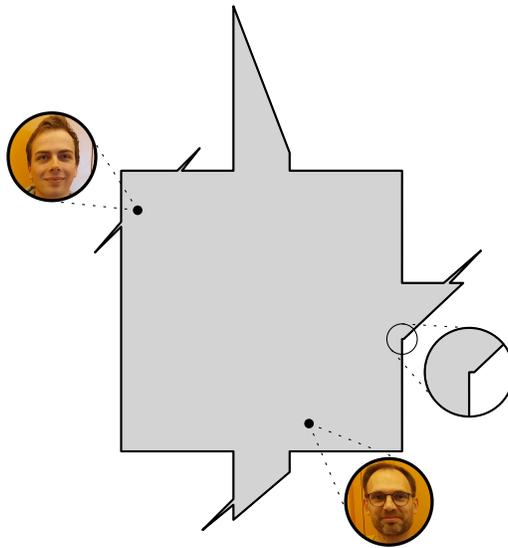


Figure 1: Lucas and Till guarding the polygon with just the two of them...

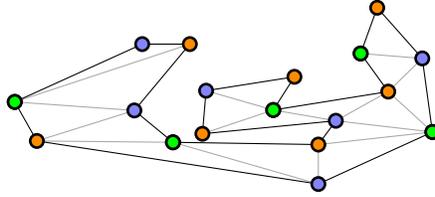


Figure 2: Any triangulation of a simple polygon can be three-colored. At least one of the color classes has at most $\lfloor n/3 \rfloor$ vertices. This color class also guards the entire polygon, as every triangle is incident to all three colors [31].

1 Introduction

In the art gallery problem, we are given a closed polygon P , on n vertices, with rational coordinates and an integer k . We are asked whether it is possible to find a set (of guards) G of size k such that any point $p \in P$ is seen by a point in G . We say two points p, q see each other if the line segment pq is contained inside P . We show that an optimal solution of two guards might need to have irrational coordinates. In such a case, we say a polygon has *irrational guards*.

The art gallery problem was formulated in 1973 by Victor Klee. See, for example, the book by O’Rourke [46, page 2]. One of the earliest results states that every simple polygon on n vertices can always be guarded with $\lfloor n/3 \rfloor$ guards [22, 31].

Interestingly, it is actually very tough to find any positive algorithmic results on the art gallery problem. It seems like the art gallery problem is almost impenetrable. For instance, only in 2002, Micha Sharir pointed out that the problem was even decidable [26, 27, see acknowledgments]. The decidability of the art gallery problem is actually easy once you know methods from real algebraic geometry [5]. The idea is to reduce the problem to the first-order theory of the reals. We encode guard positions by variables, and then we check if every point in the polygon is seen by at least one guard. Note that this is easy to encode in the first-order theory of the reals, as we are allowed to use existential ($\exists g_1, g_2, \dots$) and universal quantifiers ($\forall p = (x, y)$). Since then, despite much research on the art gallery problem, no better algorithm appeared, as far as worst-case complexity is concerned. The underlying reason for the difficulty to find better algorithms can be explained by the fact that the art gallery problem is $\exists\mathbb{R}$ -complete [57, 3]. In a nutshell, $\exists\mathbb{R}$ -completeness precisely entails that there is no better method for the worst-case complexity of the problem. ($\exists\mathbb{R}$ can be defined as the class of problems that are equivalent to finding a real root to a multivariate polynomial with integer coordinates. See Section 1.3 for an introduction.) More specifically, it was shown that arbitrary algebraic numbers may be needed to describe an optimal solution to the art gallery problem. This may come as a surprise to some readers, and was clearly a surprise back then. Specifically, “in practice”, it seems very rare that irrational guards are ever needed. The reason is that a typical situation is one of the following two. Either the guards have some freedom to move around and still see the entire polygon. Or if a guard has no freedom, it is forced to be on a line defined by vertices of the polygon. As the vertices of the polygon are at rational coordinates, the guards will be at rational coordinates in that case as well. Indeed, only in 2017, the first polygon requiring irrational guards was found [2]. Even though $\exists\mathbb{R}$ -reductions exhibit an infinite number of polygons that require irrational guards, those polygons are not “concrete” in the naive sense of the word. And up to this day, this is the only “concrete” polygon [2] that we know does require irrational guards. In this work, we find a second polygon. It is superior to the first one in the sense that it shows that two guards are already enough to enforce irrational guards. As a single guard can always be chosen to have rational coordinates, we settle the question of the minimum number of guards required to have irrational guards.

The polygon we find is again monotone. A polygon is called monotone if there exists a line l such that every line orthogonal to l intersects P at most twice. We summarize our results in the following theorem.

Theorem 1. *There exists a simple monotone polygon with rational coordinates, such that there is only one*

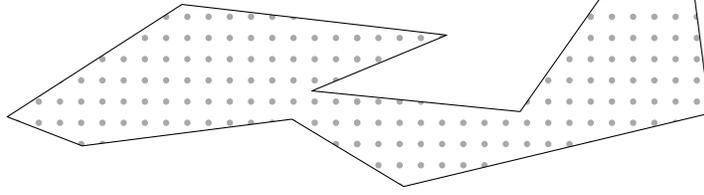


Figure 3: We may restrict the guards to lie on a dense grid. This may make the optimal solution worse.

way of guarding this polygon optimally with two guards. Those two guards have irrational coordinates.

Organization. We first discuss our results from different angles (Section 1.1). Then we give a selected overview of related research on the art gallery problem (Section 1.2). We finish this introduction with some background on the existential theory of the reals (Section 1.3). In Section 2, we give an overview of how we constructed the polygon and what is the intuition behind the different parts. In Section 3, we give the polygon with coordinates of all vertices and we provide a formal proof of correctness. In Section 4, we explain how we constructed the polygon and what technical challenges we had to overcome.

1.1 Discussion

In this section, we discuss different aspects of our findings.

Minimum number of irrational guards. It is known that one guard can always be chosen to be rational [40]. The polygon by Abrahamsen, Adamaszek, and Miltzow [2] requires three irrational guards. The main strength of our finding is to determine the minimum number of guards required to have irrational guards.

Grid Approximation. One way to circumvent worst-case complexity is to discretize the polygon and restrict oneself to a dense grid [15, 26, 27]. The polygon by Abrahamsen, Adamaszek, and Miltzow showed that a grid cannot have a better approximation factor than $4/3 = 1.333\dots$. We improve this lower bound to $3/2 = 1.5$.

Note that Bonnet and Miltzow showed that under some mild assumptions, the grid contains a constant factor approximation [15].

Intuitive Understanding. It is good to have multiple different concrete polygons that require irrational guards. This result complements the $\exists\mathbb{R}$ -completeness of the art gallery problem nicely. While $\exists\mathbb{R}$ -completeness is clearly stronger from a theoretical perspective, concrete polygons may be useful to get a better intuitive understanding of the difficulty.

Test Cases. From a practical perspective, our polygon can serve as a test case on which we can compare the performance of different algorithms. Usually, we would like to have a host of difficult and diverse instances that can be automatically generated. With difficult instances, we mean polygons that require irrational guards. We leave this as a future research question.

Technical Depth. The principal methods that we used for the construction of our polygon are in spirit similar to the methods used by Abrahamsen, Adamaszek, and Miltzow [2]. However, it turned out that it was considerably more difficult to find the polygon. On the one hand, our construction is smaller and thus there were fewer parameters that we had to manipulate to find a solution. On the other hand, the two guards interact in more intertwined ways. Thus making it much harder to find a correct placement of all the polygon vertices.

To be concrete, the construction by [2] has the guards a , m , and t . Guards a and m cover together two pockets. Similarly, guards m and t cover together two separate pockets. Thus there is no direct interaction between guards a and t . This makes it easier to construct the different parts independently.

In our case the two guards l and t together guard three pockets. And this implies that the interaction between l and t is much more integrated. This leads to a construction with some vertices being extremely close. Furthermore, our construction has pockets that were inside other pockets.

Irrational Boundary Guards. Both our polygon and the polygon by [2] have their guards in the interior. It is an interesting open problem if one can enforce irrational guards, in case all guards are restricted to lying on the boundary and are only required to guard the boundary.

Integer Coordinates. One may wonder whether there is also a polygon with integer coordinates that exposes irrational guards. The answer is yes, and this can be achieved by scaling all coordinates by all the appearing denominators.

Special Polygons. One may wonder whether it is possible to enforce irrational guards on polygons with some extra properties like being rectilinear. Both of those questions have been positively resolved by [2].

1.2 Art Gallery Problem

The literature on the art gallery is vast. Therefore, we decide to focus here on algorithmic results.

Exact Algorithmic Results. In 1979, the first algorithm for guarding a polygon in linear time with one guard appeared [40]. It took until 1992 until there was an algorithm that could determine if a polygon could be guarded by two guards in $O(n^4)$ time [7, 6]. As mentioned already above it took until 2002 to find the first correct algorithm that solves the art gallery problem [26, 27]. There is still no other algorithm known.

On the lower bound side, we know NP-hardness [39], APX-hardness [28] and W[1]-hardness [16]. One may argue that NP-hardness is enough evidence that there are no efficient algorithms for the art gallery problem and that this may fully explain the lack of algorithmic results. However, for other NP-complete problems like Clique, Subset-sum, Dominating Set, and TSP, we do know a myriad of algorithms. Although many of them run in exponential time in the worst case they give huge improvements in many different situations. We believe that the lack of algorithmic results may stem from the fact that we do not know how to discretize the art gallery problem efficiently. Note that all the mentioned problems are already discrete. We believe that the $\exists\mathbb{R}$ -completeness of the art gallery problem may give the most compelling explanation of why a concise discretization of the art gallery problem is unlikely [3, 57]. Specifically, many discretization schemes would imply that the art gallery problem lies in NP and thus imply $\text{NP} = \exists\mathbb{R}$. The first proof that the art gallery problem is $\exists\mathbb{R}$ -complete was given by Abrahamsen, Adamaszek, and Miltzow in 2017 [3]. It was recently improved by Stade, who showed that it is even $\exists\mathbb{R}$ -complete if we only require the boundary to be guarded [57]. It remains open whether guarding the boundary from the boundary is $\exists\mathbb{R}$ -complete.

Practical Difficulty. There is a series of papers that studied the art gallery problem from a practical perspective. In other words, they implemented algorithms and tested them on benchmark instances [17, 32, 35, 59, 34]. The practical experiences from those papers suggest that irrational coordinates do not play any role in the pursuit to find an optimal solution.

Explaining the Discrepancy. We are aware of two theoretical explanations for the discrepancy between the theoretical and the practical results. One such finding uses smoothed analysis and argues that there is with high probability an optimal solution after a small random perturbation of the polygon [34, 30]. A second explanation comes from Hengeveld and Miltzow. They introduced the notion of vision-stability. To explain this concept, we consider guards that can either see by some small angle δ around reflex vertices or are blocked by an angle δ by reflex vertices. See the green visibility regions in Figure 4.

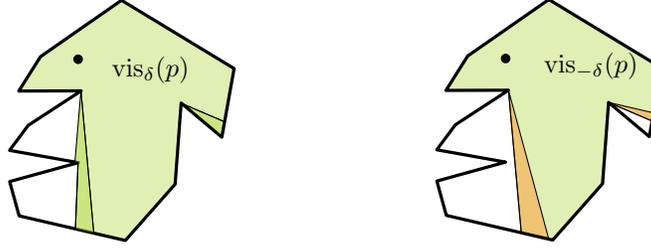


Figure 4: Left: The dark green region is added to the visibility polygon. Right: The orange region is removed from the visibility polygon.

Intuitively, if δ is small enough then the optimal number of guards will not change. Vision-stability states that there indeed exists such a $\delta > 0$. Using this assumption Hengeveld and Miltzow could find a polynomially-sized discretization scheme for the art gallery problem. It remains an open question to improve their discretization scheme.

Topology. Given a polygon, we can consider the set $\mathcal{G}(P)$ of all possible guard sets of minimum size. Together with the Hausdorff distance, $\mathcal{G}(P)$ forms a topological space. From the algebraic encoding by Sharir, we know that the topological space must be compact and semi-algebraic. The question arises: given a compact semi-algebraic S , is there a polygon P such that $\mathcal{G}(P)$ is topologically equivalent to S ?

This question was positively answered by Bertschinger, El Maalouly, Miltzow, Schneider, and Weber for homotopy-equivalence [10] and shortly improved by Stade and Tucker-Foltz to homeomorphic-equivalence [58].

1.3 Existential theory of the Reals

The complexity class $\exists\mathbb{R}$ (often pronounced as “ER”) has gained a lot of interest in recent years. It is defined via its canonical complete problem ETR (short for *Existential Theory of the Reals*) and contains all problems that polynomial-time many-one reduce to it. In an ETR instance, we are given an integer n and a sentence of the form

$$\exists X_1, \dots, X_n \in \mathbb{R} : \varphi(X_1, \dots, X_n),$$

where φ is a well-formed and quantifier-free formula consisting of polynomial equations and inequalities in the variables and the logical connectives $\{\wedge, \vee, \neg\}$. The goal is to decide whether this sentence is true. As an example, consider the formula $\varphi(X, Y) := X^2 + Y^2 \leq 1 \wedge Y^2 \geq 2X^2 - 1$; among (infinitely many) other solutions, $\varphi(0, 0)$ evaluates to true, witnessing that this is a yes-instance of ETR. It is known that

$$\text{NP} \subseteq \exists\mathbb{R} \subseteq \text{PSPACE}.$$

Here the first inclusion follows because a SAT instance can trivially be written as an equivalent ETR instance. The second inclusion is highly non-trivial and was first proven by Canny in his seminal paper [19].

Note that the complexity of working with continuous numbers was studied in various contexts. To avoid confusion, let us make some remarks on the underlying machine model. The underlying machine model for $\exists\mathbb{R}$ (over which sentences need to be decided and where reductions are performed) is the word RAM (or equivalently, a Turing machine) and not the real RAM [30] or the Blum-Shub-Smale model [14].

The complexity class $\exists\mathbb{R}$ gains its importance by numerous important algorithmic problems that have been shown to be complete for this class in recent years. The name $\exists\mathbb{R}$ was introduced by Schaefer in [48] who also pointed out that several NP-hardness reductions from the literature actually implied $\exists\mathbb{R}$ -hardness. For this reason, several important $\exists\mathbb{R}$ -completeness results were obtained before the need for a dedicated complexity class became apparent.

Common features of $\exists\mathbb{R}$ -complete problems are their continuous solution space and the nonlinear relations between their variables. Important $\exists\mathbb{R}$ -completeness results include the realizability of abstract order

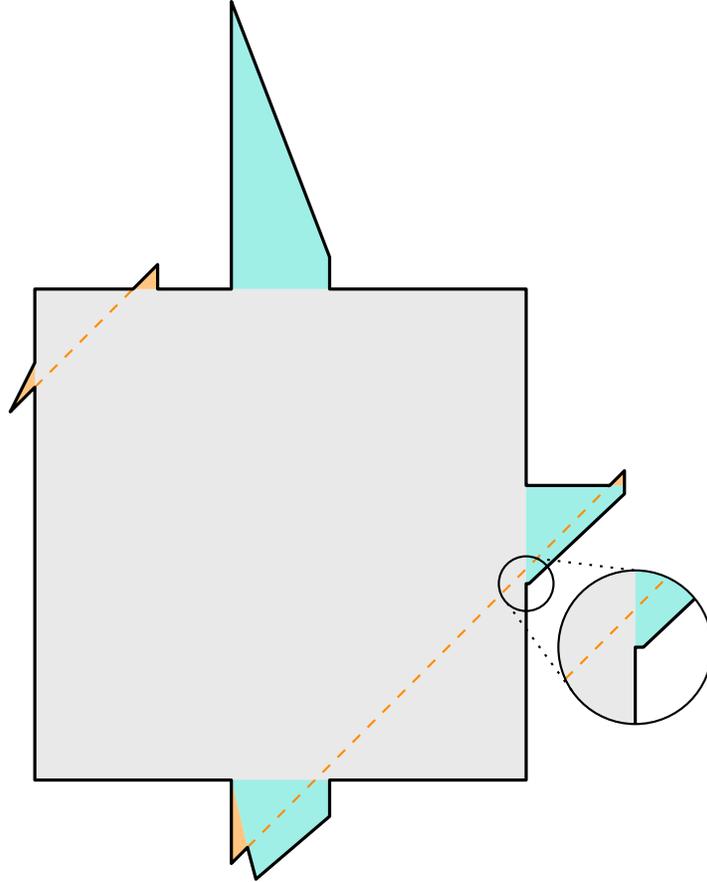


Figure 5: Our final polygon: it has a core (gray), three quadrilateral pockets (blue), and four narrow triangular pockets (yellow).

types [45, 56] and geometric linkages [49], as well as the recognition of geometric segment graphs [38, 42], unit-disk graphs [37, 43], and ray intersection graphs [20]. More results appeared in the graph drawing community [25, 29, 41, 50], regarding polytopes [24, 47], the study of Nash-equilibria [8, 11, 12, 33, 51], training neural networks [4, 9], matrix factorization [21, 53, 54, 55], or continuous constraint satisfaction problems [44]. In computational geometry, we would like to mention the art gallery problem [3, 57] and covering polygons with convex polygons [1].

Recently, the community started to pay more attention to higher levels of the “real polynomial hierarchy”, which surprisingly captures some interesting algorithmic problems [13, 23, 25, 36, 52, 18].

2 Preparation

We aim to construct a polygon. This polygon should be guarded by two guards at irrational coordinates but requires three guards at rational coordinates. We must restrict the possible coordinates the guards can be positioned. In this section, we will explore the tools to restrict the possible positions of the two guards within the polygon.




Figure 6: A small polygon that can only be guarded by two guards, because each guard segment (yellow dashed line) must contain a guard. The region where a guard could guard at least one pocket is shaded in light yellow.

2.1 Basic Definitions

Each guard g will be able to guard some region of the polygon: we call this region its *visibility polygon* $\text{vis}(g)$. The visibility polygon includes all points for which the line segment between the guard and the point is included in the polygon P . Notably, the union of the visibility polygons of the two guards must be the art gallery. Otherwise, the art gallery is not completely guarded.

A *window* is an edge of the visibility polygon $\text{vis}(g)$ that is not part of the boundary of P . We can find windows in a guard g 's visibility polygon, by shooting rays from g to reflex vertices (the vertices of the polygon, with an interior angle larger than π). If these rays do not leave the polygon at the reflex vertex, a window will exist between the reflex vertex and the position where the ray does intersect the boundary of the polygon. Let the *window's end* be the intersection of the ray with an edge of the polygon.

Our final polygon consists of the core and a number of pockets, as shown in Figure 5. The *core* of the polygon is the square in the center. We will enforce that both guards are located in the core. As a square is a convex shape, this implies that both guards will guard the core. The *pockets* are all regions outside the core. We will use pockets that are either quadrilateral or triangular. Pockets are *attached* to either the core or another pocket: they have one edge that lies on the boundary of the core or on the boundary of another pocket. Quadrilateral pockets will always be attached to the core. Each quadrilateral pocket has one edge that is not on the boundary of the core, nor adjacent to it. We will call this edge the *wall* of a quadrilateral pocket. Similarly, triangular pockets will be attached to either the core or a quadrilateral pocket. We will use pockets as a tool to limit the locations of the two guards.

2.2 Guard Segments

We can force a guard to be positioned on a line segment within the polygon. Such a line segment is called a *guard segment*. Guard segments are commonly used in the context of the art gallery problem [2, 57]. In this section, we will describe how we construct a guard segment. Let us denote by s the segment and by ℓ its supporting line.

To make s a guard segment, we add two triangular pockets where ℓ intersects ∂P . Each of the triangular pockets has an edge on ℓ . Besides this one edge, the pockets lay on different sides of ℓ . Only a guard on the line segment between the two pockets can guard both triangular pockets at the same time.

We have two guards in our polygon and both will be on a guard segment. If the two guard segments are not intersecting, we can enforce that there must be one guard on each of them as follows. First, note that there are in total four triangular pockets. Second, we make the triangular pockets sufficiently narrow. In this way, it is impossible to guard two of the triangular pockets outside of a guard segment. Thus at least one guard must be on each guard segment. A simple construction with two non-intersecting guard segments

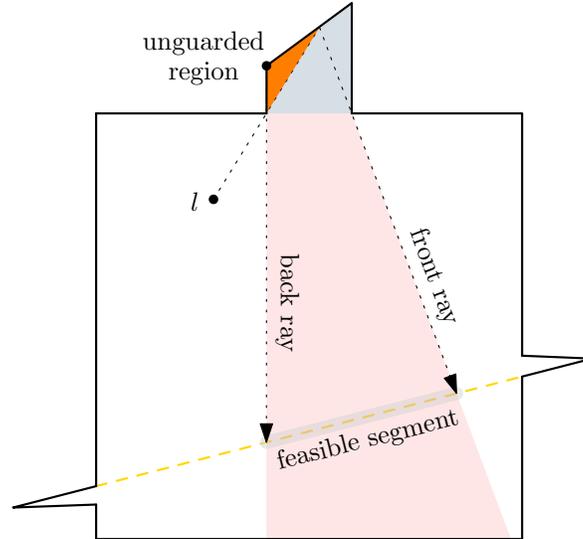


Figure 7: A polygon with guard l . The guard l defines an unguarded region in the quadrilateral pocket, a front ray and a back ray, and a feasible segment.

is shown in Figure 6.

2.3 Guarding Quadrilateral Pockets

We will now describe how given the position of guard l and a quadrilateral pocket Q will limit the position of guard t . See Figure 7 for an illustration of the following description. First, note that if l will not guard Q completely then there will remain some unguarded region (orange) in Q . The part of the guard segment of t where the unguarded region is visible is denoted the feasible segment. It is bounded from the back ray and the front ray. It is clear that t must be on the feasible segment.

We can compute the front ray by first computing the window end's s from l to the wall of Q and then shooting a ray from s in the direction of the second reflex vertex of Q .

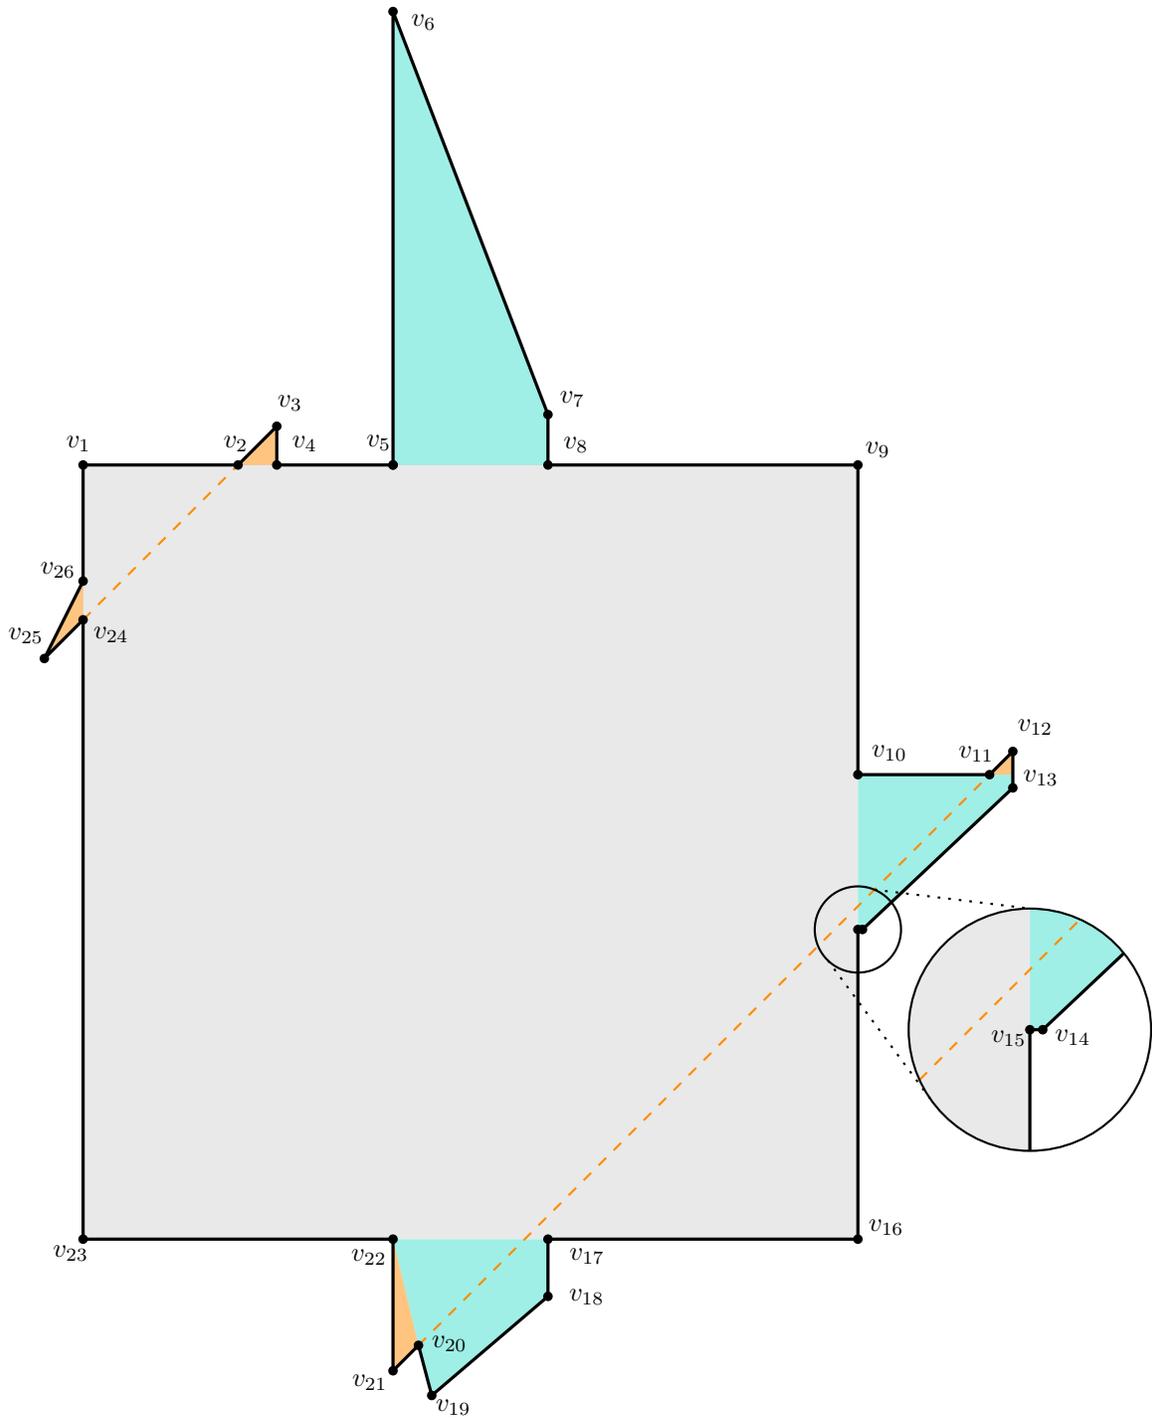


Figure 8: Our complete polygon. The art gallery is shaded according to the function of each region: white is the core, yellow is the pockets used to create guard segments, and turquoise are other pockets. The yellow dashed lines represent the guard segments. The coordinates of important vertices are given.

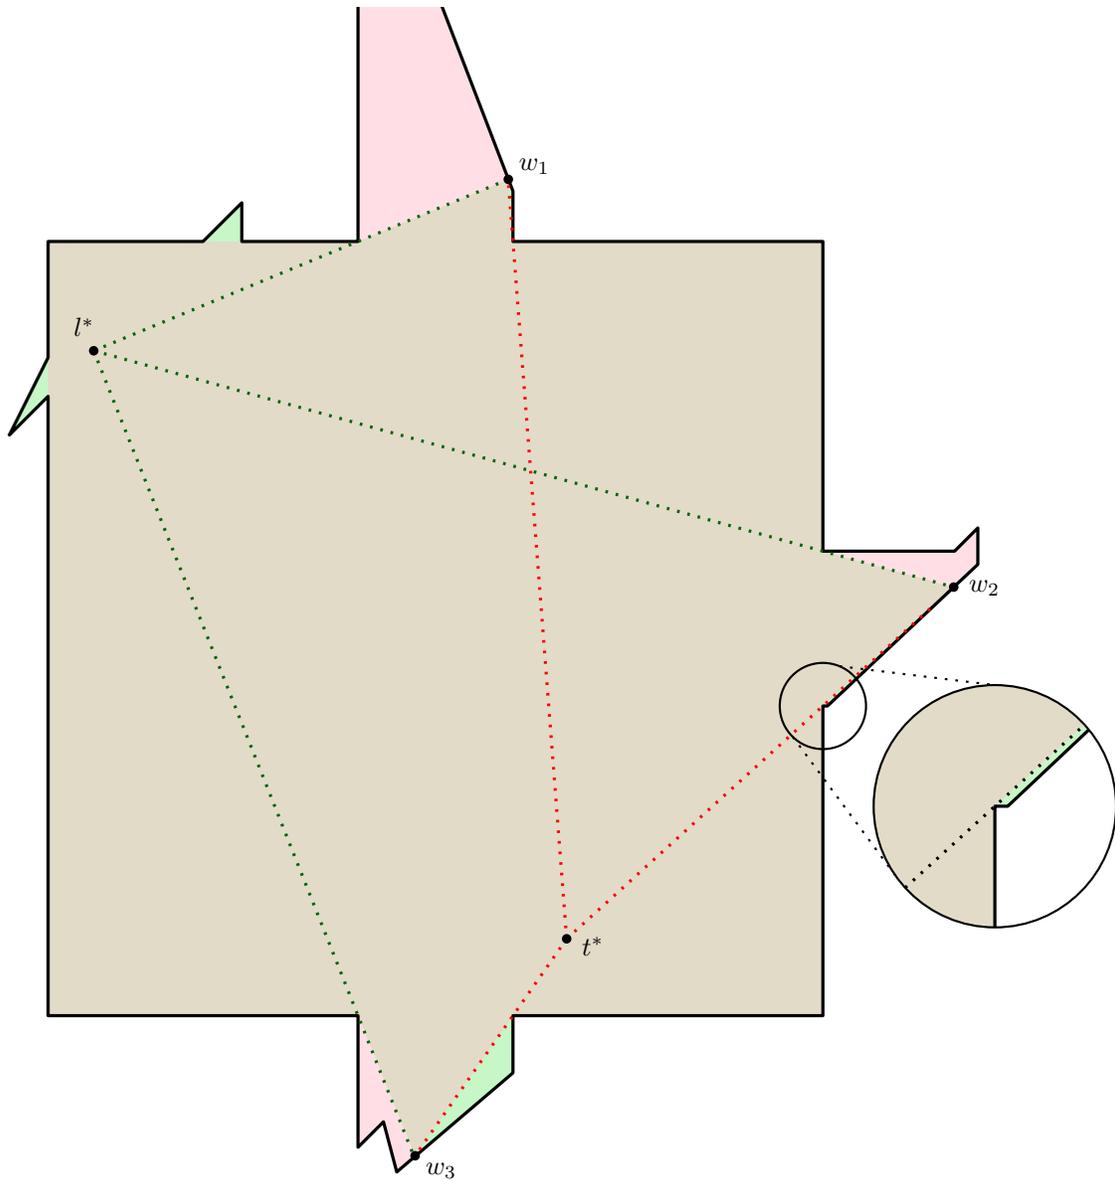


Figure 9: Our complete polygon. The optimal solution has two guards at irrational coordinates is shown. The blue regions are guarded by the upper left guard; the red regions are guarded by the bottom right guard; the purple regions are guarded by both. The dashed lines are rays shot from the guards through reflex vertices. For each pocket, these windows meet at a point on the art gallery's wall, of which the coordinates are also given.

Table 1: Coordinates of the vertices of the polygon (v_1, \dots, v_{26}) , the guards $(l$ and $t)$, and the window's ends (w_1, w_2, w_3) .

v_1	(0, 10)	v_{12}	(12, 6.3)	v_{22}	(4, 0)
v_2	(2, 10)	v_{13}	$(12, \frac{624712}{107015})$	v_{23}	(0, 0)
v_3	(2.5, 10.5)	v_{14}	$(\frac{1016072}{101007}, 4)$	v_{24}	(0, 8)
v_4	(2.5, 10)	v_{15}	(10, 4)	v_{25}	(-0.5, 7.5)
v_5	(4, 10)	v_{16}	(10, 0)	v_{26}	(0, 8.3)
v_6	$(4, \frac{465522}{29357})$	v_{17}	(6, 0)	l^*	$(3.7 - 2.2 \cdot \sqrt{2}, 11.7 - 2.2 \cdot \sqrt{2})$
v_7	$(6, \frac{312388}{29357})$	v_{18}	$(6, \frac{-25442}{34407})$	t^*	$(7.4 - 0.5 \cdot \sqrt{2}, 1.7 - 0.5 \cdot \sqrt{2})$
v_8	(6, 10)	v_{19}	$(4.5, \frac{-138913}{68814})$	w_1	$(\frac{293570 \cdot \sqrt{2} + 8052346}{1425913}, \frac{-765670 \cdot \sqrt{2} + 16485384}{1425913})$
v_9	(10, 10)	v_{20}	(4.33, -1.37)	w_2	$(\frac{1071750 \cdot \sqrt{2} + 29733818}{2673483}, \frac{1010070 \cdot \sqrt{2} + 13370606}{2673483})$
v_{10}	(10, 6)	v_{21}	(4, -1.7)	w_3	$(\frac{344070 \cdot \sqrt{2} + 3108526}{760803}, \frac{293430 \cdot \sqrt{2} + 1804526}{760803})$
v_{11}	(11.4, 6)				

3 Complete Polygon

In this section, we will present our complete polygon: a polygon that can be guarded by two guards if and only if both guards are situated at irrational points.

3.1 The Polygon

As we described in Section 2 and displayed in Figure 8, the polygon consists of a core and some pockets. The polygon has four triangular pockets defining two guard segments. The two guard segments lie on the lines $y = x + 8$ and $y = x - 5.7$. Furthermore, the polygon has three quadrilateral pockets. In Table 1, the coordinates of the vertices of the polygon, the coordinates of the two guards, and the coordinates of the window's ends are given.

The walls of the three quadrilateral pockets have the supporting lines:

1. Top pocket: $y = \frac{-76567 \cdot x + 771790}{29357}$.
2. Right pocket: $y = \frac{101007 \cdot x - 587372}{107175}$.
3. Bottom pocket: $y = \frac{29343 \cdot x - 201500}{34407}$.

3.2 Proof

We prove that our polygon can be guarded with two irrational guards, but cannot be guarded with two rational guards. We state that the polygon can be guarded by two guards placed at

$$l^* = (3.7 - 2.2 \cdot \sqrt{2}, 11.7 - 2.2 \cdot \sqrt{2})$$

and

$$t^* = (7.4 - 0.5 \cdot \sqrt{2}, 1.7 - 0.5 \cdot \sqrt{2}).$$

Figure 9 displays the visibility polygons of these two guards. It can be checked using simple calculations that the two visibility polygons cover the complete polygon. First, both guard segments will contain a guard. Furthermore, the window's ends are in the same location (so no unseen region between them) and both vertices on the wall are guarded.

Now, we prove that no two rational guards can guard our polygon. Specifically, we show that no two guards, except the ones mentioned, will guard the entire polygon. Clearly, both guard segments must contain a guard. Let l be on the guard segment in the top left of the polygon, and t be on the guard segment in the



Figure 10: The solution to the system of equations (Equation (3.1), Equation (3.2), Equation (3.3)). Here, \bullet denotes a closed interval, while \circ denotes an open interval.

bottom right of the polygon. Given the position of l , we calculate where t can guard all regions not guarded by l .

For each of the three pockets, we will bound the position of t given the position of l . To represent their positions, we will use their x-coordinates. As both l and t lie on a non-vertical guard segment, their x-coordinates will uniquely describe their position.

First, we calculate which part of the pocket l guards and which part it does not. Due to the guard segment of l , we will have exactly one window along with its corresponding window's end. As described in Section 2, we can use this construction to determine the region where t can guard the region of the pocket l does not cover. Notably, t will always be on the correct side of the back ray. Indeed, the entire guard segment of t lies on one side of the back ray. As such, we will bound the feasible segment by ensuring t lies on the correct side of the front ray. We calculate the intersection of this ray and the guard segment. Then, the x-coordinate of t may either not be smaller than, or be greater than the x-coordinate of the intersection between the front ray and the guard segment. It depends on the pocket whether the x-coordinate of t can not be smaller or greater than the x-coordinate of the intersection. Guard t must lie on the same side of the front ray as the unguarded region of the pocket. As can be verified in Figure 9, the x-coordinate of t interacts with the intersections we find for the pockets in the following way:

1. Top pocket: the x-coordinate of t must be smaller or equal to the intersection.
2. Right pocket: the x-coordinate of t must be greater or equal to the intersection.
3. Bottom pocket: the x-coordinate of t must be smaller or equal to the intersection.

It is important to note that the x-coordinate of t does not lie on the same side of all three intersections. If it did lie on the same side of all three, then the position of t could trivially be at any coordinate greater or smaller than all three intersections.

We can use the x-coordinate of l to determine its position. So, we use l 's x-coordinate (x_l) to calculate inequalities that limit the x-coordinate of t (x_t): [Lucas: There was a typo in here, fixed now. I recalculated everything](#)

$$x_t \leq \frac{42734 \cdot x_l - 70239}{5460 \cdot x_l - 9950} \quad (3.1)$$

$$x_t \geq \frac{11928 \cdot x_l - 269330}{2570 \cdot x_l - 40705} \quad (3.2)$$

$$x_t \leq \frac{13538 \cdot x_l - 616793}{4220 \cdot x_l - 93450} \quad (3.3)$$

We will use Equation (3.1), Equation (3.2), Equation (3.3) as a system of equations. A solution to the system of equations will have a corresponding pair of guards. We use an algebraic computer program to calculate the solution to this system of equations. Figure 10 shows the values for x_l for which the system of equations has a valid solution. Then, any value for x_t is chosen between the bounds imposed by x_l . However, not

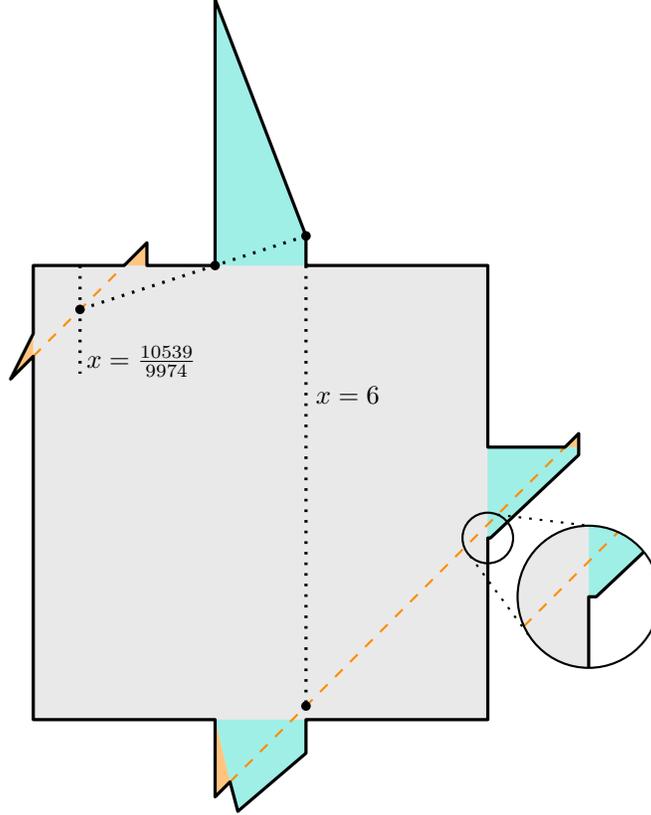


Figure 11: The guard l must be to the left of the line $x = \frac{10539}{9974}$.

all solutions for x_l correspond to valid positions for guard l . Specifically, notice in Figure 10 that the only possible value for $x_l < \frac{10539}{9974} < \frac{995}{546}$ is irrational. We will argue that x_l must be smaller than $\frac{10539}{9974}$. For the following description, we refer to Figure 11.

Suppose for the purpose of contradiction that there is a valid guard placement with $x_l \geq \frac{10539}{9974}$. In this case, guard l fails to guard any part of the wall of the top pocket. Guard x_t must be less than or equal to 6 to guard the entire wall. However, for x_t less than or equal to 6, guard t fails to guard the wall of the right pocket. Guard l can never guard the entire wall of the right pocket. This gives a contradiction and implies that $x_l < \frac{10539}{9974}$.

As such, we can limit the possible locations for guard l as $x_l < \frac{10539}{9974}$. Evidently, in this range, the only valid x-coordinate for x_l is $3.7 - 2.2 \cdot \sqrt{2}$, see Figure 10. For this x-coordinate of x_l , the only possible position for t is at $x_t = 7.4 - 0.5 \cdot \sqrt{2}$. Finally, this shows that the only possible configuration of two guards in this polygon is at $(3.7 - 2.2 \cdot \sqrt{2}, 11.7 - 2.2 \cdot \sqrt{2})$, and at $(7.4 - 0.5 \cdot \sqrt{2}, 1.7 - 0.5 \cdot \sqrt{2})$: both guards must be at irrational coordinates.

4 Challenges

We encountered new challenges while searching for our polygon, compared to Abrahamsen, Adamaszek, and Miltzow [2]'s polygon that requires three irrational guards.

Irrational Lines. To describe how we found the polygon described in the previous section, we introduce the concept of a rational and an irrational line. Give a line $\ell = \{mx + n : x \in \mathbb{R}\}$, we say that ℓ is *rational*

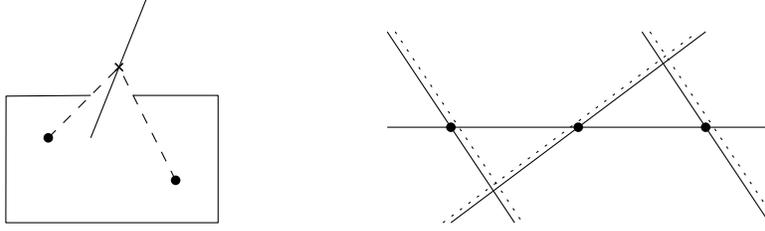


Figure 12: Left: Two guards and two reflex vertices, where the corresponding wall leads to an invalid polygon. Right: Three front rays intersecting the guard segment. Guard t must be on the dotted side of each ray. If the intersection points were reversed, there does not exist a valid solution either.

if and only if $m, n \in \mathbb{Q}$, and *irrational* otherwise. Note that a rational line might contain arbitrarily many irrational points. (For example, the line $y = 0$ contains all the irrational points of the form $(a, 0)$, with l being irrational.) Now, if we have two distinct rational points, then they span a rational line. And by point-line duality, if we have two rational lines, then they intersect at a rational point. This implies that any irrational point is contained in at most one rational line. And reversely any irrational line contains at most one rational point. (For instance, the point (π, π) is on the rational line $x = y$.)

This is relevant to us, as our guards are irrational points. Our guard segments are rational lines, as they are defined by triangular pockets. And the triangular pockets consist of rational vertices. Specifically, any window's end must be irrational, for the following reason. The line ℓ defined by the guard and the reflex vertex must be irrational, as it is not the guard segment. Furthermore, ℓ already contains a rational point, namely the reflex vertex. Thus, the window's end must be irrational as well.

Constructing the Polygon. To start, like in the construction with three guards, we parameterize the position of the (irrational) positions of the two guards and the reflex vertices before creating the polygon. In other words, $g = (g_1 \cdot \sqrt{2} + g_2, g_3 \cdot \sqrt{2} + g_4)$, with $g_i \in \mathbb{Q}$. To define the guard segments, we compute the unique rational line through each guard. Then, we define the quadrilateral pockets. To do this, we note that the window's ends of the two guards must meet on each pocket's wall. For a pocket, its window's end comes from two rays shot from the two guards through the reflex vertices of the pockets. Let w be the point where the two rays intersect. Recall that w will always be an irrational point. One unique rational line will contain w , so this must be the supporting line of the wall. Now, changing the coordinates of the two parameterized guards and the reflex vertices will change the position of the guard segments and the walls of all the quadrilateral pockets. Note that not all walls and guard segments lead to a valid polygon, or to a polygon at all. We have to check a few properties that we will describe next.

Properties. Here, we list some properties that we need to ensure. We start with the properties of the guard segments. As already mentioned, the two guard segments should not intersect. Furthermore, if the guard segments go across the whole polygon, it might be possible to guard all quadrilateral pockets with a single guard. Thirdly, if a guard segment is aligned such that a larger region of each pocket is observed when the guard is moved in one direction, then the interaction with the other guard is not meaningful. As such, many positions of guards cause invalid guard segments.

Now, let's move to the properties of the quadrilateral pockets. For each pocket, we ensured (by construction) that the window's ends of the two guards are at the exact same point. To create the walls of the pockets, we cast a ray from each guard to each pocket, to illustrate where the window in its visibility polygon would be. For each pocket, we found the (irrational) intersection of these rays of the two guards. Then, we define the wall of the pocket as a line segment on the rational line through the intersection.

This construction of the walls also poses a problem. As mentioned above, there only exists a single rational line through an irrational point. Thus, there will be only one possible wall for the given guards and reflex vertices. However, not all walls will be valid. An example of an invalid wall is shown in the left picture

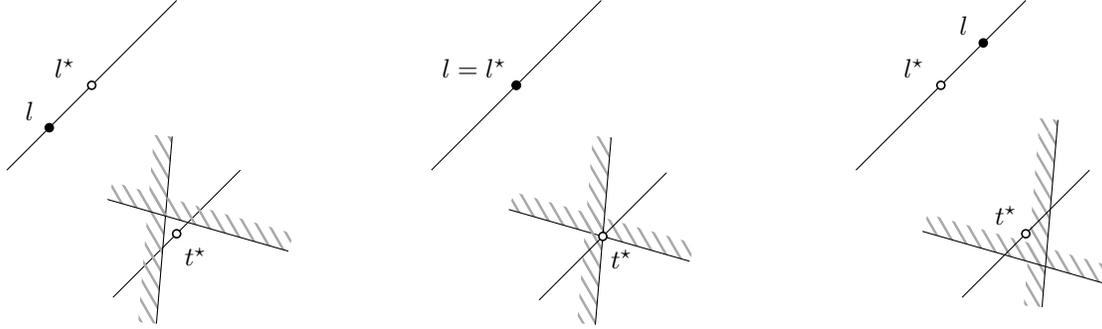


Figure 13: We draw the two guard segments without the surrounding polygon. On the top, we move the guard l from left to right. On the bottom, we see the corresponding feasible segment for guard t . Recall that we denote by l^* and t^* the coordinates of the predetermined guard positions.

in Figure 12.

Even a valid polygon does not guarantee that the construction will work. For the following description, refer to Figure 13. Our construction guarantees that the feasible segment for guard t is limited to a single point, given the predetermined position of $l = l^*$. (Recall that the feasible segment is an interval on the guard segment of t .) However, it does not guarantee that there does not exist a feasible segment for t when l is arbitrarily close to its predetermined position. Recall that we determine the feasible segment for t based on the front rays. Guard t must lie on the correct side of all three of these front rays. So, when x_l is less than its predetermined value, there must not exist an interval on the guard segment of t that lies on the correct side of all these rays. (Recall from Section 3 that we note $l = (x_l, y_l)$.) Otherwise, there must exist a rational point for t on the interval. For this rational point of t , we can find a corresponding rational point for l . However, when x_l is greater than its predetermined position, the order of the intersection of these rays with the guard segment will reverse. So there must not exist a segment on the guard segment that lies on the correct side of all rays when the intersection points are reversed, either.

To prevent this, we arrange the front rays' intersection pattern as shown in the right picture of Figure 12. This implies that the middle intersection requires the guard to be on one side, and the first and the last intersection require the guard to be on the other side.

Summary. In comparison to the polygon construction with three guards [2], our polygon has fewer parameters that we can adjust, as we have one guard less. As everything depends on those few parameters, it was difficult to find a configuration that satisfies all the desired properties simultaneously. Furthermore, we need to check some additional properties that didn't play a role in the previous construction, as the middle guard was surrounded by the other guards from two different sides. At last, we could not avoid the supporting line of the guard segment intersecting two quadrilateral pockets.

Acknowledgments. We would like to thank Thekla Hamm and Ivan Bliznets for their helpful comments on the presentation. Lucas Meijer is generously supported by the Netherlands Organisation for Scientific Research (NWO) under project no. VI.Vidi.213.150. Tillmann Miltzow is generously supported by the Netherlands Organisation for Scientific Research (NWO) under project no. 016.Veni.192.250 and no. VI.Vidi.213.150.

References

- [1] Mikkel Abrahamsen. Covering Polygons is Even Harder. In Nisheeth K. Vishnoi, editor, *2021 IEEE 62nd Annual Symposium on Foundations of Computer Science (FOCS)*, pages 375–386, 2022.
- [2] Mikkel Abrahamsen, Anna Adamaszek, and Tillmann Miltzow. Irrational guards are sometimes needed. In *SoCG 2017*, pages 3:1–3:15, 2017. Arxiv 1701.05475.
- [3] Mikkel Abrahamsen, Anna Adamaszek, and Tillmann Miltzow. The Art Gallery Problem is $\exists\mathbb{R}$ -complete. *Journal of the ACM*, 69(1):1–70, 2022.
- [4] Mikkel Abrahamsen, Linda Kleist, and Tillmann Miltzow. Training Neural Networks is ER-complete. In Marc A. Ranzato, Alina Beygelzimer, K. Nguyen, Percy Liang, Jennifer W. Vaughan, and Yann Dauphin, editors, *Advances in Neural Information Processing Systems (NeurIPS 2021)*, volume 34, 2021.
- [5] Saugata Basu, Richard Pollack, and Marie-Françoise Roy. *Algorithms in Real Algebraic Geometry*, volume 10 of *Algorithms and Computation in Mathematics*. Springer, Berlin, Heidelberg, 2006.
- [6] Patrice Belleville. Computing two-covers of simple polygons. *master thesis*, 1991.
- [7] Patrice Belleville. Two-guarding simple polygons. In *Proc. 4th Canadian Conference on Computational Geometry*, page 103–108, 1992.
- [8] Marie L. T. Berthelsen and Kristoffer A. Hansen. On the Computational Complexity of Decision Problems About Multi-player Nash Equilibria. In Dimitris Fotakis and Evangelos Markakis, editors, *International Symposium on Algorithmic Game Theory*, volume 11801 of *Lecture Notes in Computer Science*, pages 153–167, 2019.
- [9] Daniel Bertschinger, Christoph Hertrich, Paul Jungeblut, Tillmann Miltzow, and Simon Weber. Training fully connected neural networks is $\exists\mathbb{R}$ -complete. *ArXiv*, abs/2204.01368, 2022.
- [10] Daniel Bertschinger, Nicolas El Maalouly, Tillmann Miltzow, Patrick Schneider, and Simon Weber. Topological art in simple galleries. In Karl Bringmann and Timothy Chan, editors, *SOSA 2022*, pages 87–116. SIAM, 2022.
- [11] Vittorio Bilò and Marios Mavronicolas. A Catalog of EXISTS-R-Complete Decision Problems About Nash Equilibria in Multi-Player Games. In Nicolas Ollinger and Heribert Vollmer, editors, *33rd Symposium on Theoretical Aspects of Computer Science (STACS 2016)*, Leibniz International Proceedings in Informatics (LIPIcs), pages 17:1–17:13, 2016.
- [12] Vittorio Bilò and Marios Mavronicolas. Existential-R-Complete Decision Problems about Symmetric Nash Equilibria in Symmetric Multi-Player Games. In Vollmer Heribert and Brigitte Vallée, editors, *34th Symposium on Theoretical Aspects of Computer Science (STACS 2017)*, volume 66 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 13:1–13:14, 2017.
- [13] Manon Blanc and Kristoffer A. Hansen. Computational Complexity of Multi-player Evolutionarily Stable Strategies. In Rahul Santhanam and Daniil Musatov, editors, *Computer Science – Theory and Applications (CSR 2021)*, volume 12730 of *Lecture Notes in Computer Science*, pages 1–17, 2021.
- [14] Lenore Blum, Mike Shub, and Steve Smale. On a Theory of Computation and Complexity over the Real Numbers: NP-Completeness, Recursive Functions and Universal Machines. *Bulletin of the American Mathematical Society*, 21:1–46, 1989.
- [15] Édouard Bonnet and Tillmann Miltzow. An approximation algorithm for the art gallery problem. In *SoCG 2017*, pages 20:1–20:15, 2017. arXiv 1607.05527.

- [16] Édouard Bonnet and Tillmann Miltzow. Parameterized hardness of art gallery problems. *ACM Transactions on Algorithms*, 16(4), 2020.
- [17] Dorit Borrmann, Pedro J. de Rezende, Cid C. de Souza, Sándor P. Fekete, Stephan Friedrichs, Alexander Kröller, Andreas Nüchter, Christiane Schmidt, and Davi C. Tozoni. Point guards and point clouds: Solving general art gallery problems. In *SoCG 2013*, pages 347–348, 2013.
- [18] Peter Bürgisser and Felipe Cucker. Exotic Quantifiers, Complexity Classes, and Complete Problems. *Foundations of Computational Mathematics*, 9(2):135–170, 2009.
- [19] John Canny. Some Algebraic and Geometric Computations in PSPACE. In *STOC '88: Proceedings of the Twentieth Annual ACM Symposium on Theory of Computing*, pages 460–467, 1988.
- [20] Jean Cardinal, Stefan Felsner, Tillmann Miltzow, Casey Tompkins, and Birgit Vogtenhuber. Intersection Graphs of Rays and Grounded Segments. *Journal of Graph Algorithms and Applications*, 22(2):273–294, 2018.
- [21] Dmitry Chistikov, Stefan Kiefer, Ines Marusic, Mahsa Shirmohammadi, and James Worrell. On Restricted Nonnegative Matrix Factorization. In Ioannis Chatzigiannakis, Michael Mitzenmacher, Yuval Rabani, and Davide Sangiorgi, editors, *43rd International Colloquium on Automata, Languages, and Programming (ICALP 2016)*, volume 55 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 103:1–103:14, 2016.
- [22] Václav Chvátal. A combinatorial theorem in plane geometry. *Journal of Combinatorial Theory, Series B*, 18(1):39–41, 1975.
- [23] Julian D’Costa, Engel Lefauchaux, Eike Neumann, Joël Ouaknine, and James Worrell. On the Complexity of the Escape Problem for Linear Dynamical Systems over Compact Semialgebraic Sets. In Filippo Bonchi and Simon J. Puglisi, editors, *46th International Symposium on Mathematical Foundations of Computer Science (MFCS 2021)*, volume 202 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 33:1–33:21, 2021.
- [24] Michael G. Dobbins, Andreas Holmsen, and Tillmann Miltzow. A Universality Theorem for Nested Polytopes. arXiv preprint, 2019.
- [25] Michael G. Dobbins, Linda Kleist, Tillmann Miltzow, and Paweł Rzażewski. Completeness for the Complexity Class $\forall\exists\mathbb{R}$ and Area-Universality. *Discrete & Computational Geometry*, 2022.
- [26] Alon Efrat and Sarel Har-Peled. Guarding galleries and terrains. In *IFIP 2002*, pages 181–192, 2002.
- [27] Alon Efrat and Sarel Har-Peled. Guarding galleries and terrains. *Inf. Process. Lett.*, 100(6):238–245, 2006.
- [28] Stephan Eidenbenz, Christoph Stamm, and Peter Widmayer. Inapproximability results for guarding polygons and terrains. *Algorithmica*, 31(1):79–113, 2001.
- [29] Jeff Erickson. Optimal Curve Straightening is $\exists\mathbb{R}$ -Complete. arXiv preprint, 2019.
- [30] Jeff Erickson, Ivor van der Hoog, and Tillmann Miltzow. Smoothing the gap between NP and ER. In *2020 IEEE 61st Annual Symposium on Foundations of Computer Science (FOCS)*, pages 1022–1033, 2020.
- [31] Steve Fisk. A short proof of Chvátal’s watchman theorem. *J. Comb. Theory, Ser. B*, 24(3):374, 1978.
- [32] Stephan Friedrichs. Integer solutions for the art gallery problem using linear programming. Master’s thesis, TU Braunschweig, 2012.

- [33] Jugal Garg, Ruta Mehta, Vijay V. Vazirani, and Sadra Yazdanbod. $\exists\mathbb{R}$ -Completeness for Decision Versions of Multi-Player (Symmetric) Nash Equilibria. *ACM Transactions on Economics and Computation*, 6(1):1:1–1:23, 2018.
- [34] Simon B. Hengeveld and Tillmann Miltzow. A Practical Algorithm with Performance Guarantees for the Art Gallery Problem. In Kevin Buchin and Éric Colin de Verdière, editors, *37th International Symposium on Computational Geometry (SoCG 2021)*, volume 189 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 44:1–44:16, 2021.
- [35] Simon B Hengeveld and Tillmann Miltzow. A practical algorithm with performance guarantees for the art gallery problem. In *37th International Symposium on Computational Geometry (SoCG 2021)*. Schloss Dagstuhl-Leibniz-Zentrum für Informatik, 2021.
- [36] Paul Jungeblut, Linda Kleist, and Tillmann Miltzow. The Complexity of the Hausdorff Distance. In Xavier Goaoc and Michael Kerber, editors, *38th International Symposium on Computational Geometry (SoCG 2022)*, volume 224 of *Leibniz International Proceedings in Informatics (LIPIcs)*, pages 48:1–48:17, 2022.
- [37] Ross Kang and Tobias Müller. Sphere and Dot Product Representations of Graphs. *Discrete & Computational Geometry*, 47(3):548–569, 2012.
- [38] Jan Kratochvíl and Jiří Matoušek. Intersection Graphs of Segments. *Journal of Combinatorial Theory, Series B*, 62(2):289–315, 1994.
- [39] Der-Tsai Lee and Arthur K. Lin. Computational complexity of art gallery problems. *IEEE Transactions on Information Theory*, 32(2):276–282, 1986.
- [40] Der-Tsai Lee and Franco P. Preparata. An optimal algorithm for finding the kernel of a polygon. *Journal of the ACM (JACM)*, 26(3):415–421, 1979.
- [41] Anna Lubiw, Tillmann Miltzow, and Debajyoti Mondal. The Complexity of Drawing a Graph in a Polygonal Region. *Journal of Graph Algorithms and Applications*, 26(4):421–446, 2022.
- [42] Jiří Matoušek. Intersection graphs of segments and $\exists\mathbb{R}$. arXiv preprint, 2014.
- [43] Colin McDiarmid and Tobias Müller. Integer realizations of disk and segment graphs. *Journal of Combinatorial Theory, Series B*, 103(1):114–143, 2013.
- [44] Tillmann Miltzow and Reinier F. Schmiermann. On Classifying Continuous Constraint Satisfaction Problems. In Nisheeth K. Vishnoi, editor, *2021 IEEE 62nd Annual Symposium on Foundations of Computer Science (FOCS)*, pages 781–791, 2022.
- [45] Nikolai E. Mnëv. The Universality Theorems on the Classification Problem of Configuration Varieties and Convex Polytopes Varieties. In Oleg Y. Viro and Anatoly M Vershik, editors, *Topology and Geometry — Rohlin Seminar*, volume 1346 of *Lecture Notes in Mathematics*, pages 527–543. Springer, 1988.
- [46] Joseph O’Rourke. *Art Gallery Theorems and Algorithms*. Oxford University Press, 1987.
- [47] Jürgen Richter-Gebert and Günter M. Ziegler. Realization Spaces of 4-Polytopes are Universal. *Bulletin of the American Mathematical Society*, 32(4):403–412, 1995.
- [48] Marcus Schaefer. Complexity of Some Geometric and Topological Problems. In David Eppstein and Emden R. Gansner, editors, *GD 2009: Graph Drawing*, volume 5849 of *Lecture Notes in Computer Science*, pages 334–344, 2010.
- [49] Marcus Schaefer. *Realizability of Graphs and Linkages*, pages 461–482. Thirty Essays on Geometric Graph Theory. Springer, 2013.

- [50] Marcus Schaefer. Complexity of Geometric k-Planarity for Fixed k. *Journal of Graph Algorithms and Applications*, 25(1):29–41, 2021.
- [51] Marcus Schaefer and Daniel Štefankovič. Fixed Points, Nash Equilibria, and the Existential Theory of the Reals. *Theory of Computing Systems*, 60:172–193, 2017.
- [52] Marcus Schaefer and Daniel Štefankovič. Beyond the existential theory of the reals. *CoRR*, abs/2210.00571, 2022.
- [53] Marcus Schaefer and Daniel Štefankovič. The Complexity of Tensor Rank. *Theory of Computing Systems*, 62(5):1161–1174, 2018.
- [54] Yaroslav Shitov. A Universality Theorem for Nonnegative Matrix Factorizations. arXiv preprint, 2016.
- [55] Yaroslav Shitov. The complexity of positive semidefinite matrix factorization. *SIAM Journal on Optimization*, 27(3):1898–1909, 2017.
- [56] Peter W. Shor. Stretchability of Pseudolines is NP-Hard. In Peter Gritzmann and Bernd Sturmfels, editors, *Applied Geometry And Discrete Mathematics*, volume 4 of *DIMACS Series in Discrete Mathematics and Theoretical Computer Science*, pages 531–554, 1991.
- [57] Jack Stade. Complexity of the boundary-guarding art gallery problem. *arXiv preprint arXiv:2210.12817*, 2022.
- [58] Jack Stade and Jamie Tucker-Foltz. Topological universality of the art gallery problem. *arXiv preprint arXiv:2202.11076*, 2022.
- [59] Davi C. Tozoni, Pedro J. de Rezende, and Cid C. de Souza. Algorithm 966: A practical iterative algorithm for the art gallery problem using integer linear programming. *ACM Trans. Math. Softw.*, 43(2), August 2016.