

CoLD Fusion: Collaborative Descent for Distributed Multitask Finetuning

Shachar Don-Yehiya
IBM Research
Hebrew University of Jerusalem
shachar.don-yehiya@ibm.com

Elad Venezian
IBM Research
eladv@il.ibm.com

Colin Raffel
UNC Chapel Hill
craffel@gmail.com

Noam Slonim
IBM Research
noams@il.ibm.com

Yoav Katz
IBM Research
katz@il.ibm.com

Leshem Choshen
IBM Research
leshem.choshen@il.ibm.com

Abstract

Pretraining has been shown to scale well with compute, data size and data diversity. Multitask learning trains on a mixture of supervised datasets and produces improved performance compared to self-supervised pretraining. Until now, massively multitask learning required simultaneous access to all datasets in the mixture and heavy compute resources that are only available to well-resourced teams.

In this paper, we propose CoLD Fusion, a method that provides the benefits of multitask learning but leverages distributed computation and requires limited communication and no sharing of data. Consequentially, CoLD Fusion can create a synergistic loop, where finetuned models can be recycled to continually improve the pretrained model they are based on. We show that CoLD Fusion yields comparable benefits to multitask training by producing a model that (a) attains strong performance on all of the datasets it was multitask trained on and (b) is a better starting point for finetuning on unseen datasets. We find CoLD Fusion outperforms RoBERTa and even previous multitask models. Specifically, when training and testing on 35 diverse datasets, CoLD Fusion-based model outperforms RoBERTa by 2.45 points on average without any changes to the architecture.

1 Introduction

Faced with a task and some data, improved performance can often be attained by finetuning a pretrained model, i.e., further training the pretrained model on the task data. Consequently, improving a pretrained model has the potential to improve every model finetuned on it. However, pretraining is often computationally expensive, so practitioners rarely seek to pretrain new and improved models. In contrast, finetuning is typically dramatically cheaper, and a given pretrained model may therefore be finetuned many times (for example, there

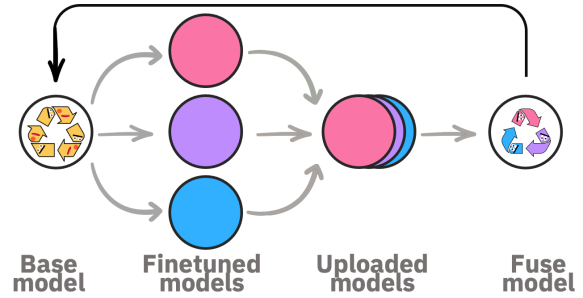


Figure 1: Schematic of CoLD Fusion. Each iteration starts from a base model. Then, each contributor downloads the model from a centralized “Repository” and finetunes it on their dataset. Next, each contributor uploads the finetuned model weights back to the Repository. After that, the Repository fuses all models into a single model by averaging their weights. Finally, the Repository replaces the base model with the fused model and the process repeats.

are thousands of finetuned BERT variants on the Hugging Face Hub.¹) Motivated by this, we study whether finetuned models can be “recycled” to create better pretrained models (c.f., Raffel, 2021).

As additional motivation, we note that the data used during finetuning is typically not seen during pretraining. Extensive evidence suggests that pretraining with more compute (Raffel et al., 2020) and data (Liu et al., 2019; Hoffmann et al., 2022; Ivgi et al., 2022) improves the resulting pretrained model. Moreover, finetuning pretrained models on supervised data can further improve the model (Phang et al., 2018; Choshen et al., 2022a), especially through multitask learning on diverse data (Aribandi et al., 2021; Aghajanyan et al., 2021a; Sanh et al., 2021; Chung et al., 2022).

In multitask learning, a single model is trained over multiple datasets at once, to fulfill one of two goals: (a) to single-handedly perform the tasks, that would otherwise require multiple dedicated models.

¹<https://huggingface.co/models?search=bert>

(b) to provide a better starting point than the pretrained. Given the availability of many finetuned models, our aim is to obtain the benefits of multitask learning by mixing multiple *models* rather than multiple datasets.

Towards this end, we focus on the setting of *collaborative multitask* learning, which involves performing multitask learning in a constrained environment: We assume that multiple contributors each finetunes a model on a single dataset. The contributors do not share their datasets with one another or change the way they finetune, but they do agree to share their produced models. This setting fits preexisting finetuning pipelines typically used by practitioners.

With a method for collaborative multitask learning, we can recycle finetuned models to improve pretrained models. ColD multitask fits the common finetuning scenario, where each contributor finetunes for their own benefit. However, by requiring only the finetuned model to be shared, the finetuning step can be recast as a training step for the collective’s benefit. In doing so, our method allows reusing compute and data consumed by practitioners and researchers. We call this method Collaborative Descent, or ColD for short.

Our approach of combining finetuned models not only produces a better pretrained model but also allows the model to keep evolving. Instead of pretraining or multitasking on a predefined amount of data, we suggest constantly accumulating finetuned models to improve the model continuously. Our method is hence limited only by the amount of finetuned models that are shared by the entire community. We discuss limitations in (§8).

At a high level, ColD Fusion works by fusing multiple finetuned models iteratively (§2). In each iteration, contributors finetune the most up-to-date model (which is presumably also the most performant) on their tasks. Then, those models are fused together (Choshen et al., 2022b) by averaging their parameters to create the base model for the next iteration.

We show that this method produces a model that performs well on the finetuning tasks, despite never manipulating more than one task at a time neither by constituent models nor their fusing (§4). Moreover, we show that ColD Fusion increases performance of the base model substantially, outperforming the pretrained by 2.45% on average on 35 datasets. Through additional analysis, we fur-

ther show that improvements are similar on tasks seen and unseen in training (§4.2) and that accumulating data is beneficial (§5.1, §5.2).

2 Methodology

After defining our framework’s goals (§2.1) and constraints (§2.2), we explain our proposed method (§2.3).

2.1 Goals of Multitask Learning

Multitask learning is typically used towards one of two goals: Either to produce a *single model* that performs well on many tasks, or to produce a *base model* that performs well on new tasks after adaptation (e.g., finetuning).

Single model. To produce a single multitask model, a set of datasets D is used to train a base model $M \in \mathcal{R}^w$ to find parameters $\theta \in \mathcal{R}^w$ that minimize the loss over each dataset in D . This reflects the traditional objective of multitask learning – to produce a set of weights that performs well on multiple tasks (Caruana, 1997).

Base model. An alternative goal of multitask learning (and the primary goal in our work) is to produce a base model that attains strong performance after adaptation. Multitask learning does not directly optimize towards this goal, but has been found to do so indirectly (Aghajanyan et al., 2021a; Liu et al., 2022). In this setting, the out-of-the-box performance of the produced model on seen tasks is less important than the performance after finetuning over it, i.e., initializing with the found weights $\theta \in \mathcal{R}^w$ and then finetuning on a desired dataset d' . In §4.2, we empirically show that our method works well both when $d' \in D$ or $d' \notin D$, i.e., whether d was used during the multitask training or not.

We note that our formulation gave no restrictions on the datasets group D . Thus, a common scenario might be that some datasets do not have the same label space, number of examples, etc. It is also possible that some datasets are complementary samples from the same distribution. In this case, our approach is similar to training on it distributively, without communicating every batch as in federated learning (Yang et al., 2019). We demonstrate that our approach also works well in this setting in §5.1.

2.2 Collaborative Constraints

In this work, we target the goals for multitask learning discussed above, but focus on a specific setting

with additional constraints. In our setting, multiple *contributors* have access to datasets that they do not share. A central *Repository* can only perform minimal computation (i.e., does not perform any training). Communication happens between the contributors and the Repository and only occurs when a given contributor finishes finetuning on their data. Our goal in setting these constraints is to restrict our focus to collaborative and distributive multitask learning.

2.3 CoLD Fusion

Our proposed method, called CoLD (Collaborative Descent) Fusion, is an iterative process that aims to perform multitask learning in the constrained setting listed above. Specifically, CoLD Fusion involves an iterative process where each contributor finetunes the current model on their dataset, communicates the resulting model back to the Repository, and the Repository fuses (Choshen et al., 2022b) all of the contributor’s models and sets it as the current model.

At first, the Repository initializes the shared model parameters θ_0 using a preexisting pretrained model. Then, at each iteration $i \in \{0, 1, 2, \dots\}$, each contributor $c \in C$ receives a dataset $d \in D$ and finetunes θ_i over it to produce parameters θ_i^c . For the purposes of our study, finetuning is any optimization process that aims to minimize the loss over the dataset d . Typically, finetuning involves minimizing the loss using a variant of gradient descent. After finetuning, each contributor sends their model’s parameters θ_i^c to the Repository. Next, the Repository fuses the contributor’s models by averaging all of the contributor’s model’s parameters to produce a new shared model as $\theta_{i+1} = \frac{1}{|C|} \sum_c \theta_i^c$. Finally, the process repeats for iteration $i + 1$.

3 Experimental Setup

In this section, we detail the datasets, models, baselines, general experiment setup, and specific experiments settings.

3.1 Datasets

In all of our experiments, we define the dataset group D to be a group of 36 English-language datasets, including most GLUE and Super-GLUE datasets, in addition to other datasets including additional NLI, sentiment and topic classification datasets as well as datasets based on Twitter data. A full list of datasets we use is provided in App. A.

For efficiency reasons, we randomly sampled 5 datasets to act as a consistent test set. We state when using the test set instead of the full datasets group.

3.2 Models and Baselines

For experiments in the main text, we use RoBERTa-base (Liu et al., 2019) as our initial model θ_0 . To demonstrate the generality of our approach, we additionally replicate some results on T5 (Raffel et al., 2020, see App. §D).

For baseline pre-trained models, we consider RoBERTa-base as well as RoBERTa-base multi-task finetuned on all datasets (except STSB, that being a regression task incurred technical difficulties). The multitask variant trains a dedicated classification head for each dataset. In addition, we consider the MUPPET (Aghajanyan et al., 2021a) model, a highly optimized multitask model trained on more datasets than we consider. MUPPET is the current state-of-the-art base pretrained model that uses the RoBERTa-base architecture (Choshen et al., 2022a).

3.3 Finetuning Process

Finetuning is used in this paper for two reasons: (a) As a way to infer and evaluate the performance of a base model and (b) as a part of the CoLD Fusion scheme. We follow the exact same finetuning procedure in either case. Finetuning hyperparameters and time and memory estimates are provided in App. B

3.4 CoLD Fusion Procedure

The general course of the experiments is as follows: On each iteration, several datasets are sampled and the latest base model is finetuned separately on each dataset. Then the resulting finetuned models are fused to create the next base model. This new model is evaluated on the test datasets at each iteration. When we mention CoLD Fusion without specifying the iteration explicitly, we refer to the model that corresponds to the final iteration.

The evaluation reflects both multitask goals (§2.2): (a) To evaluate the single model goal, we train only the classification head (equivalent to Linear Probing; Alain and Bengio, 2016), freezing the rest of the layers. We refer to it as CoLD *Frozen*. (b) For evaluating the base model goal, we take the CoLD model and use it as initialization for finetuning. We finetune separately on each dataset and

report the results on the corresponding test. We refer to it as CoLD.

4 CoLD Multitask Results

In this section, we show CoLD Fusion can produce multitask models. We show in §4.1 that CoLD Fusion fulfils both multitask objectives defined in §2. We find that base model improvements are even more apparent in few shot settings (§4.3). Finally, we verify that improvements replicate on datasets that were not seen during training (§4.2).

4.1 Collaborative Multitask

We show that CoLD Fusion achieves the two multitask objectives (see Fig. 2). We train and test CoLD Fusion for 30 iterations using the entire datasets group except STSB to provide a fair comparison to the multitask baseline. We simulate 8 contributors by sampling 8 datasets at each iteration and repeat the whole experiment using 5 different random seeds. We consider the importance of the sampling hyperparameter in §4.4.

We find that CoLD Fusion creates a superior base model (see Fig. 2b). The average result after finetuning the CoLD Fusion model is superior to the RoBERTa pretrained model by up to 2.45 points on average over the 35 datasets (see App. §C for full results). The result can be deemed significant with a difference of over 20 standard errors of the mean between the original pretrained model and the model produced by CoLD Fusion.

In comparison, the standard multitask model outperforms the original RoBERTa pretrained model by only 1.31 points. We also consider the highly optimized MUPPET model, trained on more datasets and without the CoLD multitask restrictions. MUPPET indeed outperforms our standard multitask baseline model, but is outperformed by our CoLD Fusion model.

Another important comparison is the consistency of the improvement. We find (see App. C) that the model produced by CoLD Fusion is better than the pretrained model on 75% of the datasets and attains only 1.73% worse performance on the worst-case dataset. In contrast, MUPPET hurts as many models as it helps and is 40% worse on some datasets.

CoLD Fusion also achieves the single model goal: The CoLD model has high inference scores on the datasets seen in training (see Fig. 2a), higher in fact than those of the standard multitask baseline. Moreover, it is not far from the pretrained model

when finetuned on each task separately. This implies that despite learning in a distributed way and fusing by averaging the non-linear weights of the model, the process incorporates the data well.


4.2 Unseen Datasets

We have found CoLD Fusion to create a strong base model (§4). Next, to meet the requirement of improving results for new datasets, we test the CoLD fused model on *unseen* datasets not included in the training (see Fig. 4). We achieve this by performing 3-fold cross-validation. The folds are set arbitrarily such that each fold contains 24 seen datasets (24 contributors) and 12 unseen ones that we keep for evaluation only. This ensures that each dataset has the same weight in the average score of the seen datasets and unseen datasets.


We find that the model performs on unseen datasets just as well as it does on seen ones. The strikingly similar performance between seen and unseen tasks (which is similar to in-domain vs. out-of-domain) should raise a red flag in most scenarios. However, in the unique scenario of CoLD multitasking, it meets our expectations. Both seen and unseen datasets are exposed at some point - during CoLD Fusion iterations or during finetuning. The only difference is that seen datasets are used also to finetune contributed models. Hence, in the seen case, the model trains twice on the same data, first during base model creation and again when finetuning. It is less of a surprise that training twice on the same data doesn't improve results. The improvement over the original pretrained is likely due to positive transfer across datasets.

Where finetuning is restricted to only the classification head (CoLD, Frozen in Fig. 4), the model achieves much better performance on the seen datasets than on the unseen datasets. These results are also in line with the fact that the model (apart from the classification head) was never exposed to the unseen datasets, while the entire model's weights were trained on the seen datasets. We further test CoLD Fusion's capacity to scale with more data in §5.2. We note that the unseen curve consistently increases, which may suggest that the model has acquired general skills.

Note that the scores in Fig. 4 are a bit lower than in the main experiment in Fig. 2b. This is most likely due to scaling, as here we keep unseen datasets aside and use fewer datasets for training. We show in a controlled experiment in §5.2 that

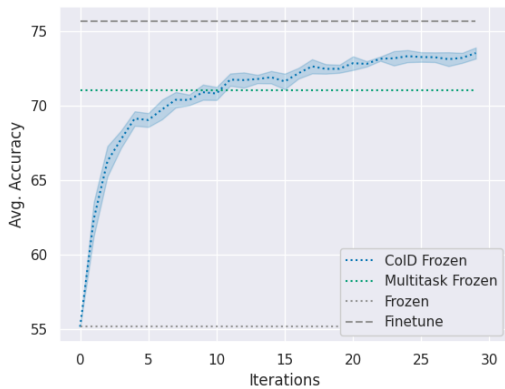

(a) Single Model

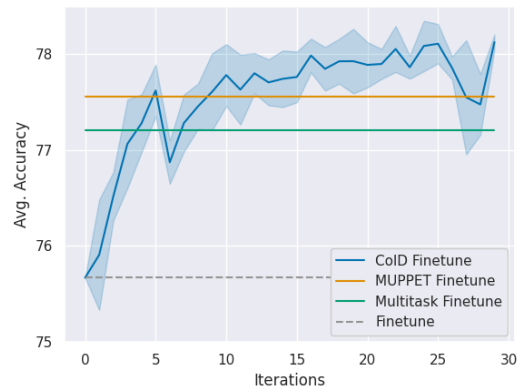

(b) Base Model

Figure 2: CoID Fusion is effective at multitask learning. CoID Fusion brings significant additional benefits as a base model for finetuning (b) and improves over finetuning the pretrained model, our multitask baseline, and MUPPET (Aghajanyan et al., 2021a). CoID Fusion also produces better performance on seen tasks (a), almost reaching finetuned accuracy. Standard deviation across runs is shown via shaded regions.

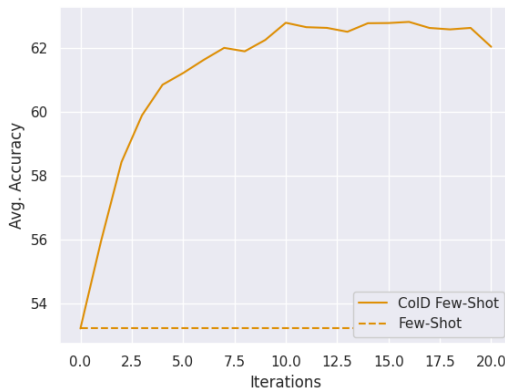


Figure 3: CoID Fusion yields improvements in few-shot learning on unseen datasets. Results are from training on 24 full datasets and testing on 12 unseen datasets with 100 labels each, averaged over 3 such folds. The pretrained model performance is highlighted by a dashed line. CoID Fusion outperforms by as much as 7%.

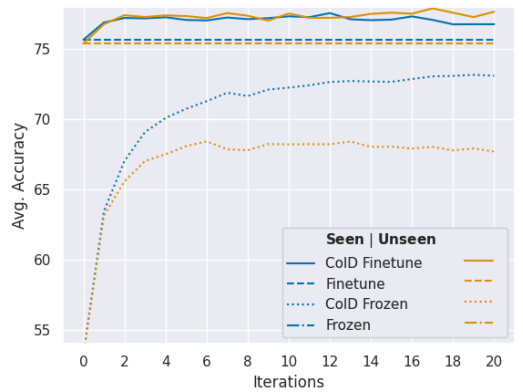


Figure 4: Fine-tuned and frozen results for CoID Fusion on datasets that were used for training (“Seen”, in blue) vs. datasets that were not (“Unseen”, in orange). The model produced by CoID Fusion is a good base model for both seen and unseen datasets. While using a frozen model is better for seen datasets, unseen datasets still benefit the CoID Fusion process.

using more datasets improves results.

4.3 Few-shot

In order to assess the benefit of CoID Fusion on few-shot scenarios, we repeat the setting in §4.2, but finetune only on 100 examples from each unseen dataset during evaluation. Fig. 3 shows a great increase in performance over the RoBERTa pretrained model, reaching an improvement of 6.73 points after 20 iterations. This provides an even stronger case for CoID Fusion in the few-shot setting.

4.4 Number of fused datasets

An important factor in CoID Fusion is the number of contributors in each iteration. Having fewer contributors implies effectively training on fewer datasets in each iteration; on the other hand, fusing fewer models may give more importance to each.

We find that the performance as a base model is hardly affected by the number of contributors in each iteration. More specifically, we observe in Fig. 5 that adding contributors makes the process more stable but has little effect on convergence speed. A possible reason is that some of the im-

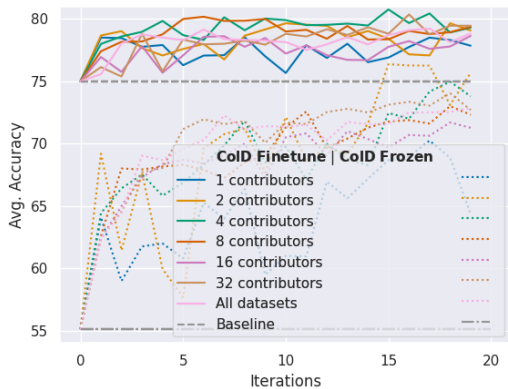


Figure 5: Effect of the number of contributors in each iteration. The graph shows the performance (y-axis) per iteration (x-axis) during CoLD Fusion. Performance of the model produced by CoLD Fusion without additional finetuning is shown in dotted lines, and after finetuning in solid lines. Each color depicts a different number of contributed models in each iteration. The pretrained model performance is highlighted by another dashed line.

provement comes from the iterations themselves and the ability to correct overfitting done in previous steps by some contributors. We further test the effect of the number of contributors under controlled settings in §5.2.

5 Single Dataset Analysis

We analyze a unique case of CoLD Fusion, where we run the distributed learning over a single dataset. For the single dataset, we chose MNLI (Williams et al., 2018) for its size (433K examples). We start by introducing the concept (§5.1). Then, we use this setting to control interfering factors and examine the algorithm characteristics (§5.2).

5.1 Federated Learning

A special case of CoLD multitask is training on data from the same distribution. This case resembles the Federated Learning scenario (Yang et al., 2019), where multiple contributors collaborate to train a model without having to exchange the actual data.

The Federated Learning experiments are run as follows: at each iteration 5 contributors sample 5k examples from MNLI dataset and another such subsample is used for evaluation. This setting simulates the never-ending data flow that often characterizes Federated learning.

As presented in Fig. 6, performance increases throughout the iterations. Thus, we conclude that

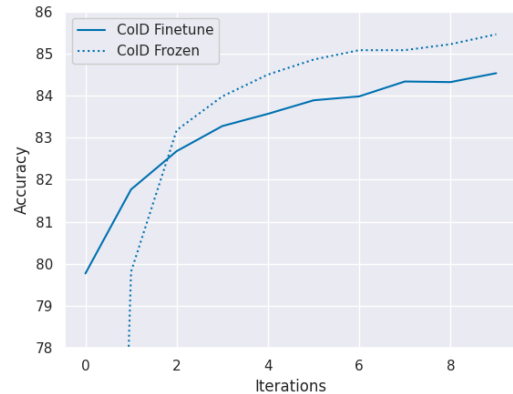


Figure 6: CoLD Fusion results when training on new data at each iteration – specifically, we sample 5k new examples from the MNLI dataset for each of the 5 contributors at each iteration. The CoLD Frozen (dotted lines) outperforms CoLD Finetuned (solid lines), possibly due to overfitting. Both outperform the pretrained model (trained on 5k samples only, dashed line).

the CoLD Fusion scheme aggregates and utilizes the newly added examples and not only coarse-grained dataset characteristics. We show similar trends in the multitask scenario (see App. E).

Note the superiority of CoLD-Frozen over CoLD in this experiment. A possible explanation is overfitting. In evaluation, finetuning all the parameters on only part of the data is worse than keeping the fused weights that are trained on several splits.

5.2 Controlled Experiments

We consider the interacting effects of the core characteristics of CoLD Fusion: the number of contributors, the amount of data each contributor has, and the overall amount of data.

To prevent the interference of the sampled datasets’ properties (e.g., size, distribution, task, etc.), we experiment in the Federated Learning setting. Moreover, we use disjoint and consistent datasets for all iterations, i.e., we do not sample datasets. We analyze the CoLD Frozen performance, as this better reveals the ability of the model to aggregate capabilities of the constituent models during fusion.

Effect of dataset size. We fix the number of contributors to 10 and test how the number of examples each contributor is training on affects results. We experiment with 1.25K, 2.5K, 5K and 10K examples. A priori we would have expected large amounts of data in each contributor’s model to obstruct the fusing process, as each model changes

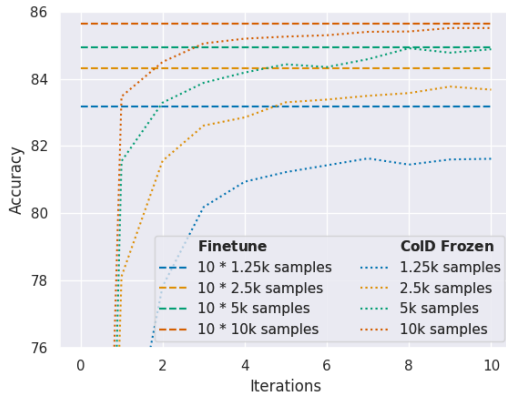


Figure 7: Results showing the effect of dataset size, using CoLD Fusion with 10 contributors training on subsets of MNLI with a varying number of training examples per line. The pretrained model performance finetuned on the full data is highlighted by dashed lines. Results keep increasing with data size, convergence to centralized finetuning takes more iterations with fewer data per contributed model.

more. In Fig. 7, we see the opposite – more data does not hurt results and might even lead to improved stability.

The low data regime, on the other hand, does not reach its full training baseline performance. Presumably, this is an overfitting artifact in evaluation, similar to §5.1 – i.e. the dataset split is too small to fit even the classification head, while the combined data shown to the baseline is enough.

Effect of the number of contributors. We show each contributor 5K examples, and see how results change with 2, 5, 10 and 20 contributors. We see in Fig. 8 that increasing the number of contributors increases performance. Moreover, the results are not only better at every step, but also keep on increasing for longer. This is a positive result in terms of the expected end result, but also means that convergence is slower.

To isolate the effect of the contributors from that of the overall data, we fix the overall amount of data to 50K and split it among the contributors evenly. Fig 9 replicates the above with more contributors. In this case, reaching convergence takes longer – approximately 2 more iterations for double the contributors and halve the data seen by each.

We conclude that additional data aids performance and additional contributors hardly change results, but delay convergence.

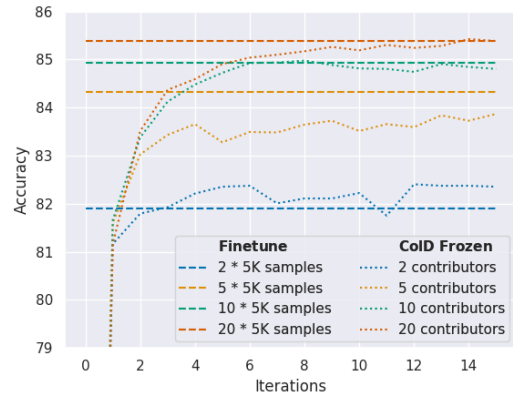


Figure 8: Effect of the number of contributors. CoLD Fusion with a varying number of contributors (dotted lines) training on subsets of MNLI with 5k samples each. The pretrained model performance finetuned on the full data is highlighted by dashed lines. With more contributors comes better performance and slower convergence.

6 Related Work

Our work strongly relies on model fusion. Model fusion was first introduced as a way to improve pretrain models by (Choshen et al., 2022b). In parallel, several works such (Matena and Raffel, 2021; Wortsman et al., 2022b) suggested different ways of fusing for other purposes such as improved finetuning.

Low-communication distributed training was proposed in similar settings to ours. Wortsman et al. (2022a) proposed distributed finetuning and model fusing in order to produce better finetuned models. This suggestion is equal to one iteration of CoLD Fusion where all models share the same dataset. Li et al. (2022) also share the similarity of distributed training, but during pretraining on unlabeled data.

Understanding why averaging different models improve quality may be related to theoretical works discussing weight and loss spaces. These works state there is a path of minimum loss between models (Garipov et al., 2018) on which the loss along the path is not increasing. Lubana et al. (2022); Benton et al. (2021); Frankle et al. (2020) claimed that under some constraints, this path is linear, which suggests that fusing the weights could produce a model that retains the capabilities of the fused models. Although different models on the same task may converge to different locations in the loss space without linear connectivity (Juneja et al.,

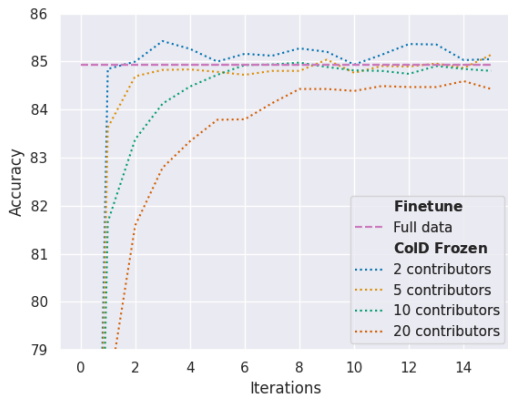


Figure 9: Results when using fixed data on each iteration using Cold Fusion with a varying number of contributors (dotted lines), training on a total of 50k examples from MNLI. The pretrained model performance is highlighted by dashed lines. Convergence times are longer as we split the data more.

2022), and although the case of multitask is more complex (Mirzadeh et al., 2020), we still believe that these works can partially explain why fusing preserves the capabilities gained by the constituent and that iterations fix it when it does not.

The literature also includes methods for better aligning models during training (Javaloy and Valera, 2021; Yu et al., 2020; Chen et al., 2018) or after it (Ainsworth et al., 2022; Jordan et al., 2022) to aid in fusing. We did not use those as we wanted to reduce the load on the repository and avoid restricting the contributors’ finetuning. However, these methods may improve results in Cold Fusion-like scenarios when applicable.

We mention that multitask learning does not optimize the base model objective directly (§2.2). Some works aim to do so (Bansal et al., 2019) through meta learning, finding models that can learn a new task well or efficiently (Hospedales et al., 2021). REPTILE (Nichol et al., 2018) meta learns in a way that resembles ours by iteratively using models trained for several batches.

7 Conclusion and Discussion

This paper suggested a scheme that can utilize finetuning to improve a pretrained model. The method doesn’t assume datasets are shared, but rather assumes that each contributor solely finetuned on their own dataset. Therefore, we believe that applying this scheme as a collaborative pretraining platform is realistic and that doing so would continually improve base models.

To scale this approach, it would be beneficial if the repository was updated asynchronously. Furthermore, if the centralized repository could be removed from the process, making the process be decentralized. In the usual finetuning setting, one might achieve robustness by tuning batch size and learning rate. Taking this metaphor to the Cold Fusion, one can either increase the number of contributors (batch) or perhaps restrict the effect of each iteration (learning rate) (Smith and Le, 2018). Following this line, future work may consider regularizing the distance from the pretrained model (learning rate) when a small number of contributors exist (batch) or consider individual weights to each contributor.

There are many parameters to optimize which might improve the method substantially. For example, fusing the contributions with a weighted average, improving fusing itself (Matena and Raffel, 2021; Ainsworth et al., 2022), controlling the datasets seen in each iterations (related to; Choshen et al., 2021; Hacoheh and Weinshall, 2019) and backtracking when a harmful update was done to the model. We would be excited to see work exploring these methods for improving Cold Fusion.

8 Limitations

Perhaps the most important limitation regarding Cold Fusion is its deployment. This paper presents a method for multitasking, not a platform. In that sense it solves both multitask learning goals under the constraints resulting from collaboration. However, using Cold Fusion in practice might require much more effort – It would require a place to host the models, a way to make sure no malicious or erroneous model was sent, and other aspects of a platform to support this training.

This is the first method to tackle Collaborative multitasking and we scaled it to 35 datasets. However, future methods may be found more efficient or scale better with the amount of data and computation.

Cold Fusion with many iterations and models might require more computational effort per a given amount of data (§5.2) and is hence less efficient than regular multitask learning. As a result, while our bottom line performance is encouraging, Cold Fusion might not be the preferred way under every possible scenario. Still, some of the costs may be alleviated by future work – for example the additional iterations when fusing many models, might

be reduced by permuting before fusing (Ainsworth et al., 2022).

While this paper studied the impact of various CoLD Fusion parameters, it is unclear how fine-tuning or even pretraining parameters affect results. However, we do have a reason to believe the method is relatively robust to these refactors through our initial results and the replication on another architecture (App. §D).

References

- Armen Aghajanyan, Anshit Gupta, Akshat Shrivastava, Xilun Chen, Luke Zettlemoyer, and Sonal Gupta. 2021a. [Muppet: Massive multi-task representations with pre-finetuning](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 5799–5811, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Armen Aghajanyan, Anshit Gupta, Akshat Shrivastava, Xilun Chen, Luke Zettlemoyer, and Sonal Gupta. 2021b. [Muppet: Massive multi-task representations with pre-finetuning](#). *ArXiv*, abs/2101.11038.
- Samuel K Ainsworth, Jonathan Hayase, and Siddhartha Srinivasa. 2022. [Git re-basin: Merging models modulo permutation symmetries](#). *arXiv preprint arXiv:2209.04836*.
- Guillaume Alain and Yoshua Bengio. 2016. [Understanding intermediate layers using linear classifier probes](#). *arXiv preprint arXiv:1610.01644*.
- Vamsi Aribandi, Yi Tay, Tal Schuster, Jinfeng Rao, Huaixiu Steven Zheng, Sanket Vaibhav Mehta, Honglei Zhuang, Vinh Q Tran, Dara Bahri, Jianmo Ni, et al. 2021. [Ext5: Towards extreme multi-task scaling for transfer learning](#). *arXiv preprint arXiv:2111.10952*.
- Trapit Bansal, Rishikesh Jha, and Andrew McCallum. 2019. [Learning to few-shot learn across diverse natural language classification tasks](#). *arXiv preprint arXiv:1911.03863*.
- Roy Bar-Haim, Ido Dagan, Bill Dolan, Lisa Ferro, Danilo Giampiccolo, and Bernardo Magnini. 2006. [The second pascal recognizing textual entailment challenge](#). In *ACL-PASCAL@ACL*.
- Francesco Barbieri, Jose Camacho-Collados, Francesco Ronzano, Luis Espinosa-Anke, Miguel Ballesteros, Valerio Basile, Viviana Patti, and Horacio Saggion. 2018. [SemEval-2018 Task 2: Multilingual Emoji Prediction](#). In *Proceedings of the 12th International Workshop on Semantic Evaluation (SemEval-2018)*, New Orleans, LA, United States. Association for Computational Linguistics.
- Valerio Basile, Cristina Bosco, Elisabetta Fersini, Debora Nozza, Viviana Patti, Francisco Manuel Rangel Pardo, Paolo Rosso, and Manuela Sanguinetti. 2019. [SemEval-2019 task 5: Multilingual detection of hate speech against immigrants and women in Twitter](#). In *Proceedings of the 13th International Workshop on Semantic Evaluation*, pages 54–63, Minneapolis, Minnesota, USA. Association for Computational Linguistics.
- Luisa Bentivogli, Peter Clark, Ido Dagan, and Danilo Giampiccolo. 2009. [The sixth pascal recognizing textual entailment challenge](#). In *TAC*.
- Gregory Benton, Wesley Maddox, Sanae Lotfi, and Andrew Gordon Gordon Wilson. 2021. [Loss surface simplexes for mode connecting volumes and fast ensembling](#). In *International Conference on Machine Learning*, pages 769–779. PMLR.
- Oana-Maria Camburu, Tim Rocktäschel, Thomas Lukasiewicz, and Phil Blunsom. 2018. [e-snli: Natural language inference with natural language explanations](#). In *NeurIPS*.
- Rich Caruana. 1997. [Multitask learning](#). *Machine learning*, 28(1):41–75.
- Zhao Chen, Vijay Badrinarayanan, Chen-Yu Lee, and Andrew Rabinovich. 2018. [GradNorm: Gradient normalization for adaptive loss balancing in deep multitask networks](#). In *Proceedings of the 35th International Conference on Machine Learning*, volume 80 of *Proceedings of Machine Learning Research*, pages 794–803. PMLR.
- Leshem Choshen, Guy Hachohen, Daphna Weinshall, and Omri Abend. 2021. [The grammar-learning trajectories of neural language models](#). *ArXiv*, abs/2109.06096.
- Leshem Choshen, Elad Venezian, Shachar Don-Yehia, Noam Slonim, and Yoav Katz. 2022a. [Where to start? analyzing the potential value of intermediate models](#). *arXiv preprint arXiv:2211.00107*.
- Leshem Choshen, Elad Venezian, Noam Slonim, and Yoav Katz. 2022b. [Fusing finetuned models for better pretraining](#). *arXiv preprint arXiv:2204.03044*.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2022. [Scaling instruction-finetuned language models](#). *arXiv preprint arXiv:2210.11416*.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. [BoolQ: Exploring the surprising difficulty of natural yes/no questions](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2924–2936, Minneapolis, Minnesota. Association for Computational Linguistics.

- Ido Dagan, Oren Glickman, and Bernardo Magnini. 2005. The pascal recognising textual entailment challenge. In *MLCW*.
- Marie-Catherine de Marneffe, Mandy Simons, and Judith Tonhauser. 2019. The CommitmentBank: Investigating projection in naturally occurring discourse. In *proceedings of Sinn und Bedeutung*. To appear in *Proceedings of Sinn und Bedeutung 23*. Data can be found at <https://github.com/mcdm/CommitmentBank/>.
- William B. Dolan and Chris Brockett. 2005. [Automatically constructing a corpus of sentential paraphrases](#). In *Proceedings of the Third International Workshop on Paraphrasing (IWP2005)*.
- Jonathan Frankle, Gintare Karolina Dziugaite, Daniel Roy, and Michael Carbin. 2020. Linear mode connectivity and the lottery ticket hypothesis. In *International Conference on Machine Learning*, pages 3259–3269. PMLR.
- Timur Garipov, Pavel Izmailov, Dmitrii Podoprikin, Dmitry P Vetrov, and Andrew G Wilson. 2018. Loss surfaces, mode connectivity, and fast ensembling of dnns. *Advances in neural information processing systems*, 31.
- Danilo Giampiccolo, Bernardo Magnini, Ido Dagan, and William B. Dolan. 2007. The third pascal recognizing textual entailment challenge. In *ACL-PASCAL@ACL*.
- Guy Hacohen and Daphna Weinshall. 2019. On the power of curriculum learning in training deep networks. In *International Conference on Machine Learning*, pages 2535–2544. PMLR.
- Ruining He and Julian McAuley. 2016. Ups and downs: Modeling the visual evolution of fashion trends with one-class collaborative filtering. In *proceedings of the 25th international conference on world wide web*, pages 507–517.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. 2022. Training compute-optimal large language models. *arXiv preprint arXiv:2203.15556*.
- Timothy Hospedales, Antreas Antoniou, Paul Micaelli, and Amos Storkey. 2021. Meta-learning in neural networks: A survey. *IEEE transactions on pattern analysis and machine intelligence*, 44(9):5149–5169.
- Maor Ivgi, Yair Carmon, and Jonathan Berant. 2022. Scaling laws under the microscope: Predicting transformer performance from small scale experiments. *arXiv preprint arXiv:2202.06387*.
- Adrián Javaloy and Isabel Valera. 2021. Rotograd: Gradient homogenization in multitask learning. In *International Conference on Learning Representations*.
- Keller Jordan, Hanie Sedghi, Olga Saukh, Rahim Entezari, and Behnam Neyshabur. 2022. Repair: Renormalizing permuted activations for interpolation repair. *arXiv preprint arXiv:2211.08403*.
- Jeevesh Juneja, Rachit Bansal, Kyunghyun Cho, João Sedoc, and Naomi Saphra. 2022. Linear connectivity reveals generalization strategies. *arXiv preprint arXiv:2205.12411*.
- Daniel Khashabi, Snigdha Chaturvedi, Michael Roth, Shyam Upadhyay, and Dan Roth. 2018. [Looking beyond the surface: A challenge set for reading comprehension over multiple sentences](#). In *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*. Association for Computational Linguistics.
- Hector Levesque, Ernest Davis, and Leora Morgenstern. 2012. [The Winograd schema challenge](#). In *Thirteenth International Conference on the Principles of Knowledge Representation and Reasoning*.
- Hector J. Levesque, Ernest Davis, and L. Morgenstern. 2011. The winograd schema challenge. In *KR*.
- Margaret Li, Suchin Gururangan, Tim Dettmers, Mike Lewis, Tim Althoff, Noah A Smith, and Luke Zettlemoyer. 2022. Branch-train-merge: Embarrassingly parallel training of expert language models. *arXiv preprint arXiv:2208.03306*.
- Xin Li and Dan Roth. 2002. [Learning question classifiers](#). In *COLING 2002: The 19th International Conference on Computational Linguistics*.
- Haokun Liu, Derek Tam, Mohammed Muqeeth, Jay Mohta, Tenghao Huang, Mohit Bansal, and Colin Raffel. 2022. Few-shot parameter-efficient finetuning is better and cheaper than in-context learning. *arXiv preprint arXiv:2205.05638*.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *ArXiv*, abs/1907.11692.
- Ekdeep Singh Lubana, Eric J Bigelow, Robert P Dick, David Krueger, and Hidenori Tanaka. 2022. Mechanistic mode connectivity. *arXiv preprint arXiv:2211.08422*.
- Andrew L. Maas, Raymond E. Daly, Peter T. Pham, Dan Huang, Andrew Y. Ng, and Christopher Potts. 2011. [Learning word vectors for sentiment analysis](#). In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 142–150, Portland, Oregon, USA. Association for Computational Linguistics.
- Pekka Malo, Ankur Sinha, Pekka Korhonen, Jyrki Wallenius, and Pyry Takala. 2014. Good debt or bad debt: Detecting semantic orientations in economic

- texts. *Journal of the Association for Information Science and Technology*, 65(4):782–796.
- Michael Matena and Colin Raffel. 2021. Merging models with fisher-weighted averaging. *arXiv preprint arXiv:2111.09832*.
- Seyed Iman Mirzadeh, Mehrdad Farajtabar, Dilan Gorur, Razvan Pascanu, and Hassan Ghasemzadeh. 2020. Linear mode connectivity in multi-task and continual learning. *arXiv preprint arXiv:2010.04495*.
- Saif M. Mohammad and Felipe Bravo-Marquez. 2017. Emotion intensities in tweets. In *Proceedings of the sixth joint conference on lexical and computational semantics (*Sem)*, Vancouver, Canada.
- Alex Nichol, Joshua Achiam, and John Schulman. 2018. On first-order meta-learning algorithms. *ArXiv*, abs/1803.02999.
- Yixin Nie, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. 2020. [Adversarial NLI: A new benchmark for natural language understanding](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 4885–4901, Online. Association for Computational Linguistics.
- Bo Pang and Lillian Lee. 2005. [Seeing stars: Exploiting class relationships for sentiment categorization with respect to rating scales](#). In *Proceedings of the 43rd Annual Meeting of the Association for Computational Linguistics (ACL'05)*, pages 115–124, Ann Arbor, Michigan. Association for Computational Linguistics.
- Jason Phang, Thibault Févry, and Samuel R. Bowman. 2018. Sentence encoders on stilts: Supplementary training on intermediate labeled-data tasks. *ArXiv*, abs/1811.01088.
- Mohammad Taher Pilehvar and Jose Camacho-Collados. 2019. [WiC: The word-in-context dataset for evaluating context-sensitive meaning representations](#). In *Proceedings of the Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (NAACL-HLT)*. Association for Computational Linguistics.
- Colin Raffel. 2021. [A call to build models like we build open-source software](#).
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J Liu. 2020. Exploring the limits of transfer learning with a unified text-to-text transformer. *Journal of Machine Learning Research*, 21:1–67.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas. Association for Computational Linguistics.
- Melissa Roemmele, Cosmin Adrian Bejan, and Andrew S. Gordon. 2011. Choice of plausible alternatives: An evaluation of commonsense causal reasoning. In *2011 AAAI Spring Symposium Series*.
- Sara Rosenthal, Noura Farra, and Preslav Nakov. 2017. [SemEval-2017 task 4: Sentiment analysis in Twitter](#). In *Proceedings of the 11th International Workshop on Semantic Evaluation (SemEval-2017)*, pages 502–518, Vancouver, Canada. Association for Computational Linguistics.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, et al. 2021. Multitask prompted training enables zero-shot task generalization. *arXiv preprint arXiv:2110.08207*.
- Klaus R Scherer and Harald G Wallbott. 1994. Evidence for universality and cultural variation of differential emotion response patterning. *Journal of personality and social psychology*, 66(2):310.
- Emily Sheng and David Uthus. 2020. [Investigating societal biases in a poetry composition system](#). In *Proceedings of the Second Workshop on Gender Bias in Natural Language Processing*, pages 93–106, Barcelona, Spain (Online). Association for Computational Linguistics.
- Samuel L Smith and Quoc V Le. 2018. A bayesian perspective on generalization and stochastic gradient descent. In *International Conference on Learning Representations*.
- Richard Socher, Alex Perelygin, Jean Wu, Jason Chuang, Christopher D. Manning, Andrew Ng, and Christopher Potts. 2013. [Recursive deep models for semantic compositionality over a sentiment treebank](#). In *Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing*, pages 1631–1642, Seattle, Washington, USA. Association for Computational Linguistics.
- Cynthia Van Hee, Els Lefever, and Véronique Hoste. 2018. [SemEval-2018 task 3: Irony detection in English tweets](#). In *Proceedings of The 12th International Workshop on Semantic Evaluation*, pages 39–50, New Orleans, Louisiana. Association for Computational Linguistics.
- Alex Warstadt, Amanpreet Singh, and Samuel R. Bowman. 2019. [Neural network acceptability judgments](#). *Transactions of the Association for Computational Linguistics*, 7:625–641.
- Adina Williams, Nikita Nangia, and Samuel Bowman. 2018. [A broad-coverage challenge corpus for sentence understanding through inference](#). In *Proceedings of the 2018 Conference of the North American*

Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers), pages 1112–1122, New Orleans, Louisiana. Association for Computational Linguistics.

Mitchell Wortsman, Suchin Gururangan, Shen Li, Ali Farhadi, Ludwig Schmidt, Michael Rabbat, and Ari S Morcos. 2022a. lo-fi: distributed finetuning without communication. *arXiv preprint arXiv:2210.11948*.

Mitchell Wortsman, Gabriel Ilharco, Samir Yitzhak Gadre, Rebecca Roelofs, Raphael Gontijo-Lopes, Ari S. Morcos, Hongseok Namkoong, Ali Farhadi, Yair Carmon, Simon Kornblith, and Ludwig Schmidt. 2022b. Model soups: averaging weights of multiple fine-tuned models improves accuracy without increasing inference time. In *International Conference on Machine Learning*.

Qiang Yang, Yang Liu, Yong Cheng, Yan Kang, Tianjian Chen, and Han Yu. 2019. Federated learning. *Synthesis Lectures on Artificial Intelligence and Machine Learning*, 13(3):1–207.

Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. 2020. [Gradient surgery for multi-task learning](#). In *Advances in Neural Information Processing Systems*, volume 33, pages 5824–5836. Curran Associates, Inc.

Marcos Zampieri, Shervin Malmasi, Preslav Nakov, Sara Rosenthal, Noura Farra, and Ritesh Kumar. 2019. Predicting the Type and Target of Offensive Posts in Social Media. In *Proceedings of NAACL*.

Xiang Zhang, Junbo Zhao, and Yann LeCun. 2015. Character-level convolutional networks for text classification. *Advances in neural information processing systems*, 28.

A Datasets used

Most datasets could be downloaded from [hugging-face datasets](#). We explicitly state the download link when relevant. As we used groups of datasets we report here the full list of datasets they contain.

GLUE:CoLA (Warstadt et al., 2019), SST2 (Socher et al., 2013), MRPC (Dolan and Brockett, 2005), QQP (data.quora.com/First-Quora-Dataset-Release-Question-Pairs), MNLI (Williams et al., 2018), QNLI Rajpurkar et al. 2016, RTE (Dagan et al., 2005; Bar-Haim et al., 2006; Giampiccolo et al., 2007; Bentivogli et al., 2009), WNLI (Levesque et al., 2011)

SuperGLUE:BoolQ (Clark et al., 2019), CB (de Marneffe et al., 2019), CoPA (Roemmele et al., 2011), MULTIRC (Khashabi et al., 2018), WIC

(Pilehvar and Camacho-Collados, 2019), WSC (Levesque et al., 2012)

MNLI (Williams et al., 2018), QNLI Rajpurkar et al. 2016, RTE (Dagan et al., 2005; Bar-Haim et al., 2006; Giampiccolo et al., 2007; Bentivogli et al., 2009), WNLI (Levesque et al., 2011), ESNLI (Camburu et al., 2018), adversarial NLI (Nie et al., 2020).

EmoInt (Mohammad and Bravo-Marquez, 2017), Emoji (Barbieri et al., 2018), Irony (Van Hee et al., 2018), OffenseEval (Zampieri et al., 2019), HatEval (Basile et al., 2019), Sentiment Analysis (Rosenthal et al., 2017)

Poem Sentiment (Sheng and Uthus, 2020), IMDB (Maas et al., 2011), Rotten Tomatoes (Pang and Lee, 2005), SST 5bins (Socher et al., 2013), SST2 (Socher et al., 2013), Amazon reviews (He and McAuley, 2016), Financial Phrasebank (Malo et al., 2014)

AG news (Zhang et al., 2015), ISEAR (Scherer and Wallbott, 1994), Yahoo answers (Zhang et al., 2015), DBpedia (Zhang et al., 2015), 20 news-group (Zhang et al., 2015), TREC in both fine-grained and coarse-grained labels (Li and Roth, 2002)

B Finetuning details

Hyperparameters. During finetuning, we use the following hyperparameters: learning rate of $5e-5$ with linear decay 0.0006 and batch size 256. Early stopping is performed on the development sets if the accuracy improvement after 256K training examples is less than 0.001. All other finetuning hyperparameters are constant across all experiments and follow the original hyperparameters published by Liu et al. (2019).

Time and Memory. Most finetuning steps take an hour or less on an A100 GPU. Fusing times are inconsequential. At each iteration all finetuning runs in parallel on all datasets (8 in most cases) and also test finetuning runs in parallel, (36 in most cases). To put it all together, in the main experiment, 30 iterations with 8 contributors, 36 test sets, and 5 seeds, required approximately 4,800 A100 GPU hours and 3.2 TB of memory if all models are to be saved once.

C Datasets Accuracy

The full results of the main experiment (§4) can be found in Table 1. It contains accuracy score for each dataset separately.

For ease of comparison we also supply two figures (Fig.10), comparing MUPPET and COLD multitask models to the pretrained. They show that ColD is much more consistent. It has less datasets that lose from changing from pretrained to ColD and smaller negative effects when there are such datasets. MUPPET however also has larger maximal gain when it does show gains, which shines favourably on the average. This makes ColD a better choice for an off-the-shelf model, but gives MUPPET an advantage when one tests a target dataset on several pretrained domains.

D T5

We present initial results to confirm our method is not unique to RoBERTa. Specifically, we train T5 (Raffel et al., 2020) with default hyperparameters, but 256 batch size and 0.0004 learning rate. We replicate the main experiment (§4) in a smaller scale, running on seed only and 5 iterations only. For ColD-Frozen, we train only the language model head.


Fig. 11 shows the main effect reminds. Both ColD and ColD-Frozen keep increasing with the iterations.

E Multitask Scale


We test the effect of the amount of datasets we use for multitasking on the performance of the resulted model as a base model. We take a random permutation of all the 36 datasets. We ColD fuse on the first 4 datasets, then the first 8, 16, and finally all the datasets. In fig. 12 we see that the 8 datasets performs worse than the 4 datasets, and that the high regime (16 and 36 datasets) performs much better than the low regime (4 and 8 datasets). These results align with (Aghajanyan et al., 2021b) observation that under 15 datasets more datasets decrease the performance, but past some critical point more datasets increase performance.

F Fix Number of Examples

We depict the ColD Fusion process with multiple tasks (Fig. 13), but only 4K examples per each contributor. This simulates a case where contributors keep streaming new information of different kinds. While this can not fully predict the effect of streaming new tasks, it shows initial positive results in this regard.

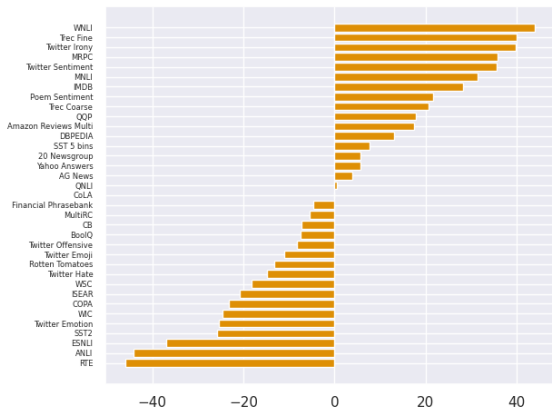

(a) MUPPET Gain

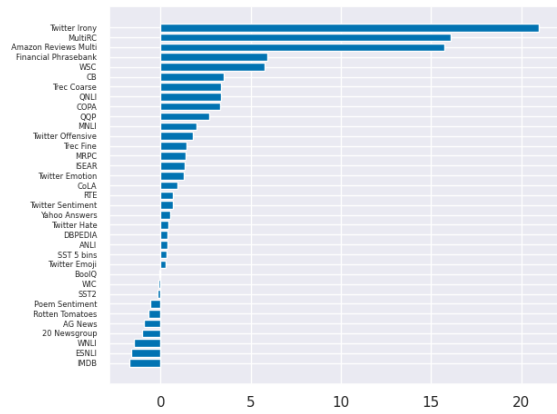

(b) CoLD Gain

Figure 10: Gains of MUPPET/CoLD over finetuning on the pretrained model. CoLD is much more consistent, with less datasets that lose from changing from pretrained to CoLD and smaller negative effects on them. MUPPET however has larger maximal gain when it does show gains.

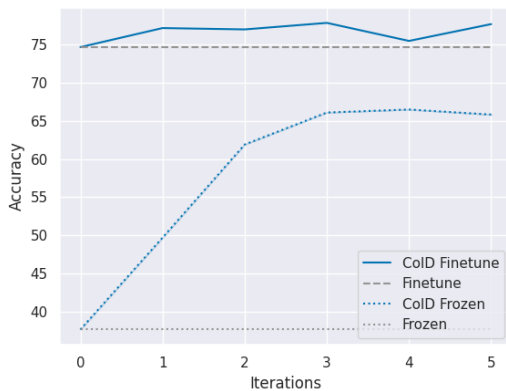


Figure 11: CoLD Fusion on T5. We replicate the main experiment (§4) on a smaller scale. Like in RoBERTa, both CoLD and CoLD-Frozen lines keep increasing with the iterations.



Figure 12: Number of datasets effect. The graph follows the performance (y-axis) per iteration (x-axis) during CoLD Fusion. Each color depicts a different number of datasets pool from where the datasets were randomly picked at each iteration. The pretrained model performance is highlighted by another dashed line.

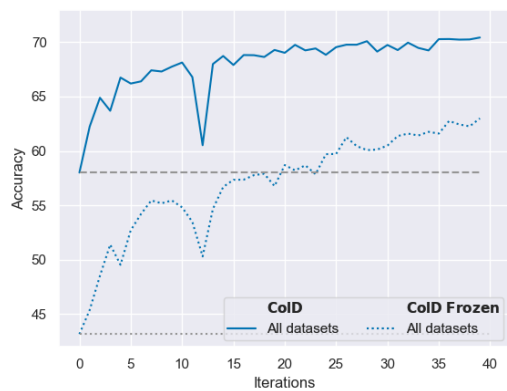


Figure 13: Running the main experiment with a fixed number of examples. For each finetune over the 36 datasets, we use 5000 examples - regardless the size of of the dataset. We can see that although the absolute results are degraded related to the regular configuration, the performance is increasing monotonically both for the CoLD and CoLD Freeze. meaning more data yields better performance.

Dataset	Finetune	Multitask	MUPPET	CoLD-Fusion
20 Newsgroup	84.28	71.91	90.00	83.24
AG News	85.81	87.23	89.77	84.88
Amazon Reviews Multi	68.95	65.80	86.50	84.69
ANLI	96.80	33.75	52.59	97.16
BoolQ	89.60	54.71	82.17	89.53
CB	87.60	67.86	80.36	91.08
CoLA	81.21	71.14	81.21	82.17
COPA	88.27	55.00	65.00	91.58
DBPEDIA	72.13	75.07	85.17	72.51
ESNLI	89.46	89.91	52.59	87.84
Financial Phrasebank	50.70	82.80	46.10	56.62
IMDB	63.46	93.08	91.74	61.73
ISEAR	93.81	65.38	73.01	95.14
MNLI	61.55	86.18	93.04	63.52
MRPC	53.13	78.92	88.97	54.50
MultiRC	69.64	56.08	64.15	85.71
Poem Sentiment	72.56	67.31	94.14	71.97
QNLI	84.00	90.10	84.48	87.34
QQP	73.47	88.31	91.25	76.17
Rotten Tomatoes	71.38	91.09	58.10	70.70
RTE	85.32	79.06	39.44	86.00
SST2	92.81	94.04	67.06	92.61
SST 5 bins	87.17	55.93	94.84	87.48
Trec Coarse	64.89	94.40	85.58	68.24
Trec Fine	56.83	66.40	96.80	58.29
Twitter Emoji	93.77	44.00	82.76	94.02
Twitter Emotion	76.50	77.97	51.11	77.78
Twitter Hate	90.92	51.45	76.02	91.32
Twitter Irony	45.00	64.80	84.77	66.00
Twitter Offensive	79.85	82.09	71.57	81.64
Twitter Sentiment	51.41	69.72	87.07	52.09
WIC	91.12	59.56	66.61	90.98
WNLI	47.07	57.75	91.10	45.56
WSC	81.73	60.58	63.46	87.50
Yahoo Answers	66.22	57.43	71.90	66.73

Table 1: Detailed results of the main experiment. Accuracy score of each dataset, for CoLD Fusion and for the 3 baselines: Finetune, our Multitask, and MUPPET.