

Two-Player Incomplete Games of Resilient Multiagent Systems

Yurid E. Nugraha^{*,**} Tomohisa Hayakawa^{**} Hideaki Ishii^{***}
Ahmet Cetinkaya^{****} Quanyan Zhu[†]

^{*} Department of Electrical Engineering, Sepuluh Nopember Institute of Technology, Surabaya 60111, Indonesia. (yurid@its.ac.id)

^{**} Department of Systems and Control Engineering, Tokyo Institute of Technology, Tokyo 152-8552, Japan. (hayakawa@sc.e.titech.ac.jp)

^{***} Department of Computer Science, Tokyo Institute of Technology, Yokohama 226-8502, Japan. (ishii@c.titech.ac.jp)

^{****} Department of Functional Control Systems, Shibaura Institute of Technology, Tokyo 135-8548, Japan. (ahmet@shibaura-it.ac.jp)

[†] Department of Electrical and Computer Engineering, New York University, Brooklyn, NY 11201, USA. (quanyan.zhu@nyu.edu)

Abstract: Evolution of agents' dynamics of multiagent systems under consensus protocol in the face of jamming attacks is discussed, where centralized parties are able to influence the control signals of the agents. In this paper we focus on a game-theoretical approach of multiagent systems where the players have incomplete information on their opponents' strength. We consider repeated games with both simultaneous and sequential player actions where players update their beliefs of each other over time. The effect of the players' optimal strategies according to Bayesian Nash Equilibrium and Perfect Bayesian Equilibrium on agents' consensus is examined. It is shown that an attacker with incomplete knowledge may fail to prevent consensus despite having sufficient resources to do so.

1. INTRODUCTION

Jamming attacks in networks are commonly modeled as games between adversaries and agents of networks, e.g., in Li et al. (2017). In some situations, a player of the game may not exactly know the impact of the players' actions on the utility of its opponents, which may be kept as a private information. We call this lack of information of a player in the game as *incomplete information* (Cho and Kreps, 1987). This incomplete information aspect affects how players determine their strategies.

Games with Bayesian probabilities are known to be effective in modelling incomplete/partial information among players. The solution concepts used include Bayesian Nash Equilibrium (Umsonst et al., 2021) and Perfect Bayesian Equilibrium (Vasal et al., 2019). These solution concepts are also recently studied in the context of n -player networks (Castiglioni et al., 2021; Eksin et al., 2014). In these games, the uninformed players form their *beliefs* of the opponents' private information characterized as *types*.

There are several game models and solution concepts considering incomplete information of the players under a sequential setting that have been discussed in the literature. For a two-player case, one of the most frequently employed models is signaling games, where an informed player moves first to signal its type to its uninformed opponent (Osborne, 2004; Sasahara and Sandberg, 2021). In this formulation, not making actions that indicate its true

type may be optimal for a player, depending on the cost. Other variation includes screening games (Kübler et al., 2008), where the uninformed player decides its strategy first without exactly knowing its opponent's type.

In our previous results, e.g., Nugraha et al. (2021, 2022), we considered a game-theoretical approach for network security problems where there are two centralized players, an attacker and a defender, who strategize on how to attack and defend the network, respectively. There, we considered that the two players under limited resources decide their strategies sequentially. In this paper, we extend the formulation to consider a more realistic scenario where the two players do not know the exact strength of their opponents. It is then natural to consider an incomplete information structure of the game, where a player does not know the exact utilities of its opponent due to its unknown attack/defense strength.

More specifically, our contribution in this paper is as follows: (i) We consider a two-player game in the context of network security with incomplete information of the players and discuss several solution concepts of the game, namely the Bayesian Nash Equilibrium and the Perfect Bayesian Equilibrium. (ii) We examine how the actions of the rational and myopic players affect the agent states under a consensus protocol in the long term. The players' actions may change over time due to their limited resources and the evolution of their beliefs on the opponents' strengths.

The paper is organized as follows. In Section 2, we outline the framework for the incomplete information model as well as the attack and defense sequences and energy consumption models of the players. In Section 3, we focus on the Bayesian Nash Equilibrium where the players execute their strategies simultaneously. We consider the case where the players make their actions sequentially in Section 4. We then provide numerical examples in Section 5 and conclude the paper in Section 6.

2. PROBLEM FORMULATION

We explore a multiagent system of n agents communicating to each other in discrete time. The network topology is described by an undirected and connected graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$. It consists of the set $\mathcal{V}$ of vertices representing the agents and the set $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$ of edges representing the communication links. Each agent i has the scalar state x_i following the consensus update rule at time $k \in \mathbb{N}_0$ given by

$$x_i[k+1] = x_i[k] + u_i[k], \quad (1)$$

$$u_i[k] = \sum_{j \in \mathcal{N}_i[k]} a_{ij}(x_j[k] - x_i[k]), \quad (2)$$

where $x[0] = x_0$, $a_{ij} > 0$, $\sum_{j=1, j \neq i}^n a_{ij} < 1$, and $\mathcal{N}_i[k]$ denotes the set of agents that can communicate with agent i at time $k \in \mathbb{N}_0$. This set may change due to the attacks. Under normal operation without any attacks, it is known that all agents converge to the same state (Bullo, 2019).

A two-player game between the attacker and the defender is considered in terms of the communication among the agents. The attacker is capable to block the communication by jamming some targeted edges and therefore delay (or completely prevent) the consensus among the agents. These jamming attacks (if successful) are represented by the removal of edges in $\mathcal{G}$. In response to the actions of the attacker, the defender tries to recover the communication by allocating resources in some edges to rebuild those edges under the attacks. Specifically, the defender may ask agent i to send stronger signals to *some* of its neighbors. These strong communication signals make the attacks ineffective. That is, if agent i uses strong communication signals in some edges, then the attacks on those edges will be unsuccessful, i.e., the agents will be able to communicate over those edges. However, by using strong communication signals, agents consume more resources.

2.1 Attack-Communication Sequence

At each time k , the attacker decides to attack some edges whereas the defender decides the edges that use strong communication signals. Specifically, at time k the attacker attacks $\mathcal{G}$ by deleting the edges $\mathcal{E}_k^A \subseteq \mathcal{E}$, whereas the defender chooses the edges to be used with strong communication signals $\mathcal{E}_k^D \subseteq \mathcal{E}$. As mentioned earlier, the attacker is not able to break the communication with strong signals by the agents. As a consequence, the network changes from $\mathcal{G}$ to $\mathcal{G}'_k := (\mathcal{V}, (\mathcal{E} \setminus \mathcal{E}_k^A) \cup \mathcal{E}_k^D)$. The agents then communicate to their neighbors $\mathcal{N}_i[k]$ based on this resulting graph $\mathcal{G}'_k$.

Fig. 1 illustrates graphs affected by the attacks and communication activities. The original network $\mathcal{G}$ is shown in the left. Then, the attacker attacks edges $\mathcal{E}_k^A =$

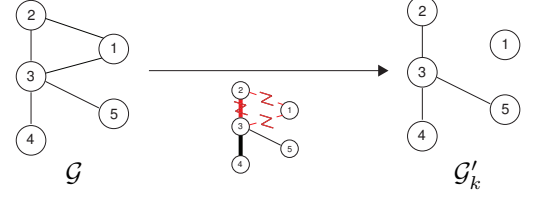


Fig. 1. Example of graphs $\mathcal{G}$ and $\mathcal{G}'_k$. In the middle graph, the attacked edges are shown in red. The edges used with weak and strong communication signals are illustrated with normal and bold lines, respectively.

$\{(1, 2), (1, 3), (2, 3)\}$, whereas the defender requests agents 2, 3, and 4 to communicate strongly through edges $\mathcal{E}_k^D = \{(2, 3), (3, 4)\}$, and the communication remains weak in other edges $\{(1, 2), (1, 3), (3, 5)\}$. As a result, the agents communicate through edges $\mathcal{E}'_k = \{(2, 3), (3, 4), (3, 5)\}$, shown in the right graph $\mathcal{G}'_k$. It is clear that the attacker's actions may not be successful, e.g., the attacker's attack on $(2, 3)$ fails due to the strong communication signals by the defender.

2.2 Resource Constraints

By attacking (resp., communicating), the attacker (resp., the defender) allocates its resources to some of the edges. These resource allocation actions are affected by the constraints on the resource availability, which is assumed to increase linearly in time. We assume that the resources allocated by the players are proportional to the number of planned attacked/communicated edges. Here, the attacks on $\mathcal{E}_k^A$ cost $\beta^A > 0$ resource per edge. The total resource used by the attacker is constrained as

$$\sum_{m=0}^k \beta^A |\mathcal{E}_m^A| \leq \kappa^A + \rho^A k \quad (3)$$

for any time k , where $\kappa^A \geq \rho^A > 0$ and $\beta^A > 0$. This inequality implies that the total resource spent by the attacker cannot exceed the available resource characterized by the initial resource κ^A and the supply rate ρ^A . The condition $\kappa^A \geq \rho^A$ allows the attacker to have at least the same attack ability at time $k = 0$, which is important for consensus as discussed later. This resource constraint upper-bounds the number of edges that the attacker can attack. See also (Cetinkaya et al., 2017; Senejohnny et al., 2018) and the references therein for related attack models.

The resource constraint of the defender, which is similar to (3), is given by

$$\sum_{m=0}^k (\hat{\beta}^D |\mathcal{E}_m^D| + \bar{\beta}^D |\bar{\mathcal{E}}_m^D|) \leq \hat{\kappa}^D + \hat{\rho}^D k \quad (4)$$

with $\hat{\rho}^D > \bar{\beta}^D |\mathcal{E}| > 0$, $\hat{\kappa}^D > \bar{\beta}^D |\mathcal{E}| > 0$, and $\hat{\beta}^D > \bar{\beta}^D > 0$. We denote by $\bar{\beta}^D$ and $\hat{\beta}^D$ the unit cost of communicating with weak and strong signals respectively, whereas $\bar{\mathcal{E}}_m^D$ is used to denote the number of edges used with weak communication signals. The inequality $\hat{\beta}^D > \bar{\beta}^D$ implies the fact that the consumed resources with the strong signals are larger than those with the weak signals, whereas $\hat{\kappa}^D, \hat{\rho}^D > \bar{\beta}^D |\mathcal{E}|$ implies that the agents are able to communicate with weak signals in all edges at all times.

Since $\bar{\mathcal{E}}_m^D = \mathcal{E} \setminus \mathcal{E}_m^D$, by supposing $\hat{\rho}^D = \rho^D + \bar{\beta}^D |\mathcal{E}|$, $\hat{\kappa}^D = \kappa^D + \bar{\beta}^D |\mathcal{E}|$, and $\hat{\beta}^D = \beta^D + \bar{\beta}^D |\mathcal{E}|$, we can rewrite (4) as

$$\begin{aligned} & \sum_{m=0}^k (\hat{\beta}^D - \bar{\beta}^D) |\mathcal{E}_m^D| + \bar{\beta}^D |\mathcal{E}| (k+1) \\ & \leq \kappa^D + \rho^D k + \bar{\beta}^D |\mathcal{E}| (k+1) \end{aligned}$$

and hence

$$\sum_{m=0}^k \beta^D |\mathcal{E}_m^D| \leq \kappa^D + \rho^D k. \quad (5)$$

For the rest of the paper, for simplicity we call β^D and ρ^D as the unit cost and the supply rate of the defender, respectively.

2.3 Games with Incomplete Information

We then continue by explaining the structure of the game between the attacker and the defender. We first make several assumptions regarding each player's knowledge of the other player's parameters.

We consider that the attacker does not know the cost β^D of the defender. Similarly, the cost β^A of the attacker is also not known by the defender. For simplicity, other resource parameters κ^A , κ^D , ρ^A , and ρ^D as well as the agent states at time k are known by both players.

Throughout this paper, we suppose that both players are strategic, i.e., they execute the strategies associated with the equilibrium. We later discuss how these strategies affect the agents' dynamics in the long term. In addition, we assume that both players are aware of the limitation in the knowledge of the other player. For example, the defender knows that the attacker does not have the exact value of β^D .

Different from games with complete information of the players, in games with incomplete information players have to guess the *type* of their opponents based on a certain probability distributions called *beliefs* (Cho and Kreps, 1987; Osborne, 2004). Since a game is played every time k , in this paper we suppose that the players update their beliefs over time, as explained later.

In this game we suppose that the types of the attacker unknown by the defender are determined by the unit cost β^A . We denote those types as $\theta^A \in \Theta^A = \{\beta_1^A, \beta_2^A\}$ where β_1^A, β_2^A denote the possible unit cost values of the attacker and satisfy $\beta_1^A < \beta_2^A$. The defender's belief of the attacker's type at time k is denoted as $0 \leq \mu_k^D(\theta^A) \leq 1$, $\theta^A \in \Theta^A$. For simplicity, we assume only two types β_1^A and β_2^A . We denote the beliefs of the types $\mu_k^D(\beta_1^A)$ and $\mu_k^D(\beta_2^A)$ as $\mu_k^{D,1}$ and $\mu_k^{D,2}$, respectively, with $\mu_k^{D,1} + \mu_k^{D,2} = 1$.

Similarly, the defender's types are determined by its unit cost β^D . We thus denote its types as $\theta^D \in \Theta^D = \{\beta_1^D, \beta_2^D\}$, with $\beta_1^D < \beta_2^D$. The attacker's belief of the defender's type at time k is denoted as $0 \leq \mu_k^A(\theta^D) \leq 1$, $\theta^D \in \Theta^D$. Denote the attacker's beliefs $\mu_k^A(\beta_1^D)$ and $\mu_k^A(\beta_2^D)$ as $\mu_k^{A,1}$ and $\mu_k^{A,2}$, respectively, with $\mu_k^{A,1} + \mu_k^{A,2} = 1$. These types θ^A and θ^D do not change over time k .

In this paper, we focus on the incompleteness of the players' information. We discuss two cases:

- (Case 1) The attacker sends jamming signals simultaneously as the defender asks agents to send communication signals.
- (Case 2) The attacker sends jamming signals before the defender decides how the agents should communicate (both actions are still considered to happen at time k).

In Case 1, the defender does not observe which edges are attacked and thus does *not* have *perfect* information of the attacks. We then consider the Bayesian Nash Equilibrium (BNE) as a suitable solution concept in this case. We discuss this formulation in more detail in Section 3.

On the other hand, since in Case 2 the attacks and the communications occur sequentially, the defender is aware of the attacks in $\mathcal{E}$ and decides its strategy based on the attacks. In this case we consider the Perfect Bayesian Equilibrium (PBE) for the interaction between the attacker and the defender, which will be discussed in Section 4. For simplicity, in Case 2 we consider only one uninformed player, i.e., only one player has incomplete knowledge, whereas the other player knows the type of the opponent.

2.4 Agent State Difference and Utility Functions Design

In our problem setting, the players also consider the effects of their actions on the agent states when attacking/communicating. Specifically, the attacker wants to make the difference among the agent states $x_i[k]$ as large as possible, whereas the defender attempts to keep this difference as small as possible. To this end, we specify the sum of the agents' state differences z_k of time k as

$$z_k(\mathcal{E}_k^A, \mathcal{E}_k^D) := x^T[k+1] L_c x[k+1], \quad (6)$$

with $L_c \in \mathbb{R}^{n \times n}$ being the Laplacian matrix of the complete graph with n agents. The choices of edges $(\mathcal{E}_k^A, \mathcal{E}_k^D)$ will affect $x[k+1]$ in (1) and in turn the value of z_k .

The utility functions of the players at the k th game (played at time k) for both BNE and PBE cases given the players' types θ^A and θ^D are defined by

$$\hat{u}_k^A(\theta^D, \mathcal{E}_k^A, \mathcal{E}_k^D) := z_k + \theta^D |\mathcal{E}_k^D| - \beta^A |\mathcal{E}_k^A|, \quad (7)$$

$$\hat{u}_k^D(\theta^A, \mathcal{E}_k^A, \mathcal{E}_k^D) := -z_k - \beta^D |\mathcal{E}_k^D| + \theta^A |\mathcal{E}_k^A|, \quad (8)$$

which are to be maximized by the players. These functions consider both players' costs of attacking/communicating strongly as well as the effect of their actions on the agents' state difference. Note that in (7), (8) we take account of the players' types θ^A, θ^D in the form of the cost terms $\theta^D |\mathcal{E}_k^D|$ and $\theta^A |\mathcal{E}_k^A|$. Recall that the players may waste their resources by allocating them inefficiently, e.g., the attacker may attempt to attack an edge over which agents use strong communication signals. We then can see from (7) (resp., (8)) that the inefficient actions by the attacker (resp., the defender) will not increase (resp., decrease) the values of z_k but affect the utilities negatively by increasing the values of $|\mathcal{E}_k^A|$ (resp., $|\mathcal{E}_k^D|$).

Due to the uncertainty in the players' various types θ^A, θ^D , the exact values of (7) and (8) are not known by the players. To find the equilibria, we thus evaluate the

possible utilities across all types of the players to obtain the expected utilities, which are represented by

$$U_k^A(\mathcal{E}_k^A, \mathcal{E}_k^D) = \sum_{\theta^D \in \Theta^D} \mu_k^A(\theta^D) \hat{u}_k^A(\theta^D, \mathcal{E}_k^A, \mathcal{E}_k^D), \quad (9)$$

$$U_k^D(\mathcal{E}_k^A, \mathcal{E}_k^D) = \sum_{\theta^A \in \Theta^A} \mu_k^D(\theta^A) \hat{u}_k^D(\theta^A, \mathcal{E}_k^A, \mathcal{E}_k^D). \quad (10)$$

These expected utilities are to be maximized by the players at every time step k .

2.5 Belief Update Design

In this game, we suppose that the players update their beliefs over time by considering their previous actions. Since the beliefs affect the players' optimal strategies, it is important for the players to have good beliefs of their opponents' types to use their resources efficiently.

We design the belief update system as follows. From the resource constraints of the players specified in (3) and (5) above, at time k the players obtain their *predicted costs* $\tilde{\beta}_k^A$ and $\tilde{\beta}_k^D$ (not necessarily in Θ^A or Θ^D) specified by

$$\tilde{\beta}_k^A = \frac{\kappa^A + \rho^A(k-1)}{\sum_{m=0}^{k-1} |\mathcal{E}_m^A|}, \quad \tilde{\beta}_k^D = \frac{\kappa^D + \rho^D(k-1)}{\sum_{m=0}^{k-1} |\mathcal{E}_m^D|}, \quad (11)$$

which are updated at every time k .

These predicted costs $\tilde{\beta}_k^A$ and $\tilde{\beta}_k^D$ are obtained by supposing that from time 0 to time $k-1$ the players' attack/communicate actions are known to each other. This is a common assumption and not difficult to realize in practice. The players predict their opponents' types by utilizing these predicted costs. For example, if the value of $\tilde{\beta}_k^A$ is close enough to β_2^A , then the defender has a larger $\mu_k^{D,2}$ compared to $\mu_k^{D,1}$.

We first address the situation where there is no previous attack (resp., no previous communication with strong signals), i.e., $\sum_{m=0}^{k-1} |\mathcal{E}_m^A| = 0$ (resp., $\sum_{m=0}^{k-1} |\mathcal{E}_m^D| = 0$). In this case, the attacker (resp., the defender) assigns equal beliefs $\mu_k^{A,1} = \mu_k^{A,2} = 0.5$ (resp., $\mu_k^{D,1} = \mu_k^{D,2} = 0.5$).

Furthermore, since the players' types do not change over time, if a player is sure of its opponent's type θ^A or θ^D , i.e., $\mu_{k'}^D(\theta^A) = 1$ or $\mu_{k'}^A(\theta^D) = 1$ at time k' , then the beliefs of the subsequent time $k > k'$ do not change.

Assuming $\sum_{m=0}^{k-1} |\mathcal{E}_m^A| \neq 0$ and $\mu_{k'}^A(\theta^A) \neq 1$ for any type θ^A and time $k' < k$, the attacker's belief of the defender's type at time k is

$$\mu_k^{A,1} = 1 - \mu_k^{A,2} = \begin{cases} \alpha, & \text{if } \tilde{\beta}_k^D = \beta_2^D \\ 1, & \text{if } \tilde{\beta}_k^D < \beta_2^D \\ \frac{0.5(\tilde{\beta}_k^D - \beta_2^D)}{\tilde{\beta}_k^D}, & \text{otherwise.} \end{cases} \quad (12)$$

for the attacker, with $\alpha < 0.5$. Similarly, assuming $\sum_{m=0}^{k-1} |\mathcal{E}_m^D| \neq 0$ and $\mu_{k'}^D(\theta^D) \neq 1$ for any $k' < k$ the defender predicts the attacker's type with the belief updated as

$$\mu_k^{D,1} = 1 - \mu_k^{D,2} = \begin{cases} \alpha, & \text{if } \tilde{\beta}_k^A = \beta_2^A \\ 1, & \text{if } \tilde{\beta}_k^A < \beta_2^A \\ \frac{0.5(\tilde{\beta}_k^A - \beta_2^A)}{\tilde{\beta}_k^A}, & \text{otherwise.} \end{cases} \quad (13)$$

From (12) (resp., (13)), we see that if the predicted cost at time k is smaller than the larger cost β_2^D (resp., β_2^A), then the attacker (resp., the defender) is sure that its opponent has type β_1^D (resp., β_1^A), since with costs β_2^D (resp., β_2^A) it is impossible to communicate strongly $\sum_{m=0}^{k-1} |\mathcal{E}_m^D|$ (resp., to attack $\sum_{m=0}^{k-1} |\mathcal{E}_m^A|$) number of edges. On the other hand, if the predicted cost is very large (much larger than β_2^A or β_2^D), then the players become less sure of the type of the opponent.

3. BAYESIAN NASH EQUILIBRIUM UNDER INCOMPLETE AND IMPERFECT INFORMATION

In this section, we consider Case 1 characterized in Section 2, where both players execute their strategies simultaneously. We first discuss our results in terms of the equilibria and the resulting optimal strategies. Then, we analyze the effects of those optimal strategies on consensus and agents' dynamics.

3.1 BNE Analysis

Here we state several results of this formulation. Since it is difficult to directly derive the general results for any number of agents and graph structures, we begin by stating the results for special cases.

We first consider a case where the defender does not have enough resources for communicating even over one edge with strong signals. Note that even though the attacker does not know the exact value of β^D , the edges used to communicate strongly in the past $\mathcal{E}_{k'}^D$, $k' < k$, are known by both players. It then follows that if the defender with $\beta^D = \beta_1^D$ would not have enough resource to communicate strongly, then the attacker will try to attack some edges as stated below.

Lemma 1. In the game under Case 1, suppose that $\kappa^D + \rho^D k < \sum_{m=0}^{k-1} \beta_1^D |\mathcal{E}_m^D| + \beta_1^D$ is satisfied at time k . Then, $\mathcal{E}_k^A = \emptyset$ is not optimal for the attacker at time k .

Proof. If $\sum_{m=0}^{k-1} \beta^D |\mathcal{E}_m^D| + \beta^D > \kappa^D + \rho^D k$ is satisfied, then the defender is not able to communicate strongly with any edge due to limited resources as constrained in (5). Since the defender's possible cost satisfies $\beta_1^D < \beta_2^D$, we have $\kappa^D + \rho^D k < \sum_{m=0}^{k-1} \beta_1^D |\mathcal{E}_m^D| + \beta_1^D < \sum_{m=0}^{k-1} \beta_2^D |\mathcal{E}_m^D| + \beta_2^D$. Thus, with the defender's cost either β_1^D or β_2^D , the attacker knows that there is no strong communication and thus will try to attack as many edges as possible. $\square$

Similarly, for the attacker's case, we can show that if the attacker with $\beta^A = \beta_1^A$ would not have enough resource to attack any edge, then the defender will not use any edge with strong signals as stated in Lemma 2 below.

Lemma 2. In the game under Case 1, suppose that $\kappa^A + \rho^A k - \sum_{m=0}^{k-1} \beta_1^A |\mathcal{E}_m^A| < \beta_1^A$ is satisfied at time k . Then, $\mathcal{E}_k^D = \emptyset$ is an optimal strategy for the defender at time k .

Let us concentrate on the BNE of the two-agent case with one edge, with $a_{12} = a_{21}$ in (1). In this case, there is only one possible change of z_k by the action of attacks/communications of the only edge (1, 2). We then denote z_k with and without communication using edge (1, 2) at time k , respectively, as $z_k^0 := (x_1[k] - x_2[k])^2$ and

$z_k^1 := (x_1[k+1] - x_2[k+1])^2 = ((1 - 2a_{12})(x_1[k] - x_2[k]))^2$. We will consider the difference $\tilde{z}_k := z_k^0 - z_k^1 = 4a_{12}(1 - a_{12})(x_1[k] - x_2[k])^2$ as well as the players' costs in the results below.

In Lemma 3, we state that if the agent states are close enough, then not communicating is an optimal strategy for the defender.

Lemma 3. In the game under Case 1, suppose that $\beta_1^D > \tilde{z}_k$. Then, $\mathcal{E}_k^D = \emptyset$ is an optimal strategy for the defender regardless of the attacker's actions.

Proof. In the two-agent case, the defender's utility is at most $\hat{u}_k^D = -z_k^1 - \beta_1^D$ when there is communication with weak signals without attack and the type of the defender is $\beta_1^D < \beta_2^D$. Thus, if $z_k^1 + \beta_1^D > z_k^0$, then the defender will always prefer not to communicate with strong signals. $\square$

Similar characteristics also exist for the attacker, which can be shown similarly to Lemma 3.

Lemma 4. In the game under Case 1, suppose that $\beta_1^D > \tilde{z}_k$. Then, $\mathcal{E}_k^A = \emptyset$ is optimal for the attacker regardless of the defender's actions and costs.

From Lemmas 3 and 4, we see that if the agent states are close enough at time k , then both players will prefer to do nothing. Since the difference among the agent states does not increase over time (Bullo, 2019), there will be no action in subsequent times as stated in the next result.

Corollary 5. Suppose that $\min\{\beta_1^D, \beta_1^A\} > \tilde{z}_{k'}$ at time k' . Then, in the game under Case 1 at any time $k \geq k'$, there is no attack nor communication with strong signals.

3.2 Effect of BNE on Consensus

Here, we discuss how the actions of strategic players acting simultaneously following BNE affect the agents' dynamics. Firstly, we address the two-agent case. Specifically, from Corollary 5, we can infer that if two agents have their initial states close enough, i.e., $(x_1[0] - x_2[0])^2 < \beta_1^A$, then consensus will be achieved at infinite time. The following lemma addresses the general case of n agents.


Lemma 6. In the game under Case 1, consensus will be achieved if there exists time k' such that $z_{k'} < \beta_1^A$.

Proof. At time k' , the attacker's utility is $\hat{u}_{k'}^A(\mathcal{E}_{k'}^A \neq \emptyset) = z_{k'+1} - \beta^A|\mathcal{E}_{k'}^A| + \theta^D|\mathcal{E}_{k'}^D|$ if it chooses to attack. Since $z_{k'+1} \leq z_{k'} < \beta_1^A$, the attacker will receive negative utility by attacking. This is always worse than the utility without attack $\hat{u}_{k'}^A(\mathcal{E}_{k'}^A \neq \emptyset) > 0$, since $z_{k'} > 0$. It then follows that the attacker does not attack any edge, and since z_k does not increase with the consensus protocol (2), there will be no attack in the future time $k > k'$, and as a result consensus is achieved. $\square$


4. PERFECT BAYESIAN EQUILIBRIUM UNDER INCOMPLETE INFORMATION

We now consider Case 2 characterized in Section 2, i.e., the situation where the attacker acts first followed by the defender (all actions are still made at the same time k). Therefore, the defender observes which edges are jammed by the attacker among $\mathcal{E}$ before making its decision.

Similar to the discussion on Case 1 in Section 3, in sequential games with incomplete information we consider

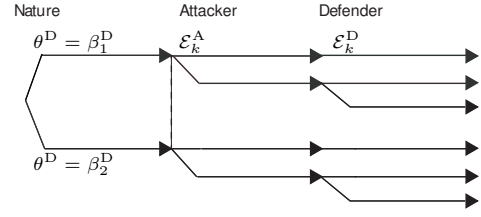

(a) A screening game structure

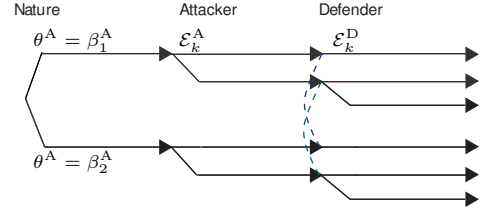

(b) A signaling game structure

Fig. 2. A screening (resp., signaling) game structure where the dashed line illustrates the incomplete information by the attacker (resp., the defender), respectively, i.e., the attacker (resp., the defender) does not know where it is on the game tree

that the players admit certain types θ^A and θ^D . Here we also assume that the players' beliefs are updated over time given their knowledge of the past players' strategies before time k . Specifically, we consider the belief update rules over time k in (12) and (13).

However, in Case 2, since the defender observes the attacker's move at the same k , its belief is also updated at the same k based on the attacker's action $\mathcal{E}_k^A$. We thus denote the defender's belief as $\mu_k^D(\theta^A|\mathcal{E}_k^A)$ updated at the same k according to the Bayesian rules (Cho and Kreps, 1987).

As mentioned in Section 2, we consider two subcases of Case 2: (Case 2a) The attacker does not know the defender's type, and (Case 2b) the defender does not know the attacker's type. These two subcases will be examined in Sections 4.1 and 4.2, respectively. The case where both players do not know each other's types requires more analysis and is not investigated in this paper.

4.1 PBE with Unknown Defender Type

In this section we examine the case where the attacker does not know whether the defender's cost is either β_1^D or β_2^D . Incomplete information games where the uninformed player makes its action first (in this case, the attacker) are sometimes called *screening games* (Kübler et al., 2008).

The extensive-form structure of this game is illustrated in Fig. 2a. At first, the *nature* decides the type of the defender θ^D , which is not known by the attacker. In our setting of games played repeatedly, we suppose that the nature always chooses the same type at any k . Then the attacker chooses its strategy followed by the defender, who knows its own type as well as the attacker's type.

Similarly to the discussion of BNE in Section 3 above, here we begin by ruling out some cases. Specifically, for no-resource case of the defender, i.e., $\kappa^D + \rho^D k -$

$\sum_{m=0}^{k-1} (\beta_1^D |\mathcal{E}_m^D|) < \beta_1^D$, Lemma 1 also holds for the PBE case at time k . Likewise, for no-resource case of the attacker, Lemma 2 holds.

We then continue to discuss the effects of the knowledge of the attacks on the defender's communication actions. Since we suppose that the defender is aware of the attacks in this case, communicating with strong signals in unattacked edges is never desirable for the defender.

Lemma 7. In the game under Case 2, $\mathcal{E}_k^D$ satisfying $(\mathcal{E}_k^D \setminus \mathcal{E}_k^A) \neq \emptyset$ is not optimal for the defender for any time k and any types and parameters of the players.

Proof. From (8), it is clear that if $\tilde{\mathcal{E}}_k = \mathcal{E}_k^D \setminus \mathcal{E}_k^A \neq \emptyset$ the defender does not obtain additional value of $-z_k$ but obtains negative value of $-\beta^D |\mathcal{E}_k^D|$. It then follows that for any given $\mathcal{E}_k^A$ and across all types Θ^A , the expected utility (10) satisfies $U_k^D(\tilde{\mathcal{E}}_k \neq \emptyset) < U_k^D(\tilde{\mathcal{E}}_k = \emptyset)$. $\square$

We then consider a special case of two-agent communication with one edge (1, 2). From Lemma 7, it is clear that the defender does not use strong signals if the attacker does not attack. If the attacker attacks, i.e., $\mathcal{E}_k^A = \{(1, 2)\}$, then the defender will use strong signals if and only if $z_k^0 - z_k^1 > \theta^D$. This implies that the defender's decision can differ based on its type. That is, if $\beta_1^D \leq z_k^0 - z_k^1 \leq \beta_2^D$, then the defender chooses to communicate strongly if its type is β_1^D and not if its type is β_2^D .

Proposition 8. In the game under Case 2a, for $n = 2$, the players' optimal strategies can be classified as follows:

- (a) For $\tilde{z}_k > \beta_2^D$, the attacker attacks if $\mu_k^{A,1} < \frac{\beta_2^D - \beta^A}{\beta_2^D - \beta_1^D}$ and does not otherwise, and the defender uses strong signals regardless of its type.
- (b) For $\tilde{z}_k < \beta_1^D$, the attacker attacks if $\tilde{z}_k > \beta^A$ and does not otherwise, whereas the defender does not use strong signals in any type.
- (c) For $\beta_1^D \leq \tilde{z}_k \leq \beta_2^D$, the defender uses strong signals if its type is β_1^D and does not if its type is β_2^D . The attacker attacks if $\mu_k^{A,1} > \frac{\tilde{z}_k - \beta^A}{\tilde{z}_k + \beta_1^D}$.

These optimal strategies cover all cases of the values of z_k^0 , z_k^1 , β_1^D , and β_2^D .

Proof. First, in the case of no attack, it is clear that the defender does not use strong signals for both types and thus the expected utility satisfies $U_k^D(\emptyset, \emptyset) = -U_k^A(\emptyset, \emptyset) = -z_k^1$.

We now consider the three cases (a)–(c) based on the value of $\tilde{z}_k$.

Case (a): $\tilde{z}_k > \beta_2^D$. If there is an attack on edge (1, 2), the defender will use strong signals for both types if $z_k^0 - z_k^1 > \beta_2^D$. Thus, the expected utility for the attacker is $U_k^A((1, 2), (1, 2)) = \mu_k^{A,1}(z_k^1 - \beta^A + \beta_1^D) + (1 - \mu_k^{A,1})(z_k^1 - \beta^A + \beta_2^D)$. This will then imply that the attacker will decide to attack if $\mu_k^{A,1} < \frac{\beta_2^D - \beta^A}{\beta_2^D - \beta_1^D}$.

Case (b): $\tilde{z}_k < \beta_1^D$. Here, it is understood that the defender does not use strong signals for both types. The expected utility of the attacker is $U_k^A((1, 2), (1, 2)) = \mu_k^{A,1}(z_k^0 - \beta^A) +$

$(1 - \mu_k^{A,1})(z_k^0 - \beta^A) = z_k^0 - \beta^A$. Thus, the attacker will choose to attack if $z_k^0 - z_k^1 > \beta^A$, regardless of its belief.

Case (c): $\beta_1^D \leq \tilde{z}_k \leq \beta_2^D$. The defender will use strong signals if its type is β_1^D and not if its type is β_2^D . In this case, the expected utility for the attacker if it decides to attack is $U_k^A((1, 2), \mathcal{E}_k^D) = \mu_k^{A,1}(z_k^1 - \beta^A + \beta_1^D) + (1 - \mu_k^{A,1})(z_k^0 - \beta^A) = \mu_k^{A,1}(z_k^1 + \beta_1^D - z_k^0) + z_k^0 - \beta^A$. The attacker will choose to attack if its belief satisfy $\mu_k^{A,1} > \frac{z_k^1 - z_k^0 - \beta^A}{z_k^1 - z_k^0 + \beta_1^D}$. $\square$

It is interesting to note from the result above that when $\tilde{z}_k > \beta_2^D$, the attacker chooses to attack if its belief of high cost of the defender, i.e., β_2^D type, is relatively high.

4.2 PBE with Unknown Attacker Type

In this subsection we examine the case where the defender, which moves later, does not know whether the attacker's cost is β_1^A or β_2^A . The two-player incomplete information games where the uninformed player makes its action last (in this case, the attacker) is commonly known as *signaling games* (Cho and Kreps, 1987).

The extensive-form game structure of signaling games is illustrated in Fig. 2. At first, the nature decides the attacker's type θ^A , which is not known by the defender (we suppose that the nature always chooses the same type at any k). Then the attacker chooses its strategy followed by the defender, who does not know the attacker's type despite knowing its actions.

Again, here we begin by ruling out some cases regarding the resource limitation. Specifically, Lemmas 1 and 2 hold for signaling games at time k .

We first characterize the defender's best response given the attacker's action. If there is no attack, from the defender's utility functions in (8) it can be understood that there is no communication with strong signals. On the other hand, if there is an attack, the defender's utility becomes $U_l^D = -z_k^1 + \theta^A - \beta^D$ if it chooses to recover and $U_l^D = -z_k^0 + \theta^A$ if it chooses not to do so. Thus, the defender will use strong signals the edge only if $z_k^0 - z_k^1 > \beta^D$. Note that the defender's best response here is not affected by the type of the attacker, unlike the attacker's response in screening games specified above.

Now we are ready to state the results of the equilibrium in signaling games for $n = 2$. In signaling games, there are three types of equilibria: (i) Separating equilibrium: different types have different actions, (ii) Pooling equilibrium: all types have the same actions, and (iii) Semi-separating equilibrium: the types of the players affect the actions of the players in a stochastic way. We discuss those equilibria in this section.

Proposition 9. In the game under Case 2b, for $n = 2$, a separating equilibrium exists if one of the following conditions is satisfied:

- $\beta_1^A \leq \tilde{z}_k \leq \beta_2^A$ and $\tilde{z}_k \leq \beta^D$, or
- $\beta_1^A \leq \beta^D \leq \beta_2^A$ and $\tilde{z}_k > \beta^D$.

The optimal strategies of the players are as follows:

- If the attacker's type is β_1^A , then attacking is an optimal strategy. Otherwise, if the attacker's type is β_2^A , then not attacking is an optimal strategy.
- The defender uses strong signals if $\tilde{z}_k > \beta^D$, and not otherwise.

Proof. From the explanation above, the defender will only use strong signals if $z_k^0 - z_k^1 > \beta^D$. In this case, the attacker's utility with attack becomes $U_l^A = z_k^1 - \beta_1^A + \beta^D$ if its type is θ_1^A and $U_l^A = z_k^1 - \beta_2^A + \beta^D$ if its type is θ_2^A , whereas without attack its utility is z_k^1 for both types. Thus, the attacker will choose to attack only in type θ_1^A if $\beta_1^A \leq \beta^D \leq \beta_2^A$.

Similarly, for the case of weak signals, the attacker's utility with attack becomes $U_l^A = z_k^0 - \beta_1^A$ if its type is θ_1^A and $U_l^A = z_k^0 - \beta_2^A$ otherwise. The attacker will then choose to attack only with type θ_1^A if $\beta_1^A \leq z_k^0 - z_k^1 \leq \beta_2^A$. $\square$

Note that in the cases specified in Proposition 9, the belief of the defender after it observes the attacker's actions becomes $\mu_k^{A,1} = 1$ if the attacker attacks and $\mu_k^{A,2} = 1$ if not.

Proposition 10. In the game under Case 2b, for $n = 2$, pooling equilibrium exists in the following conditions:

- Suppose $\tilde{z}_k \leq \beta^D$. Attacking is optimal for both types if $\beta_2^A < \beta^D$ and not optimal for both types if $\beta_1^A > \beta^D$. The optimal strategy for the defender is not to use strong signals for both types of the attacker.
- Suppose $\tilde{z}_k > \beta^D$. Attacking is optimal for both types if $\beta_1^A > \tilde{z}_k$ and not optimal for both types if $\beta_2^A < \tilde{z}_k$. The optimal strategy for the defender is to use strong signals for both types of the attacker.

In both cases, the defender's prior beliefs $\mu_k^{D,1}, \mu_k^{D,2}$ do not change, i.e., $\mu_k^D(\theta_1^D | \mathcal{E}_k^A) = \mu_k^{D,1}, \mu_k^D(\theta_2^D | \mathcal{E}_k^A) = \mu_k^{D,2}$.

Proof. Again, the defender only uses strong signals if $z_k^0 - z_k^1 > \beta^D$. In this case, similar to the proof of Proposition 9, the attacker's utility with attack becomes $U_l^A = z_k^1 - \beta_1^A + \beta^D$ if its type is θ_1^A and $U_l^A = z_k^1 - \beta_2^A + \beta^D$ otherwise. Since it is known that $\beta_1^A < \beta_2^A$, given $U_l^A = z_k^1$ without attack, the attacker will not attack for both types if $\beta_1^A > \beta^D$ and will attack if $\beta_1^A < \beta^D$.

Similarly, for the case of only weak signals, since by attacking $U_l^A = z_k^0 - \beta_1^A$ with θ_1^A type and $U_l^A = z_k^0 - \beta_2^A$ with θ_2^A type, the attacker will not attack for both types if $\beta_1^A > z_k^0 - z_k^1$ and will attack for both types if $\beta_2^A < z_k^0 - z_k^1$. This completes the proof. $\square$

The equilibria characterized in Propositions 9 and 10 cover all possible cases of the players' possible strategies.

4.3 Effect of PBE on Consensus

We then examine how the actions of strategic players resulting from PBE affect the agents' dynamics. We note from Lemma 7 that the defender does not waste any of its resource by communicating weakly when there is no attack. However, as stated in the results above, there are cases where the defender will not use strong signals if the cost is too large, relative to the agent states. As a consequence, there is a case where consensus will not be

achieved, especially in a signaling game setting, where the defender's knowledge is more limited.

The next theorem characterizes agent consensus for the screening game setting explained in Section 4.1.

Theorem 11. In the game under Case 2a discussed in Section 4.1, sufficient conditions to prevent consensus are $\beta^A \leq \rho^A$ and $\beta^A < \tilde{z}_0 < \beta_1^D$.

Proof. From Proposition 8, we can see that defender does not use strong signals if $z_k^0 - z_k^1 < \beta^D$. Additionally, as long as it has enough energy, the attacker attacks if $z_k^0 - z_k^1 > \beta^A$. Thus, with $\rho^A \geq \beta_2^A$, the attacker is able to prevent consensus. $\square$

We further characterize agent consensus for the screening game setting explained in Section 4.2.

Theorem 12. In the game under Case 2b, sufficient conditions for the attacker to prevent consensus are $\beta^A \leq \rho^A$, $\beta^A < \beta^D$, and $\tilde{z}_0 \leq \beta^D$.

Proof. From Proposition 10, it is understood that the defender does not use strong signals if $z_k^0 - z_k^1 \leq \beta^D$. Additionally, the attacker attacks if $\beta^A \leq \beta_2^A < \beta^D$. Thus, given that $\rho^A \geq \beta_2^A \geq \beta^A$, the attacker can attack for infinite steps (including at time $k = 0$ since $\kappa^A \geq \rho^A$), preventing consensus. $\square$

From the conditions of Theorems 11 and 12, we can deduce that it is easier for the attacker to prevent consensus in signaling games since the conditions in Proposition 12 are looser for the attacker. We will see through simulations if this is also the case for a more general network with $n > 2$.

5. NUMERICAL EXAMPLES

In this section, we provide numerical examples with $n > 2$ to complement the results in the previous sections, especially in consensus of agents under screening and signaling games settings. Specifically, in this section we consider a path graph 1-2-3-4-5-6 with $n = 6$ and parameters $\kappa^A = 2$, $\kappa^D = 1.6$, $\rho^A = 0.2$, and $\rho^D = 0, 1$. The real costs of the players are $\beta^A = 0.1$ and $\beta^D = 1$.

5.1 Agents' Dynamics in Screening Games

First, we consider a screening game where the attacker does not know the exact value of the defender's cost β^D , with the defender's possible type $\Theta^D = \{0.5, 1\}$. Fig. 3 shows the evolution of the agent states $x[k]$ over time, whereas Fig. 4 illustrates the changes of the attacker's belief $\mu_k^{A,1}$, the defender's estimated cost $\tilde{\beta}_k^D$, and the number of edges used with strong signals $|\mathcal{E}_k^D|$ over time.

From Figs. 3 and 4, we observe that the attacker's belief of the defender's type being β_1^D is getting closer to zero (and the estimated cost is closer to 1) every time the defender recovers (shown with increasing $|\mathcal{E}_k^D|$). On the other hand, the attacker's belief $\mu_k^{A,1}$ slowly increases when the defender does not use strong signals. In this setting, the agent states keep getting closer despite $\rho^A > \beta^A$.

5.2 Agents' Dynamics in Signaling Games

We next consider a signaling game setting where the defender observes the attacker's action at the same time

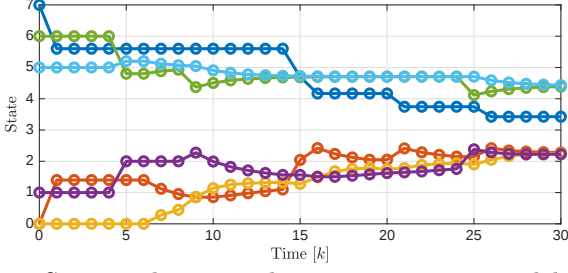


Fig. 3. State evolution in the screening game model

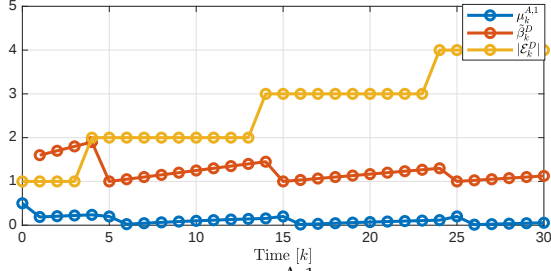


Fig. 4. The attacker's belief $\mu_k^{A,1}$, the defender's estimated cost β_k^D , and number of edges used with strong signals $|E_k^D|$ in the screening games

step but does not know the attacker's type as discussed in Section 4, with $\Theta^A = \{0.1, 1\}$. Figs. 5 and 6 show the evolution of agent states over time and the changes of $\mu_k^{D,1}$ and $\tilde{\beta}_k^A$, respectively.

From the two figures, we notice that the agent states $x_i[k]$ are further from each other compared to the screening game case despite using the same parameters. This is inline with the statement in Section 4 where it is easier for the attacker to prevent consensus in the signaling game setting. The players arrive at a pooling equilibrium only for time $k = 0$ and then quickly change to a separating equilibrium at $k = 1$. The defender's belief $\mu_1^{D,1} = 1$ implying that it is sure that the attacker has a low cost $\beta^A = 0.1$ as soon as the predicted cost $\tilde{\beta}_k^A$ falls below β_2^A , as defined in (13).

6. CONCLUSION

In this paper, we have discussed a two-player game-theoretical model of agents' communication in networks with consensus protocol under jamming attacks where players possess incomplete information of their opponents. Several game models and structures have been considered, including imperfect and perfect players' knowledge of their opponents' actions. The equilibrium of each model as well as its impact on the agents' consensus have been discussed, where the attacker is more likely to prevent consensus with complete knowledge of the opponent.

REFERENCES

Bullo, F. (2019). *Lectures on Network Systems*. Kindle Direct Publishing.
 Castiglioni, M., Celli, A., Marchesi, A., and Gatti, N. (2021). Signaling in Bayesian network congestion games: the subtle power of symmetry. In *Proc. AAAI Conference on Artificial Intelligence*, 5252–5259.

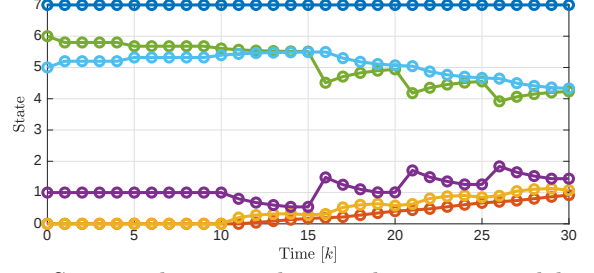


Fig. 5. State evolution in the signaling game model

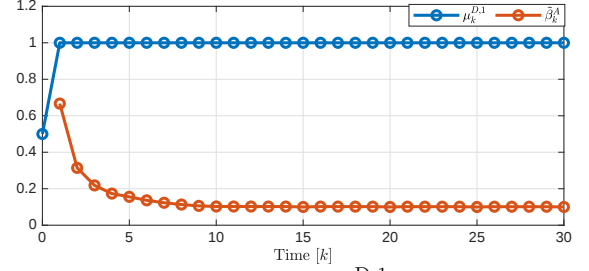


Fig. 6. The defender's belief $\mu_k^{D,1}$ and the attacker's estimated cost $\tilde{\beta}_k^A$ in the signaling games

Cetinkaya, A., Ishii, H., and Hayakawa, T. (2017). Networked control under random and malicious packet losses. *IEEE Trans. Autom. Contr.*, 62, 2434–2449.
 Cho, I. and Kreps, D.M. (1987). Signaling games and stable equilibria. *The Quarterly Journal of Economics*, 102, 179–222.
 Eksin, C., Molavi, P., Ribeiro, A., and A. Jadbabaie, A. (2014). Bayesian quadratic network game filters. *IEEE Trans. Signal Process.*, 62(9), 2250–2264.
 Kübler, D., Müller, W., and Normann, H.T. (2008). Job-market signaling and screening: An experimental comparison. *Games and Economic Behavior*, 64, 219–236.
 Li, Y., Quevedo, D.E., Dey, S., and Shi, L. (2017). SINR-based DoS attack on remote state estimation: A game-theoretic approach. *IEEE Trans. Control Netw. Syst.*, 4, 632–642.
 Nugraha, Y., Cetinkaya, A., Hayakawa, T., Ishii, H., and Zhu, Q. (2021). Dynamic resilient network games with applications to multiagent consensus. *IEEE Trans. Control Netw. Syst.*, 8, 246–259.
 Nugraha, Y., Cetinkaya, A., Hayakawa, T., Ishii, H., and Zhu, Q. (2022). Rolling horizon games of resilient networks with non-uniform horizons. *European Journal of Control*, 68, 100693.
 Osborne, M.J. (2004). *An Introduction to Game Theory*. Oxford University Press.
 Sasahara, H. and Sandberg, H. (2021). Epistemic signaling games for cyber deception with asymmetric recognition. *IEEE Contr. Syst. Lett.*, 6, 854 – 859.
 Senejohnny, D., Tesi, P., and De Persis, C. (2018). A jamming resilient algorithm for self-triggered network coordination. *IEEE Trans. Control Netw. Syst.*, 5, 981–990.
 Umsonst, D., Sarıtaş, S., Dán, G., and Sandberg, H. (2021). A Bayesian Nash equilibrium-based moving target defense against stealthy sensor attacks. ArXiv:2111.06682.

Vasal, D., Sinha, A., and Anastasopoulos, A. (2019).
A systematic process for evaluating structured perfect
Bayesian equilibria in dynamic games with asymmetric
information. *IEEE Trans. Autom. Control*, 64(1), 81–
96.