

Double-Conjugation Law in Geometrical Coherent Imaging. Application to Gaussian Beams

Pierre Pellat-Finet

Univ Bretagne Sud, CNRS UMR 6205, LMBA, F-56000 Vannes, France

Abstract. A centred system forms the coherent image of the optical field on a spherical cap, taken as an object, on another spherical cap, whose vertex and curvature center are the respective paraxial images of the vertex and center of the object cap. That “double-conjugation” law, usually obtained in the framework of a scalar theory of diffraction, is deduced from concepts of geometrical optics. A magnification law between radii of conjugate spherical-caps extends the notion of longitudinal magnification to finite distances, and generalizes the longitudinal Lagrange–Helmholtz formula. Applying the double-conjugation law to imaging Gaussian beams shows that those beams perfectly obey geometrical optics laws.

Keywords: Coherent imaging, Double conjugation, Gaussian beam, Lagrange–Helmholtz formula, Metaxial optics.

Content

1. Introduction	1
2. The laws of coherent imaging	2
3. Interpreting the radius-magnification law	12
4. Application to Gaussian beams	14
5. Conclusion	18
References	18

1 Introduction

1.1 Necessity of regarding imaging from the view of coherent optics

A great part of geometrical optics deals with image formation by centred systems. Paraxial geometrical optics, or Gaussian optics, constitutes a first-order approximation of image formation: angles of light rays with the optical axis of a centered system and transverse dimensions of objects and images are small enough that in actual calculations we may replace, for example, $\sin \alpha$ and $\tan \alpha$ by α , $\cos \alpha$ by 1, etc. The considered objects and their images generally lie in planes, orthogonal to the optical axis. Expansions to higher orders are necessary to deal with geometrical aberrations: they are at least of 3rd order [1, 2].

Moreover, geometrical optics essentially deals with incoherent objects and is therefore only interested in the irradiance of an image and not in the corresponding optical-field amplitude. An irradiance is a quadratic magnitude, proportional to the square modulus of the optical-field

Laboratoire de Mathématiques de Bretagne Atlantique UMR CNRS 6205,
Université de Bretagne Sud, CS 60573, 56017 Vannes, France.
pierre.pellat-finet@univ-ubs.fr

amplitude: thus, irradiances on a spherical cap and on the plane tangent to the sphere at its vertex are equal, since the field amplitudes on each surface differ by a quadratic phase factor. In other words, and as long as we are not concerned with geometrical aberrations, phases of optical fields, which do not appear in irradiances, have not to be taken into account in paraxial geometrical optics. Approximating object surfaces by planes is consistent with neglecting phase differences due to surface profiles.

Since the advent of lasers in 1960, however, coherent optics has taken on new importance. Some applications require controlling phases on images. For example in optical signal processing (VanderLugt filters and correlators [3–5]) field amplitudes are projected on planar holograms—used as filters—and their phases must exactly match phases engraved in those holograms. Given that an image is a copy of the considered object, the issue arises under what conditions the phase on the object is preserved in the imaging. It is necessary then to study the image of an object both in amplitude and phase, that is, to study the coherent image of a given object. We will show that the coherent image of a planar object generally lies on a spherical cap. This is why we shall use spherical caps, more general than planar objects and images (planes will be regarded as spheres with infinite curvature radii). Since the phase difference between the field on a spherical cap and the field on a tangent plane is a quadratic phase factor, a first-order approximation is not enough to deal with coherent images; we have then to develop a second-order approximation of the field amplitude and of its transfer through a lens, that is, a “metaxial approximation” [5–7].

The issue of coherent imaging is usually analyzed in the framework of a scalar theory of diffraction [5–8]. In the present article we establish the “double-conjugation law” of coherent imaging, and some of related results, within the framework of geometrical optics, without recourse to the theory of diffraction (nor to physical optics). The developed theory is purely geometrical in the sense that limited apertures of optical systems are not taken into account (i.e. diffraction by pupils are not taken into account). We eventually apply the previous law to Gaussian beams and show that imaging them through objective lenses can adequately be managed in the framework of geometrical optics.

1.2 Coherent object, coherent image

A luminous object is coherent if the vibrations emitted by all its various points have between themselves permanent phase relationships over time. That is spatial coherence.

In the following, for reasons given in Section 1.1, objects and images are spherical caps having in general an axial symmetry around the optical axis of the centered system under study (planes are included, as mentioned above). As always in optics, such spherical caps may be real or virtual. Lightwaves are assumed to be quasi-monochromatic (wavelength λ).

The coherent image of a coherent object is a homothetic copy of the object in amplitude and phase. The scale ratio will be shown to be the lateral magnification, as defined in paraxial optics. This means that we have a coherent image of an object if:

- The amplitude of the field at a point of the image is equal to the amplitude of the field at the corresponding object-point.
- The phase difference between vibrations at two points of the image is equal to the phase difference between vibrations at the corresponding points of the object (“preservation” of the phase in imaging).

Coherent imaging between an object and its image will be expressed by Eq. (34).

2 The laws of coherent imaging

2.1 Paraxial formulae

We recall some usual formulae of paraxial geometrical optics. We adopt the convention that algebraic measures are positive if taken in the sense of light propagation. The rule also holds

for mirrors, which means that the positive sense is not the same before and after reflection; the advantage of doing this way is that the following formulae hold true for dioptric as well as for katoptric systems.

Newton's conjugation formula for a centered system with foci F (object focus) and F' (image focus) is

$$z z' = f f', \quad (1)$$

where f is the object focal-length, f' the image focal-length, and $z = \overline{FA}$, $z' = \overline{F'A'}$, point A being on the optical axis and A' being its paraxial image (also on the optical axis). Points A and A' are conjugates. We have $f'/n' = -f/n$, where n is the refractive index of the object space, and n' of the image space.

If \overline{AB} is a transverse object and $\overline{A'B'}$ its paraxial image, the lateral magnification for that conjugation is defined by

$$m = \frac{\overline{A'B'}}{\overline{AB}}, \quad (2)$$

and if A and A' are on the optical axis, then (z and z' are defined above)

$$m = -\frac{f}{z} = -\frac{z'}{f'}. \quad (3)$$

If H and H' are the principal points of the system (on the optical axis), we denote $p = \overline{HA}$ and $p' = \overline{H'A'}$, and the Descartes's conjugation formula (with origin at principal points) is

$$\frac{n'}{p'} = \frac{n}{p} + \frac{n'}{f'}, \quad (4)$$

the lateral magnification m (defined above) being such that

$$m = \frac{np'}{n'p}. \quad (5)$$

For a refracting spherical surface (or spherical cap) whose vertex is V , center is C and curvature radius is $R = \overline{VC}$, we have $f' = n'R/(n' - n)$, so that the Descartes's formula becomes

$$\frac{n'}{p'} = \frac{n}{p} + \frac{n' - n}{R}, \quad (6)$$

where $p = \overline{VA}$ and $p' = \overline{VA'}$ (because $H \equiv V \equiv H'$).

2.2 Phase difference between two tangent spherical caps

Consider a spherical object, in fact a spherical cap \mathcal{A} with vertex V and center of curvature C (Fig. 1). The radius of the sphere is $R = \overline{VC}$. Let \mathcal{T} be the plane tangent to the sphere at V . The object is assumed to be coherent.

If P is a point of the sphere and p its projection on \mathcal{T} , and if we relate the plane \mathcal{T} to axes Vx and Vy (Fig. 1), the coordinates x_p and y_p of p in \mathcal{T} can serve as coordinates of P on the sphere \mathcal{A} . (There is no ambiguity in defining a point P of the spherical cap \mathcal{A} by x_p and y_p , as long as \mathcal{A} is less than a half-sphere.) If $U_A(P)$ denotes the amplitude of the optical field on \mathcal{A} at point P , and $U_T(p)$ the amplitude on \mathcal{T} at point p , then, up to second order in x_p and y_p ,

$$U_A(P) = U_A(x_p, y_p) = U_T(x_p, y_p) \exp \left[-\frac{i\pi}{\lambda R} (x_p^2 + y_p^2) \right]. \quad (7)$$

Thereafter we will write no more subscripts and will denote x and y the coordinates of a point on the spherical cap \mathcal{A} .

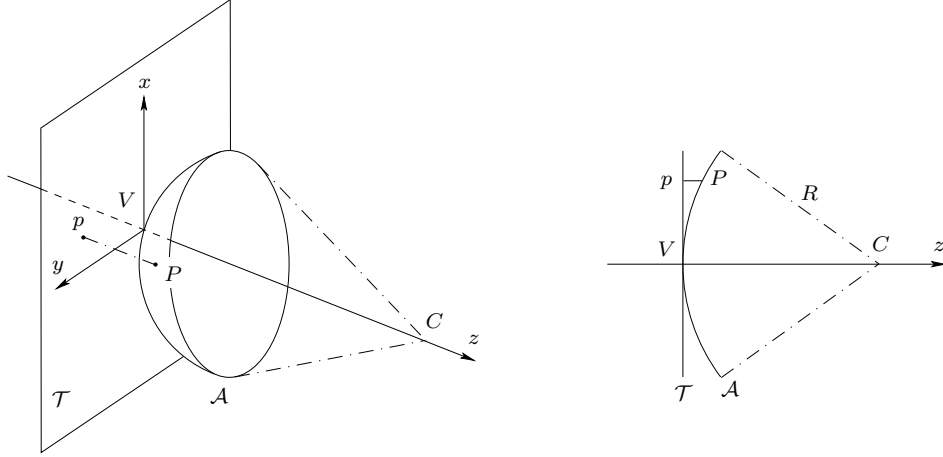


Figure 1: Coordinates x and y of p in the plane \mathcal{T} are also those of P on the spherical cap \mathcal{A} .

Now consider two spherical caps \mathcal{A} and \mathcal{B} tangent at their common vertex V , with respective radii of curvature R_A and R_B (Fig. 2). By considering the tangent plane common to the two spheres as intermediate, we deduce from Eq. (7)

$$U_B(x, y) = U_A(x, y) \exp \left[-\frac{i\pi}{\lambda} \left(\frac{1}{R_B} - \frac{1}{R_A} \right) (x^2 + y^2) \right]. \quad (8)$$

Equation (8) shows that there is a quadratic phase-difference between the amplitudes of the fields on two tangent spheres, or even between the amplitudes of the fields on a plane and on a sphere. If we are dealing with coherent imaging, i.e. if we wish to obtain an image in amplitude and phase, it is necessary to distinguish the field amplitude on a spherical cap from that on the tangent plane at vertex, as already mentioned.

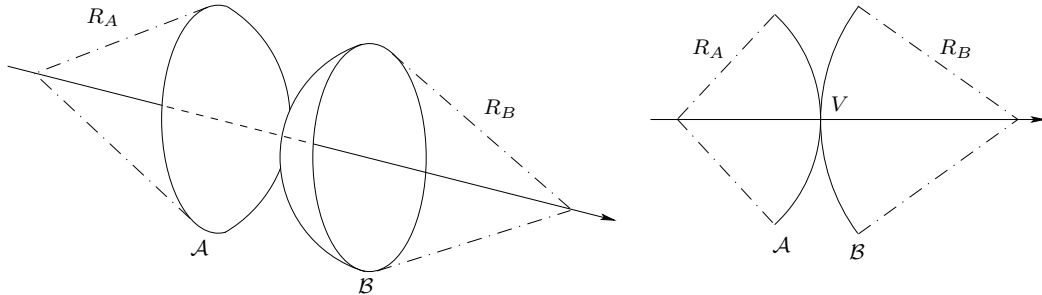


Figure 2: Field amplitudes on the tangent spherical caps \mathcal{A} and \mathcal{B} differ by a quadratic phase factor (up to second order), see Eq. (8).

2.3 Imaging a spherical cap concentric to a refracting spherical cap

We consider a refracting spherical cap \mathcal{D} with vertex V and curvature center C (radius $R = \overline{VC}$), separating two isotropic and homogeneous media with respective indices n (object space) and n' (image space).

The analysis is carried out in the conditions of approximate stigmatism. Let A be a point on the axis of \mathcal{D} : its paraxial image is A' , whose position is given, on the axis, by the conjugation formula of the refracting spherical cap, see Eq. (6).

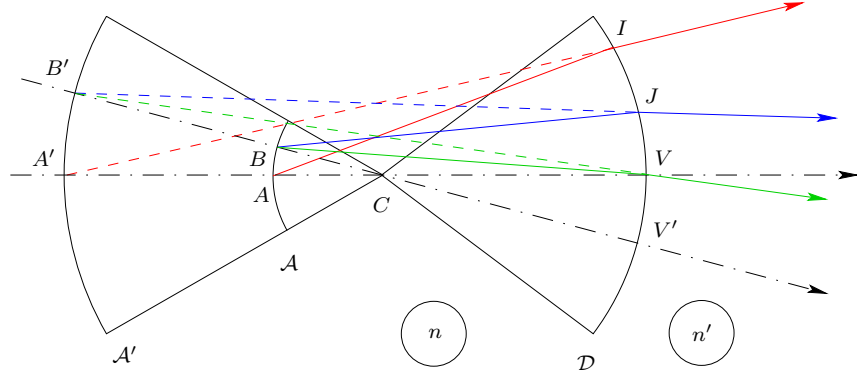


Figure 3: Imaging a spherical cap \mathcal{A} , concentric to the refracting spherical cap \mathcal{D} . If points A and A' are conjugates, points B and B' , deduced from A and A' by rotation around C , the center of curvature of \mathcal{D} , also are conjugates, and the optical paths $[AIA']$ and $[BJB']$ are equal. Here \mathcal{A} is a real object and \mathcal{A}' a virtual image.

Let us rotate the figure around C (Figs. 3 and 4). The vertex of \mathcal{D} comes in V' , point A in B and point A' in B' . The sphere \mathcal{D} being globally invariant in the rotation, the point B' is the image of B by \mathcal{D} . Let I be a point on \mathcal{D} , which comes in J in the rotation: the optical path $[AIA']$ (which contains a virtual part, if drawn as in Fig. 3) is transformed into $[BJB']$, and we have $[BJB'] = [AIA']$. According to Fermat's principle [1], the optical path $[AIA']$ is constant up to second order, whatever the ray issued from A , i.e. whatever point I on \mathcal{D} (approximate stigmatism). The same result holds for $[BJB']$, whatever point J on \mathcal{D} , because B' is the image of B . It follows that the phase difference between vibrations at A' and B' is equal to the phase difference between vibrations at A and B .

The spherical cap \mathcal{A} passing through A and centered at C contains point B , and point B' belongs to the sphere \mathcal{A}' passing through A' and centered at C . The mapping: $B \mapsto B'$ is a homothety between \mathcal{A} and \mathcal{A}' . Moreover, for every B_1 and every B_2 belonging to \mathcal{A} , their images B'_1 and B'_2 belong to \mathcal{A}' , and the phase difference between vibrations at B'_1 and B'_2 is equal to the phase difference between vibrations at B_1 and B_2 (because the phase difference between B'_j and A' is equal to the phase difference between B_j and A). This means that \mathcal{A}' is the coherent image of \mathcal{A} , and field amplitudes U_A and $U_{A'}$ are homothetic

$$U_{A'}(x', y') = \frac{1}{K} U_A\left(\frac{x'}{K}, \frac{y'}{K}\right), \quad (9)$$

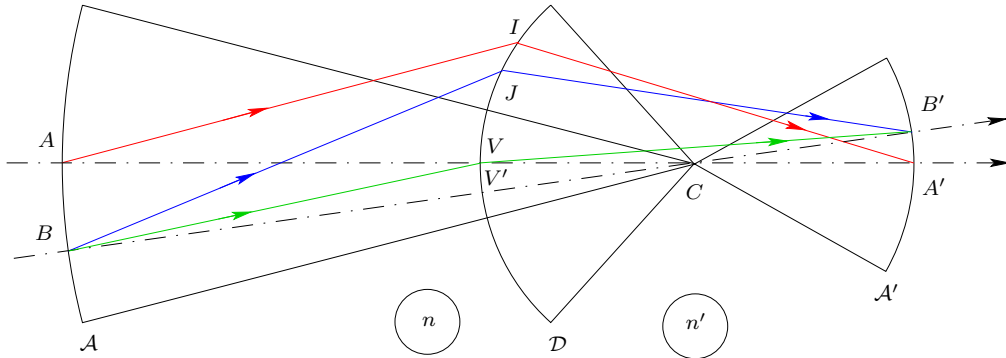


Figure 4: Same situation as in Fig. 3, but for a real object \mathcal{A} and a real image \mathcal{A}' .

where K is the scale factor. The factor $1/K$ in front of U_A expresses the conservation of energy (or power): indeed, we must have

$$\int_{\mathcal{A}'} |U_{A'}(x', y')|^2 dx' dy' = \int_{\mathcal{A}} |U_A(x, y)|^2 dx dy. \quad (10)$$

Since \mathcal{A} and \mathcal{A}' are homothetic, the scale factor K such that

$$K = \frac{R_{A'}}{R_A}, \quad (11)$$

where R_A is the radius of \mathcal{A} , and $R_{A'}$ the radius of \mathcal{A}' ($R_A = \overline{AC}$ and $R_{A'} = \overline{A'C'}$, in Figs. 3 and 4). The ray BV (drawn in green in Figs. 3 and 4) is refracted in ray VB' (or $B'V$). We denote $p = \overline{VA}$ and $p' = \overline{VA'}$, so that Snell's law at V , approximated to first order (Kepler's law [1]), leads to

$$K = \frac{n p'}{n' p}. \quad (12)$$

that is, to $K = m$, according to Eq. (5). The scale factor between the two homothetic caps \mathcal{A} and \mathcal{A}' is equal to the lateral magnification for the conjugation of A and A' .

Equation (9) then becomes

$$U_{A'}(x', y') = \frac{1}{m} U_A\left(\frac{x'}{m}, \frac{y'}{m}\right). \quad (13)$$

Fresnel transmission coefficients of the refracting surface are not taken into account. Introducing them does not change imaging laws. In Eq. (9) we omit a phase factor of the form $\exp(-2i\pi\nu\tau)$, where τ denotes the time for light to travel from A to A' (ν denotes lightwave frequency). This factor is common for all points of \mathcal{A} and their images and does not affect coherent imaging.

Remark. The above is developed within the framework of approximate stigmatism. However, if A and A' are the Weierstrass (or Young) points of the refracting spherical cap \mathcal{D} , for which there is rigorous stigmatism, there is still rigorous stigmatism for points B and B' , deduced from A and A' by rotation around the center of \mathcal{D} (Figs. 3 and 4). Finally, there is rigorous stigmatism between every point of the spherical cap \mathcal{A} and its image on \mathcal{A}' . It is a case of rigorous stigmatism between spheres. This somehow generalizes the aplanatism condition of classical geometrical optics (Weierstrass points are aplanatic).

2.4 Imaging an arbitrary spherical cap

We consider a spherical cap \mathcal{A} , concentric to \mathcal{D} , and its coherent image \mathcal{A}' as in Section 2.3. We then consider a spherical cap \mathcal{B} tangent to \mathcal{A} and centred at C_B (radius $R_B = \overline{AC_B}$), see Fig. 5. We denote U_B the field amplitude on \mathcal{B} . We have

$$U_A(x, y) = U_B(x, y) \exp\left[-\frac{i\pi}{\lambda} \left(\frac{1}{R_A} - \frac{1}{R_B}\right) (x^2 + y^2)\right]. \quad (14)$$

The field amplitude on \mathcal{A}' is given by Eq. (9).

Let \mathcal{B}' be a spherical cap tangent to \mathcal{A}' and centred at $C_{B'}$ (radius $R_{B'}$). Since \mathcal{B}' lies in the image space, the field amplitude on \mathcal{B}' is written

$$\begin{aligned} U_{B'}(x', y') &= U_{A'}(x', y') \exp\left[-\frac{i\pi}{\lambda'} \left(\frac{1}{R_{B'}} - \frac{1}{R_{A'}}\right) (x'^2 + y'^2)\right] \\ &= \frac{1}{m} U_B\left(\frac{x'}{m}, \frac{y'}{m}\right) \exp\left[-\frac{i\pi}{\lambda} \left(\frac{1}{R_A} - \frac{1}{R_B}\right) \left(\frac{x'^2 + y'^2}{m^2}\right)\right] \\ &\quad \times \exp\left[-\frac{i\pi}{\lambda'} \left(\frac{1}{R_{B'}} - \frac{1}{R_{A'}}\right) (x'^2 + y'^2)\right], \end{aligned} \quad (15)$$

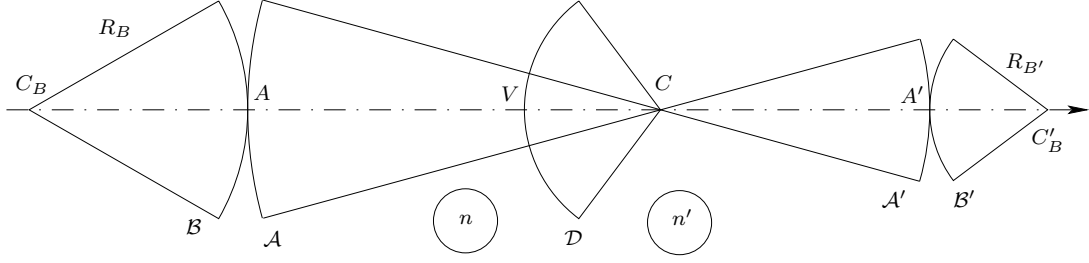


Figure 5: Imaging a spherical cap \mathcal{B} , not concentric to \mathcal{D} .

where λ' is the wavelength in the image space ($n'\lambda' = n\lambda$).

The field on \mathcal{B}' is the coherent image of the field on \mathcal{B} if, and only if, the arguments of the two exponentials are opposite for every x' and y' , that is, if, and only if,

$$\frac{1}{m^2\lambda} \left(\frac{1}{R_A} - \frac{1}{R_B} \right) = \frac{1}{\lambda'} \left(\frac{1}{R_{A'}} - \frac{1}{R_{B'}} \right). \quad (16)$$

We denote $q = \overline{VC_B}$ and $q' = \overline{VC_{B'}}$. (We still denote $p = \overline{VA}$ and $p' = \overline{VA'}$.) Then

$$R_B = \overline{AC_B} = q - p, \quad R_{B'} = \overline{A'C_{B'}} = q' - p'. \quad (17)$$

We also have (R is the curvature radius of \mathcal{D})

$$R_A = \overline{AC} = R - p, \quad R_{A'} = \overline{A'C} = R - p', \quad (18)$$

and since $n\lambda = n'\lambda'$, and taking Eq. (5) into account, we write Eq. (16) in the form

$$\frac{p^2}{n} \left(\frac{1}{R-p} - \frac{1}{q-p} \right) = \frac{p'^2}{n'} \left(\frac{1}{R-p'} - \frac{1}{q'-p'} \right), \quad (19)$$

that is

$$\frac{p^2}{n} \frac{q-R}{(R-p)(q-p)} = \frac{p'^2}{n'} \frac{q'-R}{(R-p')(q'-p')}. \quad (20)$$

Equations (11) and (12) give

$$\frac{np'}{n'p} = \frac{R_{A'}}{R_A} = \frac{R-p'}{R-p}, \quad (21)$$

from which we deduce

$$\frac{p}{n(R-p)} = \frac{p'}{n'(R-p')}, \quad (22)$$

so that Eq. (20) becomes

$$\frac{p(q-R)}{q-p} = \frac{p'(q'-R)}{q'-p'}. \quad (23)$$

We divide the numerator and the denominator of the left side of Eq. (23) by pq , and those of the right side by $p'q'$, and we divide both numerators by R : we obtain

$$\frac{\frac{1}{R} - \frac{1}{q}}{\frac{1}{p} - \frac{1}{q}} = \frac{\frac{1}{R} - \frac{1}{q'}}{\frac{1}{p'} - \frac{1}{q'}}, \quad (24)$$

which can also be written

$$\frac{\frac{n}{R} - \frac{n}{q}}{\frac{n}{p} - \frac{n}{q}} = \frac{\frac{n'}{R} - \frac{n'}{q'}}{\frac{n'}{p'} - \frac{n'}{q'}}. \quad (25)$$

We eventually subtract the denominators from the numerators to obtain

$$\frac{\frac{n}{R} - \frac{n}{p}}{\frac{n}{p} - \frac{n}{q}} = \frac{\frac{n'}{R} - \frac{n'}{p'}}{\frac{n'}{p'} - \frac{n'}{q'}}. \quad (26)$$

According to the conjugation formula (6), the numerators in Eq. (26) are equal to each other and necessarily the denominators must be equal to each other, that is

$$\frac{n}{p} - \frac{n}{q} = \frac{n'}{p'} - \frac{n'}{q'}. \quad (27)$$

Then

$$\frac{n'}{q'} - \frac{n}{q} = \frac{n'}{p'} - \frac{n}{p} = \frac{n' - n}{R}, \quad (28)$$

that is

$$\frac{n'}{q'} = \frac{n}{q} + \frac{n' - n}{R}. \quad (29)$$

Equation (29) is no more than Eq. (6) applied to curvature centers C_B and $C_{B'}$ of \mathcal{B} and \mathcal{B}' (that is, changing p into q and p' into q'): it means that C_B and $C_{B'}$ are conjugates.

We conclude: the field on \mathcal{B}' is the coherent image of the field on \mathcal{B} if, and only if, the curvature center of \mathcal{B}' is the (paraxial) image of the curvature center of \mathcal{B} .

Let us express the previous result in a general form, that is, considering \mathcal{B} first. Thus, let \mathcal{B} be an arbitrary spherical cap, with vertex V_B and center of curvature C_B . To find the coherent image of the field on this sphere, we introduce the sphere \mathcal{A} tangent to \mathcal{B} (it therefore passes through V_B) and centered at the center of curvature of \mathcal{D} . The coherent image of \mathcal{A} is the spherical cap \mathcal{A}' passing through $V_{B'}$, the paraxial image of V_B , and concentric to \mathcal{D} . The previous reasoning then shows that the coherent image of \mathcal{B} is the sphere \mathcal{B}' tangent to \mathcal{A}' (it passes through $V_{B'}$) and centered at $C_{B'}$, the paraxial image of C_B .

If m denotes the lateral magnification between vertices V_B and $V_{B'}$, the field amplitudes on \mathcal{B}' and \mathcal{B} are related by the following equation

$$U_{B'}(x', y') = \frac{1}{m} U_B\left(\frac{x'}{m}, \frac{y'}{m}\right), \quad (30)$$

up to a constant phase factor that depends on the propagation time from V_B to $V_{B'}$. (Equation (30) is Eq. (15) in which quadratic phase factors cancel, since C_B and $C_{B'}$ are conjugates.)

Proposition (Double conjugation for a refracting spherical-cap). *A refracting spherical-cap forms the coherent image of a spherical object on the spherical cap whose vertex and center of curvature are the respective paraxial images of the vertex and curvature center of the object spherical-cap.*

2.5 Radius-magnification formula for a refracting spherical-cap

We first adapt notations. In the imaging of a spherical cap, we denote m_v the lateral magnification at vertices (it is the previous parameter m). And we denote m_c the lateral magnification at centers of curvature (which are conjugates). If p and p' are the algebraic measures of the vertices, with origin at the vertex of \mathcal{D} , and if q and q' are the algebraic measures of the centers of curvature, according to the laws of paraxial optics we have

$$m_v = \frac{np'}{n'p}, \quad \text{and} \quad m_c = \frac{nq'}{n'q}. \quad (31)$$

If R_B denotes the radius of the object spherical-cap and $R_{B'}$ that of the image cap, the radius magnification is defined by

$$m_r = \frac{R_{B'}}{R_B}. \quad (32)$$

We use Eq. (27) to write

$$m_r = \frac{R_{B'}}{R_B} = \frac{q' - p'}{q - p} = \frac{np'q'}{n'pq} = \frac{n'}{n} m_v m_c. \quad (33)$$

Equation (33) is the formula of radius magnification for a refracting spherical-cap.

2.6 Coherent imaging by a centered system

We note first that the method used to deal with coherent imaging through a refracting spherical-cap can be directly transposed to imaging by a spherical mirror.

A centered system being a sequence of refracting spheres or spherical mirrors, the property of double conjugation being in a way a “transfer” relation, it should be clear that this property remains valid for every centered system: every refracting spherical-cap (or mirror) composing the system images an intermediate coherent-object in accordance with the double-conjugation law. Thus every spherical cap \mathcal{A} in the object space has a first image \mathcal{A}_1 through the first refracting surface (or mirror) of the centered system, the vertex and the center of curvature of \mathcal{A}_1 being the paraxial images of the vertex and the center of curvature of \mathcal{A} . The second refracting surface images \mathcal{A}_1 into a sphere \mathcal{A}_2 whose vertex and center are the paraxial images of the vertex and the center of curvature of \mathcal{A}_1 , and which are also the paraxial images of the vertex and the center of curvature of \mathcal{A} through the subsystem made up of the first two refracting surfaces (or mirrors). And so on. The result is expressed by the following theorem.

Theorem 1 (Double conjugation for coherent imaging by a centered system). *A centred system forms the coherent image of a spherical cap \mathcal{A} on the spherical cap \mathcal{A}' , whose vertex is the paraxial image of the vertex of \mathcal{A} , and whose center is the paraxial image of the center of \mathcal{A} . If m_v denotes the lateral magnification for the vertex conjugation, the field amplitudes on \mathcal{A} and \mathcal{A}' are linked by*

$$U_{\mathcal{A}'}(x', y') = \frac{1}{m_v} U_{\mathcal{A}} \left(\frac{x'}{m_v}, \frac{y'}{m_v} \right), \quad (34)$$

up to a constant phase factor (which does not depend on x' and y').

Remark. The conjugation of vertices is no more that what is obtained by paraxial geometrical optics. But the conjugation of curvature centers is properly a condition of coherent optics. It results from preserving phases in the imaging process.

Remark. As far as we know, the conjugation of curvature centers has first be mentioned by Kogelnik in an article devoted to optical resonators [8]. The double-conjugation law is more

systematically stated by Bonnet in his articles on metaxial optics [6, 7]. In all those works the law is deduced from a scalar theory of diffraction.

We now prove the following theorem.

Theorem 2 (Bonnet's law of radius magnification). *In the coherent imaging from \mathcal{A} (radius R_A) to \mathcal{A}' (radius $R_{A'}$) by a centered system, if m_v is the lateral magnification at vertices and m_c the lateral magnification at centers of curvature, if n is the refractive index of the object space and n' that of the image space, the radius magnification, defined by $m_r = R_{A'}/R_A$, is such that*

$$m_r = \frac{n'}{n} m_v m_c. \quad (35)$$

Proof. (i) Let \mathcal{S} be a centered system and let \mathcal{D} be a refracting spherical-cap. Light is assumed to pass across \mathcal{S} first, so that \mathcal{S} and \mathcal{D} form a centered system, denoted $\mathcal{S} \cup \mathcal{D}$. The successive optical spaces are: object space (refractive index n), intermediate space (index N) and image space (index n'). Let \overline{AB} be a transverse object in the object space, with A on the optical axis. Let $\overline{A_N B_N}$ be its image by \mathcal{S} (lateral magnification m_N), and let $\overline{A' B'}$ be the image of $\overline{A_N B_N}$ by \mathcal{D} (magnification m'). Then $\overline{A' B'}$ is the image of \overline{AB} by $\mathcal{S} \cup \mathcal{D}$; the corresponding lateral magnification is m , with

$$m = \frac{\overline{A' B'}}{\overline{AB}} = \frac{\overline{A' B'}}{\overline{A_N B_N}} \cdot \frac{\overline{A_N B_N}}{\overline{AB}} = m' m_N. \quad (36)$$

(ii) We now prove Eq. (35) by induction. We note that Eq. (35) holds for a refracting spherical-cap, see Eq. (30). Let \mathcal{S} be a centered system made up of J refracting spheres ($J > 0$). Let \mathcal{A}_N (vertex V_N , center C_N , radius $R_N = \overline{V_N C_N}$) be the coherent image of \mathcal{A} (vertex V , center C , radius $R = \overline{VC}$) through \mathcal{S} : the corresponding lateral magnifications are m_{rN} at vertices and m_{cN} at centers. Let \mathcal{D} be a refracting spherical cap located after \mathcal{S} and let \mathcal{A}' be the coherent image of \mathcal{A}_N through \mathcal{D} : lateral magnifications are m'_v and m'_c .

We denote by $\mathcal{S} \cup \mathcal{D}$ the system made up of \mathcal{S} followed by \mathcal{D} . The vertex V' of \mathcal{A}' is the paraxial image of V_N through \mathcal{D} and is also the paraxial image of V through $\mathcal{S} \cup \mathcal{D}$. Similarly, the center C' of \mathcal{A}' is the paraxial image of C_N through \mathcal{D} and is also the paraxial image of C through $\mathcal{S} \cup \mathcal{D}$. We conclude that \mathcal{A}' is the coherent image of \mathcal{A} through $\mathcal{S} \cup \mathcal{D}$. Let m_r be the lateral magnification at vertices and m_c at centers. According to item (i), the magnification at vertices is

$$m_v = m'_v m_{vN}, \quad (37)$$

and that at centers is

$$m_c = m'_c m_{cN}. \quad (38)$$

We deduce

$$m_r = \frac{R_{A'}}{R_A} = \frac{R_{A'}}{R_N} \cdot \frac{R_N}{R_A} = \frac{n'}{N} m'_v m'_c \cdot \frac{N}{n} m_{vN} m_{cN} = \frac{n'}{n} m_v m_c. \quad (39)$$

If Eq. (35) holds true for a centered system made up of J successive refracting spheres, it holds for a system made up of $J + 1$ refracting spheres. Since it holds true for $J = 1$, it holds for every J . The proof is complete. The proof also holds if \mathcal{D} is a spherical mirror.

2.7 Imaging coherent plane-objects

Centered systems with foci

We consider a centred system with foci F and F' . Let \mathcal{A} be a plane object, orthogonal to the optical axis and passing through point A . Let \mathcal{A}' be the coherent image of \mathcal{A} . Where is \mathcal{A}' formed and what is its curvature radius? To answer, we apply the double conjugation-law:

- The object \mathcal{A} passes through A : its image \mathcal{A}' passes through A' , the paraxial image of A .
- The curvature center of \mathcal{A} is at infinity: the curvature center of \mathcal{A}' is at F' , which is the paraxial image of a point at infinity (on the optical axis).

If m_a denote the lateral magnification between A and A' , the field amplitude on \mathcal{A}' is

$$U_{\mathcal{A}'}(x', y') = \frac{1}{m_a} U_A \left(\frac{x'}{m_a}, \frac{y'}{m_a} \right). \quad (40)$$

We note that if \mathcal{A} is a plane, its coherent image \mathcal{A}' is properly a sphere, centered on the image focus of the centered system. It is not possible to obtain the coherent image of a plane on a plane, if the system is a centered system with foci. Hence the necessity to consider spherical caps. The result is illustrated in Fig. 6 for various planar objects.

Conversely, the image of a spherical cap centered at the object focus of a lens is a plane.

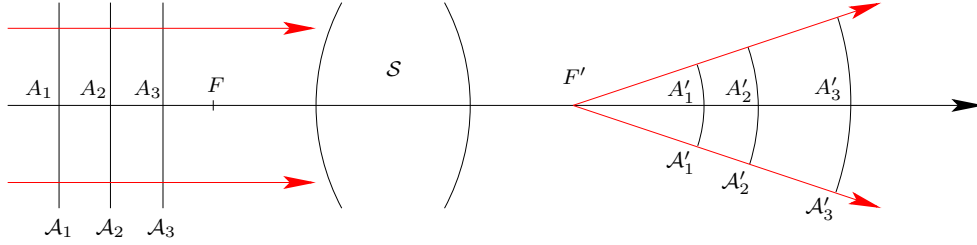


Figure 6: Coherent imaging of planar objects by a centered system S with foci (F and F'). Plane \mathcal{A}_j , whose vertex is A_j , is imaged on the spherical cap \mathcal{A}'_j passing through A'_j and centered at the image focus F' . Point A'_j is the paraxial image of A_j .

Afocal systems

Let us return to the planar object of the previous paragraph and consider that the system forming its image is afocal (which means that its foci are at infinity). The law of double conjugation thus applies as follows:

- The object \mathcal{A} passes through A : its image \mathcal{A}' passes through A' , the paraxial image of A .
- The curvature center \mathcal{A} lies at infinity: the curvature center of \mathcal{A}' also lies at infinity, since the optical system is afocal.

We conclude that the coherent image of a planar object by an afocal system is a plane. The result is illustrated in Fig. 7.

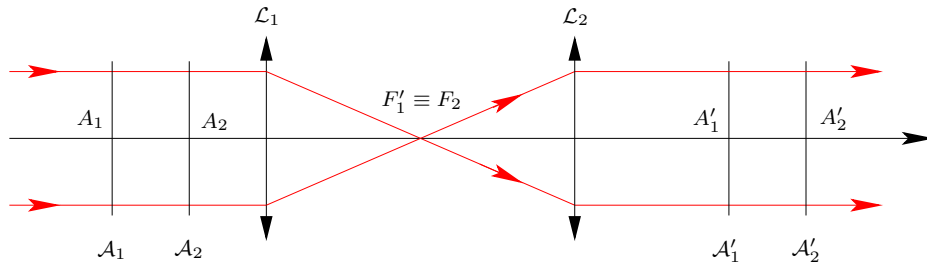


Figure 7: Coherent imaging of planar objects \mathcal{A}_1 and \mathcal{A}_2 by an afocal centered system made up of two converging lenses \mathcal{L}_1 and \mathcal{L}_2 . The image focus F'_1 of \mathcal{L}_1 coincides with F_2 , the object focus of \mathcal{L}_2 . Coherent images \mathcal{A}'_1 and \mathcal{A}'_2 are planar.

3 Interpreting the radius-magnification law

3.1 Radius magnification and longitudinal magnification

The notion of radius magnification may be regarded as a generalization of the longitudinal magnification, as used in geometrical optics, and which is as follows. An infinitesimal variation dz of point A on the optical axis results in an infinitesimal variation dz' of the conjugate A' . The longitudinal magnification at A is then defined by $m_z = dz'/dz$. From $zz' = ff'$, we deduce: $z dz' + z' dz = 0$, and then

$$m_z = \frac{dz'}{dz} = -\frac{ff'}{z^2} = -\frac{z'^2}{ff'}. \quad (41)$$

Since both dz and dz' are infinitesimal quantities, Eq. (41) makes sense only if A and A' are not too close from the foci of the optical system, because if A is close to F , a very small variation dz of z may result in a large variation of z' , and such a variation may not be written dz' .

Since $f'/n' = -f/n$, Eq. (41) can be written

$$m_z = \frac{n'}{n} \frac{z'^2}{f'^2} = \frac{n'}{n} m^2, \quad (42)$$

where m is the lateral magnification for the conjugation between A and A' , given by Eq. (3).

We now show that Eq. (42) is a limit form of the radius-magnification law of Bonnet. We consider a spherical cap \mathcal{A} (vertex A , center C , radius R_A) and its coherent image \mathcal{A}' (vertex A' , center C' , radius $R_{A'}$), formed by a centered system. We assume that the radius R_A tends to 0, that is, the center of curvature C tends to the vertex A . Then the center C' tends to A' and $R_{A'}$ tends to 0. Nevertheless the radius magnification tends to a finite value, because the lateral magnification at centers, m_c , tends to the lateral magnification at vertices, m_v . We have

$$\lim_{R_A \rightarrow 0} \frac{R_{A'}}{R_A} = \lim_{R_A \rightarrow 0} m_r = \lim_{C \rightarrow A} \frac{n'}{n} m_v m_c = \frac{n'}{n} m_v^2. \quad (43)$$

If R_A tends to 0, we write $R_A = dz$ and $R_{A'} = dz'$ and we obtain $m_z = m_v^2 n'/n$, which is Eq. (42), since the lateral magnification at vertices is also the lateral magnification for the conjugation of A and A' : $m_v = m$.

Since $R_A = \overline{AC}$ and $R_{A'} = \overline{A'C'}$, the radius magnification law appears to be a generalization of Eq. (42): it provides the longitudinal magnification for finite distances between two points on the optical axis. The law holds even if A or C are close to the object focus, or lie on both side of the focus. For example in Fig. 8, we have: $n = n'$; $f' = -f > 0$; $\overline{FA} = f$ and $\overline{FA'} = f'$; $\overline{FC} = -2f/3$, and $\overline{F'C'} = -3f'/2$; $m_v = m_a = -1$, $m_c = 3/2$, and $m_r = -3/2$, that is: $\overline{A'C'}/\overline{AC} = -3/2$. Point C' is virtual.

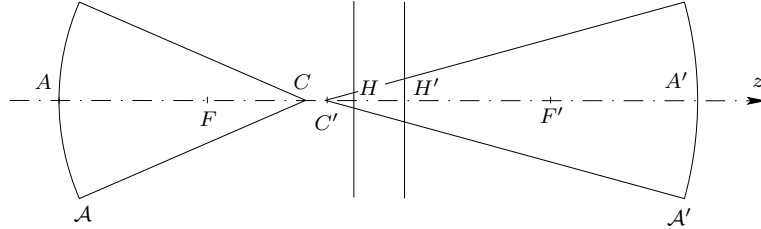


Figure 8: Illustration of the radius magnification regarded as longitudinal magnification between longitudinal segments. The optical system is represented by its foci (F and F') and its principal points (H and H'). The lateral magnification for A and A' is $m_a = -1$; the lateral magnification for C and C' is $m_c = 3/2$; the radius magnification is $m_r = -3/2$, and is also the magnification between $\overline{A'C'}$ and \overline{AC} (point C' is virtual).

3.2 Radius magnification and longitudinal Lagrange–Helmholtz formula

We first recall some laws of paraxial optics. We consider a centered system, as in Fig. 9, and a conjugation between a transverse object y , located at A , and its paraxial image y' , located at A' ; the lateral magnification is $m_y = y'/y$. A ray issued from A makes the angle α with the optical axis and its image is a ray issued from A' and making the angle α' with the axis. The angular magnification is m_α (see Fig. 9, where $\alpha > 0$ and $\alpha' < 0$), defined by

$$m_\alpha = \frac{\alpha'}{\alpha}. \quad (44)$$

The Lagrange–Helmholtz formula [1] (also called Smith–Helmholtz formula [2]) is

$$n'y'\alpha' = ny\alpha, \quad (45)$$

and if we denote $m_n = n'/n$, for sake of symmetry, Eq. (45) can be written

$$m_n m_y m_\alpha = 1. \quad (46)$$

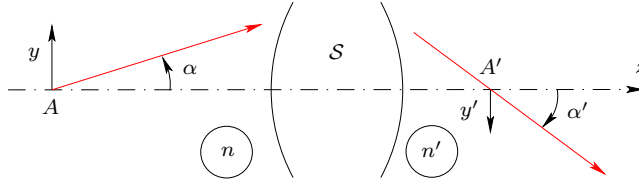


Figure 9: Lagrange–Helmholtz invariant: $ny\alpha = n'y'\alpha'$.

The longitudinal Lagrange–Helmholtz formula is [9]

$$n'\alpha'^2 dz' = n\alpha^2 dz, \quad (47)$$

where dz and dz' are as in Section 3.1. It can also be written

$$m_n m_\alpha^2 m_z = 1. \quad (48)$$

We will show that Eq. (47) is a limit form of a more general formula. We consider the imaging between an object spherical-cap \mathcal{A} (vertex A , center C , radius R_A) and its coherent image \mathcal{A}' (vertex A' , center C' , radius $R_{A'}$). Let m_α be the angular magnification at vertices and m_γ the angular magnification at centers. The Lagrange–Helmholtz formula at vertices is $m_n m_v m_\alpha = 1$, and that at centers is $m_n m_c m_\gamma = 1$, so that eventually the radius magnification is

$$m_r = \frac{n'}{n} m_v m_c = m_n m_v m_c = m_n \frac{1}{m_n m_\alpha} \frac{1}{m_n m_\gamma} = \frac{1}{m_n m_\alpha m_\gamma}, \quad (49)$$

that is

$$m_n m_r m_\alpha m_\gamma = 1. \quad (50)$$

Equation (50) can also be written

$$n' \overline{A'C'} \alpha' \gamma' = n \overline{AC} \alpha \gamma, \quad (51)$$

since $m_r = R_{A'}/R_A = \overline{A'C'}/\overline{AC}$.

If C tends to A , then C' tends to A' and m_γ tends to m_α . Since R_A and $R_{A'}$ tend to 0, we write $R_A = dz$ and $R_{A'} = dz'$, and by Eq. (50) we obtain

$$\frac{dz'}{dz} = \frac{R_{A'}}{R_A} = m_r = \lim_{C \rightarrow A} \frac{1}{m_n m_\alpha m_\gamma} = \frac{n}{n'} \frac{1}{m_\alpha^2} = \frac{n}{n'} \frac{\alpha^2}{\alpha'^2}, \quad (52)$$

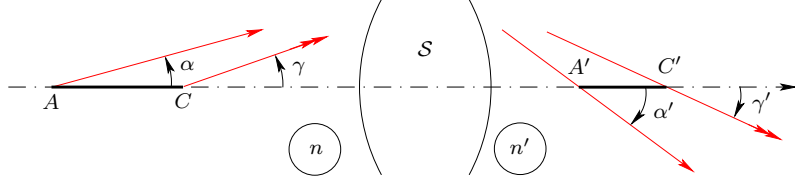


Figure 10: Longitudinal Lagrange–Helmholtz invariant for finite segments: $n \overline{AC} \alpha \gamma = n' \overline{A'C'} \alpha' \gamma'$.

which is Eq. (47) once more.

Equation (51) is a generalization of the longitudinal Lagrange–Helmholtz formula that holds for finite longitudinal segments [10] (see Fig. 10).

We illustrate the generalized longitudinal Lagrange–Helmholtz by an example borrowed from Dettwiller [10]. We consider a plane parallel plate of width ℓ , refractive index N , and placed in the air. (The plate is an afocal system.) Let V be a point on the plate (Fig. 11): its image is V' . Let A and A' be conjugates, with AV orthogonal to the plate. We have $\alpha' = \alpha$, $\gamma' = \gamma$ (see Fig. 11); we set $n = n' = 1$, $C = V$ and $C' = V'$ in Eq. (51), and we obtain $\overline{AV} = \overline{A'V'}$. Then $\overline{AA'} = \overline{AV} + \overline{VV'} + \overline{V'A'} = \overline{VV'}$. Kepler’s law, applied at point J , leads to $\overline{VV'} = (N - 1)\ell/N$, so that for every pair of conjugate points A and A' we obtain the well-known formula

$$\overline{AA'} = \frac{(N - 1)\ell}{N}. \quad (53)$$

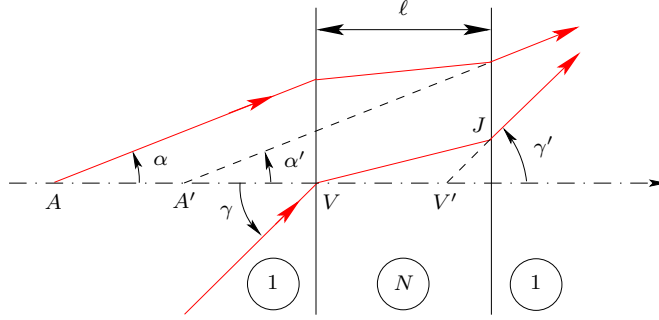


Figure 11: Imaging through a plane parallel plate. Since $\alpha' = \alpha$ and $\gamma' = \gamma$, the generalized longitudinal Lagrange–Helmholtz formula leads to $\overline{AA'} = \overline{VV'}$.

4 Application to Gaussian beams

4.1 Gaussian beams

The existence of Gaussian beams and their properties are usually developed in physical optics, in general in the framework of a scalar theory of diffraction [5,8] or from the Helmholtz wave-equation [11], not in the scope of geometrical optics. We will show, however, that imaging Gaussian beams can be explained very well in the framework of geometrical optics, provided that the properties of coherent imaging are applied to it. We begin by characterizing Gaussian beams.

Gaussian beams, which are coherent beams, are mainly encountered in the following cases:

- In quadratic index media [11].
- In stable laser-cavities and at the output of these lasers [12].

- As an approximation of optical fields in fiber optics [13]. The fundamental mode of an optical fiber (HE₁₁ mode) can be approximated by a Gaussian function.

The beam emitted by a laser is usually called a Gaussian beam. The amplitude of the field on a wavefront of such a beam is represented by a Hermite-Gauss function, in the form

$$U(x, y) = U_0 H_i(x) H_j(y) \exp\left(-\frac{x^2 + y^2}{w^2}\right), \quad (54)$$

where U_0 is a dimensional constant and H_i the Hermite polynomial of order i (i a natural integer).

Here are the properties of Gaussian beams that will allow us to study their imagings by centered optical systems [5, 14]:

- (i) Wavefronts of a given Gaussian beam are approximated, up to second order, by spherical caps, not concentric, but all centred on the beam axis. The field amplitudes on those surfaces take the form given by Eq. (54), where w depends on the considered wavefront.
- (ii) Parameter w has a minimum value, denoted w_0 , and the corresponding wavefront is a plane, denoted \mathcal{W}_0 . In this plane, the area for which the irradiance is greater or equal to $1/e^2$ is called the waist of the Gaussian beam. The parameter w_0 is the (transverse) radius of the waist.
- (iii) The curvature radius of the wavefront whose vertex is at a distance d (d is an algebraic measure) from the waist is

$$R_d = -d - \frac{\pi^2 w_0^4}{\lambda^2 d}, \quad (55)$$

and the transverse radius of the beam on this spherical cap is w_d such that

$$w_d^2 = w_0^2 + \frac{\lambda^2 d^2}{\pi^2 w_0^2}, \quad (56)$$

where λ is the wavelength of radiations.

- (iv) Given λ and given a spherical cap, there is a unique Gaussian beam for which the transverse radius takes a given value w on the cap. If R denotes the curvature radius of the spherical cap, the transverse radius of the beam waist is given by

$$w_0^2 = \frac{w^2}{1 + \frac{\pi^2 w^4}{\lambda^2 R^2}}, \quad (57)$$

and the distance from the plane of the waist to the vertex of the spherical cap is

$$d = -\frac{R}{1 + \left(\frac{\lambda R}{\pi w^2}\right)^2}. \quad (58)$$

4.2 Imaging a Gaussian beam by a centered system with foci.

The waist image is not the image waist (the image of the beam-waist is not the waist of the image-beam)

Let us consider a Gaussian beam incident on a centered system \mathcal{S} with foci, and let \mathcal{W} be a wavefront (spherical cap) of the beam. The centered system transforms \mathcal{W} into a spherical cap \mathcal{W}' , and the amplitude of the field on \mathcal{W}' is Gaussian (it is a homothetic copy of the field on \mathcal{W}).

Property (iv) above allows us to conclude that the incident Gaussian beam is transformed into a Gaussian beam (in the image space).

Let us highlight an important property of imaging Gaussian beams by optical systems with foci. Let \mathcal{W}_0 be the waist plane of the incident beam, assumed to be located at the point W_0 of the optical axis (in the object space). The image of W_0 is W'_0 , a point on the optical axis (in the image space). Since it is a plane, \mathcal{W}_0 is centered at infinity and its coherent image \mathcal{W}'_0 is properly spherical: it is the spherical cap that passes through W'_0 and that is centered at the image focus F' of the centered system (a consequence of curvature center conjugation). This sphere cannot contain the waist of the image beam, because the waist should be on a plane: the waist of the object beam and the waist of the image beam are not conjugates. There is therefore not imaging between the waists!

Pseudo-conjugation formula

Waists are not conjugated. Then where is the waist of the image beam located? It has to be on a plane, that is, on a “sphere” centered at infinity (in the image space). That plane has then to be the image of the spherical cap that, among all the wavefronts of the incident beam, is centered at the object focus F of the centered system, because F is the unique point (on the optical axis, in the object space) whose image is precisely at infinity. All that is a consequence of the curvature-center conjugation law (a part of the double-conjugation property). Let us show that such a spherical cap indeed exists.

We denote $q = \overline{FW_0}$ and look for the spherical wavefront \mathcal{W}_1 (of the object beam) that is centred at F ; its vertex is denoted W_1 (see Fig. 12). If $d_1 = \overline{W_0W_1}$, the radius of \mathcal{W}_1 is R_1 such that $R_1 = \overline{W_1F}$, and Eq. (55) leads to

$$q + d_1 = \overline{FW_1} = -R_1 = d_1 + \frac{\pi^2 w_0^4}{\lambda^2 d_1}, \quad (59)$$

so that

$$d_1 = \frac{\pi^2 w_0^4}{\lambda^2 q}. \quad (60)$$

The spherical cap \mathcal{W}_1 , which is a wavefront of the incident Gaussian-beam, is then totally defined: its vertex is W_1 , at a distance d_1 of W_0 , its center of curvature is the object focus F . Since \mathcal{W}_1 is centered at F , its image is centered at infinity and is a plane, denoted \mathcal{W}'_1 . That plane is a wavefront of the image beam, because it is the coherent image of a wavefront of the object beam, and since the waist of a Gaussian beam is on a plane, the plane \mathcal{W}'_1 contains the waist of the image beam.

If W'_1 denotes the image of W_1 , and if $q' = \overline{F'W'_1}$, the Newton’s conjugation-formula gives

$$ff' = \overline{FW_1} \cdot \overline{F'W'_1} = (q + d_1)q' = \left(q + \frac{\pi^2 w_0^4}{\lambda^2 q} \right) q', \quad (61)$$

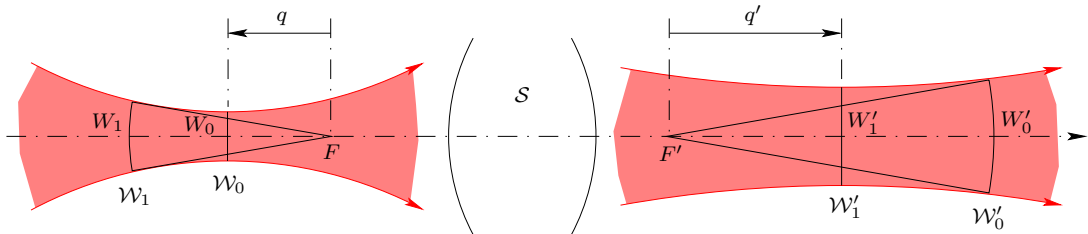


Figure 12: Imaging a Gaussian beam by a centered system with foci.

that is

$$q' = \frac{ff'}{q + \frac{\pi^2 w_0^4}{\lambda^2 q}}, \quad (62)$$

which is often written in the form

$$qq' = \frac{ff'}{1 + \frac{\pi^2 w_0^4}{\lambda^2 q^2}}. \quad (63)$$

Equation(63)—or (62)—gives the position of the waist of the image beam when the position of the waist of the object beam is known. In particular Eq. (63) resembles Newton’s conjugation formula ($zz' = ff'$), with origins at foci: it is therefore called usually “waist conjugation-formula”, which is abusive, since there is no conjugation of waists, as explained above.

Image-beam waist dimension

Let w_1 be the transverse radius of the beam on the previous spherical cap \mathcal{W}_1 and let m be the lateral magnification of the conjugation of W_1 with W'_1 . The waist radius of the image beam is $w'_1 = mw_1$, and

$$m = -\frac{f}{FW_1} = \frac{f}{R_1}. \quad (64)$$

Equations (55) and (56) lead us to write

$$\begin{aligned} w_1'^2 &= \frac{f^2 w_1^2}{R_1^2} = \frac{f^2 w_0^2 \left(1 + \frac{\lambda^2 d_1^2}{\pi^2 w_0^4}\right)}{d_1^2 \left(1 + \frac{\pi^2 w_0^4}{\lambda^2 d_1^2}\right)^2} = \frac{f^2 \lambda^2}{\pi^2 w_0^2} \cdot \frac{1}{1 + \frac{\pi^2 w_0^4}{\lambda^2 d_1^2}} \\ &= \frac{f^2 \lambda^2}{\pi^2 w_0^2} \cdot \frac{1}{1 + \frac{\lambda^2 q^2}{\pi^2 w_0^4}}, \end{aligned} \quad (65)$$

where the last equality results from Eq. (60).

Some examples

Here are some illustrations of the previous results.

- We assume $q = 0$, which means that the waist of the object beam is in the object focal-plane of the centered system. By Eq. (62) we obtain $q' = 0$: the waist of the image beam is in the image focal-plane of the centered system. Clearly there is no conjugation of waists! The waist radius of the image beam is

$$w_1' = \frac{|f|\lambda}{\pi w_0}. \quad (66)$$

- We assume $|q| \gg w_0^2/\lambda$. Equation (63) is approximated by $qq' = ff'$ (Newton’s conjugation-formula, which appears as a limit case). The radius of the waist of the image beam (w_1') then tends to 0.
- In the same vein, consider the limit case $w_0 = 0$ (with $q \neq 0$). Equation (63) then reduces to Newton’s conjugation-formula: $qq' = ff'$. According to Eq. (65), the transverse radius w_1' tends to 0: both waists reduce to points and their “conjugation law” tends to the usual conjugation law of paraxial geometrical optics.

4.3 Imaging a Gaussian beam by an afocal system

An afocal system forms a planar coherent-image of a planar object. If a Gaussian beam is incident on an afocal system, the waist having to be on a plane, the waist of the image beam is the image of the waist of the incident beam (object beam). There is conjugation of the waists. If the waist \mathcal{W}_0 of the incident beam is at W_0 , its coherent image \mathcal{W}'_0 through a given afocal system passes through W'_0 , the paraxial image of W_0 . Since \mathcal{W}_0 is centered at infinity, \mathcal{W}'_0 also is centered at infinity, because the “image focus” of the afocal system is at infinity: \mathcal{W}'_0 is a plane and it is on this plane that the waist of the image beam is located.

Let us illustrate that with an example. Consider an afocal system \mathcal{L} consisting of two convergent thin lenses \mathcal{L}_1 and \mathcal{L}_2 , with respective image focal-lengths f'_1 and f'_2 . The object focus F_2 of \mathcal{L}_2 coincides with the image focus F'_1 of \mathcal{L}_1 (see Fig. 13). The image of the object focus F_1 of \mathcal{L}_1 through \mathcal{L} is the image focus F'_2 of \mathcal{L}_2 . Consider a Gaussian beam with waist \mathcal{W}_0 placed at F_1 , the transverse radius of the waist being w_0 . The first example at the end of the previous section shows that the waist \mathcal{W}_i of the intermediate beam, which is the image beam through \mathcal{L}_1 , lies in the image focal-plane of \mathcal{L}_1 and its transverse radius is $w_i = \lambda f'_1 / (\pi w_0)$. Since F_2 merges with F'_1 , the same property applies to imaging through \mathcal{L}_2 : the waist of the image through \mathcal{L}_2 of the previous intermediate beam is in the focal plane of \mathcal{L}_2 and its transverse radius is

$$w'_0 = \frac{\lambda f'_2}{\pi w_i} = \frac{f'_2}{f'_1} w_0 = m w_0, \quad (67)$$

where m denotes the lateral magnification of the afocal system (which is a constant, independent of the considered conjugation). There is imaging between the Gaussian-beam incident on \mathcal{L}_1 and the Gaussian-beam emerging from \mathcal{L}_2 , according to the laws of paraxial geometrical optics.

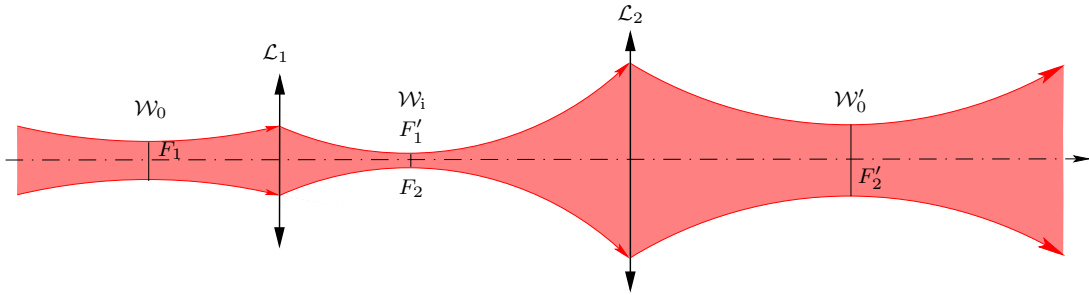


Figure 13: Imaging a Gaussian beam by an afocal centered system made up of two convergent lenses.

5 Conclusion

Coherent imaging of spherical caps by centered systems, that is imaging both amplitudes and phases, is obtained under two conditions: (i) vertex conjugation, in accordance with paraxial geometrical optics; (ii) curvature center conjugation, which is properly a coherent condition for phase preserving and which requires a second-order approximation. These two conditions constitute the “double-conjugation law” of coherent imaging and they have been deduced from pure methods of geometrical optics. To paraxial geometrical optics is therefore added coherent geometrical optics, or metaxial geometrical optics, whose core is the double-conjugation law. Imaging Gaussian beams by centered systems falls within this framework.

References

- [1] A. Maréchal, *Imagerie géométrique. Aberrations*, Éditions de la Revue d’Optique Théorique et Instrumentale, Paris, 1952.

- [2] M. Born, E. Wolf, *Principles of optics*, 7th edn, Cambridge University Press, Cambridge, 2000.
- [3] A. VanderLugt, *Optical signal processing*, John Wiley & Sons, New York, 1992.
- [4] J. W. Goodman, *Introduction to Fourier optics*, 4th edn, W. H. Freeman and Co, New York, 2017.
- [5] P. Pellat-Finet, *Optique de Fourier, théorie métaxiale et fractionnaire*, Springer, Paris, 2009.
- [6] G. Bonnet, “Introduction à l’optique métaxiale. Première partie : diffraction métaxiale dans un espace homogène : trilogie structurale, dioptre sphérique,” *Ann. Télécomm.* **33** (1978) 143–165.
- [7] G. Bonnet, “Introduction à l’optique métaxiale. Deuxième partie : systèmes dioptriques centrés (non diaphragmés et non aberrants),” *Ann. Télécomm.* **33** (1978) 225–243.
- [8] H. Kogelnik, “Imaging of optical modes—Resonators with internal lenses,” *Bell Sys. Techn. J.* **44** (1965) 455–494.
- [9] A. E. Conrady, *Applied optics and optical design. Part one*, Dover, New York, 1992.
- [10] L. Dettwiller, *Les instruments d’optique. Étude théorique, expérimentale et pratique*, 2nd edn, Ellipses, Paris, 2002.
- [11] A. Yariv, P. Yeh, *Photonics. Optical Electronics in Modern Communications*, 6th edn, Oxford University Press, New York, 2006.
- [12] A. E. Siegman, *Lasers*, University Science Books, Sausalito, 1986.
- [13] A. W. Snyder, J. D. Love, *Optical Waveguide Theory*, Chapman & Hall, London, 1983.
- [14] S. L. Chin, *Fundamentals of laser optoelectronics*, World Scientific, Singapore, 1989.