# ACRO: A multi-language toolkit for supporting Automated Checking of Research Outputs

Richard J. Preen and Jim Smith<sup>\*</sup>

University of the West of England Bristol, BS16 1QY, United Kingdom

December 7, 2022

#### Abstract

This paper discusses the development of an open source tool ACRO, (Automatic Checking of Research Outputs) to assist researchers and data governance teams by distinguishing between: research output that is safe to publish; output that requires further analysis; and output that cannot be published because it creates substantial risk of disclosing private data. ACRO extends the functionality and accessibility of a previous prototype by providing a light-weight 'skin' that sits over well-known analysis tools, and enables access in a variety of programming languages researchers might use. This adds functionality to (i) identify potentially disclosive outputs against a range of commonly used disclosure tests; (ii) suppress outputs where required; (iii) report reasons for suppression; and (iv) produce simple summary documents Trusted Research Environment (TRE) staff can use to streamline their workflow. The ACRO code and documentation are available under an MIT license at https://github.com/AI-SDC/ACRO.

## 1 Introduction

Statistical agencies and other custodians of secure facilities such as Trusted Research Environments (TREs) [1] provide researchers with access to confidential data under the 'Five-Safes' framework [2]. This enforces five orthogonal layers of safety procedures, and the last requires explicit checking of research outputs for disclosure risk. This can be a time-consuming and costly task, requiring skilled staff. This paper discusses the development of an open source tool for automating the statistical disclosure control (SDC) of routine research outputs. The goal is to make the clearance process more efficient and timely, and to allow the skilled checkers to focus their attention on the less straightforward cases.

<sup>\*</sup>To whom correspondence should be addressed. email: james.smith@uwe.ac.uk

The purpose of the tool, (ACRO, for Automatic Checking of Research Outputs) is to assist researchers and output checkers by distinguishing between research output that is safe to publish, output that requires further analysis, and output that cannot be published because of substantial disclosure risk.

This work builds upon a previous Eurostat-funded project<sup>1</sup>, in which Green, Ritchie and Smith developed a proof-of-concept prototype for the proprietary Stata<sup>2</sup> software [3]. The primary new contributions reported in this paper are:

- The implementation of a Python<sup>3</sup> toolkit.
- An extensible multi-language platform with interfaces familiar to users of popular statistical tools.
- An R language<sup>4</sup> 'skin', demonstrating cross-language support.
- An open source repository with examples, help, documentation, etc.

## 2 Background

The Five Safes framework [2] is a set of principles that enable services to provide safe research access to their data and has been adopted by a range of TREs, including the Office for National Statistics (ONS), Health Data Research-UK (HDR-UK), and the National Institute for Health Research Design Service (NIHR), as well as many others worldwide.

The Five Safes are composed of:

- Safe data: anonymisation of data to protect any confidentiality concerns.
- Safe projects: research projects make appropriate use of data.
- Safe people: researchers trained and authorised to use data safely.
- Safe settings: a secure environment that prevents unauthorised use.
- Safe outputs: screened and approved outputs that are non-disclosive.

Ensuring 'safe outputs' is a complex and often costly human labour-intensive process. Automated output checking aims to improve the rigour and consistency of the output disclosure control process and reduce human workload by automatically identifying and suppressing disclosive outputs where possible and categorising outputs as 'safe' or 'unsafe'. 'Safe' outputs requiring no or minimal further changes can be expedited through the clearing process whereas 'unsafe' outputs can be prioritised for human review [4].

 $<sup>^{1}</sup>$ http://www.fivesafes.org/SDC/ACRO/

<sup>&</sup>lt;sup>2</sup>https://www.stata.com

<sup>&</sup>lt;sup>3</sup>https://www.python.org

<sup>&</sup>lt;sup>4</sup>https://www.r-project.org

A small number of SDC tools have been produced to assist in the process of achieving 'safe outputs', such as tauArgus<sup>5</sup> and sdcTable<sup>6</sup>, however they require expert knowledge of SDC to use effectively.

With the aim of reducing the amount of user training required, a recent Eurostat project [3] developed a proof-of-concept prototype in Stata where primary disclosure is regulated by a set of simple rules. For example, a minimum threshold rule applied to the number of observations used by a statistic ensures that there is sufficient uncertainty with respect to any individual respondent. Dominance rules protect large respondent values from being approximated where the contribution to a statistic is dominated by only a few individuals. For example, the p%-rule sorts the N observations by magnitude and checks whether the sum of the smallest N-3 observations is at least p% of the largest observation. The NK rule checks that the largest N observations contribute less than K% of the total. Also, not all aggregation statistics are permitted: reporting minima or maxima values of a subgroup are prohibited, and regressions are protected by checking that the Residual degrees-of-freedom exceeds a minimum threshold.

Here we build upon the Stata prototype with the aim of expanding its coverage and impact whilst retaining a minimal learning curve. We achieve this by creating a rules-based ACRO toolkit, which is primarily implemented in Python, but with cross-language support and interfaces familiar to researchers.

## 3 The ACRO toolkit

#### 3.1 Design Philosophy and Workflow

ACRO [5] is an open source toolkit (MIT License) that provides a light-weight 'skin' that sits over well-known analysis tools, in a variety of languages researchers might use. This adds functionality to:

- 1. Identify potentially disclosive outputs against a range of commonly used disclosure tests.
- 2. Suppress outputs where required.
- 3. Report reasons for suppression.
- 4. Produce simple summary documents TRE staff can use to streamline their workflow.

ACRO has been designed with the following aims:

• Reducing barriers to adoption via a front-end application programming interface (API) that is similar to those already commonly used by researchers in their favoured language.

<sup>&</sup>lt;sup>5</sup>https://github.com/sdcTools/tauargus

<sup>&</sup>lt;sup>6</sup>https://github.com/sdcTools/sdcTable

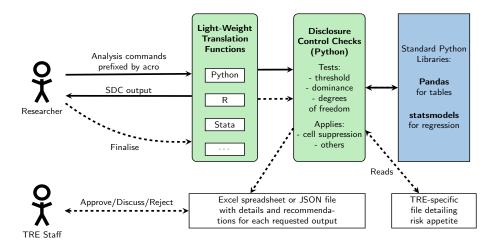


Figure 1: Schematic illustration of ACRO.

- Providing researchers with immediate feedback on the results of disclosure checks (e.g., directly to screen after executing a command) and control over the outputs that are submitted for review, e.g., the removal of outputs and choice of output format (JSON<sup>7</sup> or Microsoft Excel<sup>®</sup>).
- Having a single back-end code base constituting a single source of truth for performing checks with extensibility for different languages and ongoing support and consistency.
- Providing easy to understand help and documentation.

In practice, researchers prepare their data and statistical queries in the usual way, in their preferred language, using common commands prefixed by 'acro'. The lightweight ACRO translation functions then call the Python back-end, which executes the queries and performs the requisite output checks. The results of both the checks and the output, automatically suppressed where possible, are immediately displayed to the researcher. Details of the queries and results are stored in a list, which may subsequently be written in a final format for review by a human output checker. A schematic illustration of the ACRO workflow is shown in Figure 1 and some notebooks demonstrating example code usage and output are available via the ACRO project wiki<sup>8</sup>.

#### 3.2 Checks Implemented

For tabular data (e.g., cross tabulation and pivot tables), we prohibit the reporting of the maximum or minimum value in any cell that represents a sub-group of one or more contributors. Moreover, we suppress, and report the reason,

<sup>&</sup>lt;sup>7</sup>https://json.org

<sup>&</sup>lt;sup>8</sup>https://github.com/AI-SDC/ACRO/wiki

Table 1				
ACRO DEFAULT	Parameters	FOR	SENSITIVITY	TESTS

Description	Parameter	Value
Min frequency threshold for tabular data	safe_threshold	10.0
Min degrees-of-freedom for analytical stats	<pre>safe_dof_threshold</pre>	10.0
N parameter in $NK$ test	safe_nk_n	2.0
K parameter in $NK$ test	<pre>safe_nk_k</pre>	0.9
Min ratio for $p\%$ test	<pre>safe_pratio_p</pre>	0.1

the value of the aggregation statistic (mean, median, variance, etc.) for any cell deemed to be *sensitive*. ACRO currently supports the three most common tests for sensitivity: ensuring the number of contributors is above a frequency threshold, and testing for dominance via p% and NK rules. ACRO builds a series of suppression masks, which indicate which cells are to be suppressed for each check. A summary outcome table indicating which suppression rule was applied to each cell is presented to the researcher, along with the result of the query. For regressions, e.g., linear, probit and logit regression, the tests verify the number of degrees of freedom exceeds a threshold. The checking of graphical plots has not been implemented as this stage since this is a complex problem with many different methods for producing visualisations, even focusing only on Pandas.

As noted above, all of these tests and checks are configurable according to the TRE's risk appetite. The data custodian, e.g., TRE staff member, specifies the parameter values used for the output checks in a YAML<sup>9</sup> configuration file, which is loaded upon ACRO initialisation. The default ACRO parameters are shown in Table 1. Future releases will offer the option to over-ride these on a dataset, or even attribute level.

#### 3.3 ACRO-PY

Python is a popular multi-platform language widely used for data analysis and machine learning. PyPI<sup>10</sup> provides a simple package management system for distributing open source Python libraries. Pandas [6] and the statsmodels [7] Python libraries are mature, popular, and well-supported packages for data analysis, statistical testing, and statistical data exploration. Pandas is currently used by more than 55% of all Python users<sup>11</sup>.

The use of Python as the primary implementation therefore enables the leveraging of existing expertise and community support with these packages so that the ACRO front-end can be as similar to the API researchers already know and trust, and further facilitates the rapid development of disclosure checking functionality on the back-end. As the PyPI distribution system is simple and

<sup>&</sup>lt;sup>9</sup>https://yaml.org

<sup>&</sup>lt;sup>10</sup>https://www.pypi.org

<sup>&</sup>lt;sup>11</sup>https://lp.jetbrains.com/python-developers-survey-2021/

allows the use of semantic versioning, it supports a rapid and iterative developand-deploy strategy to provide continuing functionality and improvements.

For example, the current version of ACRO may be installed as simply as:

pip install acro

The currently implemented methods are listed below; for more details see the ACRO project documentation<sup>12</sup>.

crosstab(index, columns[, values, rownames, ...])
Compute a simple cross tabulation of two (or more) factors.
Same API as pandas.crosstab.

- finalise([filename]) Creates a results file for checking.
- logit(endog, exog[, missing, check\_rank])
  Fits Logit model.
  Same API as statsmodels.discrete.discrete model.Logit.
- logitr(formula, data[, subset, drop\_cols])
  Fits Logit model from a formula and DataFrame.
  Same API as statsmodels.formula.api.logit.
- ols(endog[, exog, missing, hasconst]) Fits Ordinary Least Squares Regression. Same API as statsmodels.regression.linear\_model.OLS.
- olsr(formula, data[, subset, drop\_cols])
  Fits Ordinary Least Squares Regression from a formula and DataFrame.
  Same API as statsmodels.formula.api.ols.
- pivot\_table(data[, values, index, columns, ...])
  Create a spreadsheet-style pivot table as a DataFrame.
  Same API as pandas.pivot table.
- probit(endog, exog[, missing, check\_rank])
  Fits Probit model.
  Same API as statsmodels.discrete.discrete model.Probit.
- probitr(formula, data[, subset, drop\_cols])
   Fits Probit model from a formula and DataFrame.
   Same API as statsmodels.formula.api.probit.

remove\_output(key)

Removes an output from the results dictionary.

An example ACRO query and its output is shown in Figure 2 where the R/G column is automatically suppressed.

<sup>&</sup>lt;sup>12</sup>https://ai-sdc.github.io/ACRO/

```
safe_table = acro.crosstab(
    df.year, df.grant_type, values=df.inc_grants, aggfunc="mean")
 INFO:acro:outcome_df:
                                                                 R/G
 grant_type
               G
                    Ν
                         R
 year
 2010
                        ok
                                      threshold; p-ratio; nk-rule;
               ok
                   ok
 2011
               ok
                                                         threshold;
                   ok
                        ok
 2012
                                                         threshold;
               ok
                   ok
                        ok
 2013
               ok
                                                         threshold;
                   ok
                        ok
                                                         threshold;
 2014
               ok
                   ok
                        ok
 2015
              ok
                   ok
                        ok
                                                         threshold;
 INFO:acro:get_summary(): fail; threshold: 6 cells suppressed;
     p-ratio: 1 cells suppressed; nk-rule: 1 cells suppressed;
 INFO:acro:add_output(): output_1
                      G
                                                       R/G
grant_type
                                       Ν
                                                    R.
year
              9921906.0
                               0.000000
                                           8402284.0
2010
                                                        NaN
2011
              8502246.0
                          124013.859375
                                           7716880.0
                                                        NaN
2012
             11458580.0
                          131859.062500
                                            6958050.5
                                                        NaN
             13557147.0
                          147937.796875
                                           7202273.5
2013
                                                        NaN
2014
             13748147.0
                          133198.250000
                                           8277525.0
                                                        NaN
2015
             11133433.0
                          146572.187500
                                          10812888.0
                                                        NaN
```

Figure 2: Example ACRO query (top), with disclosure control reporting (middle, grey box) and output (bottom) where column R/G is suppressed.

### 3.4 ACRO-R

The R front-end is an example of cross-language support. It provides a set of wrapper functions that execute Python back-end checking via the reticulate<sup>13</sup> package, which provides automatic conversations for many types, e.g., R data frame to Pandas DataFrame.

For regressions, the common R lm() and glm() functions were shadowed with equivalent versions implemented as acro\_lm() and acro\_glm(), respectively. For tabular data, the dplyr<sup>14</sup> package is commonly used within R, however no simple cross tabulation or pivot table functions are provided; instead various combinations of groupby() and summarize() etc. are used. Therefore, at this stage of development, the Python cross tabulation and pivot table functions were directly interfaced with acro\_crosstab() and acro\_pivot\_table().

## 4 Future Plans

Future plans include the production of an equivalent 'skin' for Stata; and the development of a toolkit that can be embedded within projects such as Open-

<sup>&</sup>lt;sup>13</sup>https://github.com/rstudio/reticulate

<sup>&</sup>lt;sup>14</sup>https://github.com/tidyverse/dplyr

SAFELY<sup>15</sup> and medical TREs. Additional features and improved user experience will be facilitated by the involvement of end-users and output checkers.

## Acknowledgement

This project was supported by the University of the West of England, as part of a wider project funded under the 'Expanding Research Excellence' scheme. It builds heavily of the foundational work undertaken during Eurostat project carried out by Elizabeth Green, Felix Ritchie and Jim Smith [3]. The authors are grateful to Green and Ritchie for comments as this work progressed.

## References

- T. Hubbard, G. Reilly, S. Varma, and D. Seymour, "Trusted research environments (TRE) green paper," Zenodo, July 2020. doi: 10.5281/zenodo.4594704.
- [2] F. Ritchie, "The 'five safes': A framework for planning, designing and evaluating data access solutions," Zenodo, Sept. 2017. doi: 10.5281/zenodo.897821.
- [3] E. Green, F. Ritchie, and J. Smith, "Automatic checking of research outputs (ACRO): A tool for dynamic disclosure checks," *ESS Statistical Working Papers*, vol. 2021, Oct. 2021. doi: 10.2785/75954.
- [4] F. Ritchie, "Disclosure detection in research environments in practice," in *Joint UNECE/Eurostat work session on statistical data confidentiality*, vol. WP. 73, United Nations Statistical Commission and Economic Commission for Europe Conference of Europe Statisticians, European Commission Statistical Office of the European Communities (Eurostat), 2008.
- [5] R. J. Preen and J. Smith, "ACRO v.0.0.5." https://github.com/AI-SDC/ACRO, Nov. 2022. doi: 10.5281/zenodo.7273904.
- The Pandas development team, "Pandas." https://github.com/pandas-dev/pandas, Oct. 2022. doi: 10.5281/zenodo.3509134.
- [7] S. Seabold and J. Perktold, "statsmodels: Econometric and statistical modeling with python," in *9th Python in Science Conference*, 2010.

<sup>&</sup>lt;sup>15</sup>https://www.opensafely.org