

Structure of Classifier Boundaries: Case Study for a Naïve Bayes Classifier

Alan F. Karr*, Zac Bowen†, Adam A. Porter‡

February 12, 2024

Abstract

Whether based on statistical models, training data or a combination, classifiers assign complex input data points to one of a small number of output categories. For a naïve Bayes classifier whose input space is a graph, we study the structure of the *boundary*, which comprises those points for which at least one neighbor is classified differently. The scientific setting is metagenomic assembly of DNA reads produced by Next Generation Sequencers (NGSs). The boundary is both large and complicated in structure. We introduce a new measure of uncertainty, Neighbor Similarity, that compares the result for an input point to the distribution of results for its neighbors. This measure not only tracks two inherent uncertainty measures for the Bayes classifier, but also can be implemented for classifiers without inherent measures of uncertainty.

Key words: classifier, Bayes classifier, uncertainty, DNA reads, metagenomics

1 Introduction

Classifiers are ubiquitous in today’s world. They are used in facial recognition, for military purposes, by autonomous vehicles, and, in this paper, as a step in assembling short DNA reads from multiple source genomes into longer “contigs.” Inputs include numerical data, character strings, images and sound clips. The underlying statistical methodologies range from maximum likelihood for mixture models to Bayes methods (as in this paper) to neural networks and deep learning based on labeled “training data.”

Typically, the input space for a classifier is both high-dimensional and enormous, while the output space is much smaller. Often, the input space is a graph, which is true in our case study. Then, insight into the classifier can be gained from understanding its *boundary*—those points in the input space with one or more neighbors that are classified differently. From the input data perspective, these points can be thought of as fragile,¹ because changing them only ever so slightly changes the output. In our experiment, neighbors differ by one nucleotide pair (a single nucleotide polymorphism (SNP)), which can result from a sequencer error, another data quality problem, or natural polymorphism. And as we show below, quantifying how

*Fraunhofer USA Center Mid-Atlantic and Temple University, Department of Statistics, Operations, and Data Science; akarr@fraunhofer.org

†Fraunhofer USA Center Mid-Atlantic; zbowen@fraunhofer.org

‡University of Maryland, Department of Computer Science, and Fraunhofer USA Center Mid-Atlantic; aporter@cs.umd.edu

¹Our usage differs from that in epidemiology, where fragility is a property of clinical trials datasets that measures how many outcomes must change in order to alter statistical significance of the result. See, e.g., Baera et al. (2021).

much a boundary point differs from its neighbors yields a measure of uncertainty that is computable for any classifier whose input space is a graph.

Understanding the boundary illuminates how the classifier works. Is the boundary large or small? Is its geometry simple or complex? How can it be located and explored? For our case study, the boundary in no way resembles boundaries for smooth functions, i.e., level sets.² By contrast, it is large, containing as much as 30% of the input space, not of lower dimension, and complex geometrically.

The remainder of this paper is organized in the following manner. In Section 2, we describe our experiment: the scientific setting, the data and the Bayes classifier, as well as introduce two surrogate uncertainty measures. Section 4 contains results for the DNA reads, together with techniques for exploring the boundary. Sections 5 and 6 contain discussion and conclusions, respectively.

2 Experimental Setting

Here we introduce the components of our case study. The illustrative problem we address is classifying short DNA sequences as having arisen from one of three candidate genomes, which is an essential step in software systems for metagenomic assembly.

2.1 Classifiers

In this paper, a classifier is a function C from a finite input space \mathcal{I} to a finite output space \mathcal{O} . Elements of \mathcal{I} are termed *inputs* or *data*, and $C(x) \in \mathcal{O}$ is the *decision* or *result* for input x . Although it is not a logical necessity, there is little point in constructing or using a classifier unless $|\mathcal{I}| \gg |\mathcal{O}|$, where $|S|$ is the cardinality of the set S . In our case study, 101 nucleotides with 5 possible values each yield $|\mathcal{I}| = 5^{101}$, and three candidate genomes yield $|\mathcal{O}| = 3$.

Although also not a necessity, we restrict attention to deterministic classifiers: for an input x , there is a unique, reproducible output $C(x)$. In our case study, C is based on maximizing Bayesian posterior probabilities, and there are inherent measures of uncertainty to which we compare the surrogate measures proposed in Section 3.2. Mixture models that represent the effects of (discrete) latent variables are of the same ilk (Titterton et al., 1985). By contrast, deep learning and neural network models use a set $\mathcal{T} = \{t_1, \dots, t_m\} \subseteq \mathcal{I}$ of labeled training data to determine tunable parameters of C in such a way that $C(t_j)$ is equal to a known value D_j for each j .

We further assume that the input space \mathcal{I} is an *loopless, undirected graph*, whose edgeset E defines neighboring inputs: $x, y \in \mathcal{I}$ are *neighbors* if and only if $x \neq y$ and $\{x, y\} \in E$. We denote by $N(x) = \{y : \{x, y\} \in E\}$ the set of neighbors, or neighborhood, of x . For ease of interpretation and because it is true in our case study, we further assume that \mathcal{I} is *connected*: for any $x, y \in \mathcal{I}$, there is a path $(x_1 = x, \dots, x_k = y)$ that connects them: $\{x_j, x_{j+1}\} \in E$ for each j .

Our output space \mathcal{O} consists of three virus genomes that give rise to simulated DNA reads produced by a NGS, and has no particular structure.

²For instance, the level sets of a smooth function on a “continuous” space are smooth, lower-dimensional manifolds.

2.2 Mathematical Preliminaries

To establish notation, a DNA sequence G is a character string chosen from the nucleotide (base) alphabet $\mathcal{N} = \{A, C, G, T\}$. At one extreme, G may be an entire genome—for instance, a virus or a chromosome. At another, it may be a read generated by a NGS. Given a sequence G , its length is $|G|$; the i^{th} base in G is $G(i)$; and the bases from location i to location $j > i$ are $G(i : j)$.

We focus on triplets, whose distributions are 64-dimensional summaries of sequences. Other cases appear in the literature, especially quartets, also referred to as tetranucleotides (Pride et al., 2003; Teeling et al., 2004a,b). The *triplet distribution* $P_3(\cdot|G)$ of a sequence G is defined as

$$P_3(b_1b_2b_3|G) = \text{Prob}\{G(k : k+2) = b_1b_2b_3\} \quad (1)$$

for each choice of $b_1b_2b_3$, where b_1, b_2 and b_3 are elements of \mathcal{N} , and k is chosen at random from $1, \dots, |G| - 2$. An equivalent perspective is that of a second-order Markov chain (Karr et al., 2023). The information contained in $P_3(\cdot|G)$ is the same as that contained in the pair distribution $P_2(\cdot|G)$ and the 16×4 transition matrix

$$T_3((b_1, b_2), b_3|G) = \text{Prob}\{G(k+2) = b_3 | G(k) = b_1, G(k+1) = b_2\}, \quad (2)$$

whose rows are indexed by (b_1, b_2) and columns are indexed by b_3 , and which gives the distribution of each base conditional on its two predecessors.

2.3 The Three Genomes and the Reads Dataset

Our scientific context is reference-guided metagenomic assembly—piecing together fragments (reads) of DNA from multiple sources into longer sequences called contigs, as performed by *MetaCompass* (Cepeda et al., 2017). We focus on one conceptual step in assembly, namely, assigning reads to sources from a reference database. In our case study, there are three reference genomes: an adenovirus genome of length 34,125, downloaded with the read simulator *Art*, which we call *Adeno*; a SARS-CoV-2 genome of length 29,926 contained in a coronavirus dataset downloaded from National Center for Biotechnology Information (NCBI) in November, 2020, which we call *COVID*; and a SARS-CoV genome of length 29,751 from the same database, which we call *SARS*. Thus, $\mathcal{O} = \{\text{Adeno}, \text{COVID}, \text{SARS}\}$.

Table 9, in Appendix A, contains the triplet distributions for these three virus genomes. Measured by Hellinger distance,³ these distributions are very different. The distances are 0.234 for *Adeno*/*COVID*, 0.125 for *Adeno*/*SARS* and 0.161 for *COVID*/*SARS*. To contextualize these values, the empirical 0.001 p -values for triplet distributions of genomes of the same size simulated from each distribution are 0.01941755 for adenovirus, 0.02094808 for *COVID*, and 0.02065539 for *SARS*. Therefore, classifiers based on triplet distributions are promising.

The read dataset is the same as in Karr et al. (2023). We employed the *Mason_simulator* software (Holtgrewe, 2010) to simulate Illumina⁴ NGS reads of length 101 from each genome, with approximate 6X coverage. The numbers of reads are 1966, 1996 and 1907, respectively; the total number of reads is 5869. The *Mason_simulator* introduces errors in the form of transpositions (SNPs), insertions, deletions and

³The definition is given in (7) below.

⁴Illumina manufactures NGSs that employ an optical technology; see <https://www.illumina.com/>.

undetermined bases.⁵ The latter, following convention, appear in the simulated reads as “N” and must be accommodated in computations. Parameters of the `Mason_simulator` were set at default values.

2.4 The Bayes Classifier

Our classifier C is similar to that in Wang et al. (2007). For each read R , posterior probabilities are calculated for each genome, and the decision for that read is the genome with the maximal posterior probability—the MAP (maximal *a posteriori* probability) estimate.

Specifically, the input space \mathcal{I} is the set of all sequences of length 101 from the set $\{A, C, G, T, N\}$; the output space is $\mathcal{O} = \{\text{Adeno}, \text{COVID}, \text{SARS}\}$; and $R_1, R_2 \in \mathcal{I}$ are neighbors if and only if R_1 and R_2 differ by exactly one nucleotide, i.e., their Hamming distance (Navarro, 2001) is equal to one. Therefore, each element of \mathcal{I} has 404 neighbors. Usefully, nature provides a physical interpretation of neighbors as SNPs.

The three likelihood functions, denoted by $L(\cdot|\text{Adeno})$, $L(\cdot|\text{COVID})$, and $L(\cdot|\text{SARS})$, calculated from the triplet distributions. To illustrate for adenovirus,

$$\begin{aligned} L(R|\text{Adeno}) &= P_2(R(1)R(2)|\text{Adeno}) \times T_3((R(1), R(2)), R(3)|\text{Adeno}) \\ &\quad \times T_3((R(2), R(3)), R(4)|\text{Adeno}) \times \dots \\ &\quad \times T_3\left((R(|R| - 2), R(|R| - 1)), R(|R|)|\text{Adeno}\right), \end{aligned} \quad (3)$$

where $P_2(\cdot|A)$ is the pair distribution defined by analogy with (1), and T_3 is given by (2). In (3), we have ignored Ns for simplicity; when they are present, they lead to sums over all possible bases.

To complete the Bayesian formulation, we assume a uniform prior $\pi_R = (1/3, 1/3, 1/3)$ on \mathcal{O} for each read. We then use Bayes’ theorem and the three likelihoods to calculate posterior probabilities over \mathcal{O} , which yield the classifier decisions. For each read R , the posterior probability of $x \in \mathcal{O}$ is

$$p(x|R) = \frac{\pi_R(x)L(R|x)}{\pi_R(\text{Adeno})L(R|\text{Adeno}) + \pi_R(\text{COVID})L(R|\text{COVID}) + \pi_R(\text{SARS})L(R|\text{SARS})}. \quad (4)$$

Finally,

$$C(R) = \arg \max_{x \in \mathcal{O}} p(x|R).$$

We note that since the π_R is uniform, it cancels in (4), so $C(R)$ is also the maximum likelihood estimator (MLE).

3 Key Concepts

This section introduces the boundary and associated surrogate uncertainty measures.

⁵These are cases in which the sequencer detects that a nucleotide is present, but is unable to determine whether it is A, C, G or T. Some DNA read datasets contain other “partial” classifications, for instance, a base that is one of two possibilities.

3.1 The Boundary

The boundary \mathcal{B} associated with C is the set of elements of \mathcal{I} that have at least one neighbor classified differently:

$$\mathcal{B} = \{R \in \mathcal{I} : C(R') \neq C(R) \text{ for some } R' \in N(R)\}. \quad (5)$$

In principle, the notation should also capture dependence on C , but in this case study, C is fixed, so we suppress that dependence.

Note that whenever two reads are classified differently, any path in \mathcal{I} connecting them must contain at least two (neighboring) boundary points. Below we focus on *Hamming paths*, which are the shortest. Given reads $R \neq R'$ with Hamming distance k —they differ in k of 101 locations, a Hamming path from R to R' simply replaces one differing nucleotide in R at a time by the corresponding nucleotide in R' . Therefore, each successive pair on the path are neighbors. Such a path $(R_0 = R, \dots, R_k = R')$ has length $k + 1$; there are $k!$ of them. The “simplest” path simply moves left to right in the character strings. Because $C(R) \neq C(R')$, there must be at least one value of j for which $C(R_j) \neq C(R_{j+1})$, in which case, the neighbors R_j and R_{j+1} both belong to \mathcal{B} .

To provide initial numerical evidence, Table 1 contains the confusion matrix for the Bayes classifier C , which is computable because we know the source of each read, and shows that C performs well, albeit not spectacularly. Looking only at the columns, Table 1 identifies 3,867,933 = 1933 × 2001 pairs, the first of which is classified as Adeno and the other as COVID; 3,740,355 = 1933 × 1935 pairs, the first of which is classified as Adeno and the other as SARS; 3,871,935 = 2001 × 1935 pairs, the first of which is classified as COVID and the other as SARS. Any conclusion about the seemingly large size of these numbers should be tempered by remembering that $|\mathcal{I}| = 5^{101}$.

Table 1: Confusion matrix for the Bayes classifier C . The correct classification rate is 81.55%.

Source	Decision			Sum
	Adeno	COVID	SARS	
Adeno	1601	115	250	1966
COVID	64	1717	215	1996
SARS	268	169	1470	1907
Sum	1933	2001	1935	5869

3.2 Surrogate Uncertainty Measures

The Bayes classifier C possesses two inherent and related measures of uncertainty, the maximum posterior likelihood and the entropy of the posterior distribution.⁶ Other classifiers may lack such measures, although there might be informal measures of “confidence.” For instance, partition models often characterize confidence in terms of the homogeneity of terminal nodes, which is a useful but not fully principled measure, since it does not result from a statistical model.

⁶The entropy of a probability distribution P on a finite set \mathcal{S} is $H(P) = -\sum_{s \in \mathcal{S}} p(s) \log p(s)$, with the convention that $0 \times -\infty = 0$. Entropy is minimized by distributions concentrated at a single point and maximized at the uniform distribution on \mathcal{S} , with maximizing value $\log(|\mathcal{S}|)$.

We now introduce three surrogate measures that are computable for *any* classifier operating on the same input space \mathcal{I} . Two of them, for a read R , are functions of the distribution on \mathcal{O} of $\{C(R') : R' \in N(R)\}$.

The first measure, *Boundary Status*, of a read R is the number of genomes other than that assigned to R itself appearing among the outputs for its 404 neighbors. Thus, $BS(R) = 0$ means that all neighbors are classified the same as the read, i.e., R is not on the boundary; $BS(R) = 1$ means that one of the other genomes appears among the neighbors, and $BS(R) = 2$ means that both other genomes do.

The second measure, *Neighbor Similarity*, quantifies the extent to which the neighbors of a read have the same decision it does. In symbols, given a read R ,

$$NS(R) = 1 - H(q_R, q_{N(R)}), \quad (6)$$

where H denotes Hellinger distance (Nikulin, 2001), q_R is the degenerate probability distribution on \mathcal{O} concentrated on $C(R)$, and $q_{N(R)}$ is the probability distribution on \mathcal{O} of $\{C(R') : R' \in N(R)\}$. The Hellinger distance between distributions p and q on a finite set A is given by

$$H(p, q) = \sqrt{\frac{1}{2} \sum_{x \in A} \left(\sqrt{p(x)} - \sqrt{q(x)} \right)^2}. \quad (7)$$

Hellinger distance is a metric, and takes values between zero (if and only if $p = q$) and one (when p and q have disjoint supports). In symbols,

$$\mathcal{B} = \{R \in \mathcal{I} : NS(R) < 1\}.$$

Unlike BS , NS takes account only of *how many* neighbors differ, not their values. The almost inescapable interpretation of $NS(R)$ is uncertainty regarding the classification of R . If $NS(R) = 1$, *all* neighbors of R have the same decision as R , and, intuitively, we would be more certain of the decision for R . At the other extreme, if $NS(R)$ were zero,⁷ changing any single nucleotide of R changes the decision, in which case we would be highly uncertain about $C(R)$.

Both BS and NS can be calculated for any classifier whose input space has the graph structure described in Section 2, and their values returned along with the classifier decision. The only but not trivial burden is computational: the classifier must be run on *all* neighbors of the input. See Section 5 for further discussion.

A third surrogate measure is equally intuitive but more speculative, because we lack a demonstrably feasible method for calculating it. It is the *Distance from the Boundary*: $DB(R)$ is the minimum value of k for which there exists a path $(R_0 = R, \dots, R_k)$ in \mathcal{I} such that $R_k \in \mathcal{B}$. Then, the interpretation is that the larger $DB(R)$, the greater the certainty regarding $C(R)$, because the more R would have to be “mutated” in order to change $C(R)$. It is easy to obtain upper bounds on $C(R)$: for any other read R' with $C(R') \neq C(R)$, $DB(R)$ is at most the Hamming distance between R and R' . The unresolved problem is exact computation of $DB(R)$. Also, the ubiquity of the boundary suggests that DB may lack discriminatory power not already present in BS and NS .

4 Results

All analyses reported here were performed using the R Language and Environment for Statistical Computing (R Core Team, 2020). Data and R code are available at <https://doi.org/10.7910/DVN/FXOFLLI>.

⁷Which does not occur in our case study.

4.1 DNA Reads

Table 2 contains cross-tabulations of Boundary Status for the 5869 reads as a function of (1) read source, (2) the classifier decision and (3) correctness of the classifier decision. Before discussing details, we observe that 1791 of the 5869 reads, or 30.52%, lie on the boundary \mathcal{B} , the first concrete evidence that \mathcal{B} is not “thin.” Of these 1791 boundary reads, 190 (3.24%) have Boundary Status equal to 2.

Looking in more detail, Figure 1 shows the neighbor distributions over \mathcal{O} for all the reads. In it, three-dimensional probabilities (barycentric coordinates) are converted to Cartesian coordinates, as points in an equilateral triangle. Pure Adeno, in the sense that $\text{Prob}(\text{Adeno}) = 1$, is the top vertex, pure COVID is the lower left vertex, and pure SARS is the lower right vertex. Because we know the sources of the reads, we create separate displays for each source. The white diamond in each scatterplot is the centroid of the probabilities it contains, and all three centroids lie close to the source. A read on an edge has neighbors of two kinds, one of which is that of the read itself. (In theory, a read could have $\text{BS}(R) = 2$ without neighbors of its same type, but this bizarre case of a read classified differently from all of its neighbors does not occur in our dataset. The minimum number of concordant neighbors is 11.) A read in the interior of the triangle has neighbors with all three decisions.

The topmost table in Table 2 shows Boundary Status as a function of read source, so that its *row sums* match those in Table 1. The distribution of Boundary Status is not uniform across the three sources: boundary percentages are 30.0% for Adeno reads, 22.1% for COVID reads and 40.0% for SARS reads. The p -value for the χ^2 test on this table is less than 10^{-16} , so the differences are significant. SARS reads are more likely than others to lie on the boundary.

The middle table in Table 2 provides a complementary view of Boundary Status as a function of classifier decision, so that its row sums match the *column sums* in Table 1. Here also, the χ^2 test is massively significant. SARS remains the outlier: relatively more reads classified as SARS lie on the boundary than for Adeno or COVID.

The bottom table in Table 2 shows Boundary Status as a function of correctness of the classifier decision, and begins to get at the heart of the matter. Of incorrectly decided reads, 64.66% lie on the boundary, while only 22.81% of correctly decided reads lie on the boundary! The classifier is struggling in the vicinity of \mathcal{B} , and one rightly should be less confident of such decisions. The χ^2 statistic for this table is 726.65, more than five times that for source (topmost table), and three times that for decision (middle table). Moreover, the Kolmogorov-Smirnov test for the two empirical cumulative distribution functions (ECDFs) is massively significant: Boundary Status is higher for incorrect decisions than for correct ones.

In parallel to Table 2, Figures 2 shows the distribution of Neighbor Similarity as a function of read source, read decision and decision correctness. In particular, these ECDFs make clear how many reads are *not* on the boundary, for which $\text{NS}(R) < 1$. The qualitative messages mirror those in Table 2.

Neighbor Similarity is, obviously, more burdensome computationally than simply running the classifier. However, the computation is infinitely parallelizable: classifier evaluation for one neighbor is completely independent of that for other neighbors. An alternative strategy is to sample neighbors, which generates estimates for Neighbor Similarity. Figure 3 provides initial evidence that sampling can be effective. It is based on the entire 5869-element read dataset. The x -axis is the number of reads sampled; the order was randomized for each read. The y -axis is more complicated. For each read R and sample size k we calculated a partial Neighbor Similarity $\text{NS}(R, k)$ using (6). Then for each k , we fitted a linear model with $\text{NS}(\cdot, 404) = \text{NS}$ as response and $\text{NS}(\cdot, 1), \dots, \text{NS}(\cdot, k)$ as predictors. Finally, the y -axis contains values

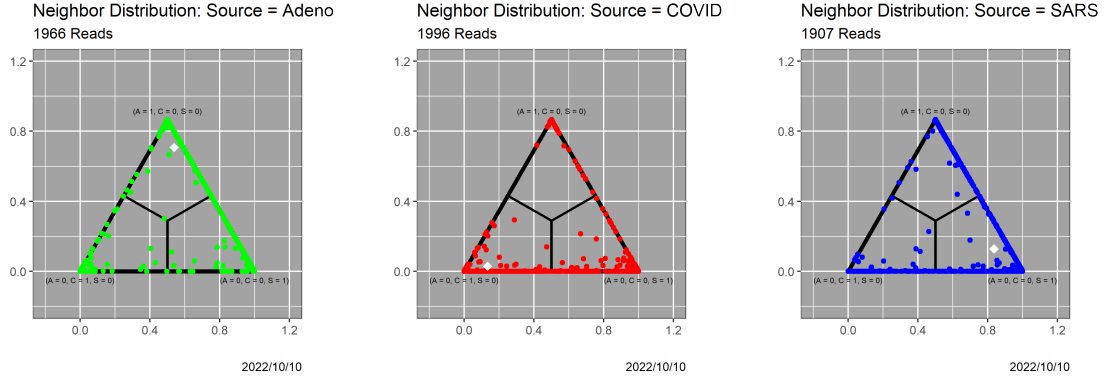


Figure 1: Neighbor distributions for the 5869 reads, by source.

Table 2: *Top*: Cross-tabulation of read source and Boundary Status. *Middle*: Cross-tabulation of read decision and Boundary Status. *Bottom*: Cross-tabulation of decision correctness and Boundary Status.

Source	Boundary Status			Sum
	0	1	2	
Adeno	1378	526	62	1966
COVID	1554	375	67	1996
SARS	1146	700	61	1907
Sum	4078	1601	190	5869

Decision	Boundary Status			Sum
	0	1	2	
Adeno	1408	491	34	1933
COVID	1575	345	81	2001
SARS	1095	765	75	1935
Sum	4078	1601	190	5869

Correct?	Boundary Status			Sum
	0	1	2	
No	382	598	101	1081
Yes	3696	1003	89	4788
Sum	4078	1601	190	5869

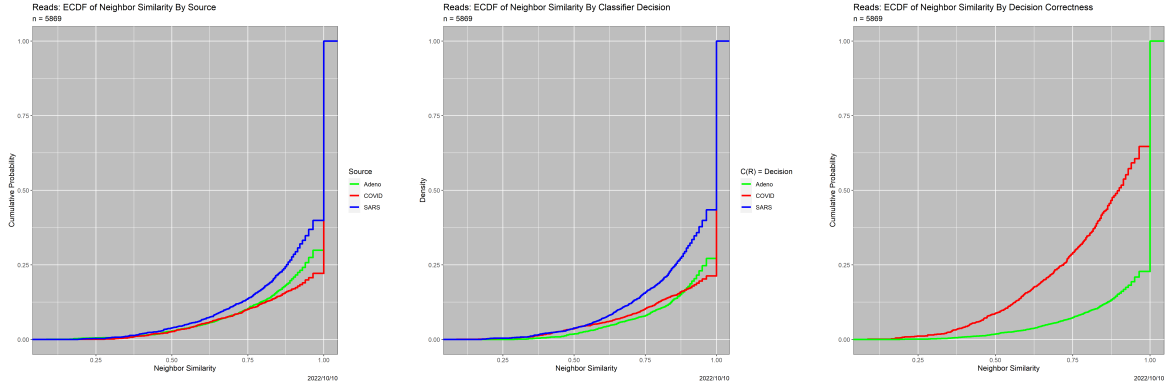


Figure 2: ECDFs of Neighbor Similarity. *Left*: by read source. *Center*: by classifier decision. *Right*: by decision correctness

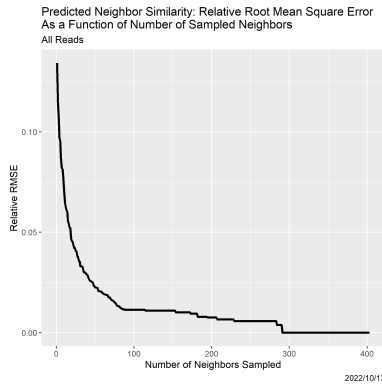


Figure 3: Relative root mean squared error in estimating NS from samples of neighbors.

of relative root mean squared error (RRMSE)⁸ for each model. From the figure, an RRMSE of 5% requires only 20 sampled neighbors, and there is minimal benefit from sample sizes exceeding 80. How these values scale with problem size is not clear.

4.2 Relationship to Inherent Measures of Uncertainty

We next investigate the relationships between Neighbor Similarity and the two inherent measures for C : $MP(\cdot)$ —the maximum of the three posterior probabilities, and $PE(\cdot)$ —the entropy of the posterior distribution. Always, $MP(R) \geq 1/3$, and the closer $MP(R)$ is to 1, the more certain C is of the decision for R . Figure 4 depicts the relationship between MP and NS as a function of classifier decision. Because one ultimate goal is to employ NS in contexts where neither MP nor a model-derived analog is available, it would not have been appropriate to use read source there rather classifier decision. The correlation between MP

⁸The square root of the mean squared error for the linear model divided by the mean response.

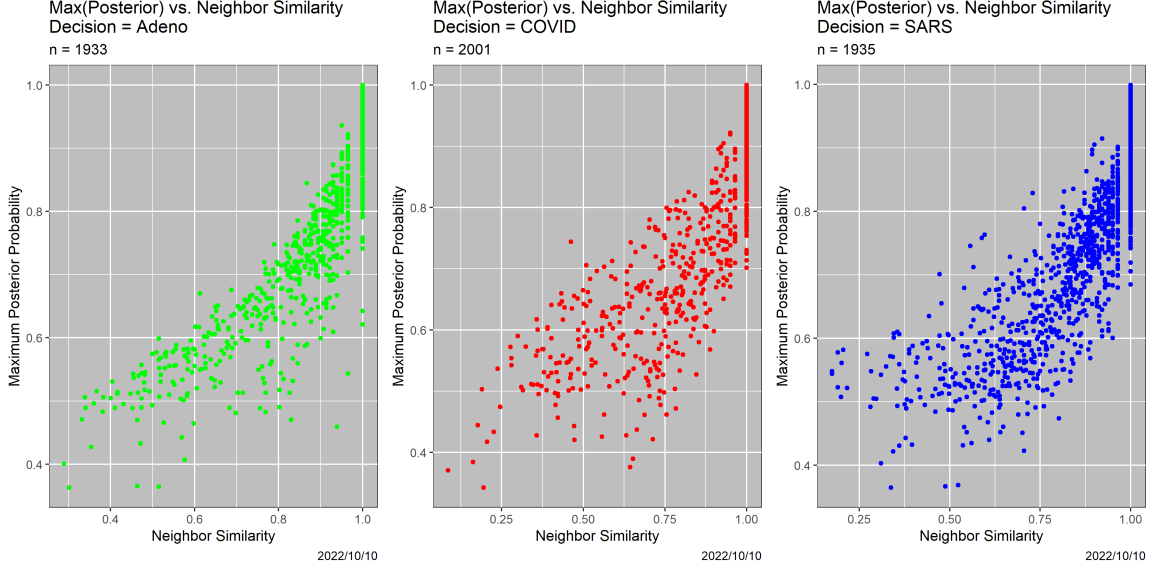


Figure 4: Scatterplots of MP versus NS, by classifier decision. *Left:* decision = Adeno, *Center:* decision = COVID. *Right:* decision = SARS.

and NS is 0.8488; the disaggregated correlations are 0.8784 for Adeno, 0.8502 for COVID and 0.8400 for SARS.

We can construct good statistical models to predict $MP(R)$ from $NS(R)$ and $C(R)$, of which we present two. The first is a fully saturated quadratic model reflecting the curvature evident in Figure 4:

$$MP = \alpha_{C(R)} NS(R)^2 + \beta_{C(R)} NS(R) + \gamma_{C(R)}. \quad (8)$$

As the notation suggests, the process is equivalent to fitting three separate models to datasets constructed by filtering on $C(R)$. The adjusted coefficient of determination for the model is 0.8341, indicating good fit. Figure 5 shows actual and predicted values of MP by classifier decision. Much of the imperfect fit is simple inability to predict the continuous variable MP within sets of reads having the same value of NS (especially those with $NS = 1$), which the figure makes perfectly clear.

Figure 6 shows a partition model—in this case, a regression tree (Breiman et al., 2017; Hastie et al., 2001). The tree has been pruned to only seven terminal nodes using standard heuristics that trade off predictive accuracy for model complexity. The mean squared error is slightly superior to that for the regression model—0.003313057 as compared to 0.003794415.

The second inherent measure of uncertainty for C is posterior entropy PE. The correlations between NS and PE are -0.7167 (aggregated), -0.7437 (Adeno), -0.7280 (COVID), and -0.6964 (SARS). Analogously to Figure 4, Figure 7 contains scatterplots of PE versus NS by classifier decision. Clearly, PE is predicted less well by NS and classifier decision than is MP. For a quadratic regression model analogous to that in (8), the adjusted R^2 is only 0.6928. The corresponding partition model, shown in Figure 8, identifies which variables and interactions are most relevant. Again, the mean squared error is slightly lower than for the quadratic regression model.

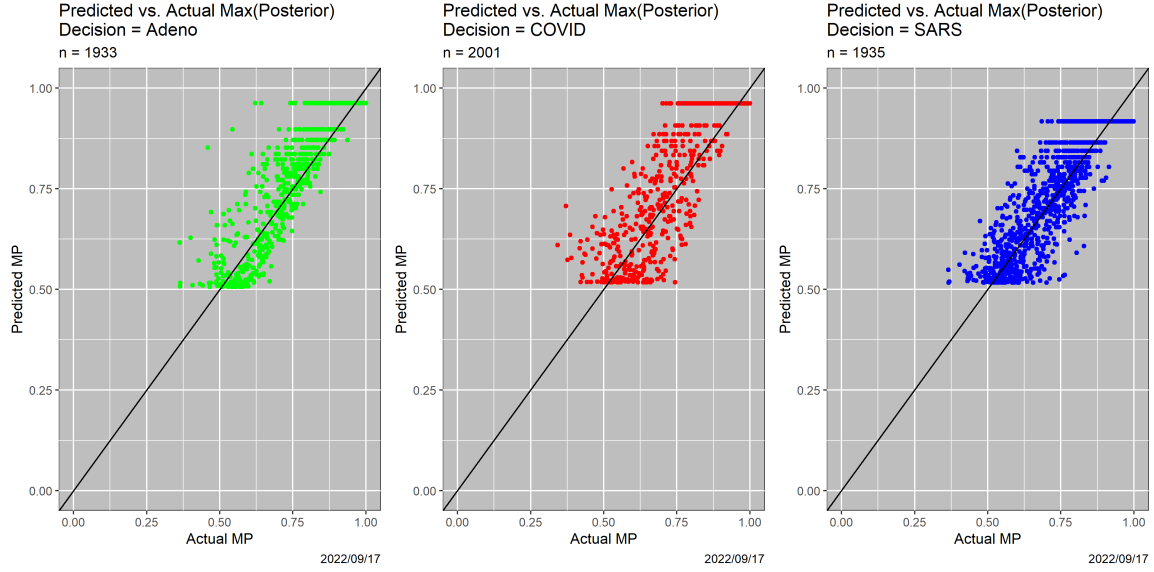


Figure 5: For the quadratic regression model, scatterplots of predicted MP versus actual MP, by classifier decision. *Left:* decision = Adeno, *Center:* decision = COVID. *Right:* decision = SARS.

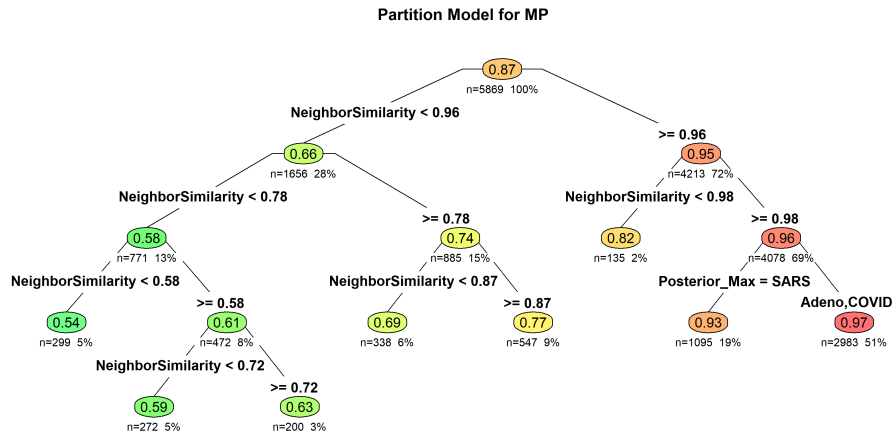


Figure 6: Partition model for $MP(R)$ using $NS(R)$ and $C(R)$ as predictors. Values in each node are means of MP; numbers below nodes are counts and percentages; edges are labeled by the predictor on which the split occurs and the associated value.

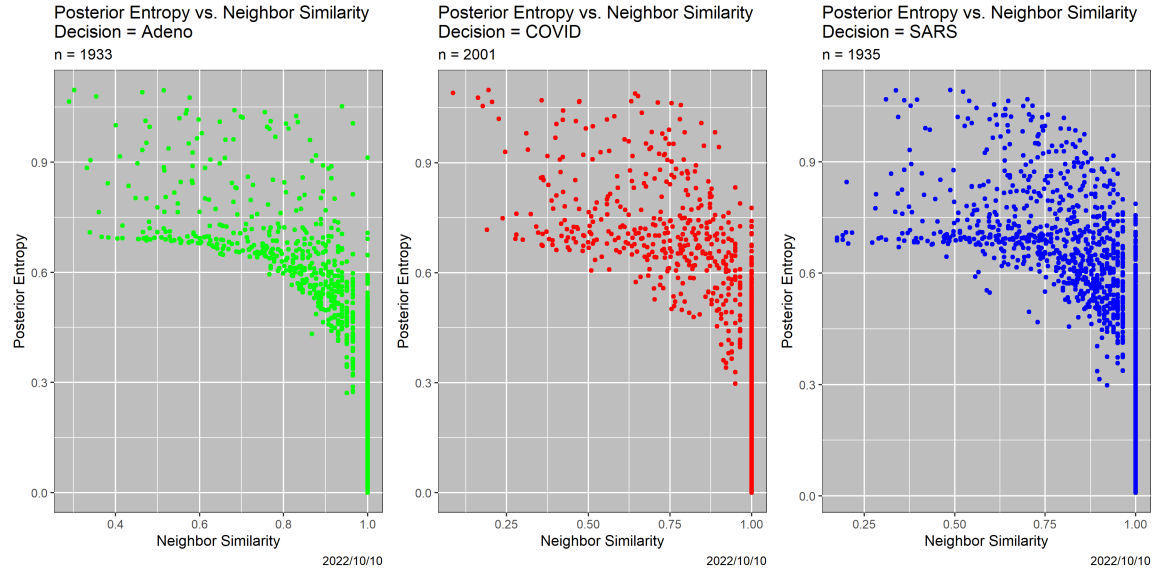


Figure 7: Scatterplots of PE versus NS, by classifier decision. *Left*: decision = Adeno, *Center*: decision = COVID. *Right*: decision = SARS.

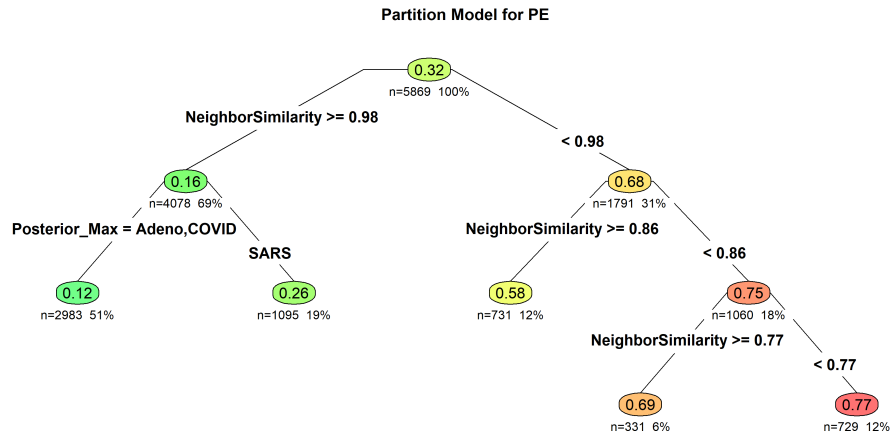


Figure 8: Partition model for $PE(R)$ using $NS(R)$ and $C(R)$ as predictors. Values in each node are means of PE; numbers below nodes are counts and percentages; edges are labeled by the predictor on which the split occurs and the associated value.

4.3 Exploring the Boundary

We present here three strategies for locating the boundary \mathcal{B} and exploring its structure.

The first and simplest method for locating \mathcal{B} has been mentioned already in Section 3.1: if $C(R) \neq C(R')$, then any path from R to R' contains at least two elements of \mathcal{B} . Within the reads dataset, there are 11,480,223 such pairs. If we eliminate duplicates and for each pair consider only the Hamming path that in left-to-right order replaces each nucleotide in R differing from the corresponding nucleotide in R' by the latter, then we have a mechanism for locating boundary pairs. Based on a random sample of 25 origin reads, but considering *all other reads with different decisions*, 1,242,162 boundary points were identified. There is significant variability, however, as shown in Table 3. Moreover, the table shows that paths originating from reads classified as COVID differ significantly from those originating at reads classified as Adeno or SARS.

Table 3: Results for Hamming paths from 25 randomly sampled reads to all other reads with differing classifier decisions.

SampleID	Decision	Boundary Points	Classifier Evaluations
958	Adeno	71646	296286
1283	SARS	59530	298994
256	Adeno	50388	294923
1137	SARS	32052	303790
638	SARS	75160	296341
4905	Adeno	57804	302409
2914	Adeno	42374	292198
513	COVID	63228	289336
2160	COVID	52038	292711
2835	COVID	58806	293286
1386	Adeno	31784	304305
3584	Adeno	40992	296839
1912	SARS	34274	296172
4857	Adeno	31002	302553
3713	Adeno	37630	292638
4196	Adeno	32332	300289
5113	Adeno	68118	293587
4090	SARS	43252	297002
1981	Adeno	49500	293600
2666	Adeno	50380	295404
2153	COVID	60832	295370
2674	SARS	52446	295611
351	Adeno	75608	301328
5154	SARS	37546	297293
1940	Adeno	33440	303009

Of course, whenever $C(R) \neq C(R')$, there are multiple Hamming paths connecting R and R' . Initial

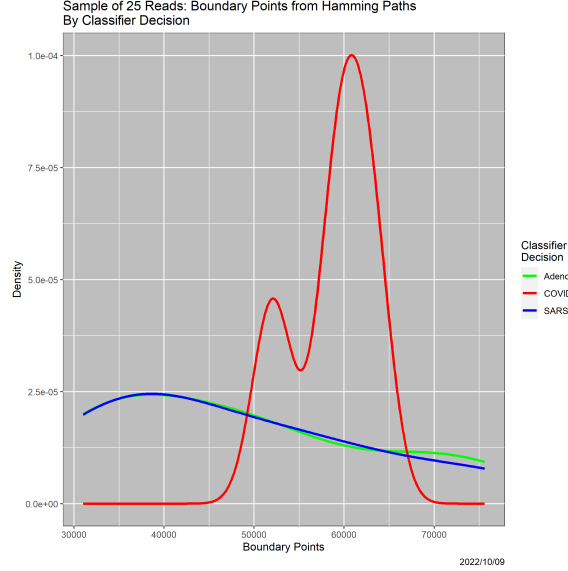


Figure 9: Numbers of boundary points on Hamming paths, by classifier decision.

experiments have shown that a strategy of using multiple Hamming paths is not materially more effective than using one Hamming path in terms of unique boundary pairs identified relative to computational effort. The reason, we hypothesize, is that multiple paths from R to R' often cross \mathcal{B} at the same places.

A second strategy, motivated by Markov chain Monte Carlo (MCMC) methods used to investigate large spaces of contingency tables (Diaconis and Sturmfels, 1998), is to perform random walks originating from sequences $x \in \mathcal{I}$, moving to a neighboring sequence at each step, and checking whether \mathcal{B} has been crossed, i.e., whether the classifier decision has changed. Were \mathcal{B} thin, this strategy of wandering randomly would be horribly ineffective. But, because \mathcal{B} is not thin, it works reasonably well. To illustrate, we chose a random sample of 100 reads for each decision, and ran random walks of length 2000 steps originating at each. Keeping in mind that each boundary pair comprises two boundary points, 35,352 boundary points were found, of 600,300 sequences visited.

The hypothesis that this process would be more efficient if started from a boundary point is not confirmed. We repeated the experiment starting from 300 sequences known to be boundary points, again spread uniformly over the three decisions. The improvement over random walks starting from random sequences is minimal; indeed, fewer boundary points—35,238—were identified. We interpret this as further confirmation that the boundary is not thin, so that starting from it generates little benefit. Note that *none* of the 600 random walks failed to cross the boundary, so it is never far away. Summary statistics appear in Table 4.

From Table 5, both versions of random walks are less efficient than Hamming paths, as measured by the number of boundary points identified divided by the number of classifier evaluations, which is the primary computational expense of boundary exploration. But, these results again confirm the omnipresence of \mathcal{B} .

Note that in our implementation both Hamming paths and random walks may pass through boundary points without identifying them, which can happen because, for computational efficiency, each point in the path is compared only to its predecessor rather than all of its neighbors.

Table 4: Comparison of summary statistics for 300 random walks originating at reads and for 300 random walks originating at boundary points.

Origins	Minimum	Mean	Maximum
Reads	28	117.77	274
Boundary Points	16	117.46	280

Table 5: Summary of methods for exploring the boundary.

Method	Classifier Evaluations	Boundary Points	Efficiency
Hamming Paths	7,425,274	1,242,162	16.73%
Random Walks, Random Origin	600,300	34,932	5.82%
Random Walks, Boundary Origin	600,300	25,238	5.87%
Crawling Boundary	8,146,256	20,164	0.25%

Finally, we present random walk-like methods for “crawling the boundary” once it has been reached. We simulated 100 random walks starting at boundary points, but constrained to move *only to adjacent and not previously visited boundary points*. Each crawl was allowed to continue for 250 steps, or until it was not possible to move to another and not previously visited boundary point. The fact that such points exist further confirms the geometric complexity of the boundary: it is “hairy” in the sense that the points from which no continuation is possible are tips of hairs.

Crawling the boundary, while insightful, is not efficient. Of the 100 random walks, 64 did not terminate within 250 steps, indicating that the boundary \mathcal{B} is significantly contiguous. The lengths of crawls that did terminate range from 5 to 242, with no discernible structure to their distribution. The 36 crawls that did terminate are the hairs mentioned in the preceding paragraph—points at which continuing on the boundary is possible only by backtracking. While in the minority, they are nevertheless not rare. Beyond this, the boundary is convoluted: all three decisions are present in 58 of the 100 crawls. Put differently, if one were to think of three boundaries—an Adeno–COVID boundary, an Adeno–SARS boundary, and a COVID–SARS boundary—they cross each other frequently, as evidenced by the 190 reads with neighbors of all three types. In all other crawls, the decisions must and do alternate, indicating that some segments of the boundary lie between two decisions.

The inefficiency of crawling the boundary, which is apparent in Table 5, is partly an artifact of our computational implementation. At each step, we classify *all* neighbors before determining if it is possible to proceed. Computation would be reduced by examining neighbors sequentially, and proceeding once a neighbor with a differing classification is identified.

4.4 Do Boundary Points Differ from Other Reads?

Our final results address a natural question: do the 1791 boundary reads in our dataset differ from the 4078 other reads? Figure 10 provides initial insight. It contains scatterplots of the four components of a multi-dimensional scaling (MDS) (Kruskal and Wish, 1978) of the triplet distributions, colored by Boundary

Status. The most striking feature is the concentration of values of Component 1 for reads R with $BS(R) = 2$, which is reinforced by the upper left-hand panel in Figure 11. This latter figure contains plots of the ECDFs of each of the four components, disaggregated by Boundary Status; the colors match those in Figure 10. In fact because of overplotting in Figure 10, there is additional structure that is less visible in it than in Figure 11. Notably, there are many instance where one ECDF lies entirely below another, including Component 1 ($BS = 2$) below Component 1 ($BS = 1$); effectively, Component 3 ($BS = 0$) below Component 3 ($BS = 1$) below Component 3 ($BS = 2$); Component 4 ($BS = 0$) below Component 4 ($BS = 1$); and Component 4 ($BS = 2$) below Component 4 ($BS = 1$). Almost uniformly the differences among the ECDFs, as evaluated by Kolmogorov-Smirnov tests, are statistically significant.

A partition model with triplet distributions as predictors and BS as response tells a complementary story. Without pruning, the model has 818 terminal nodes, with sizes ranging from 1 to 296, and predicts Boundary Status exactly. When the model is pruned with standard heuristics, there are 705 nodes ranging in size from 1 to 347, with the confusion matrix shown in shown in Table 6. The correct classification rate is 98.76%.

Many analysts would still be uncomfortable that this model is overfit, so in Table 7, we show all possible pruned versions of the model, as generated by the R package `rpart`. At the top is the “default model” that predicts all reads to have Boundary Status 0. At the bottom is the unpruned, and perfect, model. Halving the incorrect classification rate from 30% to 15%, for instance, requires only 182 terminal nodes. Their sizes range from 3 to 445, with a mean size of 32 and median of 14. To demonstrate the scientific insights that follow from this approach, Table 10, in Appendix B, shows the importance of each of the 64 predictors to the splits that comprise the model, as percentages that sum to 100%. In order, the five most important predictors are TTT (which codes for the amino acid phenylalanine), TAT (tyrosine), GTT (valine), GCG (alanine), and AAG (lysine).

Finally, regarding validation, if the 705-node pruned model is applied to the 6000-element **ReadsNew** dataset discussed in Section 5.2.1, it correctly predicts Boundary Status in 4464 cases, or 74.2%, which is respectable performance given the limited training data.

Table 6: Confusion matrix for the pruned partition model of Boundary Status as a function of triplet distribution, for the 5869 reads. The correct classification rate is 98.76%.

Actual	Predicted			
	0	1	2	Sum
0	4061	17	0	4078
1	49	1552	0	1601
2	4	3	183	190
Sum	4114	1572	183	5869

5 Discussion

There are two themes in this paper: the nature of the boundary and the surrogate measures of uncertainty based on the boundary, especially Neighbor Similarity. Concerning the former, the takeaway message is “beware the boundary.” For our Bayes classifier, all of our analyses suggest that the boundary may comprise

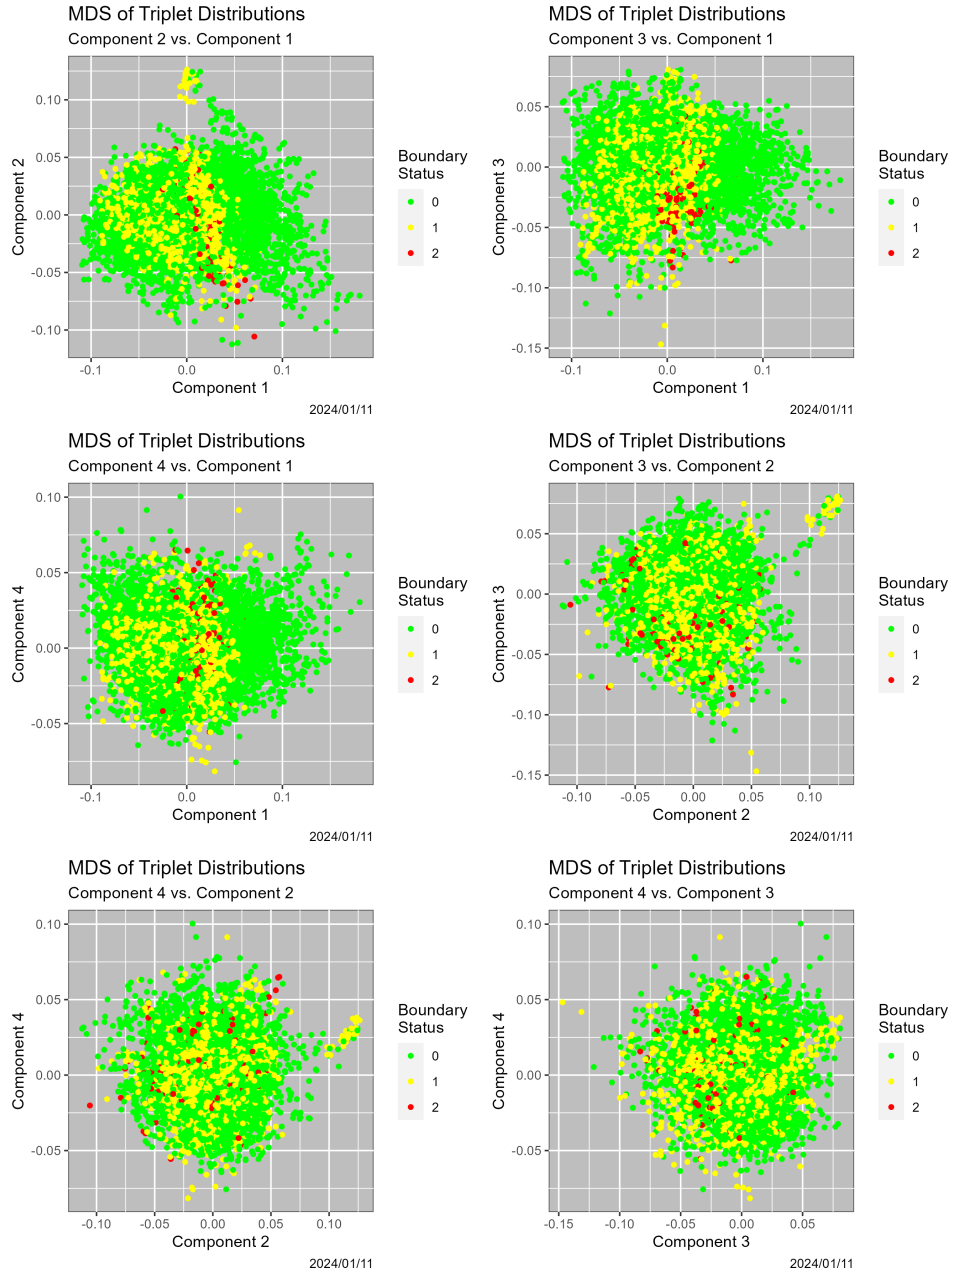


Figure 10: Pairwise scatterplots of the first four MDS components of the triplet distributions, colored by Boundary Status.

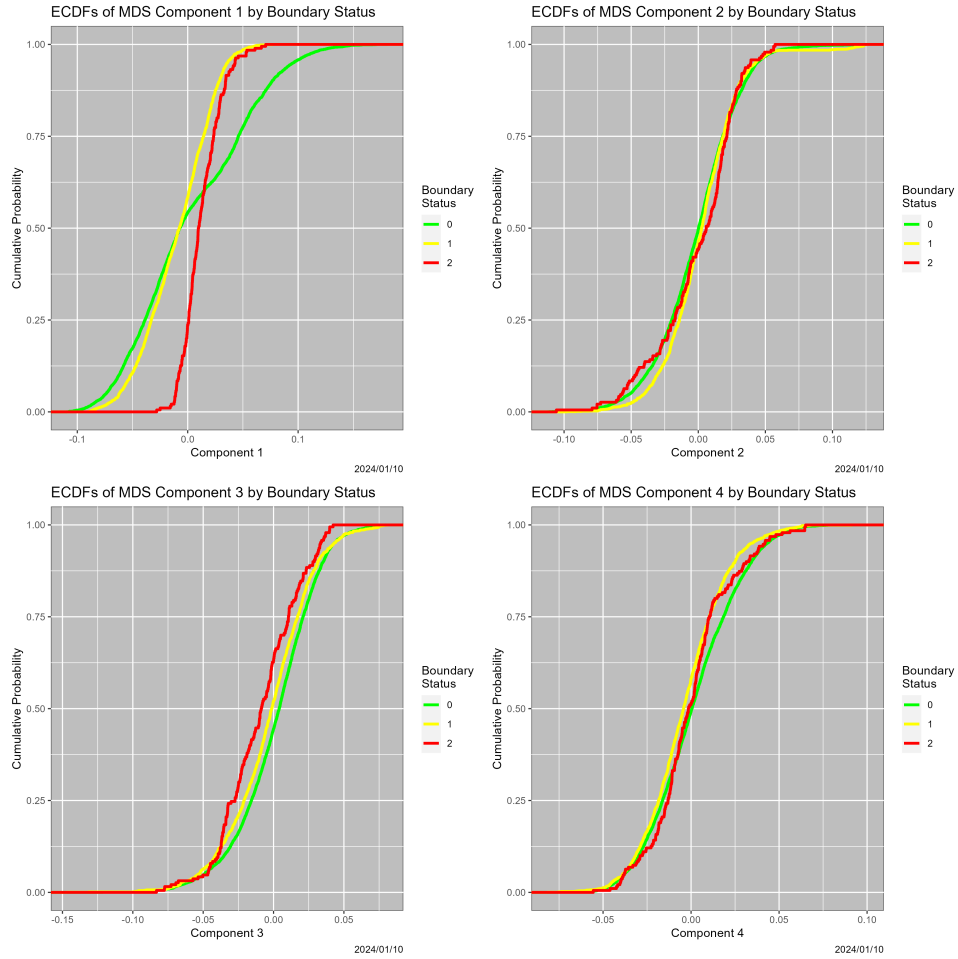


Figure 11: ECDFs of the first four MDS components, colored by Boundary Status.

20% or more of the input space. The boundary is both not sparse and geometrically complicated.

5.1 General Issues

The extent to which lying on or near the boundary \mathcal{B} can or should affect either classifier output or decisions based on it is clearly contextual. The first issue is whether to check boundary status for a given query. So long as the input space has graph structure, the issue is computational, not conceptual: simply check all the neighbors, which, as noted, is completely parallelizable. If one cares only about whether the query is on the boundary, the process can be terminated once a neighbor with a different result is found. However, given the size of the boundary, this strategy is almost surely too blunt. In many cases, both scientific and broader impacts merit a quantified measure such as Neighbor Similarity. Although in our read classification case study, the consequences of misclassification are not major, for classifiers such as *SeqScreen* (Balaji et al., 2022), which is designed to identify pathogenic sequences, the consequences of incorrect decisions may be

Table 7: For all possible pruned partition models, the number of terminal nodes and correct classification rate. The principal pruned version is indicated by ***, and the “halve the error rate” model by +++

Complexity Parameter	Terminal Nodes	Correct Classification Rate
0.004467	1	69.483728
0.003908	35	74.646447
0.003350	41	75.413188
0.003210	42	75.515420
0.002792	49	76.299199
0.002606	61	77.321520
0.002513	65	77.645255
0.002233	74	78.394957
0.002171	110	80.882604
0.002122	123	81.802692
0.002047	128	82.126427
0.001954	131	82.313852
0.001861	140	82.859090
0.001675	143	83.029477
0.001535 +++	182	85.244505
0.001489	189	85.619356
0.001396	204	86.300903
0.001303	214	86.726870
0.001196	223	87.084682
0.001117	232	87.425456
0.000977	357	91.906628
0.000931	364	92.128131
0.000838	375	92.468904
0.000782	410	93.388993
0.000744	420	93.678651
0.000698	441	94.223888
0.000558	445	94.309082
0.000465 ***	705	98.756177
0.000419	712	98.858409
0.000372	724	99.028795
0.000279	773	99.625149
0.000186	815	99.982961
0.000000	818	100.000000

dramatic, and the risks of accepting high-uncertainty classifier results without further investigation may be unacceptable. Not knowing the level of uncertainty is equally problematic.

Furthermore, in the face of rampant concern about data quality in DNA databases (Commichaux et al., 2021; Langdon, 2014; Steinegger and Salzberg, 2020), and given that changing a data point to a neighbor, as done in (Karr et al., 2022) to measure data quality, is seemingly the most innocuous data quality problem,⁹ it seems prudent to care about neighbors.

In Section 4, we showed that that Neighbor Similarity relates to both inherent measures of uncertainty for our Bayes classifier. From an operational perspective, Figure 12 is more important. It contains receiver operating characteristic (ROC) curves for two decision rules, one based on accepting decisions for which MAP exceeds a threshold, which is encoded by color, the other for the decision rule based on accepting decisions for which NS exceeds a threshold. The two ROC curves are essentially identical. For the Bayes classifier, NS is as effective as MAP for making principled decisions.

⁹As least with respect to the accuracy dimension of data quality, which is but one of many dimensions (Karr et al., 2006).

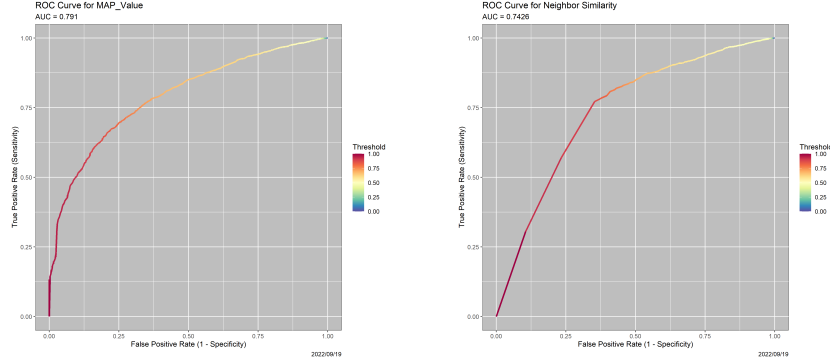


Figure 12: *Left*: ROC curve for the decision rule based on thresholded values of MAP. *Right*: ROC curve for the decision rule based on thresholded value of NS.

5.2 Scientific Generalizability

There are, of course, questions of scientific generalizability: are the properties observed somehow specific to our read dataset, or descriptive of the classifier C more generally? And do they apply to other classifiers?

5.2.1 Other Datasets

To address the first question, we ran the classifier on five additional datasets:

ReadsNew: A dataset containing 2000 Adeno reads, 2000 COVID reads and 2000 SARS reads, all of length 101, generated by the `Mason_simulator`, which can be viewed as addressing the question of replicate variability. There is no reason to expect the classifier to perform differently on it than on the main dataset.

ReadsEcoli: A dataset containing 6000 `Mason_simulator`-generated reads of length 101 from an *E. coli* genome.

Random6K: A dataset containing 6000 random sequences of length 101 generated from $\{A, C, G, T\}$, which represents pure noise.

ReadsMixed1: A dataset combining the original dataset and 2000 elements of **ReadsEcoli**, which represents a situation that the classifier is not prepared for: the presence of a fourth source of reads.

ReadsMixed2: A dataset combining the original dataset and 100 elements of **ReadsEcoli**, which represents an alternative situation that the classifier is not prepared for: contamination from a fourth source of reads.¹⁰

The results, including the core dataset **ReadsOriginal** for comparison, appear in Table 6 and Figure 13. In Table 6, the three columns under “Decisions” are percentages of the classifier output, as are the two

¹⁰Contamination of DNA samples is a pervasive problem in multiple contexts, especially analysis of ancient DNA (Reich, 2018).

columns under “Boundary.” The first two rows, representing two sets of reads from Adeno, COVID and SARS with approximately equal distributions of the read source, do not differ, meaning the that classifier seems not to be vulnerable to replicate variability. The last two rows differ the most from **ReadsOriginal**, and both the Decision distribution and the Boundary distribution differ dramatically from the first two rows. For reasons that are not yet clear, **ReadsEcoli** and **Random6K** are overwhelmingly classified as Adeno. The hypothesis that this constitutes a “vote splitting” artifact of there being one Adenovirus genome and two Coronavirus genomes is demonstrably false. In a set of 30,000 random sequences, if classifier choices are restricted to Adeno and Corona, only 77 of the 27,492 sequences classified as Adeno change to the latter. But **ReadsEcoli** and **Random6K** also differ: using Hellinger distances and empirical p -values, the differences between the Decision distributions and Boundary distributions are massively significant.

The third and fourth rows in Table 6 are, as expected, midway between the first two rows and the last two rows. Note that, for ease of interpretation, row 3 contains **ReadsMixed2**—the case with 100 contaminating *E. coli* reads, which should be, and is, closer to **ReadsOriginal** and **ReadsNew** than **ReadsMixed1**, with 2000 *E. coli* reads.

Figure 13 contains the ECDFs of Neighbor Similarity for all six datasets. That for **ReadsOriginal** (blue) is essentially completely overplotted by those for **ReadsNew** (cyan) and **ReadsMixed2** (green). Interestingly, but consistent with the Boundary columns in Table 6, **ReadsEcoli** is now the most different from **ReadsOriginal**, **ReadsNew** and **ReadsMixed2**, even though it contains “real” reads. We performed one- and two-sided Kolmogorov-Smirnov tests on selected pairs of the ECDFs in Figure 13. No difference involving **ReadsOriginal**, **ReadsNew** and **ReadsMixed2** was remotely significant. On the other hand, differences between **ReadsOriginal** and all of **ReadsMixed1**, **Random6K**, and **ReadsEcoli** were massively significant, in the latter two cases with p -values of zero.

Therefore, Boundary Status and Neighbor Similarity are usable as diagnostics that indicate when a classifier is being used on data that differ from what was expected. For the Bayes classifier, “what is expected” is incorporated in the prior and the likelihood functions (Karr et al., 2023). For many other classifiers, the training data represent “what is expected.” The question is being investigated.

Table 8: Summary of results for the Bayes classifier applied to alternative datasets. Columns for Decision and Boundary are percentages.

Dataset	Count	Decision			Boundary	
		Adeno	COVID	SARS	No	Yes
ReadsOriginal	5869	32.94	34.09	32.97	69.48	30.52
ReadsNew	6000	32.43	33.82	33.75	68.7	31.3
ReadsMixed2	5969	33.86	33.59	32.55	69.69	30.31
ReadsMixed1	7869	48.1	26.2	25.7	74.1	25.9
ReadsEcoli	6000	92.767	2.933	4.300	87.35	12.65
Random6K	6000	90.8333	0.3833	8.7833	78.75	21.25

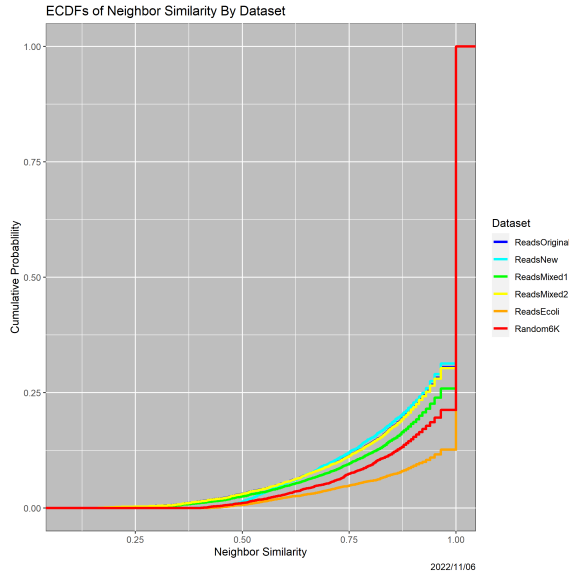


Figure 13: Empirical cumulative distribution functions of Neighbor Similarity for six datasets.

5.2.2 Other Classifiers

Full results will be reported in forthcoming papers, but initial experiments show similar behavior for other classifiers applied to the same dataset, including partition models, random forests and neural networks.

6 Conclusions

The two principal contributions of this paper are surrogate measures of uncertainty for classifiers and methods for investigating their boundaries. In particular, we propose Neighbor Similarity as a measure of uncertainty for classifiers lacking inherent measures of uncertainty. Despite the computational burden, the potential to avoid incorrect decisions is enormous.

As always, at least as many questions are raised as answered. One of the more challenging is whether Neighbor Similarity is viable in the context of production-grade classifiers such as SeqScreen. A central issue may be whether the information gained justifies the computational cost. A (still short) DNA sequence of length 10,000 has more than 40,000 neighbors, and running SeqScreen on all of them may be prohibitive. We showed the potential of sampling to estimate Neighbor Similarity from a subset of neighbors; investigating demonstrably effective strategies to do so is a priority.

Underlying everything is a scientific and statistical issue not addressed in this paper and clearly needing more attention. Is a low value of $NS(R)$ a statement about the read or about the classifier? Or, if present, the training data? As long there is a range of observed values of NS, and especially if there are values near 1, then low values are plausibly statements about reads. On the other hand, uniformly small values of $NS(R)$ seem to suggest problems with the classifier (or, if present, the training data). But then, what if the problem is just innately hard?

Acknowledgements

This research was supported in part by NIH grant 5R01AI100947–06, “Algorithms and Software for the Assembly of Metagenomic Data,” to the University of Maryland College Park (Mihai Pop, PI). We thank Professor Pop for numerous insightful discussions.

References

- Baera, B. R., Gaudinob, M., Charlson, M., Fremes, S. E., and Wells, M. T. (2021). Fragility indices for only sufficiently likely modifications. *Proceedings of the National Academy of Sciences*, 118(49):1–12.
- Balaji, A., Kille, B., Kappell, A. D., Godbold, G. D., Diep, M., Elworth, R. A. L., Z., Albin, Q. D., Nasko, D. J., Shah, N., Pop, M., Segarra, S., Ternus, K. L., and Treangen, T. J. (2022). SeqScreen: accurate and sensitive functional screening of pathogenic sequences via ensemble learning. *Genome Biology*, 23:133.
- Breiman, L., Friedman, J., Olshen, R., and Stone, C. J. (2017). *Classification and Regression Trees*. CRC Press, Boca Raton, FL.
- Cepeda, V., Liu, B., Almeida, M., Hill, C. M., Treangen, T. J., and Pop, M. (2017). MetaCompass: Reference-guided assembly of metagenomes. Preprint, bioRxiv, <https://doi.org/10.1101/212506>.
- Commichaux, S., Shah, N., Ghurye, J., Stoppel, A., Goodheart, J. A., Luque, G. G., Cummings, M. P., and Pop, M. (2021). A critical assessment of gene catalogs for metagenomic analysis. *Bioinformatics*. btab216.
- Diaconis, P. and Sturmfels, B. (1998). Algebraic algorithms for sampling from conditional distributions. *Ann. Statist.*, 26:363–97.
- Hastie, T., Tibshirani, R., and Friedman, J. (2001). *The Elements of Statistical Learning: Data Mining, Inference, and Prediction*. Springer–Verlag, New York.
- Holtgrewe, M. (2010). Mason: A read simulator for second generation sequencing data. *Technical Report FU Berlin*.
- Karr, A. F., Hauzel, J., Porter, A. A., and Schaefer, M. (2022). Measuring quality of DNA sequence data via degradation. *PLoS ONE*, 2022:0221459. DOI: 10.1371/journal.pone.0221459.
- Karr, A. F., Hauzel, J., Porter, A. A., and Schaefer, M. (2023). Application of Markov structure of genomes to outlier identification and read classification. Preprint. arXiv:2112.13117.
- Karr, A. F., Sanil, A. P., and Banks, D. L. (2006). Data quality: A statistical perspective. *Statistical Methodology*, 3(2):137–173.
- Kruskal, J. B. and Wish, M. (1978). *Multidimensional Scaling*. SAGE, New York.
- Langdon, W. B. (2014). Mycoplasma contamination in the 1000 genomes project. *BioData Mining*, 7:3.

- Navarro, G. (2001). A guided tour to approximate string matching. *ACM Computing Surveys*, 33(1):31–88.
- Nikulin, M. S. (2001). Hellinger distance. In *Encyclopedia of Mathematics*. EMS Press, Berlin.
- Pride, D. T., Meinersmann, R. J., Wassenaar, T. M., and Blaser, M. J. (2003). Evolutionary implications of microbial genome tetranucleotide frequency biases. *Genome Research*, 13:145–158.
- R Core Team (2020). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria.
- Reich, D. (2018). *Who We Are and How We Got Here: Ancient DNA and the New Science of the Human Past*. Vintage Books, New York.
- Steinegger, M. and Salzberg, S. L. (2020). Terminating contamination: large-scale search identifies more than 2,000,000 contaminated entries in GenBank. *Genome Biology*, 21(1):115.
- Teeling, H., Meyerdierks, A., Bauer, M., Amann, R., and Glöckner, F. O. (2004a). Application of tetranucleotide frequencies for the assignment of genomic fragments. *Environmental Microbiology*, 6(9):938–947.
- Teeling, H., Waldmann, J., Lombardot, T., Bauer, M., and Glöckner, F. O. (2004b). TETRA: a web-service and a stand-alone program for the analysis and comparison of tetranucleotide usage patterns in DNA sequences. *BMC Bioinformatics*, 5(163).
- Titterton, D., Smith, A., and Makov, U. (1985). *Statistical Analysis of Finite Mixture Distributions*. Wiley, New York.
- Wang, Q., Garrity, G. M., Tiedjel, J. M., and Cole, J. R. (2007). Naïve Bayesian classifier for rapid assignment of rRNA sequences into the new bacterial taxonomy. *Applied and Environmental Microbiology*, 73(16):5261–5267.

A Triplet Distributions of the Three Genomes

Table 9: Triplet distributions for the adenovirus, COVID and SARS genomes used in this paper.

Triplet	Adeno	COVID	SARS	Triplet	Adeno	COVID	SARS
AAA	0.031826	0.026367	0.025581	GAA	0.017496	0.012899	0.015261
AAC	0.020016	0.010660	0.018051	GAC	0.012220	0.005982	0.012337
AAG	0.018463	0.016776	0.018891	GAG	0.013832	0.007252	0.013278
AAT	0.018551	0.030176	0.021917	GAT	0.011927	0.021621	0.015597
ACA	0.020016	0.012699	0.026219	GCA	0.017847	0.008221	0.014421
ACC	0.015327	0.006851	0.013076	GCC	0.015063	0.004278	0.007866
ACG	0.010316	0.003709	0.005210	GCG	0.015327	0.002373	0.004975
ACT	0.016265	0.016609	0.022018	GCT	0.016499	0.013868	0.020908
AGA	0.014213	0.016208	0.018085	GGA	0.016704	0.005514	0.011698
AGC	0.017701	0.007519	0.011765	GGC	0.014243	0.005247	0.009849
AGG	0.015591	0.008421	0.013984	GGG	0.012279	0.003409	0.004975
AGT	0.014711	0.019015	0.015059	GGT	0.013041	0.018346	0.013916
ATA	0.012836	0.024429	0.013345	GTA	0.013334	0.020151	0.014723
ATC	0.011224	0.010694	0.011294	GTC	0.010228	0.007419	0.009984
ATG	0.017378	0.029475	0.026085	GTG	0.014067	0.016308	0.018488
ATT	0.018990	0.038765	0.024438	GTT	0.016294	0.037562	0.019698
CAA	0.020573	0.012565	0.024471	TAA	0.018961	0.032148	0.019160
CAC	0.014008	0.006015	0.016202	TAC	0.015679	0.017244	0.019933
CAG	0.019342	0.008956	0.014891	TAG	0.010579	0.018179	0.011832
CAT	0.017115	0.012030	0.018589	TAT	0.012836	0.039533	0.019026
CCA	0.019400	0.006149	0.013311	TCA	0.013774	0.012498	0.020202
CCC	0.014067	0.002573	0.004773	TCC	0.013744	0.006115	0.007059
CCG	0.010257	0.001604	0.003059	TCG	0.008059	0.003676	0.005849
CCT	0.014506	0.009491	0.011631	TCT	0.014301	0.019416	0.019093
CGA	0.009055	0.002406	0.004672	TGA	0.015503	0.023593	0.022018
CGC	0.015503	0.001771	0.004471	TGC	0.017290	0.014203	0.022085
CGG	0.010257	0.001571	0.002756	TGG	0.018170	0.019115	0.018723
CGT	0.009143	0.005614	0.007194	TGT	0.017027	0.038464	0.026724
CTA	0.013012	0.017544	0.018723	TTA	0.018873	0.044981	0.023160
CTC	0.011459	0.007085	0.012000	TTC	0.016968	0.016508	0.018925
CTG	0.017525	0.014203	0.018891	TTG	0.019019	0.035390	0.026085
CTT	0.019576	0.020552	0.024034	TTT	0.030595	0.059985	0.027463

B Variable Importance for a Pruned Partition Model

Variable importance for a partition model measures the extent to which each predictor affects the splits in the model. The values below are for the 182-terminal node model in Section 4.4.

Table 10: Relative importance of the 64 predictors for the “halve the error rate” pruning of the partition model in Section 4.4.

Variable	Importance	Variable	Importance
TTT	4.5974	GGA	1.3454
TAT	4.5730	GAA	1.3437
GTT	3.6585	CCG	1.2929
GCG	3.6076	ACG	1.2341
AAG	2.7438	AAC	1.1639
CGG	2.6345	AGA	1.1582
CAC	2.5845	GAC	1.1186
ATA	2.5252	CAG	1.1119
TTA	2.4875	ATC	1.0779
CGC	2.4463	TCT	1.0733
CCC	2.1925	TAC	1.0558
AAA	2.0777	GCC	1.0429
TTG	2.0324	GAG	1.0367
GAT	2.0316	TGA	1.0167
ATT	2.0179	CAT	1.0009
ATG	1.8936	TCG	0.9881
TGT	1.8814	GTA	0.9734
AGG	1.7983	CGA	0.9728
TAA	1.7764	CCT	0.8902
ACA	1.7416	GTC	0.8836
GGC	1.7339	CTA	0.8758
AAT	1.7241	TGC	0.8617
CTT	1.7121	TCA	0.8203
TTC	1.6527	GGT	0.7777
GCA	1.6409	CTG	0.7758
AGC	1.6359	ACT	0.6747
CCA	1.5917	GCT	0.6221
AGT	1.5696	TGG	0.6044
ACC	1.5281	CTC	0.5921
CAA	1.4947	TCC	0.5856
TAG	1.3968	CGT	0.3860
GTG	1.3584	GGG	0.3021