

Automatic ESG Assessment of Companies by Mining and Evaluating Media Coverage Data: NLP Approach and Tool

Jannik Fischbach^{1,2*}, Max Adam^{3*}, Victor Dzhagatspanyan^{3*}, Daniel Mendez^{2,4}, Julian Frattini⁴, Oleksandr Kosenkov², and Parisa Elahidoost²

¹ Netlight Consulting GmbH, Sternstraße 5, 80538 Munich, Germany,
jannik.fischbach@netlight.com

² fortiss GmbH, Guerickestraße 25, 80805 Munich, Germany
{fischbach,mendez,kosenkov,elahidoost}@fortiss.org

³ Technical University of Munich, Arcisstraße 21, 80333 Munich, Germany
{firstname}.{lastname}@tum.de

⁴ Blekinge Institute of Technology, Valhallavägen 1, 371 41 Karlskrona, Sweden
{firstname}.{lastname}@bth.se

Abstract. Context: Sustainable corporate behavior is increasingly valued by society and impacts corporate reputation and customer trust. Hence, companies regularly publish sustainability reports to shed light on their impact on environmental, social, and governance (ESG) factors. **Problem:** Sustainability reports are written by companies themselves and are therefore considered a *company-controlled* source. Contrary, studies reveal that *non-corporate* channels (e.g., media coverage) represent the main driver for ESG transparency. However, analysing media coverage regarding ESG factors is challenging since (1) the amount of published news articles grows daily, (2) media coverage data does not necessarily deal with an ESG-relevant topic, meaning that it must be carefully filtered, and (3) the majority of media coverage data is unstructured. **Research Goal:** We aim to extract ESG-relevant information from textual media reactions automatically to calculate an ESG score for a given company. Our goal is to reduce the cost of ESG data collection and make ESG information available to the general public. **Contribution:** Our contributions are three-fold: First, we publish a corpus of 432,411 news headlines annotated as being environmental-, governance-, social-related, or ESG-irrelevant. Second, we present our tool-supported approach called **ESG-Miner** capable of analyzing and evaluating headlines on corporate ESG-performance automatically. Third, we demonstrate the feasibility of our approach in an experiment and apply the **ESG-Miner** on 3000 manually labeled headlines. Our approach processes 96.7 % of the headlines correctly and shows a great performance in detecting environmental-related headlines along with their correct sentiment. We encourage fellow researchers and practitioners to use the **ESG-Miner** at <https://www.esg-miner.com>.

Keywords: Natural Language Processing · ESG Assessment · Social Media Mining · Corporate Social Responsibility.

* The authors contributed equally to this paper.

1 Introduction

Context Corporate Social Responsibility (CSR) plays an increasingly important role in today’s society and affects the public perception of a company. In fact, studies [18,28] show that ethically and socially responsible corporate behavior is positively associated with corporate reputation, customer satisfaction, and customer trust. The necessity of taking social responsibility for corporate actions is also gaining greater recognition among political decision makers. Specifically, the European Union adopts regulations that force companies to improve their environmental and social impact. Similarly, long-term institutional investors such as insurance companies or pension funds promote CSR [25]. Driven by the growing interest in CSR, companies strive to integrate social and environmental criteria into their corporate behavior and release sustainability reports. This trend is particularly evident considering the number of sustainability reports published by S&P 500 companies. While in 2011 less than 20 % of these companies reported on their activities towards achieving sustainability goals, this number climbed to 86 % in 2018 [13]. To make a company’s social and environmental impact measurable, the “Environmental, Social, and Governance” (ESG) concept has evolved. In contrast to evaluating a company solely from a business and financial perspective, ESG analysis considers the impact of a company on the environment and society and evaluates how this impact is managed.

Problem Sustainability reports are written by companies themselves and therefore considered a *company-controlled* source [27]. For this reason, sustainability reports are being criticized since they provide a biased overview of the ESG activities of a company. ESG ratings issued by agencies such as Moody’s and Sustainalytics are also subject to critical scrutiny, given that they apply different criteria for ESG assessments rendering the ratings difficult to compare. Contrary, non-corporate channels such as media coverage are considered the main driver for ESG transparency [15]. Specifically, companies can hardly control media coverage making it a more credible and unbiased source of CSR [8,9]. However, analysing media coverage regarding ESG criteria is challenging due to the following issues:

1. The amount of published news articles grows daily, rendering a manual ESG assessment impractical. This problem becomes even more prominent when aiming for a real-time ESG assessment.
2. Media coverage data does not necessarily deal with an ESG-relevant topic, meaning that it must be carefully filtered.
3. The majority of media coverage data is *unstructured*, which makes automatic processing increasingly difficult.

Research Goal and Contributions We aim at extracting ESG-relevant information from public, textual media reactions automatically to calculate an ESG score for a given company. We focus on headlines of major news outlets since they represent suitable and credible reactions to corporate-related events. Full-text news articles are an infeasible alternative because of the increased parsing complexity. Since the sentiment of a reputable article is usually conveyed reliably in its

title, full-text articles do not promise a significant benefit. As highlighted in Fig. 1, we implement an NLP approach, called **ESG-Miner**, that is capable to assess a company’s ESG performance in four steps: ❶ identify headlines that mention a given company, ❷ classify headlines as “ESG-relevant” or “ESG-irrelevant”, ❸ classify relevant headlines into corresponding ESG category, and ❹ identify if the headline is positive/neutral/negative regarding the company’s performance in the classified ESG category. Based on the output of this pipeline, we calculate a score representing the public opinion about the performance of a company in the three domains. In essence, the **ESG-Miner** helps to drive down the cost of ESG data collection and makes ESG information available to the general public, enabling consumers and investors to make better-informed purchase- and investment decisions. This paper makes the following contributions (C):

- **C 1:** We publish a data set of 432,411 news headlines annotated as being environmental-, governance-, or social-related. This allows fellow researchers to use the corpus as a benchmark for other ESG-relevant NLP tasks.
- **C 2:** We present our tool-supported approach called **ESG-Miner** capable of analyzing and evaluating corporate ESG-performance based on headlines automatically. We empirically evaluate our approach in an experiment and compare its prediction performance with human performance. Out of 3000 manually labeled headlines, the **ESG-Miner** was able to process 2901 headlines (96.7 %) correctly. In particular, the **ESG-Miner** performed well in detecting environmental-related headlines along with their correct sentiment.
- **C 3:** To strengthen transparency and facilitate replication, we make our tool, code, and annotated data set publicly available.¹

Related Work The analysis of news regarding ESG relevance is an active field of research. Yuan [35] manually examines Facebook posts by six Chinese and six Korean companies in terms of CSR. Guo et al. [14] propose an approach called ESG2Risk that can be used for volatility prediction of stocks based on ESG news. Luccioni et al. [23] present ClimateQA which is capable of analysing sustainability reports to identify climate-relevant sections based on a question answering approach. Similarly to us, Sokolov et al. [31], Lee et al. [22], and Nugent et al. [26] apply language models to automatically detect ESG topics in unstructured text data. However, these approaches only focus on specific intermediate steps (e.g., ESG relevance analysis) and fail to provide an end-to-end pipeline for ESG assessment. Furthermore, the approaches are not published as a tool and thus not accessible to the public.

2 Twitter as a Real-Time Source for News Headlines

To extract ESG-relevant information from news headlines, we require an annotated set of headlines to train a suitable approach. To the best of our knowledge, there

¹ A demo of the **ESG-Miner** can be accessed at <https://www.esg-miner.com>. Our replication package can be found at <https://doi.org/10.5281/zenodo.7148423>.

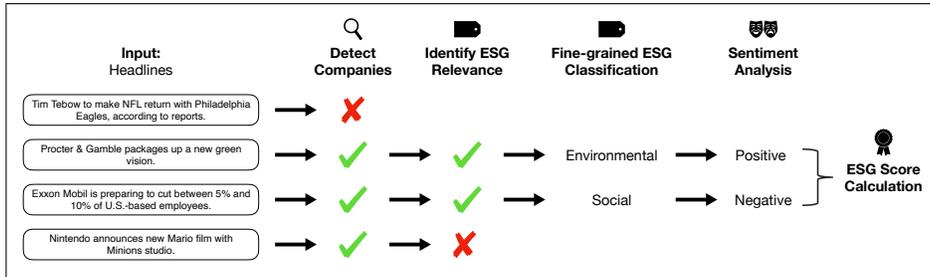


Fig. 1. Overview of the ESG-Miner Pipeline.

is no labeled corpus of headlines available in the research community that could be used for our purposes. Due to the unavailability of adequate data, we created our own training corpus. One way to collect news articles is to download them from news websites by using an automated script. However, most of the news websites are structured differently and use various architectures, requiring us to adjust the script for every website that should be monitored. Contrary, we found that tweets of major news outlets are an easily accessible source of headlines. In fact, news outlets usually publish their stories on social media since internet users increasingly access social media to receive news [29].

Data Collection and Analysis We collect over 552,018 tweets published by @guardian between December 2014 and April 2021. We select *The Guardian* as data source for news articles due to its general trustworthiness and consistent assignment of tags to articles, on which we base the creation of our data set. However, we plan to expand the data set in further research by adding articles from other news outlets. 78.3 % of the collected tweets contain a headline and a link to the corresponding article on theguardian.com. The remaining tweets deal e.g. with promotions and are therefore not relevant for our use case. Manually mapping the collected headlines to respective ESG categories is not feasible. Thus, we utilize the posted links to collect specific tags assigned to the articles and establish a mapping between tags and ESG categories (see Tab. 1). The mapping was generated by the second author and reviewed by the first and third author. Discrepancies were clarified in extensive discussions to converge at a consistent tag-to-ESG-category mapping. In total, we identified 15,388 different tags. Each article is associated with at least one tag. When creating the tag-to-ESG category mapping, we focus on the 414 tags that were assigned to at least 1,000 headlines since an analysis of all 15,388 tags is too time-consuming. We investigate these 414 tags considering the ESG definition that is established in literature [36,32]. We identified nine tags related to the environmental domain, ten social tags, and five governance-related tags. Articles are often associated with multiple tags (e.g., an environmental-related article is assigned to the tags “waste”, “plastics”, and “recycling”). To avoid redundancy in our data set, we treat such articles as only one distinct instance in the respective domain. Therefore, the total number of

Table 1. Mapping of *The Guardian* Article Tags to ESG Domains. We Present the Tags Assigned to Each Domain, the Number of the Guardian News Articles per Tag, and the Number of Distinct Headlines per Domain.

		ESG Categories					
		Environmental		Social		Governance	
tags and # headlines	environment	21,830	gender	3,988	corporate governance	3,798	
	climate change	8,209	lgbt rights	2,872	tax avoidance	1,528	
	renewable energy	1,238	discrimination at work	262	executive pay / bonuses	751	
	waste	924	employment law	499	ethics	193	
	plastics	675	gender pay gap	205	tax havens	592	
	recycling	481	race	7,581			
	pollution	1,908	human rights	3,081			
	air pollution	676	work & careers	4,106			
	ghg emissions	2,111	job losses	2,632			
			jobs	4			
	# distinct headlines	22,763		23,222		4,880	
		total of ESG-relevant headlines: 50,865					

distinct headlines per domain is lower than the combined number of examples for each tag of a domain. In rare cases ($\approx 3\%$), an article was assigned with tags from different ESG categories. We exclude these articles from our data set to prevent issues with training our classifier.

Following our constructed mapping, the final data set consists of 22,763 distinct articles belonging to the environmental domain, 23,222 social-related, and 4,880 governance-related articles (see Tab. 1). In summary, we identified 50,865 distinct articles containing ESG-relevant information. We consider the remaining 381,546 collected articles as ESG-irrelevant. The distribution among the ESG categories is highly imbalanced. While the number of news articles related to the environmental and social domains is balanced, we found significantly fewer governance-related articles.

3 ESG-Miner: Mining and Evaluating Headlines Regarding A Company’s ESG Performance

This section describes the implementation of the *ESG-Miner*. As shown in Fig. 1, it is capable of searching for specific company names in headlines (see Sec. 3.1), classifying headlines as ESG-relevant/irrelevant (see Sec. 3.2), demarcating between environmental-, social-, and governance-related headlines (see Sec. 3.2), and analyzing the sentiment of headlines (see Sec. 3.3). The calculation of the final ESG score is described in Sec. 3.4. Full tables detailing the results of all experiments performed in this section are included in our replication package.¹ In all experiments, we utilize a 10-fold *Cross Validation* as studies [19] have shown that a model that has been trained this way demonstrates low bias and variance.

3.1 Automated Company Detection in News Headlines

Initially, we need to detect in which headlines a company of interest has been mentioned. It may seem reasonable to use a rule-based system that searches for

company names in headlines, e.g. by using regex expressions. However, rule-based systems tend to produce many *False Positives* (FP) and are time-consuming to maintain. We apply a *Named Entity Recognition* approach capable of distinguishing organizations from people, locations, etc. Specifically, we use the spaCy entity recognizer [2] to detect organizations in headlines and then use String matching to analyze the names of the identified organizations. For the latter, we use *Term Frequency Inverse Document Frequency* (TF-IDF) to transform company names into a vector and then use a cosine similarity threshold of 0.95 to assess whether the identified organization matches the name of the company of interest.

3.2 Automated ESG Classification of News Headlines

After identifying a company of interest in headlines, we need to determine to which ESG domain the headline belongs to or if the headline is ESG-irrelevant. To this end, we develop an NLP approach consisting of two steps: First, our approach demarcates ESG-relevant from ESG-irrelevant headlines (binary classification). Second, the approach assigns ESG-relevant headlines to one of three ESG classes (multiclass classification). We only use the tags for the generation of the ground truth data set and deliberately do not base our approach of classifying headlines into ESG categories on the tags assigned by news outlets. Otherwise, the applicability of the **ESG-Miner** would be limited as it can only process tagged headlines and its performance would strongly depend on the existence and quality of the assigned tags, which might vary among news outlets and might not necessarily be consistent within one outlet. In the following, we describe our applied methods for both steps followed by a report of the results of our experiments.

Step 1: Demarcating between ESG-relevant and ESG-irrelevant headlines The detection of ESG-relevant headlines is a binary classification problem, in which we are given a certain headline \mathcal{X} and we are required to produce a nominal label $y \in \mathcal{Y} = \{\text{ESG-relevant}, \text{ESG-irrelevant}\}$. We compare the performance of different approaches for this task: Machine Learning (ML) approaches (e.g., Random Forest) and Deep Learning-based (DL) approaches (e.g., BERT [7]).

Overview of Applied Approaches We investigate the use of supervised ML and DL models that learn to predict whether a headline is ESG-relevant based on our labeled data set: Naive Bayes (NB), Support Vector Machines (SVM), Random Forest (RF), Decision Tree (DT), Logistic Regression (LR), and K-Nearest Neighbor (KNN). We use different methods to transform the headlines into sentence embeddings: TF-IDF, doc2vec [21], and spaCy [17]. We compare the performance of the mentioned ML classifiers with the *Bidirectional Encoder Representations from Transformers* (BERT) model which achieved state-of-the-art results for many NLP tasks (e.g., question answering [34], causality detection [11]). BERT is pre-trained on large corpora and can therefore easily be fine tuned for any downstream task without the need for much training data. We make use of the fine tuning mechanism of BERT and investigate to which extent it can be

used for the detection of ESG-relevant headlines. BERT requires input sequences with a fixed length. Therefore, for headlines that are shorter than this fixed length, padding tokens are inserted to adjust all sequences to the same length. Other tokens, such as the classification (CLS) token, are also inserted in order to provide further information of the headline to the model. For our classification task, we mainly use this token because it stores the information of the whole headline. We feed the pooled information into a single-layer feedforward neural network that uses a softmax layer, which calculates the probability that a sentence is ESG-relevant or not: $\hat{y} = \text{softmax}(Wv_0 + b)$, where \hat{y} are the predicted class probabilities for the headline, W is the weighted matrix, v_0 represents the first token in the headline (i.e., the CLS token), and b is the bias. We select the class (c) with the highest probability as the final classification result: $c = \text{argmax}(\hat{y})$.

Evaluation Procedure Our labeled data set is imbalanced as only 50,865 headlines are ESG-relevant. To avoid the class imbalance problem, we apply *Random Under Sampling* (RUS). We randomly select headlines from the majority class and exclude them from the data set until a balanced distribution is achieved. From our training corpus we also exclude headlines that do not refer to companies as these will already be filtered out in the first step of our pipeline. Further, we mask company names to prevent bias towards certain companies when training our classifier. Initial experiments have shown that this preprocessing step is essential, given that some companies are significantly more often mentioned in ESG-relevant tweets than others. Our final data set consists of 3,626 headlines of which 1,813 are equally ESG-relevant and ESG-irrelevant.

Experimental Results Our experiments reveal that the choice of sentence embeddings has a significant influence on the performance of all examined ML methods. When using doc2vec, all ML methods show poor performance and deviate significantly from their best achieved results. For example, NB achieves a macro- F_1 score of 0.77 when using TF-IDF and only a macro- F_1 score of 0.34 when using doc2vec. In contrast, when comparing the performance of the ML methods using TF-IDF and spaCy sentence embeddings, we did not observe any significant performance differences. The only exception is DT, which shows a stronger performance when using TF-IDF compared to spaCy. Interestingly, we did not find any major performance differences between our ML and DL methods. Although the BERT model possesses a rich linguistic understanding due to its intensive pre-training, it could not outperform the majority of our ML approaches. In fact, $\boxed{\text{BERT} \wedge \text{Softmax}}$ achieved the same best macro- F_1 score of 0.8 as $\boxed{\text{TF-IDF} \wedge \text{SVM}}$ and $\boxed{\text{TF-IDF} \wedge \text{LR}}$. $\boxed{\text{BERT} \wedge \text{Softmax}}$ performs significantly better in the detection of ESG-irrelevant headlines than in the detection of ESG-relevant headlines (F_1 score deviation of 27 %). $\boxed{\text{TF-IDF} \wedge \text{SVM}}$ and $\boxed{\text{TF-IDF} \wedge \text{LR}}$, on the other hand, show a balanced performance in the detection of both classes.

In summary, our experiments confirm the findings of other studies [10,12,11,16] that the application of DL methods does not necessarily lead to a better performance compared to conventional ML methods. We found that the ML methods $\boxed{\text{TF-IDF} \wedge \text{SVM}}$ and $\boxed{\text{TF-IDF} \wedge \text{LR}}$ as well as our DL approach $\boxed{\text{BERT} \wedge \text{Softmax}}$

possess the same predictive power according to the macro- F_1 score. Nevertheless, we choose `BERT \wedge Softmax` as our final model for ESG relevance analysis because BERT demonstrated in previous studies [11] that it is able to handle unseen data well due to its strong language understanding.

Step 2: Fine-grained Classification of ESG-relevant Headlines Fine-grained ESG classification is a multiclass classification problem, in which—given a certain ESG-relevant headline \mathcal{X} —we aim to produce a nominal label $y \in \mathcal{Y} = \{\text{environment, social, governance}\}$. Specifically, the `ESG-Miner` assigns headlines that have been classified as ESG-relevant to one of the three ESG categories.

Overview of Applied Approaches and Evaluation Procedure Similar to the experiments on the binary classification task, we compare the performance of different ML and DL approaches for the fine-grained ESG classification task: NB, SVM, RF, DT, LR, KNN (ML-based approaches) and BERT (DL-based approach). We reuse the 1,813 ESG-relevant headlines included in the balanced data set from step 1 for training our methods for the fine-grained classification of ESG-relevant headlines. We apply RUS to ensure a similar distribution of environmental-, governance-, and social-related headlines. Our final data set consists of 1,794 ESG-relevant headlines including 598 environmental-, governance-, and social-related headlines each.

Experimental Results Our previous observation that the choice of sentence embeddings affects the performance of ML methods is corroborated by our experiments for step 2. The use of `doc2vec` leads to the poorest performance of our investigated ML methods. Among the ML methods, `spaCy \wedge RF` achieves the best performance with a macro- F_1 score of 0.86. While our DL approach does not lead to a large performance gain in the distinction between ESG-relevant and irrelevant headlines, it outperforms all examined methods in the fine-grained classification of ESG headlines. In fact, `BERT \wedge softmax` is capable of classifying ESG-relevant headlines almost flawlessly into the three ESG domains and achieves a macro- F_1 score of 0.95. Hence, we select `BERT \wedge softmax` as the best performing for the second step of your pipeline and integrate it into the `ESG-Miner`.

3.3 Sentiment Analysis

In the third step, the `ESG-Miner` analyzes the sentiment of the fine-grained classified headlines. Specifically, it examines whether the behavior of the company mentioned in the headline is considered neutral, positive, or negative regarding the three ESG categories. There are a number of NLP methods available for analysing the sentiment of NL text [5]. However, our initial experiments demonstrated that existing sentiment analysis tools are not suitable for the analysis of ESG-relevant tweets. We hypothesize that their poor performance can be attributed to the nature of ESG-relevant headlines that tend to be written objectively. However, conventional sentiment methods rely on subjective statements and keywords in

order to understand the sentiment of a text [30]. Driven by this observation, we implement a new sentiment classifier trained on ESG-relevant headlines.

Training Corpus Creation To train our sentiment classifier, we create a training corpus by manually annotating 500 ESG-relevant headlines. We involve three annotators experienced in the analysis of ESG data and conduct a workshop where we discuss several examples. To ensure consistent annotations, we create an annotation guideline, in which we define the three labels (neutral, positive, and negative) along with a set of sample annotations. We use *Label Studio* [1] for labeling each headline. To verify the reliability of the annotations, we calculate the inter-annotator agreement. We distribute the 500 ESG-relevant headlines among the annotators, ensuring that 100 headlines are labeled by two annotators (overlapping quote of 20 %). Based on the overlapping headlines, we calculate the Cohen’s Kappa [6] measure to evaluate how well the annotators can make the same annotation decision for a given category. We interpret Cohen’s Kappa using the taxonomy developed by Landis and Koch [20]. Our analysis reveals that in most cases the annotators agreed on the negative labels (kappa: 0.78). We observed moderate agreement on assigning positive (0.58) and neutral labels (0.53). For some samples, the annotators disagreed whether a headline reports positively on the behavior of a company or whether the sentiment should still be considered neutral. Across all labels, the mean value is 0.63, which indicates substantial agreement. Therefore, we assess our labeled data set as reliable and suitable the implementation of our sentiment classification approach.

Overview of Applied Approaches and Evaluation Procedure Sentiment analysis of NL text is a multiclass classification problem, in which we are given a certain headline \mathcal{X} and we are required to produce a nominal label $y \in \mathcal{Y} = \{\text{neutral, positive, negative}\}$. Thus, we face a similar classification problem as for the fine-grained classification of ESG-relevant headlines. We therefore use the same methods in our experiments and train them on our annotated data set: NB, SVM, RF, DT, LR, KNN (ML-based approaches) and BERT (DL-based approach). Our annotated data set contains of 125 neutral, 177 negative, and 198 positive headlines. To ensure a similar distribution within the 500 annotated headlines, we apply RUS to avoid the class imbalance problem when training our approaches. Our final data set consists of 375 ESG-relevant headlines including 125 neutral, positive, and negative headlines each.

Experimental Results Our results underline the observation from our initial experiments that conventional sentiment methods like CoreNLP [24] and Flair [3] are not suitable to determine the sentiment of ESG-relevant headlines. Both methods show a very poor performance and achieve macro- F_1 scores of 0.32 and 0.42. Our self-trained models perform substantially better. For example, a good performance is shown by methods based on TF-IDF sentence embeddings. In fact, $\overline{\text{TF-IDF} \wedge \text{NB}}$ and $\overline{\text{TF-IDF} \wedge \text{LR}}$ achieve the best macro- F_1 score of 0.74. Interestingly, $\overline{\text{BERT} \wedge \text{softmax}}$ is unable to cope with this performance and achieves a significantly worse macro- F_1 score of 0.67.

3.4 ESG Score Calculation

In the last step, the **ESG-Miner** summarizes the sentiments of the analyzed headlines and calculates a score for each of the three ESG domains. Each score represents the public opinion about the performance of a company in the respective domain. To this end, we apply a simple mean calculation that is also used by sentiment analysis tools [33]. We weigh a negative headline by -1, a neutral headline by 0, and a positive headline by +1. Based on this scale, we sum up the weights of all sentiments and divide the result by the total amount of sentiments captured. The resulting score lies in the interval between -1 and 1, where a negative value represents a predominantly negative public opinion and vice versa.

4 Experiment: ESG-Miner in Practice

We aim to investigate whether the **ESG-Miner** is suitable for your use in practice. To this end, we apply it to real-world unseen data and compare its prediction performance with human performance. Specifically, we ask study participants to manually analyze 3000 headlines and compare their analysis result with the one obtained by the **ESG-Miner**. The participants perform the same steps as the **ESG-Miner**, i.e. they first search for headlines that contain a certain company, then check whether the headlines are ESG-relevant and so on. In our study, we ask the participants to assume the role of a sustainability manager working for ExxonMobil who wants to get an overview of the current public perception of ExxonMobil’s ESG performance.

Study Design We randomly collect 3000 headlines posted by *The Independent* (@independent), *Reuters* (@reuters), and *The New York Times* (@nytimes). We involve four study participants and assign 750 headlines to each participant, of which 500 are unique and 250 overlapping. To verify the reliability of their annotations, we calculate the inter-annotator agreement in the same way as in Sec. 3.3. Checking the inter-annotator agreement is important for two reasons: First, we need to verify whether the participants follow the same understanding during the annotation process and whether the annotations can thus be used as a gold standard to compare human performance with the performance of the **ESG-Miner**. Second, the inter-annotator agreement gives a first indication on the difficulty of an annotation task and highlights which performance can be expected from an automated approach. In fact, studies [4] show that tasks that are challenging for humans tend to be challenging for machines as well.

Study Results The identification of companies was performed by the study participants without any major discrepancies. Out of the 3000 headlines, they identified 395 headlines that refer to ExxonMobil. Our calculated Cohen’s kappa value of 0.96 underlines almost perfect agreement among the participants. In case of discrepancies, the samples were discussed by the study participants to agree on a single label. The **ESG-Miner** performs very well in recognizing companies

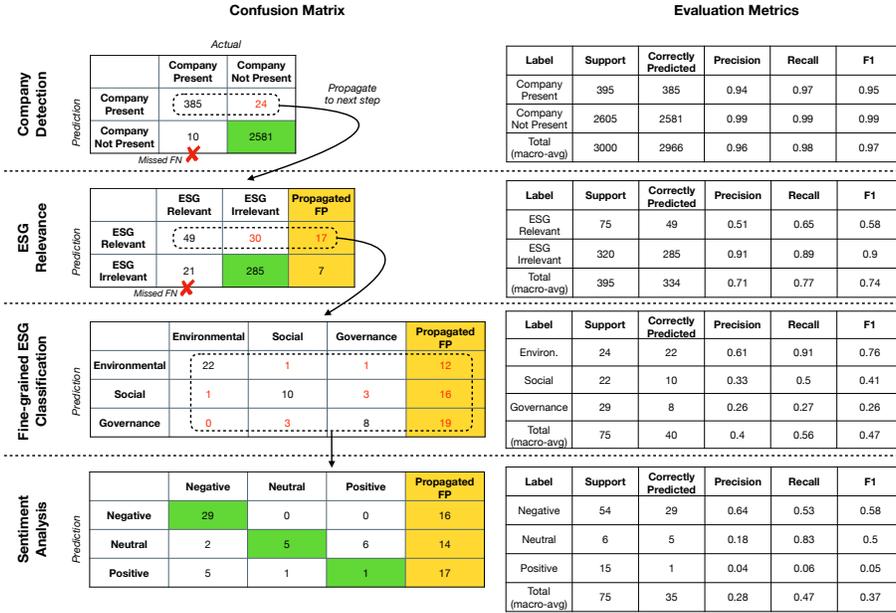


Fig. 2. Results of Our Case Study: Human Performance vs. ESG-Miner. Propagated FPs Are Highlighted in Red. Correctly Processed Headlines Are Highlighted in Green.

and detects 385 of the 395 manually identified headlines. It produces only 24 FP and 10 *False Negatives* (FN) leading to a very strong macro- F_1 score of 0.97.

In the second step, the study participants reviewed the 395 headlines with regard to ESG relevance. With substantial agreement (kappa: 0.78), they identified 75 ESG-relevant and 320 ESG-irrelevant headlines. In contrast to the manual annotation process where we avoid the propagation of FP and FN through discussions among the participants, the ESG-Miner applies its classifier to all headlines in which it has identified ExxonMobil. Out of these 409 headlines (385 *True Positives* (TP) + 24 FP), it identified 84 headlines as being ESG-relevant. In this context, the ESG-Miner detected 49 of the 75 ESG-relevant headlines, predicted 47 FP, and 21 FN. Fig. 2 demonstrates that the propagation of FPs and the absence of headlines due to being classified as FNs affects the prediction performance causing a significant negative impact on the Precision value. This effect becomes even more prominent in the subsequent steps, since both the FPs resulting from the company detection and newly created FPs are forwarded to the fine-grained ESG classification. Additionally, 21 FNs get lost.

In the third step, the participants examined the 75 ESG-relevant headlines regarding the three ESG domains. This annotation task raised more misconceptions than the ESG relevance analysis. Across all categories, the annotators achieved only moderate agreement (kappa: 0.59). While the annotators largely

agreed on the environmental label, some disagreed on whether a headline is social or governance-related. After resolving these disagreements, the study participants identified 24 environment-related, 22 social-related, and 29 governance-related headlines. The **ESG-Miner** applied its fine-grained classifier to the 96 headlines which it recognized as being ESG-relevant. Similarly to the human annotator, the **ESG-Miner** performs well in identifying environmental-related headlines and correctly detects 22 of the 24 headlines manually annotated as environmental-related. However, it shows a significantly worse performance in detecting social-related and governance-related headlines. It recognized only 10 of the 22 social-related headlines and 8 of the 29 governance-related headlines. Nevertheless, Fig. 2 reveals that this performance problem is not attributable to inadequate functioning of our classifier, but is rather caused by the FNs being dropped in preceding steps. Indeed, if we study the performance of the **ESG-Miner** applied to the 49 ESG-relevant headlines, we obtain a good Accuracy value of 0.81.

In the last step, the study participants determined the sentiment of the fine-grained classified headlines. Similar to the training corpus creation in Sec. 3.3, the participants showed substantial agreement in the assignment of negative labels but only moderate agreement regarding positive and neutral labels. 54 of the 75 ESG-relevant headlines were identified as negative, 15 as positive and 6 as neutral. The **ESG-Miner** correctly detects 29 of the 54 negative headlines and 5 of the 6 neutral headlines. However, it identifies only 1 of the 15 positive headlines. The F_1 scores achieved in this step are also negatively affected by the high number of propagated FPs from the previous steps. The confusion matrix shown in Fig. 2 clearly indicates that the **ESG-Miner** is certainly capable of determining the sentiment of ESG-relevant headlines with reasonable performance.

Summary of Evaluation:

*The **ESG-Miner** performs well in the detection of companies in headlines, the identification of environmental-related headlines as well as in the identification of negatively connoted headlines. Out of all 3000 headlines examined, the **ESG-Miner** was able to process 2901 headlines (96.7 %) correctly (see green highlighting in Fig. 2): 2581 were correctly filtered out in the company detection step, 285 headlines were correctly identified as ESG-irrelevant, and out of the 75 ESG-relevant headlines, the **ESG-Miner** classified 35 headlines into the right ESG domain along with the correct sentiment. However, our evaluation also pointed out that the propagation of FPs and FNs leads to performance problems. For example, ESG-irrelevant headlines are erroneously assigned to ESG domains which has to be manually corrected by the user of the **ESG-Miner**. The results of our case study motivate the further development of the **ESG-Miner** particularly in terms of improving the ESG relevance analysis to reduce the high number of propagated FPs.*

Threats to Validity As in every empirical study, our evaluation is also subject to potential validity threats. This paragraph discusses these threats and describes

how we mitigated them. A major threat to internal validity are the annotations by the study participants as an annotation task is to a certain degree subjective. To minimize the bias of the annotators, we assessed the inter-rater agreement. However, imprecise annotations can never be completely avoided. To achieve reasonable generalizability, we selected headlines posted by three different news outlets for the experiment. However, the limited sample size of 3000 headlines does not provide the statistical basis to generalize the results of our experiment beyond the studied samples. Nevertheless, we hypothesize that the **ESG-Miner** may perform similarly when processing headlines posted by other news outlets as the majority of news outlets use a similar language when formulating headlines. Validation of this claim requires further empirical investigation.

5 Conclusion, Limitations, and Outlook

We take a first step of applying NLP to automatically screening media coverage with respect to ESG categories. We leverage NLP to improve transparency of sustainability-related topics like the ESG performance of specific companies. For this purpose, we create a gold standard corpus of 432,411 headlines annotated as being ESG-irrelevant or environmental-, social-, or governance-related. We use this corpus to train our NLP approach called **ESG-Miner** capable of detecting companies in headlines, classifying them as ESG-relevant/irrelevant, assigning relevant headlines into one of the three ESG domains, and calculating a final ESG score by analyzing the sentiments of the headlines. Although our evaluation on 3000 unseen headlines showed that the **ESG-Miner** performs well in detecting environmental-related headlines, we also observed several limitations (L) that need to be addressed in further research:

- **L1:** The **ESG-Miner** is only suitable for analyzing the ESG performance of companies that are frequently featured in news articles. Thus, the ESG performance of companies with little or no coverage in headlines remains intransparent.
- **L2:** At present, the **ESG-Miner** is not able to perform all steps in its pipeline reliably and generates a series of FPs. Hence, it demands human intervention and is only suitable as a semi-automatic method for analyzing a company’s ESG performance. In future research, especially the ESG relevance classifier must be improved to prevent the propagation of excessive FPs.
- **L3:** The ESG-score calculation currently employs a very rudimentary scoring function. A more sophisticated approach weighting the impact of each relevant headline has to be explored to reflect the companies standing in the respective category more accurately.

References

1. Label studio. <https://labelstud.io/>, used version: 1.5
2. spacy entity recognizer. <https://spacy.io/api/entityrecognizer>
3. Akbik, A., Bergmann, T., Blythe, D., Rasul, K., Schweter, S., Vollgraf, R.: FLAIR: An easy-to-use framework for state-of-the-art NLP. In: NAACL 2019, 2019 Annual Conference of the North American Chapter of the Association for Computational Linguistics (Demonstrations). pp. 54–59 (2019)
4. Berry, D.M.: Empirical evaluation of tools for hairy requirements engineering tasks. *Empirical Software Engineering* **26**(6), 111 (Aug 2021)
5. Birjali, M., Kasri, M., Beni-Hssane, A.: A comprehensive survey on sentiment analysis: Approaches, challenges and trends. *Knowledge-Based Systems* **226**, 107134 (2021), <https://www.sciencedirect.com/science/article/pii/S095070512100397X>
6. Cohen, J.: A coefficient of agreement for nominal scales. *Educational and Psychological Measurement* (1960)
7. Devlin, J., Chang, M.W., Lee, K., Toutanova, K.: BERT: Pre-training of deep bidirectional transformers for language understanding. In: NAACL’19
8. Du, S., Bhattacharya, C., Sen, S.: Maximizing business returns to corporate social responsibility (csr): The role of csr communication. *International Journal of Management Reviews* **12**(1), 8–19 (2010)
9. Eisend, M., Küster, F.: The Effectiveness of Publicity versus Advertising: A Meta-Analysis, pp. 277–291. Gabler, Wiesbaden (2011)
10. Fakhoury, S., Arnaoudova, V., Noiseux, C., Khomh, F., Antoniol, G.: Keep it simple: Is deep learning good for linguistic smell detection? In: International Conference on Software Analysis, Evolution and Reengineering, SANER. pp. 602–611 (2018)
11. Fischbach, J., Frattini, J., Spaans, A., Kummeth, M., Vogelsang, A., Mendez, D., Unterkalmsteiner, M.: Automatic detection of causality in requirement artifacts: The cira approach. In: Dalpiaz, F., Spoletini, P. (eds.) *Requirements Engineering: Foundation for Software Quality*. pp. 19–36. Springer International Publishing, Cham (2021)
12. Fu, W., Menzies, T.: Easy over hard: A case study on deep learning. In: Joint Meeting on Foundations of Software Engineering (ESEC/FSE). p. 49–60 (2017)
13. Gillan, S.L., Koch, A., Starks, L.T.: Firms and social responsibility: A review of esg and csr research in corporate finance. *Journal of Corporate Finance* p. 101889 (2021)
14. Guo, T., Jamet, N., Betrix, V., Piquet, L.A., Hauptmann, E.: Esg2risk: A deep learning framework from esg news to stock volatility prediction (2020)
15. Hammami, A., Hendijani Zadeh, M.: Audit quality, media coverage, environmental, social, and governance disclosure and firm investment efficiency. *International Journal of Accounting & Information Management* **28**(1), 45–72 (Jan 2020)
16. Henao, P.R., Fischbach, J., Spies, D., Frattini, J., Vogelsang, A.: Transfer learning for mining feature requests and bug reports from tweets and app store reviews. In: 2021 IEEE 29th International Requirements Engineering Conference Workshops (REW). pp. 80–86 (2021)
17. Homnibal, M., Montani, I.: spaCy NLP library, <https://spacy.io/>, used version: 3.3
18. Islam, T., Islam, R., Pitafi, A.H., Xiaobei, L., Rehmani, M., Irfan, M., Mubarak, M.S.: The impact of corporate social responsibility on customer loyalty: The mediating role of corporate reputation, customer satisfaction, and trust. *Sustainable Production and Consumption* **25**, 123–135 (2021)

19. James, G., Witten, D., Hastie, T., Tibshirani, R.E.: An Introduction to Statistical Learning (2013)
20. Landis, J.R., Koch, G.G.: The measurement of observer agreement for categorical data. *Biometrics* (1977)
21. Le, Q.V., Mikolov, T.: Distributed representations of sentences and documents. *CoRR abs/1405.4053* (2014), <http://arxiv.org/abs/1405.4053>
22. Lee, O., Joo, H., Choi, H., Cheon, M.: Proposing an integrated approach to analyzing esg data via machine learning and deep learning algorithms. *Sustainability* **14**(14) (2022), <https://www.mdpi.com/2071-1050/14/14/8745>
23. Luccioni, A., Baylor, E., Duchene, N.: Analyzing sustainability reports using natural language processing (2020)
24. Manning, C., Surdeanu, M., Bauer, J., Finkel, J., Bethard, S., McClosky, D.: The Stanford CoreNLP natural language processing toolkit. In: Proceedings of 52nd Annual Meeting of the Association for Computational Linguistics: System Demonstrations. pp. 55–60. Association for Computational Linguistics, Baltimore, Maryland (Jun 2014), <https://aclanthology.org/P14-5010>
25. Meng, Y., Wang, X.: Do institutional investors have homogeneous influence on corporate social responsibility? evidence from investor investment horizon. *Managerial Finance* (2019)
26. Nugent, T., Stelea, N., Leidner, J.L.: Detecting ESG topics using domain-specific language models and data augmentation approaches. *CoRR abs/2010.08319* (2020), <https://arxiv.org/abs/2010.08319>
27. Mar García-de los Salmones, M.d., Herrero, A., Martínez, P.: Determinants of electronic word-of-mouth on social networking sites about negative news on csr. *Journal of Business Ethics* **171**(3), 583–597 (Jul 2021)
28. Schramm-Klein, H., Zentes, J., Steinmann, S., Swoboda, B., Morschett, D.: Retailer corporate social responsibility is relevant to consumer behavior. *Business & Society* **55**(4), 550–575 (2016)
29. Shearer, E.: Social media outpaces print newspapers in the u.s. as a news source. Pew Research Center (2018)
30. Socher, R., Perelygin, A., Wu, J., Chuang, J., Manning, C.D., Ng, A., Potts, C.: Recursive deep models for semantic compositionality over a sentiment treebank. In: Proceedings of the 2013 Conference on Empirical Methods in Natural Language Processing. pp. 1631–1642. Association for Computational Linguistics, Seattle, Washington, USA (Oct 2013), <https://aclanthology.org/D13-1170>
31. Sokolov, A., Mostovoy, J., Ding, J., Seco, L.: Building machine learning systems for automated esg scoring. *The Journal of Impact and ESG Investing* **1**(3), 39–50 (2021), <https://jesg.pm-research.com/content/1/3/39>
32. Sokolov, A., Mostovoy, J., Ding, J., Seco, L.: Building machine learning systems for automated esg scoring. *The Journal of Impact and ESG Investing* **1**(3), 39–50 (2021)
33. Stine, R.A.: Sentiment analysis. *Annual review of statistics and its application* **6**, 287–308 (2019)
34. Yang, W., Xie, Y., Lin, A., Li, X., Tan, L., Xiong, K., Li, M., Lin, J.: End-to-end open-domain question answering with BERTserini. In: Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (Demonstrations). pp. 72–77. Association for Computational Linguistics, Minneapolis, Minnesota (Jun 2019), <https://aclanthology.org/N19-4013>
35. Yuan, S.: Comparing international communication of corporate social responsibility by chinese and korean firms on social media. *IEEE Transactions on Professional Communication* **64**(2), 154–169 (2021)

36. Ziolo, M., Filipiak, B.Z., Bak, I., Cheba, K.: How to design more sustainable financial systems: The roles of environmental, social, and governance factors in the decision-making process. *Sustainability* **11**(20) (2019)