
KNOWLEDGE-BASED DATASET FOR TRAINING PE MALWARE DETECTION MODELS

TECHNICAL REPORT

✉ **Peter Švec**

Institute of Computer Science and Mathematics
Faculty of Electrical Engineering and Information Technology
Slovak University of Technology
Ilkovičova 3, Bratislava, Slovakia
peter.svec1@stuba.sk

✉ **Štefan Balogh**

Institute of Computer Science and Mathematics
Faculty of Electrical Engineering and Information Technology
Slovak University of Technology
Ilkovičova 3, Bratislava, Slovakia
stefan.balogh@stuba.sk

✉ **Martin Homola**

Department of Applied Informatics
Faculty of Mathematics, Physics and Informatics
Comenius University
Mlynská dolina, Bratislava, Slovakia
homola@fmph.uniba.sk

✉ **Ján Klúka**

Department of Applied Informatics
Faculty of Mathematics, Physics and Informatics
Comenius University
Mlynská dolina, Bratislava, Slovakia
kluka@fmph.uniba.sk

January 3, 2023

ABSTRACT

Ontologies are a standard for semantic schemata in many knowledge-intensive domains of human interest. They are now becoming increasingly important also in areas until very recently dominated by subsymbolic representations and machine-learning-based data processing. One such area is information security, and more specifically malware detection. We propose *PE Malware Ontology* that offers a reusable semantic schema for Portable Executable (PE, Windows binary format) malware files. The ontology was inspired by the structure of the data in the EMBER dataset and it currently covers the data intended for static malware analysis. With this proposal, we hope to achieve: a) a unified semantic representation for PE malware datasets that are available or will be published in the future; b) applicability of symbolic, neural-symbolic, or otherwise explainable approaches in the PE Malware domain that may lead to improved interpretability of results which may now be characterized by the terms defined in the ontology; and (c) by joint publishing of semantically treated EMBER data, including fractional datasets, also improved reproducibility of experiments.

Keywords Ontology · Dataset · Malware · Windows · Interpretability · Explainable AI

1 Introduction

There are currently a number of datasets that may be used to train malware detection models. Among the most popular recent datasets we find Elastic Malware Benchmark for Empowering Researchers (EMBER) [Anderson and Roth, 2018] (approx. 1.1 million samples) and more recently Sophos/ReversingLabs 20 million sample dataset (SoReL) [Harang

and Rudd, 2020] (approx. 20 million samples). The advantage of these datasets is that they were already analyzed by security experts and for each sample they provide extensive feature data extracted and pre-processed in structured textual format. In addition, SoReL provides disarmed binaries to some of the samples. Several other online data sources are available, even some that contain genuine malicious binaries in their samples. Such binaries may be used if some additional information about the sample needs to be extracted.

Specifically both EMBER and SoReL cover the domain of PE Malware (i.e., Windows executables and libraries). Both are well tailored for processing by various machine learning tools; for example EMBER directly provides a script to vectorize the data which is required by many sub-symbolic classifiers.

However, in reality the data contained in these datasets is structured (JSON files) and all textual characteristics provided for each sample can be interpreted as meaningful properties. Such data is essentially symbolic and can be viewed as (or, exported into) a knowledge base or a knowledge graph. Such treatment of the data would enable to capitalize on knowledge-processing tools, or even some tools rooted in the more recent neural-symbolic AI movement, especially to improve the interpretability of the resulting classifier models.

To give an example, approaches such as concept-learning may be used to obtain a symbolic characterization of a malware sample in the form of a concept expression based on an ontology [Švec et al., 2021]. Knowledge-base embedding [Bordes et al., 2013] may be used to improve effectiveness of learned models by injecting prior symbolic knowledge. More recently, neural network activation patterns recognition and alignment with ontology concepts de Sousa Ribeiro and Leite [2021] may be used to explain and diagnose trained neural network classifiers.

Also, EMBER and SoReL are vast, they contain millions of samples. Some of the studies that have been published [Vinayakumar et al., 2019, Liu et al., 2020, Ghouti and Imam, 2020] had to resort to reducing the dataset of interest to a smaller size, especially if the trained classifier is computationally demanding. However no unified methodology for reducing the datasets has been established.

To alleviate the outlined issues, our work targets the following goals:

Unified semantic representation: To provide a unified vocabulary for relevant PE malware characteristics that can be then used to represent any relevant data sample regardless of its source.

Interpretability of results: To ensure that the vocabulary provides a suitable nomenclature that is meaningful and recognized by human users. Consequently prototype samples, concept descriptions, rules, or any other characterizations expressed in the vocabulary would be understandable and explainable.

Reproducibility of experiments: Ensure that experiments may be executed on datasets of different suitable sizes without the need to reduce the full original dataset to smaller ones again and again in each study.

To address the first two goals, we have developed a unified ontology that can provide a reusable semantic schema for PE malware files. To the best of our knowledge, such ontology was missing so far. We have also aligned the nomenclature used to describe actions possibly performed by PE files with the Malware Attribute Enumeration and Characterization (MAEC) standard [MITRE Corp., 2020] which is widely accepted for malware descriptions.

Our goal was to improve interpretability of the captured data. The ontology is partly based on the EMBER dataset structure derived from the EMBER data features, but it is not a direct ontological mapping of this or any other individual dataset. The emphasis is placed on data features that are meaningful in malware characterization. For this reason we included only those features that make sense from an expert’s point of view, while other less meaningful features were left out. Some of the left-out features (e.g., file size) may even cause the trained classifiers to be prone to trial counterattacks. Also some of the features captured in the ontology can be considered as *derived* in that they combine multiple low-level EMBER data entries into a meaningful feature. Two features are based on thresholds on top of numeric features (e.g., “high entropy”). This is useful for systems that have difficulties with handling numeric values.

But our goal was also to create a dataset that could be effectively used as a standard benchmark to help advance learning algorithms in the malware detection domain and that would also offer unambiguous reproducibility of experimental results. To this end, we release EMBER data (2018 version) which has been translated into RDF semantic format, including smaller fractional datasets which have been fixed for sake of better comparison of diverse experiments that require smaller data volume than the full EMBER.

Our ontology, including the fractional datasets, and mapping scripts is available in our GitHub repository¹.

¹<https://github.com/orbis-security/pe-malware-ontology>

2 Data sources

In this section we describe in more detail the EMBER dataset, which we used as the foundation for our ontology, along with the modifications we proposed. The main difference between the EMBER and SoReL datasets is that SoReL contains more samples together with disarmed malware binaries. However, the static properties of samples that these datasets offer are almost identical (a few are missing in SoReL). Among other things, we decided on the EMBER dataset because it is generally more used in research (261 vs. 32 citations).

2.1 EMBER

The dataset contains a total of 1.1 million samples and includes 400,000 malicious samples, 400,000 benign samples and 300,000 unlabeled samples, so the dataset can also be applied to unsupervised learning algorithms. The labeled samples from the dataset are also divided into training and testing sets (600,000 for training and 200,000 for testing). The dataset itself is composed of a collection of JSON objects, where each object represents data statically extracted from the PE file of one sample. A simplified example of one sample can be seen in Listing 1. The static properties themselves are organized as follows:

General file information: This set of features is dedicated to general information about the file, such as file size, information whether the file contains a digital signature, presence of debugging symbols, presence of a TLS section, or the number of imported and exported functions.

Header information: These are properties found in file headers such as the target architecture for which the file was compiled, linker version, various timestamps, etc.

Section information: This set is dedicated to individual sections in the binary file. For each section dataset contains its name, content type (code, initialized or uninitialized data), various properties (such as read, write, and execute rights), or the value of the entropy of the section's content.

Imported functions: List of imported functions organized by the DLL (here it is necessary to note that if the file imports a certain function, it does not necessarily have to be called in the code).

Exported functions: List of exported functions. These are mostly included only in cases where the PE file is a library.

In addition to the categories mentioned above, the EMBER dataset also contains other numerical properties such as byte histogram, byte-entropy histogram, or simple statistics for the strings found in the file.

Listing 1: Static features for single binary sample.

```
{
  "sha256": "eb87d82ad7bdc1b753bf91858d2986063ebd8aabeeb8e7e91c0c78db21982a0d6",
  "md5": "aba129a3d1ba9d307dad05617f66d8e7",
  "appeared": "2018-01",
  "label": 1,
  "avclass": "fareit",
  "histogram": [ 96506, 8328, 5582, ... ],
  "byteentropy": [0, 4229, 269, 247, ... ],
  "strings": {
    "numstrings": 7762,
    "avlength": 181.60641587219789,
    "printabledist": [591, 51, 96, 46, ... ],
    "printables": 1409629,
    "entropy": 5.037064474164528,
    "paths": 0,
    "urls": 9,
    "registry": 0,
    "MZ": 11
  },
  "general": {
    "size": 2261028,
    "vsize": 1912832,
    "has_debug": 0,
    "exports": 0,
    "imports": 17,
    "has_relocations": 1,
    "has_resources": 1,
    "has_signature": 0,
    "has_tls": 1,
    "symbols": 0
  },
  "header": {
    "coff": {
      "timestamp": 708992537,

```

```

    "machine": "1386",
    "characteristics": ["CHARA_32BIT_MACHINE", "BYTES_REVERSED_LO", "EXECUTABLE_IMAGE",
        ... ]
  },
  "optional": {
    "subsystem": "WINDOWS_GUI",
    "dll_characteristics": [],
    "magic": "PE32",
    "major_image_version": 0,
    "minor_image_version": 0,
    "major_linker_version": 2,
    "minor_linker_version": 25,
    ...
  }
},
"section": {
  "entry": "CODE",
  "sections": [
    {
      "name": "CODE",
      "size": 443392,
      "entropy": 6.532932639432919,
      "vsize": 442984,
      "props": ["CNT_CODE", "MEM_EXECUTE", "MEM_READ"]
    },
    ...
  ]
},
"imports": {
  "kernel32.dll": ["DeleteCriticalSection", "TlsSetValue", "Sleep", ... ],
},
"exports": [],
"datadirectories": [ { "name": "EXPORT_TABLE", "virtual_address": 0 }, ... ]
}

```

2.2 Other sources

Following the success of EMBER, Sophos/ReversingLabs 20 million sample dataset (SoReL) was published by Harang and Rudd [2020] who especially aimed at scaling up the volume of samples available. The structure of SoReL samples is similar to EMBER and it covers the same static features with very minor differences. These once more represented in JSON. In addition to approximately 15M JSON structured samples that are labelled and over 4M additional ones that are unlabelled, SoReL also contains approximately 10M real binary malware samples that have been disarmed in by modifying their header file). The ontology presented in this work may be directly applied on SoReL.

Among the most popular sources (that provide real binaries) are VirusTotal [vir, b], which, however, provides paid services (along with benign files), VirusShare [vir, a], which currently contains approx. 50 million malicious samples or MalShare [mal]. Known datasets that contain dynamic properties include MALREC [Severi et al., 2018], which captures the overall activity of malware in the form of logging all sources of indeterminism in the system, such as system calls, peripheral devices, etc. In total, it contains approximately 66,000 samples. A smaller dynamic dataset that focuses primarily on logging API calls is Mal-API-2019 [Catak and Yazı, 2019] and contains approximately 7,000 samples. In 2022, a dataset from AVAST was released [Bosansky et al., 2022], which, unlike previous works, combines static and dynamic features and contains approx. 50,000 malware samples (its main purpose is to classify malware into individual families). Other well-known datasets include ClaMP [cla], which contains only Portable Executable (PE) file headers (approx. 5,000) or MalImg [Nataraj et al., 2011], which contains malicious samples, encoded in gray scale in form of approx. 10,000 samples from different families. The DREBIN dataset is also worth mentioning, but unlike the previous works, it contains binary samples from the Android platform [Arp et al., 2014].

3 Data preprocessing

3.1 Dataset standardization

Individual samples may import a large number of functions from various standard DLLs implementing system APIs. They provide useful clues about the possible actions a sample can perform when running, although not all imported functions may be called and not all of these actions are relevant from the malware-detection perspective. In order to extract only relevant information from samples' imports to the ontological representation in a way that is aligned with standard best practice, we have turned to Malware Attribute Enumeration and Characterization (MAEC) [MITRE Corp., 2020]. MAEC is a community-developed structured language for describing information about malware, combining static and dynamic features (different kinds of behavior, interactions between processes, and so on). We map the space

of imported functions to *malware actions*, defined in one of MAEC’s vocabularies [MITRE Corp., 2017]. This aids not only standardization of the dataset, but also achieves an effect similar to dimensionality reduction in traditional machine learning – irrelevant imported functions are disregarded and multiple functions with a similar effect can be mapped to a single action. The complete mapping of API functions to actions is available in our GitHub repository.

The MAEC vocabulary describes malware actions in general, i.e., regardless of whether they are determined by static or dynamic analysis. So, in some cases, we cannot map an imported function to a MAEC malware action. Compare, for example, the `CreateFile` and `HttpSendRequest` API calls. We can map the first one directly to the `create-file` action. However, a call to the `HttpSendRequest` function could be mapped to any of the `send-http-method-request` actions in the vocabulary (`send-http-get-request`, `send-http-put-request`, etc.) depending on its input parameters, which are not available in the dataset.

In order to map more API calls, we have extended the MAEC actions vocabulary with additional actions summarized in Table 1. The unmappable method-specific HTTP request actions have been removed in favor of more general `send-http-request`. New actions pertaining to calls to cryptographic API functions, commonly used by malware, have been added.

Moreover, we have categorized the actions into several classes, such as networking, file access, or system manipulation, in order to aid generalization in concept learning applications of our dataset. We describe these classes in more detail in Section 4.7.

Table 1: Extensions of the MAEC actions vocabulary

Action	Description
<code>send-http-request</code>	The action of sending an HTTP client request to a server
<code>encrypt</code>	The action of file encryption
<code>decrypt</code>	The action of file decryption
<code>generate-key</code>	The action of cryptographic key generation

3.2 File and section features

Samples in the EMBER dataset are characterized by a number of properties of various types (cf. Lst. 1). We have selected the most salient of them based on malware detection expert knowledge to be mapped to the ontological representation as *features* of samples (PE files) or samples’ sections. There are three kinds of such features in the ontology:

1. direct representations of boolean (actually 0/1) properties from the original dataset;
2. features obtained by pre-processing original properties not directly represented in the ontology;
3. features obtained by pre-processing properties that are also represented directly.

Features of the first kind arise from sample properties such as `general.has_relocations`. The original properties mapped to these features are listed within the description of features in Sec. 4.2.

There are two features of the second kind: One of them is the presence of a non-empty Common Language Runtime data directory (in the `datadirectories` property) in the sample, which is indicative of .NET binaries. The other is the sample’s entry point being located in a non-executable section (checked by inspecting the `section.entry` property and the respective member of the `section.sections` array). Machine-learning algorithms can thus take advantage of these two important features even though the underlying properties are not represented in the ontology directly.

Features of the third kind, also called *derived* features, can be defined by OWL 2 expressions, but they are known to experts to be important malware indicators and are thus worth naming explicitly. Moreover, assigning these features to samples during dataset pre-processing exposes them even to tools that lack the required expressivity (cardinality restrictions, data type restrictions, enumerated data types with long lists of literals) or enabling it imposes a significant performance penalty. If, e.g., a classifier trained on the data set is capable of working efficiently with constructs required to define some of the derived features, these may be considered redundant and the user of our dataset may instruct the tool to selectively ignore them so as not to enlarge the dimensionality or search space unnecessarily. Likewise, if the user targets a learning algorithm to learn from the derived features, e.g., for sake of efficiency, it may be indicated to remove or to ignore the original data from which they were constructed.

Two features derived from numerical sample properties in the EMBER dataset stand out due to their important role in malware detection and a less trivial way of determining a suitable threshold controlling the assignment of the feature to

a sample. These features are *a low number of imports* of the sample and *a high entropy* of a sample’s section. They indicate that the sample may be packed. The threshold values for these features are inspired by *pestudio* [pes], a tool commonly used by security teams for the initial assessment of malware samples. Based on *pestudio*’s defaults, a sample importing less than 10 functions is considered having a low number of imports, and a section with entropy greater than 7.0 is marked as having a high entropy.

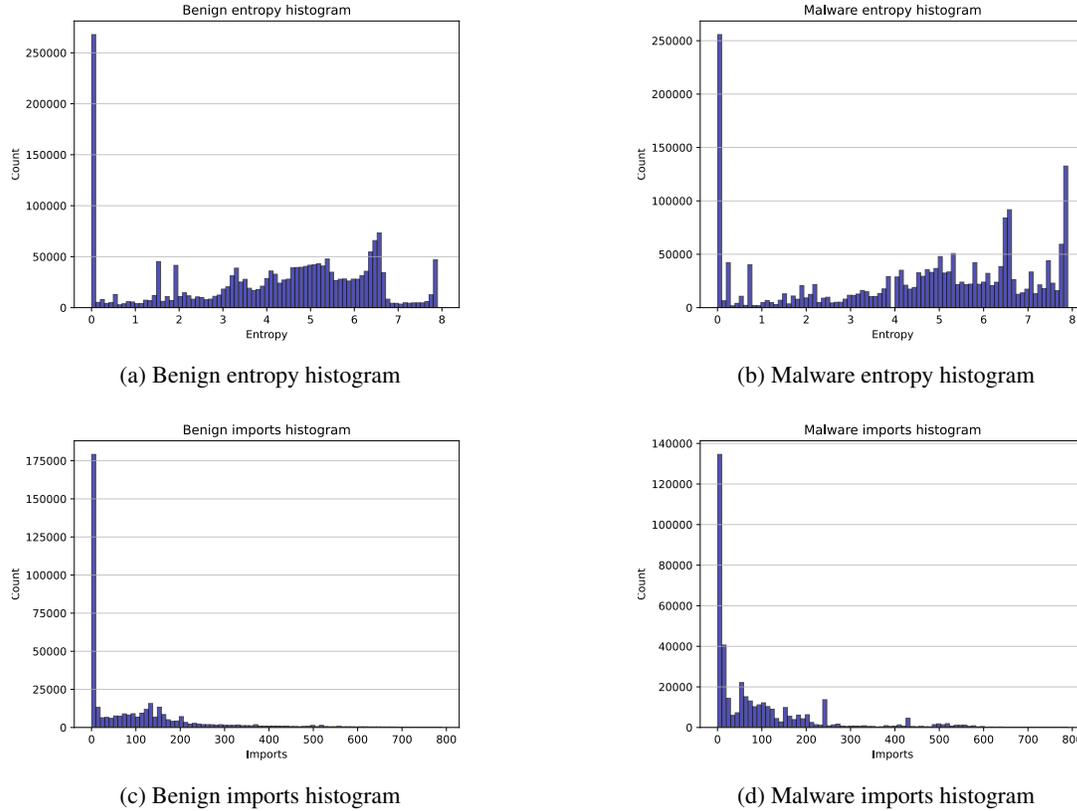


Figure 1: Entropy and imports histograms for EMBER dataset

In order to verify the threshold values from the *pestudio* tool, we performed a basic statistical analysis for the entire EMBER dataset. Specifically, we were interested in histograms representing the number of imports for each sample and the entropy of each section in the dataset. The results are depicted in Fig. 1. The threshold value for section entropy was confirmed. We can see that there are significantly more sections in malware samples with entropy higher than 7.0 compared to the number of such sections in benign samples. As for the number of imports, the histograms in Figs. 1c and 1d do not show any clear indicative value that separates a significant volume of malware and benign samples. In particular, a large number of both kinds of samples import less than 10 API functions. This feature alone is thus not a strong indicator of a sample’s maliciousness, although it may become useful in combination with other features. Hence we decided to include it anyway and keep *pestudio*’s preset threshold of 10.

Another non-trivially derived feature of sections is *a non-standard name*. While we map section names to the ontological representation, describing this feature in OWL 2 requires a data property restriction with a negated list of section names usually produced by compilers and linkers. We consider it improbable that a learning algorithm would discover such a restriction. We have thus opted to collect usual section names and to add this feature to sections when EMBER data is transformed to the ontology. The list of usual section names is available in our GitHub repository.

4 PE Malware Ontology

We now introduce PE Malware Ontology. While we used the structure of the EMBER as a starting point, it should be noted that our ontology is not a direct mapping of this or any other individual dataset. Since one of the most important goals was interpretability, we included only those features that make sense from an expert’s point of view. For this reason, we did not use various features such as file sizes, linker versions, byte histograms, etc. In theory, there may be

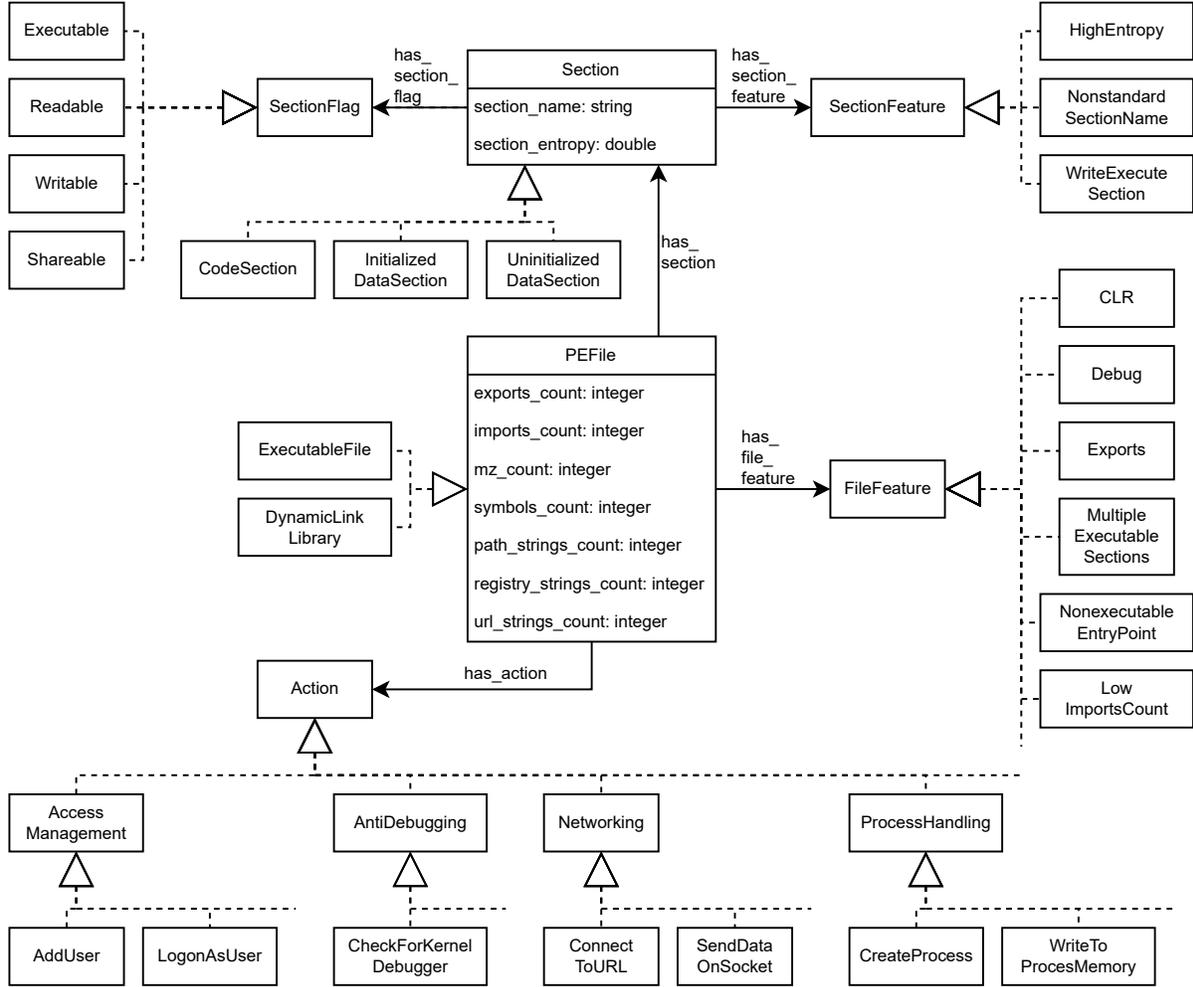


Figure 2: Core classes of the EMBER ontology and their properties

patterns between in features and various classifiers can learn them, but from an expert’s perspective, such features are meaningless for distinguishing between malware and benign samples. Also, the use of such features could subsequently cause the learned classifiers being prone to trivial adversarial attacks.

Our ontology is partially depicted in Figure 2. The core classes and properties are fully depicted, but only an illustrative sample of file features and actions is shown for brevity. The ontology contains 195 classes, 6 object properties, and 9 data properties in total.

4.1 PE files

Each sample of a Portable Executable file [Bridge et al., 2022] in the original dataset is represented by an instance of the PEFfile class, central to our ontology. Each such instance is further classified either as a proper executable in the ExecutableFile subclass of PEFfile or as a shared library (DLLs) in the DynamicLinkLibrary subclass. The respective subclass is determined based on the COFF header available in the EMBER dataset.

The PEFfile class is the domain of 7 data properties (see Tab. 2) which provide information on the number of imports and exports, symbols, and MZ headers (mapped from the general property of JSON descriptions of samples), as well as the number of path, registry, and URL strings (mapped from the strings property).

PE files structurally consist of sections, possess features relevant to malware detection, and may perform actions (based on their imported functions) when executed. These entities are represented by instances of the respective classes in the ontology (Section, FileFeature, Action) which are linked to a PEFfile instance via the has_section, has_file_feature, and has_action object property, respectively.

Table 2: PEFile properties

Data property	Range	Object property	Range
exports_count	xsd:integer	has_action	Action
imports_count	xsd:integer	has_file_feature	FileFeature
mz_count	xsd:integer	has_section	Section
path_strings_count	xsd:integer		
symbols_count	xsd:integer		
registry_strings_count	xsd:integer		
url_strings_count	xsd:integer		

4.2 File features

The FileFeature class has 15 subclasses representing various qualitative features of PE files that are, based on expert knowledge, relevant to malware detection. They are enumerated and described in Table 3. As detailed in Sect. 3.2, these features can be sorted into three categories: directly represented features, pre-processed features, and additional derived features that are obtained from underlying values that are also represented.

Each subclass of FileFeature has a single prototypical instance. All PEFile instances that possess a feature are linked via the `has_file_feature` object property to the feature’s prototypical instance. Although this way of modeling features may be uncommon, it allows for easily readable descriptions of possible malware in the Manchester syntax, e.g., `ExecutableFile has_file_feature some {multiple_executable_sections}` – to be read e.g. “an executable file with the feature of having multiple executable sections”.

Table 3: PE file features

File feature class	Description (sample property in JSON or equivalent OWL 2 expression)
Directly represented features	
Debug	Contains a debug section (<code>general.has_debug</code>)
Relocations	Contains a relocation section (<code>general.has_relocations</code>)
Resources	Contains resources (fonts, images, etc.; <code>general.has_resources</code>)
Signature	Is digitally signed (<code>general.has_signature</code>)
TLS	Includes a Thread Location Storage section (possibly a secret entry point; <code>general.has_tls</code>)
Pre-processed features	
CLR	Contains a Common Language Runtime data directory (used in .NET binaries)
NonexecutableEntryPoint	Entry point is not in an executable section
Derived features	
Exports	Exports functions (mostly in DLLs; <code>exports_count some xsd:integer[> 0]</code>)
MultipleExecutableSections	Has multiple sections with the executable flag (<code>has_section min 2 (has_section_flag some Executable)</code>)
LowImportsCount	The number of imported functions is smaller than the threshold value (<code>imports_count some xsd:integer[< imports_threshold]</code>)
NonstandardMZ	Has no or more than one MZ headers (possibly contains an embedded PE file; <code>mz_count some xsd:integer[> 1]</code>)
PathStrings	Contains strings defining paths (<code>path_strings_count some xsd:integer[> 0]</code>)
RegistryStrings	Contains strings defining registry keys (<code>registry_strings_count some xsd:integer[> 0]</code>)
Symbols	Has COFF debug symbols (deprecated in executables; <code>symbols_count some xsd:integer[> 0]</code>)
URLStrings	Contains strings defining URLs (<code>url_strings_count some xsd:integer[> 0]</code>)

4.3 Sections

Instances of the `Section` class represent sections of PE file samples in the original dataset. A `PEFile` instance is linked to all its sections via the `has_section` property. Sections are further classified based on the type of data found in the given section into one of `Section`'s three subclasses: `CodeSection`, `InitializedDataSection`, and `UninitializedDataSection`.

`Section` instances have data properties assigning them their names and the entropies of their content. Furthermore, they are linked to their permission flags and features by the respective object properties shown in Table 4.

Table 4: Section properties

Data property	Range	Object property	Range
<code>section_entropy</code>	<code>xsd:double</code>	<code>has_section_feature</code>	<code>SectionFeature</code>
<code>section_name</code>	<code>xsd:string</code>	<code>has_section_flag</code>	<code>SectionFlag</code>

4.4 Section flags

The `SectionFlag` class classifies the flags given to PE file sections. In the EMBER dataset, these flags are included in the `props` property of each section. From the malware-detection point of view, the most interesting of them are the flags controlling how processes executing the PE file may access (read, write, execute) and share the memory region into which this section is mapped. These flags can be, in theory, combined arbitrarily. Only these four flags are represented in the ontology by the `Executable`, `Readable`, `Writable`, and `Shareable` subclasses of `SectionFlag`. Similarly to file features, each subclass has a prototypical instance that sections with the respective flag are linked to via the `has_section_flag` object property.

4.5 Section features

Similarly to `FileFeature`, `SectionFeature`'s subclasses represent features of the sections that, based on our expert knowledge, are relevant for malware detection. They are listed in Table 5. All of these features are derived, and their values are computed from the section's data properties and flags, as detailed in Sect. 3.2.

Instances of `Section` are linked to the prototypical instances of the three subclasses of `SectionFeature` using the `has_section_feature` property.

Table 5: Section features

Section feature class	Description (equivalent OWL 2 expression)
<code>HighEntropy</code>	The value of section's entropy is larger than the threshold value (<code>section_entropy some xsd:double [> entropy_threshold]</code>)
<code>NonstandardSectionName</code>	Section's name is not in the list of standard section names (<code>section_name some not {".text", ".data", ".rsrc", ... }</code>)
<code>WriteExecuteSection</code>	Section has write and execute permissions (<code>(has_section_flag some Writable) and (has_section_flag some Executable)</code>)

4.6 Annotation of derived features

As discussed in Sec. 3.2, derived features of PE files and sections may be considered redundant in some applications and retaining them in the data set may have adverse effects. We have documented such features in the ontology with the `derived_as` annotation property, in order to facilitate their automatic identification. Each derived feature class is annotated using this property with the respective defining OWL 2 expression (see Tables 3 and 5), encoded as a string in the Manchester syntax.

4.7 Actions

Instances of class `Action` represent actions that may be taken by a process executing the code from a PE file. Actions are classified in 139 leaf subclasses of `Action` (a *leaf* class is one with no named subclasses except itself) that are

aligned with the MAEC standard’s Malware actions vocabulary as described in Sec. 3.1. In order to aid generalization during classifier learning, we have added 17 categories of actions listed in Table 6. Each category is represented by an intermediate class (e.g., `ProcessHandling`; see Fig. 2) – a direct subclass of `Action` and a direct superclass of the leaf MAEC-based action classes falling into the category (e.g., `CreateProcess`, `WriteToProcessMemory`).

Currently, each leaf action class has a prototypical instance and all `PEFile` instances that may perform this action are connected to it by the `has_action` object property. This connection is created by mapping imported functions from the `imports` property of samples in the EMBER dataset to the corresponding MAEC malware actions if possible. For example, when generating an ontological representation of a sample importing an API function that creates a process, a prototypical instance `create-process` of the `CreateProcess` class is linked to the sample’s `PEFile` instance via the `has_action` property. Of course, importing such an API function does not necessarily mean that it will actually be called (thus creating a process) when this sample is run.

Alternatively, if dynamic tracing data from running samples in a sandboxed environment are available, every action actually performed by a sample could be represented by an individual, non-prototypical instance of `Action`, classified in the appropriate leaf subclass and further characterized by additional properties, such as parameters, previous and next action, or timestamp. Extending our ontology to cover such dynamic data may be interesting future work. However, to the best of our knowledge, no such dataset is currently available.

Table 6: Action classes

Action class	Description
<code>AccessManagement</code>	Managing users on the system (adding new user, enumerating existing users, etc.)
<code>AntiDebugging</code>	Debugger detection techniques
<code>Cryptography</code>	Encrypting/decrypting files, generating keys, etc.
<code>DirectoryHandling</code>	Manipulating with directories (creation, deletion, etc.)
<code>DiskManagement</code>	Mounting/unmounting disks, enumerating existing disks
<code>FileHandling</code>	Manipulating with files (creation, deletion, etc.)
<code>InterProcessCommunication</code>	Communication between processes (named pipes)
<code>LibraryHandling</code>	Loading library into running processes
<code>Networking</code>	Various networking activities (connecting to a socket, sending DNS requests)
<code>ProcessHandling</code>	Various APIs for process handling, including creation or modifying process memory
<code>RegistryHandling</code>	Enumerating registry keys, writing new values, etc.
<code>ResourceSharing</code>	Manipulating with resources shared over network
<code>ServiceHandling</code>	Manipulating with systems’s services
<code>SynchronizationPrimitivesHandling</code>	Handling mutexes/semaphores
<code>SystemManipulation</code>	Various APIs for obtaining system information
<code>ThreadHandling</code>	Creating remote threads, enumerating running threads
<code>WindowHandling</code>	Window manipulation APIs (creating new windows, dialog boxes, etc.)

5 Fractional datasets

One of the important goals was to create datasets that would allow unambiguous reproduction of experimental results. For this reason, we generated multiple datasets with a clear definition of which samples belong to the training set and which belong to the testing set. Each dataset contains 50% positive samples (malware) and 50% negative samples (benign). We generated datasets of various sizes from 1000 to 800,000 (i.e. the entire EMBER dataset excluding unlabeled samples). The main reason was that concept learning algorithms are computationally more demanding than some traditional machine learning algorithms, and for that reason it can be useful to have less robust datasets available. We also generated several variants for each fractional dataset size, which were randomly selected from the entire EMBER dataset. More details can be seen in Table 7.

There are three files for each individual dataset:

`dataset_N_1000.owl`: this is an ontology filled with individuals of OWL type, which contains 1000 malware/benign samples;

Table 7: Fractional datasets properties

Name	Total samples	Positive	Negative	Variants
dataset_N_1000.owl	1000	500	500	10
dataset_N_10000.owl	10,000	5000	5000	10
dataset_N_100000.owl	100,000	50,000	50,000	10
dataset_N_800000.owl	800,000	400,000	400,000	1

`dataset_N_1000_raw.json`: original JSON samples from the EMBER dataset (including unused features) from which the ontological dataset was generated;

`dataset_N_1000_examples.json`: list of positive and negative samples in the given dataset in JSON format.

We refrain from publishing a predefined split of the datasets into the training and testing part, as committing to one split may lead into lucky or unlucky setting for certain learning algorithms or even to overfitting on the given predefined split. Instead we propose to follow the k -fold cross-evaluation methodology [Refaeilzadeh et al., 2009] in which the dataset is split in k equal parts and in each run one of them is used for testing while the rest of the data is used for training. The results are then averaged. Fivefold and tenfold splits are commonly used.

6 Usage in concept learning

The ontology can be used by various machine learning algorithms where the goal is to build a malware detection model. One such example includes the family of concept learning algorithms. Which can be used to provide descriptive characterizations of (parts of) the malware sample using terms from the ontology. Three examples of class expressions (in standard description logics syntax [Baader et al., 2003]) learned using Parallel Class Expression Learner (PARCEL) Tran et al. [2012] algorithm are shown below:

$$(\exists has_file_feature.\{multiple_executable_sections\}) \sqcap (\geq 2 has_section.(\exists has_section_feature.\{high_entropy\})) \quad (1)$$

$$(\exists has_action.\{read_from_process_memory\}) \sqcap (\exists has_section.(\exists has_section_feature.\{write_execute_section\})) \quad (2)$$

$$(\neg DynamicLinkLibrary) \sqcap (\exists has_action.\{connect_to_ftp_server\}) \sqcap (\exists has_action.\{enumerate_registry_key_values\}) \quad (3)$$

We can see that expressions are highly interpretable and human readable. For instance, expression (1) could be interpreted as follows: *a binary is malicious if it has multiple sections that are executable and has at least two sections with high value of entropy*. Given that the class expressions are in fact logical formulae, they may also be used with an ontology-based retrieval system to query for samples that satisfy each given expressions.

7 Conclusions

The PE Ontology, described in this report, is intended as an inter-operable representation format that can be used to publish datasets of samples of PE malware. The ontology is partly based on the EMBER dataset but does not copy the EMBER data properties one-to-one but instead relied on expert knowledge and standard nomenclature to improve interpretability and reusability.

We hope it may also serve as a first step to establish an industry-standard for a semantic schema specifying what data should actually be included in these datasets – considering its future gradual extensions, if needed.

It can be readily used to extract class expressions of learned malware samples either ex post or during the learning process when malware detection models are learned. As briefly hinted in Section 6 such class expressions can than serve e.g. to generate explanations in human language.

The ontology, being based on EMBER, is currently suited especially for data resulting from static malware analysis. For future work, it might be useful to extend it to support data resulting from dynamic malware analysis as well.

8 Acknowledgement

This research was sponsored by Slovak Republic under grants APVV-19-0220 (ORBIS) and by the EU H2020 programme under Contract no. 952215 (TAILOR)

References

- Classification of malware PE headers. URL <https://github.com/urwithajit9/ClAMP>. [Online; accessed 2022-10-08].
- MalShare. URL <https://malshare.com/>. [Online; accessed 2022-10-15].
- Malware initial assessment. URL <https://www.winator.com/>. [Online; accessed 2022-10-08].
- VirusShare, a. URL <https://virusshare.com>. [Online; accessed 2022-05-15].
- VirusTotal, b. URL <https://www.virustotal.com/>. [Online; accessed 2022-10-08].
- Hyrum S Anderson and Phil Roth. EMBER: An open dataset for training static PE malware machine learning models. *arXiv preprint arXiv:1804.04637*, 2018.
- Daniel Arp, Michael Spreitzenbarth, Malte Hubner, Hugo Gascon, Konrad Rieck, and CERT Siemens. DREBIN: effective and explainable detection of Android malware in your pocket. In *NDSS*, volume 14, pages 23–26, 2014.
- Franz Baader, Diego Calvanese, Deborah L. McGuinness, Daniele Nardi, and Peter F. Patel-Schneider, editors. *The Description Logic Handbook: Theory, Implementation, and Applications*. Cambridge University Press, 2003. ISBN 0-521-78176-0.
- Antoine Bordes, Nicolas Usunier, Alberto García-Durán, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. In *Advances in Neural Information Processing Systems 26: 27th Annual Conference on Neural Information Processing Systems 2013. Proceedings of a meeting held December 5–8, 2013, Lake Tahoe, Nevada, United States*, pages 2787–2795, 2013.
- Branislav Bosansky, Dominik Kouba, Ondrej Manhal, Thorsten Sick, Viliam Lisy, Jakub Kroustek, and Petr Somol. Avast-CTU public CAPE dataset. *arXiv preprint arXiv:2209.03188*, 2022.
- Karl Bridge, Ahmed Hesham, Russ Keldorph, YongKang Zhu, Nico Abram, John Kennedy, Drew Batchelor, David Coulter, Jay Krell, j04n, Colin Robertson, Maurice Kayser, Christopher Warrington, Michael Satran, and Mark LeBLanc. PE format, June 2022. URL <https://learn.microsoft.com/en-gb/windows/win32/debug/pe-format>. [Online; accessed 2022-11-15].
- Ferhat Ozgur Catak and Ahmet Faruk Yazı. A benchmark API call dataset for Windows PE malware classification. *arXiv preprint arXiv:1905.01999*, 2019.
- Manuel de Sousa Ribeiro and João Leite. Aligning artificial neural networks and ontologies towards explainable AI. In *Thirty-Fifth AAAI Conference on Artificial Intelligence, AAAI 2021, Thirty-Third Conference on Innovative Applications of Artificial Intelligence, IAAI 2021, The Eleventh Symposium on Educational Advances in Artificial Intelligence, EAAI 2021, Virtual Event, February 2–9, 2021*, pages 4932–4940. AAAI Press, 2021.
- Lahouari Ghouti and Muhammad Imam. Malware classification using compact image features and multiclass support vector machines. *IET Inf. Secur.*, 14(4):419–429, 2020. doi:10.1049/iet-ifs.2019.0189.
- Richard Harang and Ethan M Rudd. SOREL-20M: A large scale benchmark dataset for malicious PE detection. *arXiv preprint arXiv:2012.07634*, 2020.
- Xinbo Liu, Yaping Lin, He Li, and Jiliang Zhang. A novel method for malware detection on ml-based visualization technique. *Comput. Secur.*, 89, 2020. doi:10.1016/j.cose.2019.101682.
- MITRE Corp. MAEC™ 5.0 specification. Vocabularies, 2017. URL https://maecproject.github.io/releases/5.0/MAEC_Vocabularies_Specification.pdf. [Online; accessed 2022-05-15].
- MITRE Corp. Malware attribute enumeration and characterization, 2020. URL <https://maecproject.github.io/>. [Online; accessed 2022-05-15].
- Lakshmanan Nataraj, Sreejith Karthikeyan, Gregoire Jacob, and Bangalore S Manjunath. Malware images: visualization and automatic classification. In *Proceedings of the 8th international symposium on visualization for cyber security*, pages 1–7, 2011.
- Payam Refaailzadeh, Lei Tang, and Huan Liu. Cross-validation. In Ling Liu and M. Tamer Özsu, editors, *Encyclopedia of Database Systems*, pages 532–538. Springer, 2009. doi:10.1007/978-0-387-39940-9_565.

- Giorgio Severi, Tim Leek, and Brendan Dolan-Gavitt. MALREC: Compact full-trace malware recording for retrospective deep analysis. In *International Conference on Detection of Intrusions and Malware, and Vulnerability Assessment*, pages 3–23. Springer, 2018.
- Peter Švec, Štefan Balogh, and Martin Homola. Experimental evaluation of description logic concept learning algorithms for static malware detection. In *ICISSP*, pages 792–799, 2021.
- An C Tran, Jens Dietrich, Hans W Guesgen, and Stephen Marsland. An approach to parallel class expression learning. In *International Workshop on Rules and Rule Markup Languages for the Semantic Web*, pages 302–316. Springer, 2012.
- R. Vinayakumar, Mamoun Alazab, K. P. Soman, Prabaharan Poornachandran, and Sitalakshmi Venkatraman. Robust intelligent malware detection using deep learning. *IEEE Access*, 7:46717–46738, 2019. doi:10.1109/ACCESS.2019.2906934.