

PauliComposer: Compute Tensor Products of Pauli Matrices Efficiently

Sebastián V. Romero^{1,2,*} and Juan Santos-Suárez^{3,†}

¹TECNALIA, Basque Research and Technology Alliance (BRTA), 48160 Derio, Spain

²Department of Physical Chemistry, University of the Basque Country UPV/EHU, Apartado 644, 48080 Bilbao, Spain

³Instituto Galego de Física de Altas Enerxías (IGFAE),

Universidade de Santiago de Compostela, 15705 Santiago de Compostela, Spain

(Dated: December 19, 2023)

We introduce a simple algorithm that efficiently computes tensor products of Pauli matrices. This is done by tailoring the calculations to this specific case, which allows to avoid unnecessary calculations. The strength of this strategy is benchmarked against state-of-the-art techniques, showing a remarkable acceleration. As a side product, we provide an optimized method for one key calculus in quantum simulations: the Pauli basis decomposition of Hamiltonians.

Keywords: tensor product, Kronecker product, Pauli matrices, quantum mechanics, quantum computing.

I. INTRODUCTION

Pauli matrices [1] are one of the most important and well-known set of matrices within the field of quantum physics. They are particularly important both in physics and chemistry when used to describe Hamiltonians of many-body spin glasses [2–7] or for quantum simulations [8–13]. The vast majority of these systems are out of analytic control so that they are usually simulated through exact diagonalization which requires their Hamiltonians to be written in its matrix form. While this task may be regarded as a trivial matter in a mathematical sense, it involves the calculation of an exponentially growing number of operations. Furthermore, description of quantum systems via Matrix Product States (MPS) [14], Density Matrix Renormalization Group (DMRG) [15] and Projected Entangled Pair States (PEPS) [16] also involve large scale Hamiltonians, as well as Lanczos method [17], whose formulation has been efficiently encoded on quantum hardware recently [18].

In this work, we present the *PauliComposer* (PC) algorithm which significantly expedites this calculation. It exploits the fact that any Pauli word only has one element different from zero per row and column, so a number of calculations can be avoided. Additionally, each matrix entry can be computed without performing any multiplications. Even though the exponential scaling of the Hilbert space cannot be avoided, PC can boost inner calculations where several tensor products involving Pauli matrices appear. In particular, those that appear while building Hamiltonians as weighted sums of Pauli strings or decomposing an operator in the Pauli basis.

The PC algorithm could be implemented in computational frameworks in which this sort of operations are crucial, such as the Python modules Qiskit [19], PennyLane [20], OpenFermion [21] and Cirq [22]. It can also potentially be used in many other applications, such as

the Pauli basis decomposition of the Fock space [23] and conventional computation of Ising model Hamiltonians to solve optimization problems [24–27], among others.

The rest of the article is organized as follows: in Sec. II we describe the algorithm formulation in depth, showing a pseudocode-written routine for its computation. In Sec. III, a set of tests is performed to show that a remarkable speed-up can be achieved when compared to state-of-the-art techniques. In Sec. IV, we show how this PC algorithm can be used to solve relevant problems. Finally, the conclusions drawn from the presented results are given in Sec. V. We provide proofs for several statements and details of the algorithm in the appendices.

II. ALGORITHM FORMULATION

In this section we discuss the PC algorithm formulation in detail. Pauli matrices are hermitian, involutory and unitary matrices that together with the identity form the set $\sigma_{\{0,1,2,3\}} = \{I, X, Y, Z\}$. Given an input string $x = x_{n-1} \dots x_0 \in \{0, 1, 2, 3\}^n$, the PC algorithm constructs

$$P(x) := \sigma_{x_{n-1}} \otimes \sigma_{x_{n-2}} \otimes \dots \otimes \sigma_{x_0}. \quad (1)$$

Let us denote its matrix elements as $P_{j,k}(x)$ with $j, k = 0, \dots, 2^n - 1$. It is important to remark that for each row j , there will be a single column $k(j)$ such that $P_{j,k(j)} \neq 0$ (see App. A). The solution amounts to a map from the initial Pauli string to the positions and values of the 2^n nonzero elements. This calculation will be done sequentially, hence the complexity of the algorithm will be bounded from below by this number.

As a first step, it is worth noting that Pauli string matrices are either real (all elements are ± 1) or purely imaginary (all are $\pm i$). This depends on n_Y , the number of Y operators in $P(x)$. We can redefine $\tilde{Y} := iY$, so that $\tilde{\sigma}_{\{0,1,2,3\}} = \{I, X, \tilde{Y}, Z\}$ and $\tilde{P}(x) := \tilde{\sigma}_{x_{n-1}} \otimes \dots \otimes \tilde{\sigma}_{x_0}$. As a result, every entry in $\tilde{P}(x)$ will be ± 1 . This implies that there is no need to compute any multiplication: the problem reduces to locating the nonzero entries in $\tilde{P}(x)$ and tracking sign changes. The original $P(x)$ can be recovered as $P(x) = (-i)^{n_Y \bmod 4} \tilde{P}(x)$.

* sebastian.vidal@tecnalia.com

† juansantos.suarez@usc.es

We will now present an iterative procedure to compute \tilde{P} by finding for each row j the nonzero column number $k(j)$ and its corresponding value $\tilde{P}_{j,k(j)}$. For the first row, $j = 0$, the nonzero element $\tilde{P}_{0,k(0)}$, can be found at

$$k(0) = [y(x_{n-1}) \dots y(x_0)]_{10}, \quad (2)$$

where $[\cdot]_{10}$ is the decimal representation of a bit string and $y(x_i)$ tracks the diagonality of σ_{x_i} , where $y(x_i)$ is equal to 0 if $x_i = \{0, 3\}$ (thus $\sigma_{x_i} \in \{I, Z\}$) and 1 otherwise (thus $\sigma_{x_i} \in \{X, Y\}$). The value of this entry is

$$\tilde{P}_{0,k(0)} = +1 \implies P_{0,k(0)} = (-i)^{n_Y \bmod 4}. \quad (3)$$

The following entries can be computed iteratively. At the end of stage l , with $l = 0, \dots, n-1$, all nonzero elements in the first 2^{l+1} rows of $P_{j,k(j)}$ will have been computed using the information given by the substring $x_l \dots x_0$. At the next step, $l+1$, the following 2^l rows are filled using the ones that had already been computed, where the row-column relation $k(j)$ is given by

$$k(j+2^l) = k(j) + (-1)^{y(x_l)} 2^l, \quad j = 0, \dots, 2^l - 1. \quad (4)$$

The second term of the RHS of this relation takes into account the way that the blocks of zeros returned at stage l affect the new relative location of the nonzero blocks within the new $2^{l+1} \times 2^{l+1}$ subcomposition. Its corresponding values are obtained from the previous ones, up to a possible change of sign given by

$$P_{j+2^l, k(j+2^l)} = \epsilon_l P_{j, k(j)}, \quad (5)$$

with ϵ_l equal to 1 if $x_l \in \{0, 1\}$ and -1 otherwise. This ϵ_l is nothing but a parameter that takes into account if σ_{x_l} introduces a sign flip. In Alg. 1 a pseudocode that summarizes the presented algorithm using (2)-(5), is shown.

For the particular case of diagonal Pauli strings (only I and Z matrices), there is no need to compute the row-column relation $k(j)$, just the sign assignment is enough. Even if this is also the case for anti-diagonal matrices, we focus on the diagonal case due to its relevance in combinatorial problems [24–27]. See Alg. 2 for the pseudocode of this case (PDC stands for *PauliDiagonalComposer*).

The PC algorithm is able to circumvent the calculation of a significant amount of operations. When generic Kronecker product routines (see App. B) are used for the same task, the amount of multiplications needed for computing a Pauli string is $\mathcal{O}[n2^{2n}]$ and $\mathcal{O}[n2^n]$ for dense and sparse matrices, respectively. In contrast, the PC algorithm, considering the worst-case scenarios, needs

- $\{I, Z\}^{\otimes n}$: $\mathcal{O}[2^n]$ changes of sign.
- Otherwise: $\mathcal{O}[2^n]$ sums and $\mathcal{O}[2^n]$ changes of sign.

In all cases our algorithm can significantly outperform those that are not specifically designed for Pauli matrices.

On top of that, this method is also advantageous for computing weighted Pauli strings. Following (3), $W := \omega P$, with arbitrary ω , can be computed by defining

Algorithm 1: PC: compose n Pauli matrices

```

input :  $x_{n-1}x_{n-2} \dots x_0 \leftarrow$  string with  $x_i \in \{0, 1, 2, 3\}$ 
1  $n \leftarrow \text{len}(x)$ 
2  $n_Y \leftarrow$  number of  $Y$  matrices in  $x$ 
3  $j \leftarrow \text{range}(0, 2^n - 1)$  // rows
4  $k, m \leftarrow$  empty  $2^n$ -array // columns/entries
5  $k(0) \leftarrow y(x_{n-1}) \dots y(x_0)$  in base 10
6  $m(0) \leftarrow (-i)^{n_Y \bmod 4}$ 
7 for  $l \in \text{range}(0, n-1)$  do
8    $k(2^l : 2^{l+1} - 1) \leftarrow k(0 : 2^l - 1) + (-1)^{y(x_l)} 2^l$ 
9   if  $x_l \in \{0, 1\}$  then //  $\epsilon_l = 1$ 
10     $m(2^l : 2^{l+1} - 1) \leftarrow m(0 : 2^l - 1)$ 
11   else //  $\epsilon_l = -1$ 
12     $m(2^l : 2^{l+1} - 1) \leftarrow -m(0 : 2^l - 1)$ 
output:  $P(x)$  as a sparse matrix stacking  $(j, k, m)$ 
```

Algorithm 2: PDC: compose n diagonal Pauli matrices

```

input :  $x_{n-1}x_{n-2} \dots x_0 \leftarrow$  string with  $x_i \in \{0, 3\}$ 
1  $n \leftarrow \text{len}(x)$ 
2  $j, k \leftarrow \text{range}(0, 2^n - 1)$  // rows/columns
3  $m \leftarrow$  empty  $2^n$ -array // entries
4  $m(0) \leftarrow 1$ 
5 for  $l \in \text{range}(0, n-1)$  do
6   if  $x_l = 0$  then //  $\epsilon_l = 1$ 
7     $m(2^l : 2^{l+1} - 1) \leftarrow m(0 : 2^l - 1)$ 
8   else //  $\epsilon_l = -1$ 
9     $m(2^l : 2^{l+1} - 1) \leftarrow -m(0 : 2^l - 1)$ 
output:  $P(x)$  as a sparse matrix stacking  $(j, k, m)$ 
```

$W_{0,k(0)} = \omega(-i)^{n_Y \bmod 4}$ which avoids having to do any extra multiplication. This change is reflected in Alg. 1 by changing line 6 to $m(0) \leftarrow \omega(-i)^{n_Y \bmod 4}$ and line 4 to $m(0) \leftarrow \omega$ in Alg. 2. This is specially important as it can be used to compute Hamiltonians written as a weighted sum of Pauli strings, where $H = \sum_x \omega_x P(x)$.


III. BENCHMARKING

In this section we analyse the improvement that the PC strategy introduces against other known algorithms labelled as *Naive* (regular Kronecker product), Algorithm 993 (Alg993) [28], *Mixed* and *Tree* [29, 30]. Further details can be found in App. B. We benchmark these algorithms using MATLAB [31] as it is proficient at operating with matrices (it incorporates optimized routines of the well-known BLAS and LAPACK libraries [32, 33]). The PC avoids matrix operations and thus it would not be ideal to implement it using MATLAB. Instead, we use Python [34] since many quantum computing libraries are written in this language [19–22]. See Tab. I for a full description of the computational resources used.

Concerning memory needs, with this algorithm only 2^n nonzero elements out of 2^{2n} are stored. This is exactly the same as using sparse matrices, thus, no major improvement is to be expected. As for the computational time, we compare how different algorithms behave as the length n of the Pauli string increases. In Fig. 1 execution

Table I. Computer specifications.

Processor	Intel Core i7-11850H (16 × 2.50 GHz)		
RAM	32.0 GB (DDR4)		
OS	Ubuntu 22.04.1 LTS (×64)		
MATLAB [31]	9.12.0.1884302 (R2022a)		
Python [34]	3.9.12		
NumPy [35]	1.23.2	SciPy [36]	1.9.0
Qiskit [19]	0.38.0	PennyLane [20]	0.23.1

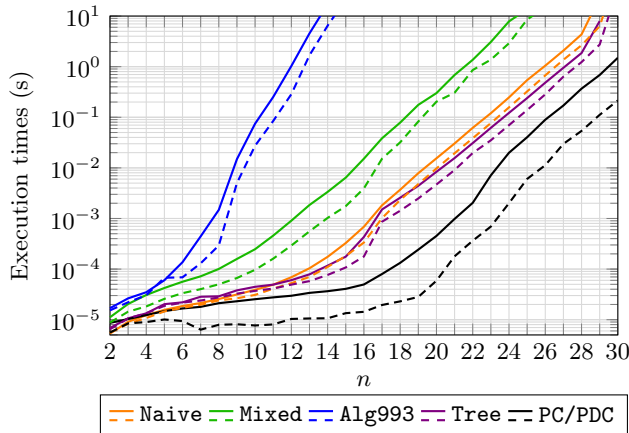Figure 1. (Color online) Execution times for computing general (solid line) and diagonal (dashed) n -Pauli strings using different methods.

times for general and diagonal Pauli strings are shown. For the PC methods, we use the PC routine (Alg. 1) for the general case and the PDC routine (Alg. 2) for the diagonal one. In accordance to our theoretical analysis, the PC algorithm proves to be the best performing routine.

On a more technical note, when using the PC routine, matrices with complex values (n_Y odd) take twice as much time as real valued ones (n_Y even). Consequently, we compute their execution times separately and then average them. Moreover, it is convenient to choose when to use PC or PDC as the latter can be up to 10 times faster.

IV. REAL USE CASES OF THE PAULICOMPOSER ALGORITHM

The PC algorithm can be used to perform useful calculations in physics. In this section, the Pauli basis decomposition of a Hamiltonian and the construction of a Hamiltonian as a sum of weighted Pauli strings are discussed in detail. Another worth mentioning scenario is the digital implementation of the complex exponential of a Pauli string, i.e. $e^{-i\theta P(x)} = \cos(\theta)I - i\sin(\theta)P(x)$.

Pauli basis decomposition of a Hamiltonian.—The decomposition of a Hamiltonian written as a $2^n \times 2^n$ matrix into the Pauli basis is a common problem in quantum computing. Given a general Hamiltonian H , this decomposition can be written as $H = \sum_x \omega_x P(x)$ with $x = x_{n-1} \dots x_0$ and $P(x)$ as in (1). The coefficients ω_x

are obtained from the orthogonal projection as

$$\omega_x = \frac{1}{2^n} \text{tr}[P(x)H] = \frac{1}{2^n} \sum_{j=0}^{2^n-1} P_{j,k(j)}(x) H_{k(j),j}. \quad (6)$$

Following the discussion in Sec. II, the double sum collapses to a single one in (6) since there is only one nonzero element per row and column. Each of these weights can be computed independently, which allows for a parallel implementation. Additionally, in some special cases, it can be known in advance if some ω_x will vanish:

- If H is symmetric, strings with an odd number of Y matrices can be avoided ($2^{n-1}(2^n + 1)$ terms).
- If H is diagonal, only strings composed by I and Z will contribute (2^n terms).

The operations made by *PauliDecomposer* (PD) are

- If H is diagonal ($\mathcal{O}[2^n]$ strings): $\mathcal{O}[2^{2n}]$ operations.
- Otherwise ($\mathcal{O}[2^{2n}]$ strings): $\mathcal{O}[2^{3n}]$ operations.

This PD algorithm checks if the input matrix satisfies one of the aforementioned cases and computes the coefficients using the PC routine and (6), discarding all vanishing Pauli strings. This workflow considerably enhances our results, especially for diagonal matrices.

In Tab. II and Fig. 2, we tested the most extended methods for decomposing matrices into weighted sums of Pauli strings against PD, using Python [34] to compare their performance. In particular, we used the *SparsePauliOp* class from Qiskit [19] and the *decompose_hamiltonian* function from PennyLane [20] (only works with hermitian Hamiltonians). To the best of authors' knowledge, both routines are based on Naive approach without inspecting the input matrix nature before proceeding.

Four types of random $2^n \times 2^n$ matrices were generated, namely non-hermitian H_{NH} , hermitian H_H , symmetric H_S and diagonal H_D matrices. The PD vastly outperforms Qiskit and PennyLane routines, specially for the symmetric and diagonal cases.

Building of a Hamiltonian as a sum of weighted Pauli strings.—Many Hamiltonians are written in terms of weighted Pauli strings. Our method can compute weighted Pauli strings directly without extra computations. In Fig. 3 we show a performance comparison of the presented methods for computing Hamiltonians written as sums of weighted Pauli strings. The Hamiltonian used is similar to the one proposed in [27],

$$H = \sum_{i=0}^{n-1} \alpha_i \sigma_3^i + \sum_{i<j}^{n-1} \beta_{ij} \sigma_3^i \sigma_3^j, \quad (7)$$

being the corresponding weights $\vec{\alpha}$ and $\vec{\beta}$ arbitrary and σ_3^i as defined in (B2). This Hamiltonian is computed using Alg. 3, which uses the PDC routine (see Alg. 2) with

Table II. Execution times (in seconds) for decomposing an arbitrary $2^n \times 2^n$ matrix. Here, PC and PDC calculations were made computing weights sequentially and in parallel.

n	2	3	4	5	6	7	8	9	10
Non-hermitian matrix H_{NH}									
PC (sequential)	0.0005	0.0021	0.012	0.078	0.55	4.06	31.2	254	2008
PC (parallel)	0.094	0.093	0.11	0.15	0.38	2.10	13.5	94.3	719
Qiskit	0.0015	0.0050	0.020	0.14	1.16	8.78	92.38	1398	26938
Hermitian matrix H_H									
PC (sequential)	0.0004	0.0021	0.012	0.078	0.56	4.24	32.86	261	2007
PC (parallel)	0.068	0.070	0.079	0.12	0.33	1.99	13.02	96.5	647
Qiskit	0.0010	0.0035	0.018	0.10	1.47	12.02	108	1295	26848
PennyLane	0.0013	0.0060	0.030	0.15	2.23	10.66	97.6	2019	35014
Symmetric matrix H_S									
PC (sequential)	0.0003	0.0010	0.0058	0.036	0.24	1.78	14.05	108	794
PC (parallel)	0.059	0.059	0.061	0.078	0.13	0.48	2.75	20.1	140
Qiskit	0.0010	0.0036	0.018	0.10	1.45	11.07	105	1320	26399
PennyLane	0.0011	0.0054	0.027	0.13	1.36	9.22	91.52	1477	31583
Diagonal matrix H_D									
PDC (sequential)	0.0001	0.0002	0.0006	0.0018	0.0068	0.025	0.094	0.37	1.49
PDC (parallel)	0.055	0.057	0.059	0.060	0.060	0.064	0.078	0.12	0.35
Qiskit	0.0010	0.0035	0.018	0.10	1.46	11.0	103	1270	25977
PennyLane	0.0010	0.0047	0.023	0.11	1.20	8.29	86.2	1370	30941

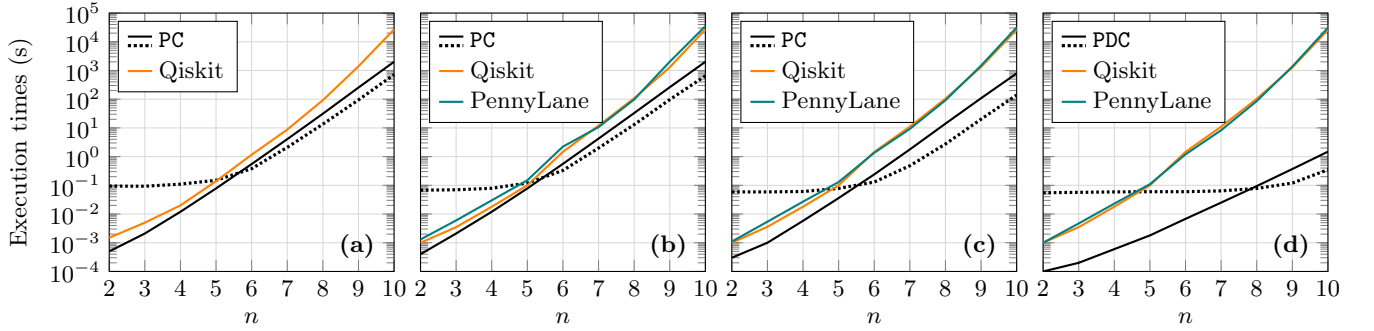


Figure 2. (Color online) Execution times for decomposing $2^n \times 2^n$ (a) non-hermitian H_{NH} , (b) hermitian H_H , (c) symmetric H_S and (d) diagonal H_D matrices with different methods. For PC and PDC, solid (dotted) line depicts sequential (parallelized) decomposition. See Tab. II. As expected, notice that the larger n , the higher impact of parallelization.

two inputs: the string $x \in \{0, 3\}^n$ to compute and the weights to consider. In the PDC case, we use two strategies: compute each weighted term of (7) directly and compute each Pauli string and then multiply it by its corresponding weight (solid and dashed lines in Fig. 3, respectively). This is done by changing lines 6 to $H \leftarrow H + \alpha_i \text{PDC}(str_1)$ and 10 to $H \leftarrow H + \beta_{ij} \text{PDC}(str_2)$ in Alg. 3 for the second one. There is no significant difference between both methods.

V. CONCLUSIONS

The fast and reliable computation of tensor products of Pauli matrices is crucial in the field of quantum mechanics and, in particular, of quantum computing. In this article we propose a novel algorithm with proven

Algorithm 3: Ising model Hamiltonian computation

```

input :  $\vec{\alpha}, \vec{\beta} \leftarrow$  lists of weights
1  $n \leftarrow \text{len}(\vec{\alpha})$ 
2  $H \leftarrow 2^n \times 2^n$  sparse matrix of zeros
3 for  $i \in \text{range}(0, n - 1)$  do
4    $str_1 \leftarrow$  string of  $n$  zeros //  $n$  identities
5    $str_1(i) \leftarrow 3$  //  $Z$  in the  $i$ -th position
6    $H \leftarrow H + \text{PDC}(str_1, \alpha_i)$ 
7   for  $j \in \text{range}(i + 1, n - 1)$  do
8      $str_2 \leftarrow \text{copy}(str_1)$ 
9      $str_2(j) \leftarrow 3$  //  $Z$  in the  $j$ -th position
10     $H \leftarrow H + \text{PDC}(str_2, \beta_{ij})$ 
output: Hamiltonian  $H$  as a sparse matrix

```

theoretical and experimental enhancements over similar methods of this key yet computationally tedious task.

First, one can consider what we call the **Naïve** algorithm, which consists on performing the calculations directly. It is clearly highly inefficient as it scales in the number of operations as $\mathcal{O}[n2^n]$ for sparse Pauli matrices. Second, the **Mixed** algorithm uses the mixed-product property

$$\bigotimes_{i=0}^{n-1} \sigma_{x_{n-i-1}} = \prod_{i=0}^{n-1} \sigma_{x_{n-i-1}}^i, \quad (\text{B1})$$

with

$$\sigma_{x_i}^i := \begin{cases} I^{\otimes n-1} \otimes \sigma_{x_0} & \text{if } i = 0 \\ I^{\otimes n-i-1} \otimes \sigma_{x_i} \otimes I^{\otimes i} & \text{if } 0 < i < n-1, \\ \sigma_{x_{n-1}} \otimes I^{\otimes n-1} & \text{if } i = n-1 \end{cases} \quad (\text{B2})$$

to simplify the calculation into a simple product of block diagonal matrices. Based on this procedure, **Alg993** is presented in [28]. It can be shown that this method performs over $\mathcal{O}[n2^n]$ operations. Besides that, as Fig. 1 suggests, the fact that it requires to transpose and reshape several matrices has a non-negligible effect that fatally increases its computation time. Finally, the **Tree** routine starts storing pairs of tensor products as

$$\left\{ \sigma_{x_{n-2i-1}} \otimes \sigma_{x_{n-2i-2}} \right\}_{i=0}^{n/2-1} \quad \text{if } n \text{ even} \\ \left\{ \sigma_{x_{n-1}} \right\} \cup \left\{ \sigma_{x_{n-2i-1}} \otimes \sigma_{x_{n-2i-2}} \right\}_{i=0}^{\lfloor n/2 \rfloor} \quad \text{if } n \text{ odd} \quad (\text{B3})$$

and proceeds with the resultant matrices following the same logic, which allows to compute (1) by iteratively grouping its terms by pairs. For better results, this method can be parallelized.

-
- [1] W. Pauli, *Zeitschrift für Physik* **43**, 601 (1927).
 - [2] W. Heisenberg, *Zeitschrift für Physik* **49**, 619 (1928).
 - [3] H. Bethe, *Zeitschrift für Physik* **71**, 205 (1931).
 - [4] D. Sherrington and S. Kirkpatrick, *Phys. Rev. Lett.* **35**, 1792 (1975).
 - [5] D. Panchenko, *Journal of Statistical Physics* **149**, 362 (2012).
 - [6] J. Hubbard and B. H. Flowers, *Proceedings of the Royal Society of London. Series A. Mathematical and Physical Sciences* **276**, 238 (1963).
 - [7] A. Altland and B. Simons, *Second quantization, in Condensed Matter Field Theory* (Cambridge University Press, 2006) pp. 39–93.
 - [8] P. Jordan and E. Wigner, *Zeitschrift für Physik* **47**, 631 (1928).
 - [9] S. B. Bravyi and A. Y. Kitaev, *Annals of Physics* **298**, 210 (2002).
 - [10] J. T. Seeley, M. J. Richard, and P. J. Love, *The Journal of Chemical Physics* **137**, 224109 (2012).
 - [11] A. Tranter, S. Sofia, J. Seeley, M. Kaicher, J. McClean, R. Babbush, P. V. Coveney, F. Mintert, F. Wilhelm, and P. J. Love, *International Journal of Quantum Chemistry* **115**, 1431 (2015).
 - [12] A. Tranter, P. J. Love, F. Mintert, and P. V. Coveney, *Journal of Chemical Theory and Computation* **14**, 5617 (2018).
 - [13] M. Steudtner and S. Wehner, *New Journal of Physics* **20**, 063010 (2018).
 - [14] S. Östlund and S. Rommer, *Phys. Rev. Lett.* **75**, 3537 (1995).
 - [15] S. R. White, *Phys. Rev. Lett.* **69**, 2863 (1992).
 - [16] F. Verstraete and J. I. Cirac, *arxiv:cond-mat/0407066* (2004).
 - [17] C. Lanczos, *J. Res. Natl. Bur. Stand. B* **45**, 255 (1950).
 - [18] W. Kirby, M. Motta, and A. Mezzacapo, *Quantum* **7**, 1018 (2023).
 - [19] Qiskit, *Qiskit: An Open-source Framework for Quantum Computing* (2021).
 - [20] PennyLane, *PennyLane: Automatic Differentiation of Hybrid Quantum-Classical Computations* (2018).
 - [21] OpenFermion, *OpenFermion: The Electronic Structure Package for Quantum Computers* (2017).
 - [22] Cirq, *Cirq* (2022).
 - [23] R. Liu, S. V. Romero, I. Oregi, E. Osaba, E. Villar-Rodriguez, and Y. Ban, *Entropy* **24**, 1529 (2022).
 - [24] A. Lucas, *Frontiers in Physics* **2**, 5 (2014).
 - [25] E. Osaba, E. Villar-Rodriguez, and I. Oregi, *IEEE Access* **10**, 55805 (2022).
 - [26] S. V. Romero, E. Osaba, E. Villar-Rodriguez, I. Oregi, and Y. Ban, *Scientific Reports* **13**, 11777 (2023).
 - [27] M. G. de Andoin, E. Osaba, I. Oregi, E. Villar-Rodriguez, and M. Sanz, in *Proceedings of the Genetic and Evolutionary Computation Conference Companion*, GECCO '22 (2022) pp. 2214–2222.
 - [28] P. L. Fackler, *ACM Trans. Math. Softw.* **45**, 1 (2019).
 - [29] R. A. Horn and C. R. Johnson, *Matrix equations and the kronecker product*, in *Topics in Matrix Analysis* (Cambridge University Press, 1991) p. 239–297.
 - [30] C. S. Burrus, *Implementing Kronecker Products Efficiently*, in *Automatic Generation of Prime Length FFT Programs* (OpenStax CNX, 2009) pp. 41–49.
 - [31] *MATLAB version 9.12.0.1884302 (R2022a)*, The Mathworks, Inc., Natick, Massachusetts (2022).
 - [32] C. L. Lawson, R. J. Hanson, D. R. Kincaid, and F. T. Krogh, *ACM Trans. Math. Softw.* **5**, 308 (1979).
 - [33] E. Anderson, Z. Bai, C. Bischof, S. Blackford, J. Demmel, J. Dongarra, J. Du Croz, A. Greenbaum, S. Hammarling, A. McKenney, and D. Sorensen, *LAPACK users' guide*, 3rd ed., Software, environments, tools (Society for Industrial and Applied Mathematics, 1999).
 - [34] Python, *Python: A Dynamic, Open Source Programming Language*, Python Software Foundation (2022).
 - [35] Charles R. Harris and K. Jarrod Millman et al., *Nature* **585**, 357 (2020).
 - [36] SciPy, *Nature Methods* **17**, 261 (2020).