

Detecting Excessive Data Exposures in Web Server Responses with Metamorphic Fuzzing

Lianglu Pan

lianglup@student.unimelb.edu.au
The University of Melbourne
Parkville, Victoria, Australia

Toby Murray

toby.murray@unimelb.edu.au
The University of Melbourne
Parkville, Victoria, Australia

Shaanan Cohney

cohneys@unimelb.edu.au
The University of Melbourne
Parkville, Victoria, Australia

Van-Thuan Pham

thuan.pham@unimelb.edu.au
The University of Melbourne
Parkville, Victoria, Australia

ABSTRACT

APIs often transmit far more data to client applications than they need, and in the context of web applications, often do so over public channels. This issue, termed *Excessive Data Exposure* (EDE), was OWASP’s third most significant API vulnerability of 2019. However, there are few automated tools—either in research or industry—to effectively find and remediate such issues. This is unsurprising as the problem lacks an explicit test oracle: the vulnerability does not manifest through explicit abnormal behaviours (e.g., program crashes or memory access violations).

In this work, we develop a metamorphic relation to tackle that challenge and build the first fuzzing tool—that we call EDEFuzz—to systematically detect EDEs. EDEFuzz can significantly reduce false negatives that occur during manual inspection and ad-hoc text-matching techniques, the current most-used approaches.

We tested EDEFuzz against the sixty-nine applicable targets from the Alexa Top-200 and found 33,365 potential leaks—illustrating our tool’s broad applicability and scalability. In a more-tightly controlled experiment of eight popular websites in Australia, EDEFuzz achieved a high true positive rate of 98.65% with minimal configuration, illustrating our tool’s accuracy and efficiency.

KEYWORDS

web api testing, excessive data exposure, metamorphic testing

1 INTRODUCTION

Every week, another leak! Server-side APIs of web applications frequently transmit more data than is needed for their corresponding clients. This may not have been an issue, were it not for the fact that these APIs are often publicly accessible. API vulnerabilities of this type are known as *Excessive Data Exposures* (EDEs). Despite ranking as OWASP’s #3 most significant API vulnerability for 2019 [1], technology to detect these vulnerabilities remains underdeveloped.

This motivates us to develop the first automated and systematic fuzzing tool—that we call EDEFuzz—to detect EDEs. As the “gold standard for finding and removing costly, exploitable security flaws”, fuzzing is a key tool for cost-effectively detecting and remediating such issues [2].

We posit that the lack of automated tools to detect EDEs is due to their *semantic* nature. Specifically, EDEs do not manifest through explicit, abnormal behaviours (e.g., program crashes or memory

“Automatic tools usually can’t detect this type of vulnerability because it’s hard to differentiate between legitimate data returned from the API, and sensitive data that should not be returned without a deep understanding of the application.”

— The Open Web Application Security Project (OWASP)

“This vulnerability is so prevalent (place 3 in the top 10) because it’s easy to miss. Automation is near useless here because robots can not tell what data should not be served to the user without telling them exactly how the application should work. This is bad because API’s are often implemented in a generic way, returning all data and expecting the front-end to filter it out.”

— Wallarm End-to-End API Security Solution

Figure 1: Industry views on the EDEs. These indicate the prevalence of EDEs and limitations of existing detection tools

access violations). Detecting them thus requires a model of what constitutes an EDE.

We start with a definition: an API is vulnerable to EDE if it exposes meaningfully more data than what the client legitimately needs [1].

Consider a simple example of an online storefront. When a user views the page for a specific product, an API call may be made to fetch stock levels, informing the user whether the item is in stock. The API returns the stock level, but may also return extraneous data (such as the profit margin on the item) that is not displayed to the user but is nonetheless transmitted. The transmission of the extra data constitutes an “excessive data exposure”. This leads to our motivating question:

How can one automatically detect if a web API exposes more data than it should?

The question is related to the famous test oracle problem. How can a tester or an automated testing technique distinguish desired, correct behaviour from undesired or incorrect behavior [3]. The common wisdom in industry (see **Figure 1**) is that the test oracle problem renders EDE detection beyond current testing approaches.

We address this challenge with the following key insight:

Data returned from an API endpoint is more likely excessive if it has no impact on the content displayed to a user.

Specifically, we develop the following novel metamorphic relation¹ to side-step this problem. Through the relation, automated testing approaches can check if a data field in an API response is excessive by checking for difference between what a client displays when the field is present in a API response, versus when the field is deleted.

Formally, assume we have an API response under analysis $\mathcal{R}_{\text{origin}}$ comprising a set of data fields. A web client (e.g., a web browser) uses $\mathcal{R}_{\text{origin}}$ to render a page that can be represented by a Document Object Model (DOM) tree $\mathcal{D}_{\text{origin}}$. A data field $d \in \mathcal{R}_{\text{origin}}$ is considered non-excessive if the following inequality holds:

$$\text{diff}_{\text{DOM}}(\mathcal{D}_{\text{origin}}, \mathcal{D}_{\text{mutated}}) \neq 0, \quad (1)$$

where diff_{DOM} calculates the difference between two DOM trees $\mathcal{D}_{\text{origin}}$ and $\mathcal{D}_{\text{mutated}}$. $\mathcal{D}_{\text{mutated}}$ is constructed from $\mathcal{R}_{\text{mutated}}$ which we obtain by removing the in-question data field d from $\mathcal{R}_{\text{origin}}$. If a data field violates Equation (1), it is deemed excessive.

This relation enables us to build a system that significantly reduces the potential for false negatives that can otherwise occur with competing approaches—manual inspection and ad-hoc text-matching. Notably, keyword matching techniques often use a list of terms (such as “key”, “token”, “password” etc) in order to flag exposures [5]. Therefore under keyword-matching, when an excessive data field does not match any known keywords, it is erroneously ignored.

In contrast to these approaches, our tool EDEFuzz leverages the metamorphic relation to detect EDEs. It does so by mutating and replaying API responses into the client side of a web application and compares the generated DOM tree with the original tree in each fuzzing iteration.

Building the tool required us to surmount two main technical challenges.

First, we needed to build an API fuzzer with *response determinism*. Existing mutation algorithms used in Web API testing/fuzzing [6] focus on mutating API requests which introduces random and untargeted changes in server responses. However, our metamorphic relation requires that the responses differ only in a single field.

Second, like other fuzzing tools, the usefulness of our tool depends on its ability to achieve reasonable throughput (represented in tests per second). This challenge is particularly acute in the context of web fuzzing as tools are rate limited by both bandwidth, and server load. For public sites, the challenge is further compounded by both server-side rate-limiting and the need to minimize disruption. These hinder the timely progress of a fuzzing tool.

To address these two challenges, we adopt a “record-replay” model [7]. We combine a web proxy and a custom-built simulated server to minimize interactions with sites under-test. Prior to beginning the fuzzing process, our tool initiates a “record” phase: a web proxy captures all client requests and server responses, including the request sent to the targeted API and the corresponding response. Note that in each fuzzing campaign EDEFuzz targets only one API. Following the record phase, fuzzing begins (i.e., the “replay” phase).

In the replay phase, *no communication with the actual remote server is necessary*. Our lightweight simulated server handles all

requests. If a request is sent to the targeted API, the simulated server transmits a mutated version of the original server response. Otherwise, the simulated server merely replays the recorded transmissions.

This architecture yields several benefits. First, test executions (i.e., sending requests and getting responses) are performed locally—leading to much lower latency. Second, changes to the remote server do not impact test results, making them highly deterministic. Maintaining deterministic results is a critical requirement for fuzzing in general because it helps reduce false positives. However, when detecting EDEs, this also helps reduce false negatives. Absent this determinism, an application change that yields a different web page may cause EDEFuzz to incorrectly flag a field as non-excessive—believe the DOM change to be caused by changes in the server-response and not in the application itself. Third, the architecture permits running tests in parallel, which minimizes the burden of scaling the tool.

We evaluate the tool in two different settings. First motivated by a recent massive Web API leak in Australia [8], we run our tool against several comparable web properties in that country. We perform a detailed comparison of the tool’s results against a corresponding manual effort to assess the severity and accuracy of the findings. Second, we run our tool against a broader set of sixty-nine web applications—the complete set of applicable targets present in the Alexa Top-200. We use this evaluation to assess the scalability of our tool as well as its applicability to a representative set of global web applications.

Our overall contributions are as follows:

- We identified a novel metamorphic relation that helps to address the test oracle problem in the context of detecting excessive data exposure.
- We designed and developed the first systematic and automated fuzzing tool for detecting excessive data exposure vulnerabilities. To the best of our knowledge, our tool EDEFuzz, is the first of its kind.
- We empirically evaluated the accuracy of our approach, its applicability to popular websites, and its efficiency (both in terms of computational time and human effort). Our results demonstrate EDEFuzz’s effectiveness for discovering unknown sensitive data leakage via EDE also, whose prevalence we also investigated. We found that our approach is
 - highly accurate: 98.65% of the fields flagged by the tool in a controlled study were true excessive data exposures.
 - widely applicable to popular websites, requiring modest computational costs and human effort to employ.
 - able to discover zero-day EDE vulnerabilities. Specifically, it found five zero-day EDE vulnerabilities serious enough to merit immediate disclosure.

We structure the remainder of the paper as follows: In Section 2, we provide the necessary preliminaries on Web APIs, Excessive Data Exposures and Metamorphic Fuzzing. In Section 3, we diverge from typical paper structure by motivating our work with several real-world vulnerabilities *discovered by our tool*. In Section 4, we present our automated approach to detect EDEs and our implementation. In Section 5, we report our experimental results and answer our research questions. A survey of related work in Section 6 is followed by a brief discussion in Section 7.

¹ A metamorphic relation is one that holds between two different program inputs and their corresponding outputs [4]

1.1 Research Ethics

We considered both the propriety of our scanning and fuzzing techniques and engaged in vulnerability disclosure.

We discussed our research in a series of conversations with our research ethics office who ultimately deemed it exempt from a full review process. Our research involves scraping and scanning commensurate with ordinary activity by both search engines and the research community. Our methodology minimizes interaction with remote servers by performing all fuzzing offline on a simulated replica of the target server. Given the low impact of capturing the outcome of a limited number of HTTP requests and the potential benefits of our research it was determined that our work adheres to the principle of beneficence that is the hallmark of research ethics.

As our work notes, EDEFuzz flags fields for further human analysis (rather than indicating vulnerabilities with certainty). As a result, our assessment of whether a flagged field rises to a reportable level requires human judgement about whether an EDE leaks sensitive information and the potential harms from that leak. In the five instances where we discovered sensitive data leakage we contacted the affected entities. By time of submission, two of the five entities had remediated the issues, while the other three entities claimed it wouldn't pose any security issue on their products.

2 BACKGROUND

We recall elements of web-application design and fuzzing techniques as relevant to excessive data exposure.

2.1 Web APIs & Excessive Data Exposure

Web applications often expose API endpoints to the public internet. Exposing the endpoint allows the application to separate front- and back-end logic. While the front-end components focus on rendering visual elements and their associated interactive components, back-end logic is more closely tied to long-term data storage. The API allows the front-end to query the back-end and in many cases serves a response in either JSON or XML. While an API ought to narrowly tailor the data served in a response to the request, this practice is often ignored. OWASP terms this excessive data exposure (EDE) [9].

One cause for EDEs is that API developers over-rely on API clients to perform data filtering. This eases the cognitive burden on back-end developers who can avoid determining the specific client needs of the client *a priori*.

When present, EDEs are often trivial to exploit. To obtain the excess (or even sensitive data), it is often sufficient to simply examine response traffic from the target API.

Since technology to scan for and detect EDEs remains underdeveloped, OWASP only provides general advice [9] on how to prevent them, such as “Never rely on the client to filter data!”, “Review all API responses and adapt them to match what the API consumers really need”, and “Enforce response checks to prevent accidental leaks of data or exceptions”. However, the prevalence of EDEs implies that it is challenging for API developers to strictly follow this advice without effective automation!

2.2 Fuzzing

Fuzzing is a process of repeatedly generating (random) inputs and feeding them to the system under test (SUT) to cover more code and

discover bugs. In its traditional use, a fuzzer detects issues through aberrant program behaviour, such as program crashes. This indicates a potential security bug in the SUT. In response, the fuzzer will preserve the bug-triggering input for further analyses (e.g., manual debugging).

While we preserve the input generation phase above, our work notably deviates in that we detect potential errors through *the lack of change* in program output, rather than a spec violation or crash.

However our work is not the first to address API testing. Web API fuzzing recently garnered increased interest from both industry and academia [6], [10], [11]. RESTler [6] is the current state-of-the-art approach. RESTler is a stateful black-box REpresentational State Transfer (REST) API fuzzing tool. For a target with an OpenAPI/Swagger specification [12], RESTler analyzes its entire specification, and then generates and executes tests through its REST APIs.

Researchers typically classify fuzzers based on how the level of integration between the SUT and the fuzzer. The most common classification is based on the fuzzer's awareness of the internal structure of the SUT [13]. Specifically, a black-box fuzzer knows nothing about the internal structure of the SUT. In contrast, a white-box fuzzer would know everything about the SUT such as its source code, its control flows and data flows. Grey-box fuzzing is in between; it leverages partial knowledge of the SUT, typically via lightweight program instrumentation. Our tool can be classified as a black-box fuzzer because it requires no internal instrumentation.

2.3 Metamorphic Testing/Fuzzing

We focus on fuzzing as our approach to detecting EDEs because of its demonstrated success in discovering security flaws.

Highlighting the effectiveness of fuzzing, as of May 2022, Google's fuzzing infrastructure had detected over 25,000 bugs [14]. However, these bugs were detected using explicit test oracles. Bugs with a test oracle either lead to program crashes (e.g., segmentation faults) or are caught by instrumentation-based checkers (e.g., Address Sanitizer, Undefined Sanitizer). In contrast, semantic bugs like EDEs do not manifest through explicit abnormal behaviours, and cannot be reliably detected by observing *single* program executions.

How do we build tools to detect semantic bugs? Metamorphic testing and fuzzing, which leverage metamorphic relations, are a promising approach. At its core metamorphic fuzzing involves *comparing* multiple executions of the SUT under different inputs and observing whether some relation (called the *metamorphic relation*) holds between their corresponding outputs.

Consider the following toy example of metamorphic bug finding: we can test a function that reverses a list by testing, for an arbitrary input list x , whether reversing the reverse of x yields x itself; or for a function that calculates distance between a pair of points, whether the distance from point a to c is always smaller or equal to the sum of the distances from a to b and from b to c , etc.

Metamorphic relations are properties that must necessarily hold with respect to the correct functioning of the SUT. In metamorphic testing the violation of a metamorphic relation indicates a potential bug [4]. Past work has successfully identified and used metamorphic relations to find bugs in a variety of systems [15], [16]. In one notable example, He, Meister, AND Su [15] successfully applied metamorphic testing to test Machine Translation software. Rigger AND Su [16]

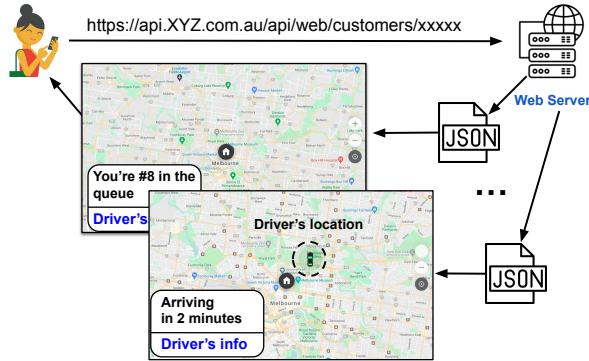


Figure 2: A sample API flow for a package delivery service. A web application requests tracking information, that is returned in a JSON object.

identified a novel metamorphic relation and leveraged it to identify 121 unique bugs in popular DBMS.

3 MOTIVATING EXAMPLES

In this section, we present a selection of real-world EDEs detected by our tool to demonstrate their prevalence, their implications, and the challenges in detecting them using prior approaches. We use the examples to motivate our tool, while providing a comprehensive evaluation in [Section 5](#).

Vulnerability 1 - Locations and Contact Details. In this example, we describe a vulnerability EDEFuzz discovered while testing the live delivery tracking service offered by COMPANY-I, an Australian last-mile delivery service. The vulnerability has been reported and fixed. As shown in [Figure 2](#), a customer receives a unique link on the day that an item is on board for delivery. The link opens a web page whose contents includes the name and a photo of the delivery driver, an Estimated Time of Arrival of the delivery, and the position of the item in the deliver driver’s queue. The page sends an API request to the server regularly, and updates the contents on the page based on the API response. Part of this API response is shown in [Listing 1](#), with potentially sensitive information removed.

The client-side logic allows the webapp to display the accurate geographic location of the delivery driver *only* when the item to be delivered is at the front of the queue. It suggests that while the driver is delivering an item to a customer, another customer should not be able to ascertain the location of the driver—which would leak the location of other deliveries. However, EDEFuzz detected that the API response always contains rich information about the delivery driver, including accurate latitude and longitude (the location field), direction of facing (the bearing field), and speed of travelling (the speed field). EDEFuzz also identified the driver’s manager’s information in the API response.

Listing 1: An API response to a query for delivery status. The authors have redacted or adjusted sensitive information.

```

1 {
2   "driver":{
3     "id":353,
4     "url":"/api/web/drivers/353",

```

```

5     "full_name":"[NAME]",
6     "car":{
7       "car_type":1,
8       "car_type_name":"Car",
9       "capacity":33
10    },
11    "member_id":37270063,
12    "avatar":"[URL_TO_AVATAR]",
13    "is_online":true,
14    "work_status":"working",
15    "phone":"[PHONE_NUMBER]",
16    "status":"in_progress",
17    "location":{
18      "id":1081725,
19      "timestamp":1632107809.0,
20      "speed":7.60149761928202,
21      "accuracy":4.88680554160758,
22      "location":"-
23      ↪ 37.79998905537697,144.9940922248341",
24      "created_at":"2021-09-20T13:16:49.365492+10:00",
25      "bearing":277.508087158203,
26      ...
27    },
28    ...
29  },
30  "manager":{
31    "id":305,
32    "full_name":"[NAME]",
33    "email":"[EMAIL]",
34    "avatar":null,
35    "is_online":false,
36    "work_status":"not_working",
37    "phone":"[PHONE_NUMBER]",
38    "can_make_payment":false,
39    "merchant_position":"Manager",
40    "role":"Manager",
41    ...
42  },
43  ...

```

Knowing the timestamped location of the delivery driver, a customer may recover the route that the delivery driver is travelling, or even be able to identify the address of other customers who receive parcel from the same delivery driver. The leaked information may also be used in conjunction with other vulnerabilities to perform more attacks, such as a social engineering attack [17].

Vulnerability 2 - Warehouse Stock Levels. EDEFuzz detected EDE vulnerabilities in several retailer websites in Australia including COMPANY-C, COMPANY-D, COMPANY-J, and COMPANY-E. While the previous vulnerability in COMPANY-I’s service exposes obvious sensitive information (e.g., email addresses, contact numbers and timestamped locations), this vulnerability exposed detailed stock availability, which might be considered sensitive or not depending on the organization’s data classification model.

Many retailers allow potential customers to check their stock availability online before visiting their shops. Some retailers reveal precise stock values on their websites, while other retailers decided to only display categorised values such as “in stock”, “low stock” and “out of stock”. Interestingly, we noticed a few such online services in which the server transmits the precise stock values but the web application only displays categorised values based on thresholds.

Listing 2: An API response to a query for stock availability. The authors have redacted potentially sensitive information.


```

1  {
2    "stores":[
3      {
4        "id":488,
5        "name":["STORE_NAME"],
6        "address":["STORE_ADDRESS"],
7        "suburb":"Melbourne",
8        "postcode":"3000",
9        "storephone":["PHONE_NUMBER"]",
10       "storemon":"8.00AM - 9.00PM",
11       "storetue":"8.00AM - 9.00PM",
12       "storewed":"8.00AM - 9.00PM",
13       "storethu":"8.00AM - 9.00PM",
14       "storefri":"8.00AM - 9.00PM",
15       "storesat":"9.00AM - 9.00PM",
16       "storesun":"9.00AM - 9.00PM",
17       "storestate":"Victoria",
18       "distance":0.11381435106590139,
19       "latitude":...,
20       "longitude":...,
21       "products":[
22         {
23           "id":"2632206",
24           "available":85,
25           "qty":0,
26           "reserved":0,
27           "order":1
28         },
29         ...
30       ],
31       ...
32     ]
33   }

```

For instance, COMPANY-C is an Australian-based pharmacies retailer giant with hundreds of stores. Its website allows a customer to search for stock availability of an item in nearby shops, displaying results as “available” or “unavailable” for each shop. Upon investigating excessive data fields contained in their API response, we noticed that the exact stock level is exposed. Part of an API response is shown in **Listing 2**, with certain fields removed.

Here we are interested in the data field named products. We hypothesise that the value of available reflects the actual stock of an item remaining in the given shop: when available is present and equal to zero, “unavailable” is displayed; otherwise the item is displayed as “available”. The **Listing 2** shows one of a Melbourne-located store has stocked 85 of an item with ID 2632206 (a bottle of Vitamin D tablets).

Similar design was also observed in other retailer companies such as COMPANY-D and COMPANY-E. COMPANY-D claimed that their accurate stock level is non-sensitive, whereas COMPANY-E removed their stock level from their API response before we tried to contact them.

Regarding attack scenarios, if a retailer knows about the stock details of their competitors in different locations, they could adjust their logistic plan accordingly to increase their sales and gain more profit. Individual suppliers might also take advantage of this vulnerability to increase their prices for specific retailers when they know that they are low on stock. Having access to that kind of information, a 3rd-party company (e.g., a shopping suggestion service) could also develop an app and give more precise suggestions to their customer, leading to some monetary benefit.

Vulnerability 3 - Network bandwidth. Transmitting excessive data fields reduces performance and consequently the user experience of

the web application. Further, it imposes increases bandwidth requirements which can pose a significant accessibility issue. EDEs imply a lack of consensus between an application’s back- and front-ends. Like other “code smells” EDEs are indicative of poor development practices that may cause other vulnerabilities. The behaviour of the COMPANY-C service examined in Vulnerability 2 is instructive. EDE-Fuzz identified that the targeted API response contains 104 store objects. Each store object is a dictionary with 26 data fields. However, we observed that the stock information updated on the web page was fully determined by no more than 120 of these fields: those from the eight (closest) stores. The front-end consumed only 4.4% of the data fields transmitted by the server.

The Bugs Escaped Detection! There are a variety of ways in which these flaws may have escaped notice. Developers, while aware of security flaws, are heavily reliant on tooling to detect bugs. As discussed in **Section 2** tools to discover EDEs are of low effectiveness. Both keyword-matching tools [5] and manual approaches are prone to false negatives. Consider Vulnerability-2. Detecting it using keyword matching would require adding the keyword “available” and/or “stock” to the tooling—requiring the same focus developer that might have avoided the bug in the first place, which obviates the usefulness of the keyword approach.

A tool-free approach also requires back-end developers to carefully ascertain if a given field is needed. While this is in-line with development best practices, the realities of software development mean this is not always feasible.

As discussed in the case of Vulnerability-2, while COMPANY-D claimed that their accurate stock level is non-sensitive, COMPANY-E removed that information from their API response following our disclosure. This further indicates the need for a principles based approach that reduces the burden on developers to determine the balance between business need and sensitivity.

In this work, we tackle each of these problems to a different extent, which particular focus on the first (effective tooling to detect EDEs). While our tool EDEFuzz is designed to reduce false negatives; however, it may still flag fields that a business does not consider sensitive (c.f. the divergence between COMPANY-D and COMPANY-E above). The divergence in the severity of a given leak requires us to make reasonable (but principled) judgements in our evaluation of EDEFuzz. Is a given leak a business or ethical problem? Through publication, we advocate for a community driven process to establish clearer guidelines around what data is most sensitive.

4 OUR APPROACH

In this Section, we first provide an overview of EDEFuzz and detail the design of its components. We depict the main workflow of EDEFuzz when testing a website (given its URL and a targeted API endpoint) in **Figure 3**.

4.1 Overview

Identifying API Endpoints. Tester who wish to identify API endpoints can identify them in several ways. In the case of in-house testing, the developers identify what API(s) they want to test. A penetration tester can leverage tools like crawlers to automatically explore the website and detect exposed APIs. However, this automated approach could be destructive and potentially illegal without

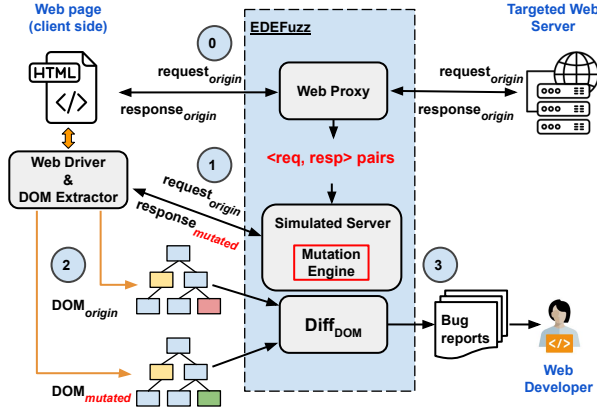


Figure 3: The workflow of our approach to identify excessive data exposure vulnerabilities in web APIs.

permission from the website owners. In our experiments (as detailed in [Section 5](#)) we identify target APIs by examining browser behavior.

As discussed in [Section 1](#), EDEFuzz follows the “record-replay” model to gain high testing efficiency. Its workflow consists of four main steps which are in turn divided into two phases: recording/preparation phase (Step 0) and relaying/fuzzing phase (Steps 1-3).

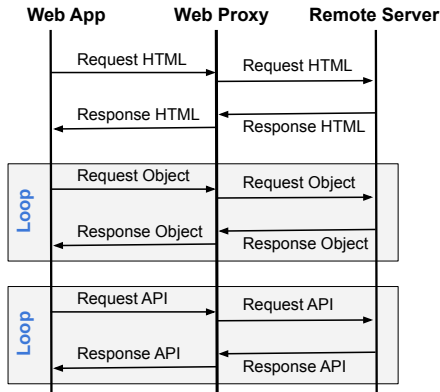


Figure 4: Sequence diagram of the recording phase. A proxy captures the set of server responses necessary to achieve a baseline state for accessing the target API.

Recording/Preparation Phase. In this semi-automated phase, the goal is to generate a configuration file denoted as C that brings the client under test to a baseline state. This file will be used in the subsequent replaying/fuzzing phase. To that end, we use a Web Proxy to capture the traffic between a client app, which is a web browser in our experiments, and the targeted web server. Specifically, we start the client app and capture its initial state S_0 . After that, we let the client open the given URL, wait for the web page to be fully loaded. The tester then interacts with the page (e.g., fill in text boxes, click buttons) to trigger a request to the target API. We denote S_1 as

the client state at which the request has just been completely sent. We develop a lightweight browser plugin to capture the interaction steps required to traverse from state S_0 to S_1 and save them into the configuration file so that they can be played back in subsequent steps.

The standard most common for responses to web API requests is JSON. Under AJAX or similar paradigms, when the API response is received a client uses the JSON response to update the web page (e.g., showing more information) and the update typically alters only some parts of the web page, rather than changing the entire page. We denote S_2 as the client state immediately following the update. This state can be typically identified by the existence of certain page elements. The steps required to identify the transition from S_1 to S_2 (typically of the form “wait until page element X appears”) are also recorded in the configuration file, meaning it now stores all steps required to traverse from state S_0 to S_2 . At S_2 , a baseline DOM tree (denoted as \mathcal{D}_{origin}) of the web page is extracted using the DOM Extractor component. This DOM tree will be compared with other trees to be generated in the fuzzing phase to check for potential excessive data exposures based on the metamorphic relation defined in [Equation \(1\)](#).

In [Figure 4](#), we model the client-server communication using a sequence diagram. As shown, before the targeted request-response pair has been exchanged, the browser and the server might have completed other exchanges for fetching HTML documents and other object files (e.g., images, style-sheets, Javascripts). All the request-response pairs (denoted as P) and resources are recorded and stored in the local machine for the replaying/fuzzing phase.

Replaying/Fuzzing Phase. The input for this phase includes: 1) a configuration file C that helps EDEFuzz traverse through different client states (i.e., from state S_0 to state S_2), 2) the original DOM tree \mathcal{D}_{origin} , and 3) all request-response pairs (P) recorded in the recording phase.

Listing 3: A sample configuration file generated in recording phase.

```

1 TARGET /api/v2/stock/get
2
3 LOAD https://www.example.com/path/page
4 INPUT //input[@id="text-postcode"] 3000
5 CLICK //span[text()='Check availability']
6 WAIT_LOCATE //div[@id="stock-info"]/div[2]
7 FUZZ

```

[Listing 3](#) shows a sample configuration file. The first line specifies the target API under test. The rest lines in the configuration file define a sequence of user interactions to be performed in order to reach state S_2 . Specifically, the example interactions include loading a web page, entering the number 3000 into a text box, clicking a button and then waiting for a specific element to appear on the web page before capturing the state. Apart from these actions, EDEFuzz also supports HOVER, SLEEP, and SCROLL for (i) hovering the mouse on a specific element, (ii) waiting for a specified period of time, and (iii) scrolling up and down, respectively.

In each fuzzing iteration, EDEFuzz goes through three steps (Steps 1-3). In the first step (Step-1), the Web Driver component, which is built on top of the Selenium Web Driver [18], uses the configuration file C to replay all the steps until the client reaches the state S_1 . Before that state has been reached, the Simulated Server responds to client

requests with the corresponding recorded responses stored in P with no modification. Once state S_1 is reached and the Simulated Server receives the request sent to the targeted API, it mutates the originally recorded response by deleting a specific data field and transmits to the client. We describe the mutation algorithm in detail in [Section 4.3](#).

After the baseline state is reached, the client uses the mutated response to update the page accordingly. If this leads to any error, EDEFuzz moves to the next fuzzing iteration. Otherwise, EDEFuzz waits until the page is fully updated (i.e. until state S_2 is reached) and uses the DOM Extractor to extract the current DOM tree denoted as $\mathcal{D}_{\text{mutated}}$ (Step-2). In Step-3, EDEFuzz compares $\mathcal{D}_{\text{mutated}}$ and $\mathcal{D}_{\text{origin}}$ using a comparison algorithm described in [Section 4.4](#). If the two DOMs are the same (based on our definition of similarity) then we flag the deleted data field. According to the metamorphic relation, the field is excessive. Once all fuzzing iterations are completed, EDEFuzz reports all the potential excessive data fields to the tester for further analysis and confirmation (see [Section 4.5](#)).

Randomness: The explanation so far assumes that web replaying is fully deterministic: given a configuration file, EDEFuzz—without applying any mutations on the server response—produces the same DOM tree across all runs. Though uncommon, we identified a few cases in which this assumption does not hold. For instance, a social media platform may randomly insert advertisement between user posts during runtime. This causes the web page to be visually different in each run, even if all contents transmitted from the server were identical. We discuss the issues in details and how we address them in [Section 4.2](#) and [Section 4.4](#).

Implementation Details. We implemented EDEFuzz in Python3 using Selenium as a Web Driver to control web browser. We successfully tested our tool on widely used platforms including Ubuntu 18.04, Ubuntu 20.04, macOS Big Sur (version 11) and Windows 10. Currently, EDEFuzz supports two web browsers: Google Chrome and Mozilla Firefox. Our design is modular to support future extensions.

4.2 Simulated Server

Our design decision, to build a simulated server, brings several benefits to EDE testing. The server supplies locally recorded contents with minimal delay—reducing test latency. Secondly, EDEFuzz does not need to communicate with the targeted remote server during the fuzzing phase, allowing testing in parallel without affecting the targeted server. This allows developers to easily test their servers without impacting production services. The design also ensure consistency within a given run, ensuring test results are not affected by any potential changes to the state of the remote server during the testing process. Lastly, we can use the cached/recorded contents as a snapshot of server’s states, allowing further testing and studying of detected EDEs in the future even if the server is modified.

Since the simulated server serves as a snapshot of states on the remote server, there is no need to handle cookies or sessions within EDEFuzz. A response is sent via matching the requested URL from the collection of recorded request-response pairs. This also allows us to test sites in which the user needs to first log-in: as long as the remote server sent responses representing the session of a user who

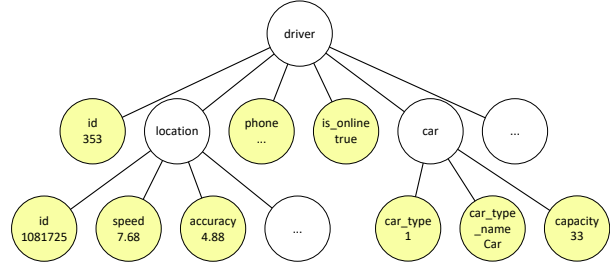


Figure 5: Tree representation of the JSON object in [Section 3](#). The mutation engine uses this representation to determine what to mutate. We highlight leaf nodes in yellow.

was logged-in during the recording phase, our simulated server can reproduce it in the testing stage.

Websites that request resources by randomised URLs pose a challenge under our current design. A typical case is when a web page that, when requesting a resource from the server, generates a random token to be included in the request URL. This is a challenge for our simulated server, since it causes a request to be generated for which the simulated server has no recorded response. Our experimental evaluation in [Section 5.2](#) shows that this limitation affects only a fraction of popular websites (8.7% of our evaluated target set). Therefore, we believe the current design represents an appropriate trade-off. It is worth noting that, in a in-house testing setup, developers could ensure determinism.

4.3 Mutation Engine

The original API response (JSON) produced by the server is assumed to be valid both structurally and semantically. We generate test cases by mutating the original API response.

We represent the server-supplied JSON object using a tree. Each leaf node is potentially an excessive data field. For example, [Figure 5](#) shows the (partial) tree representation of the JSON object from COMPANY-I shown in [Section 3](#). In this tree, all leaf nodes are shaded light yellow.

We generate each mutation (test case) by removing a leaf node from the tree. For example, a valid mutation could remove the key-value pair `id: 353` from the driver dictionary, or `capacity: 33` from the car dictionary.

Unlike other fuzzing approaches which may generate an infinite number of test cases (e.g by using genetic mutation operators such as bit flips and splicing [19]), our approach produces a fixed number of test cases based on the actual leaf nodes on the tree. We did attempt to study if we can further reduce that number using approaches like binary tree search and delta debugging [20]. However, doing so is non-trivial because there is no way to determine whether a subtree (or set of fields) contains at least *one* field that constitutes an EDE (if we delete all of them and notice a change in the DOM, then it might mean that none are excessive, or all-but-one are excessive, or something in-between). Instead our metamorphic relation can tell us only if *all* fields in some set are subject to EDE (when we remove them all and no change is detected in the DOM). It is worth noting that this design decision also ensure more predictable test run times.

4.4 Similarity Check for DOM Trees

A web page (an HTML document) has a hierarchical structure that can be represented using a DOM tree. In [Section 4.4](#) and [Figure 6](#) we show a sample HTML document and its DOM tree, respectively. This is a simplified version of one of our testing targets COMPANY-I, which we shared in [Section 3](#).

Recall, a DOM tree has nodes and each tree node represents a tag element in the HTML document. Each tree node has zero or more attributes—which are stored as key-value pairs—representing tag attributes of the corresponding tag element. A tree node may have children. A child could be either a tree node, or simply a string. For instance, in [Figure 6](#) the root node represents the `<html>` tag and it has two children: a `<head>` node and a `<body>` node.

When comparing two web pages, one considers both the DOM tree structure and the content within each tree node. According to our metamorphic relation, if an API response with a particular data field removed would still result in the identical DOM tree, compared to the DOM tree produced using the original API response, that data field is reported as excessive. Two DOM trees are considered identical if and only if *all* of the following conditions hold:

- (C1) Their root nodes have the same tag name
- (C2) Their root nodes have the same number of attributes
- (C3) Each corresponding pair of attributes have the same key value
- (C4) Their root nodes have the same number of children
- (C5) Each corresponding pair of children representing a tag element is identical, with respect to conditions C1-4
- (C6) Each corresponding pair of children representing a string is identical

To check for all of these conditions, the most simple yet effective approach is to compare the string representations of the corresponding HTML documents. Our experiments showed that this works for 47 out of 54 targets. However, we observed that several web pages contain elements which are not affected by the API response. For example, the value of the `class` attribute within a `<div>` tag could be randomly generated at run-time. Another common case is when the web page displays the current date and time on it. Apparently, these cases could yield false negatives using the straightforward string-based comparison approach.

To address this issue, we relax the conditions C3 and C6. That is, we accept the differences in string leaf nodes and in attributes' values caused by randomness. To that end, EDEFuzz runs a pre-processing step before the fuzzing phase. In this step, EDEFuzz uses the configuration file *C* to replay and generate a few DOM trees, all generated from replaying the same server response. After that, it recursively traverses and compares $\mathcal{D}_{\text{origin}}$ with each of the newly generated DOM trees to look for those parts that differ due to randomness, and marks those random elements and attributes of $\mathcal{D}_{\text{origin}}$ that should be ignored in the comparison step of the fuzzing phase. It is worth noting that, in this pre-processing step, if EDEFuzz finds that the generated DOM trees are *structurally* different from $\mathcal{D}_{\text{origin}}$, i.e. violating conditions C1, C2, C4 and C5, it will decide to terminate the testing process. In our experiment, 9 of 69 targets were flagged at this step, meaning that they produced web pages with different structures, even using the same set of responses.

In the fuzzing phase, EDEFuzz compares the DOM tree $\mathcal{D}_{\text{mutated}}$ produced from each test case, with the pre-processed $\mathcal{D}_{\text{origin}}$. Basically, EDEFuzz (i) recursively traverses through every node in $\mathcal{D}_{\text{origin}}$ and its corresponding node in $\mathcal{D}_{\text{mutated}}$, and (ii) compares each pair of nodes. EDEFuzz will skip all string nodes and attributes on $\mathcal{D}_{\text{origin}}$ that have been marked as “ignored” in the pre-processing step. Two nodes are deemed structurally different if any of the conditions C1, C2, and C4 is violated. Moreover, they are considered different in terms of content if there is a discrepancy in the values of the nodes (in the case of non-ignored string nodes) or the non-ignored attributes (for other types of nodes).

While comparing the entire DOM tree can identify if a web page is different from another, in many cases a response will affect only specific areas of a web page. Our approach can optionally utilise human knowledge to allow the user to specify an *area-of-interest* on the web page. The area-of-interest is a subtree in the DOM tree that contains contents (that the user believes are) affected by the API response. The area-of-interest in the [Figure 6](#) example could be the subtree rooted at the node `<div class="container">` (highlighted in yellow in the tree representation). This helps increase efficiency by narrowing down the tree structure to be processed and compared, and it also avoids other components on the web page affecting the comparison (e.g. consider the web page displays the current time at the top of the page).

4.5 Result Inspection

The final step of our approach is manually inspecting the results of EDEFuzz. This involves inspecting each of the flagged data fields to determine what kind of data it exposes (e.g. is it sensitive or not) and, therefore, whether the web application should be modified to avoid this exposure.

5 EXPERIMENTAL EVALUATION

We designed our experimental evaluation to answer the following research questions.

- (RQ1) **Accuracy.** Of the data fields flagged by EDEFuzz as excessive, what proportion are true excessive data exposures (i.e. are unused by the web page). This evaluates the usefulness of our metamorphic relation.
- (RQ2) **Applicability.** To what proportion of widely used web sites can EDEFuzz be applied successfully? This helps to understand limitations of our approach, both inherent and those that arise from EDEFuzz's current implementation.
- (RQ3) **Efficiency.** How much human effort and computational time is required to apply EDEFuzz? This sheds light on the scalability of our approach.
- (RQ4) **Prevalence of Sensitive Data Leakage.** Of those fields flagged by EDEFuzz as excessive, what proportion contain sensitive data? This helps us understand how prevalent sensitive data leakage is amongst excessive data exposure issues.

Note the distinction between RQ1 and RQ4. Specifically, given some set of data fields reported by EDEFuzz as excessive, the former measures the proportion of *true positives* whereas the latter measures the proportion that are *sensitive*. These notions are entirely orthogonal: a flagged data field is a true positive precisely when it is really excessive (i.e. unused by the web page), regardless of whether

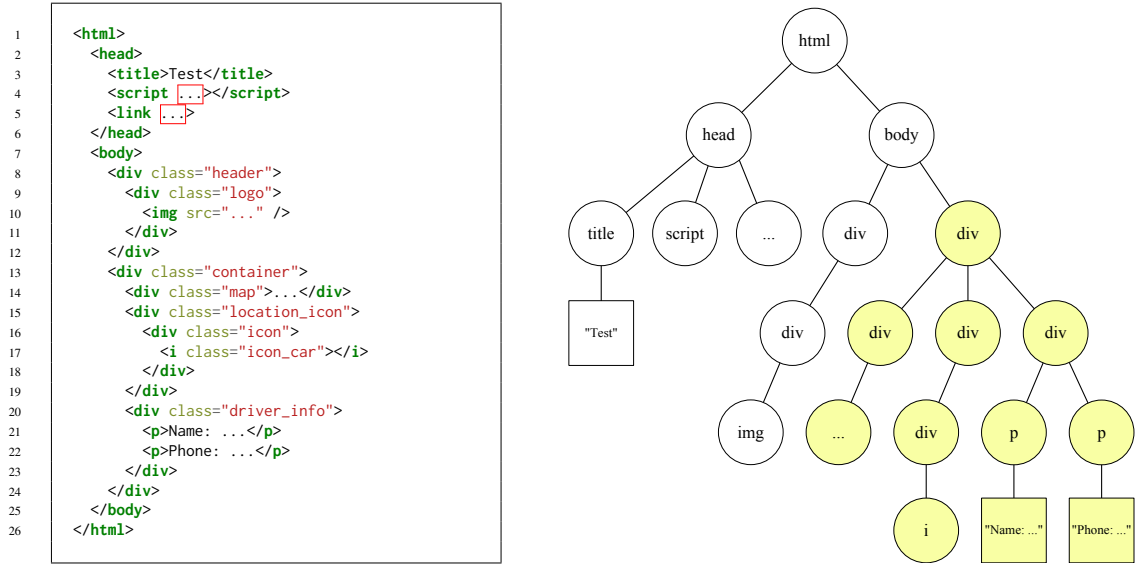


Figure 6: The tree representation of a simple HTML document. Each rounded node represents a tag element while each square node represents a string. The hierarchical structure allows a human to easily specify a subtree (in yellow) for the tool to evaluate.

the data it contains is sensitive or not. Likewise, a field contains sensitive data precisely when that data should not be revealed by the web application, regardless of whether the field is excessive (i.e. is unused by the web page) or not. Flagged fields that are not true positives are *false positives*. False positives can exist, for instance, when a field contained in a response is used to affect the DOM only after subsequent user interaction with the web page. Importantly, whether a data field is a true or false positive is a property of the behaviour of the web page. That is, distinguishing between true and false positives requires carefully understanding *all* behaviours of the web application, including by reading its code and interacting with it, to determine whether the data field contained in the response is ever used in future by the page. Whether a field is sensitive or not is simply a property of the data that field contains, and can be relatively quickly ascertained by inspecting just the field itself.

This means that accurately evaluating **RQ1** requires a set of web sites whose behaviour is (or can be) well-understood by the humans inspecting EDEFuzz’s results. Carefully understanding the behaviour of an individual site can be very time consuming. Therefore, for **RQ1** we assembled a set (see **Table 1**) of eight (8) popular websites within a single country (Australia) that were familiar and whose function and the individual behaviours of the web page were therefore able to be well-understood. This purposeful restriction was necessary to ensure that the proportion of true positives could be accurately evaluated.

In contrast, adequately evaluating the remaining research questions requires a data set that comprises widely used web sites. Therefore the remaining RQs were evaluated on a data set drawn from the Alexa Top-200 list of web sites. While not applicable to **RQ1** (since enumerating all of their possible behaviours to accurately determine true positives is infeasible), this set forms a representative best-of sample, suitable for assessing EDEFuzz’s performance in general

Target	Rank	Used when
COMPANY-A	37	Load tracking history of parcel
COMPANY-B	—	List members of a school subject
COMPANY-C	121	Check stock availability of item
COMPANY-D	—	Check stock availability of item
COMPANY-E	59	Check stock availability of item
COMPANY-F	166	Get flight prices for next 30 days
COMPANY-G	123	Check stock availability of item
COMPANY-H	2770	List vehicles available for sale

Table 1: Australian websites tested. We include short descriptions of the purpose of the targeted APIs on which we performed deeper evaluation. Where available we provide Alexa ranking’s within Australia (extracted 29th April 2022).

(**RQ2** and **RQ3**), as well as to understand the prevalence of sensitive data leakage via EDE among common web sites (**RQ4**).

5.1 Procedure

We follow the 4-step procedure below to fuzz test a given website using EDEFuzz. The procedure is well-aligned with the workflow of the tool, as discussed in **Section 4.1**.

(Step-1) Identifying the target API endpoint. Given a primary domain, we identify API endpoint(s) for inclusion in the testing regime. Each domain accessed a variety of APIs, some internal to the domain (eg., a shopping website accessing the site’s stock inventory and pricing endpoint) and some external (eg., an analytics endpoint to retrieve recent visitor counts). Of these, we manually identify the internal API most relevant to the function of the site in question. For instance, in **Table 1** we list the selected Australian sites and endpoints used in our evaluation.

(Step-2) Writing a configuration file. We compose a configuration file that specifies how to correctly trigger the selected endpoint—this includes the sequences of user interactions that preclude the execution of a request to the API.

This process is semi-automated via our custom-built web browser plugin. However the plugin still requires the user to manually perform interactions. After the file is generated, the operator reviews the file to make any necessary changes.

Completely automating this step poses a more significant research challenge that we leave for future work. It represents an existing trade-off in fuzzing: more manual annotation and configuration generally reduces the running time of tools and expands their flexibility, while increasing human labor.

We specified an area-of-interest (see [Section 4.4](#)) on all our evaluation targets, at the cost of a few seconds per target.

(Step-3) Running EDEFuzz. After devising an appropriate configuration, we then execute EDEFuzz, time its execution, and collate the results for analysis. We chose not to repeat the fuzzing process for each target because, unlike in traditional fuzzing, EDEFuzz’s mutation process is deterministic by design.

(Step-4) Analysing results. This involves the manual classification step, discussed in [Section 4.5](#).

5.2 Results

RQ1. Accuracy

We evaluated the accuracy of our metamorphic relation, as implemented in EDEFuzz, for identifying excessive data exposures against the eight sites listed in [Table 1](#). The TP column of [Table 2](#) summarises the results by recording the true positive rate, namely the proportion of reported excessive fields (Reported) that were actually excessive (Confirmed). This was determined by manually inspecting the web pages and carefully understanding their behaviours, including via manual interaction, to check whether, for each reported data field, they had any behaviours that made use of the data field. If no such behaviours were identified, the field was classified as a true positive; otherwise it constitutes a false positive.

The average true positive rate was 98.65%, confirming the exceptionally high degree of accuracy of our approach. (Later, [RQ4](#) investigates which of these EDEs actually leaked sensitive data which, as argued in [Section 5](#), is a separate concern.)

RQ2. Applicability

We evaluated the applicability of EDEFuzz on a subset of the top 200 sites (as recorded by the Alexa ranking). Of the 200 sites, we excluded (see [Figure 7](#)) from analysis those that had no web APIs (and, hence, no possibility for EDE); those requiring payment; those in a language that none of our authors understand; those comprising adult or illegal content; those that were geoblocked; and those that required solving a CAPTCHA. Doing so excluded around 60% of the 200 sites, after deduplication. None of these exclusions represent limitations of our approach or implementation. Of the remaining sites, we additionally excluded 12 sites that used HTTP_POST requests to query their APIs with query parameters included in the request body, since EDEFuzz’s simulated server currently relies solely on

the request URL to supply the response, though this implementation-level limitation could be resolved with modest future work. This left 69 sites against which we evaluated EDEFuzz.

Of these 69 sites, EDEFuzz successfully applied to 53 targets (76.8%). Of the 16 unsuccessful targets, all but one were the result of nondeterminism aka randomness: nine (13.0%) didn’t pass the pre-processing step (as explained in [Section 4.4](#)), as these websites populated elements of their page non-deterministically; six (8.7%) used requests that included non-deterministic tokens required to load resources. The final unsuccessful target used shadow roots within its web page, preventing EDEFuzz from accessing its complete DOM tree. Comprehensive results for each target are in [Appendix A](#).

We further assessed applicability by performing an additional validation step on those 53 successful targets. This was done to test the implicit assumption of our mutation strategy that, given any two fields of a response, whether one is excessive is independent of the presence or absence of the other, i.e. that each field of a response can be assessed independently of the others. We tested this assumption for each of the 53 successful targets by taking the entire set of fields flagged by EDEFuzz as excessive and removing *all* of them simultaneously from the recorded response, and replaying that mutated response to see whether the resulting DOM passed the similarity check ([Section 4.4](#)) to the original. Surprisingly we found that for three (3) of the sites, removing multiple fields at once caused a difference in the DOM even when removing each of the fields individually did not (behaviour we confirmed via manual testing for each of them). For these sites (indicated with a V in the Reason column of the table in [Appendix A](#)) one might reasonably debate whether those flagged fields really are excessive or not, a question we leave for future work.

Overall we find that EDEFuzz is highly applicable; however sites that employ nondeterminism, either in their DOM contents or the requests they generate, need to be made deterministic for EDEFuzz to be successfully applied to them (as already noted in [Section 4.2](#)).

RQ3. Efficiency

Efficiency measures not only the amount of computational time to employ EDEFuzz, but also the amount of human effort both to configure the tool and to inspect its results to determine which reported excessive data fields contain sensitive data. We evaluated efficiency across both the Australian sites ([Table 2](#)) and the Top 200 data set ([Appendix A](#)). Experiments for the Australian sites were carried out on a commodity PC with an Intel Core i7-9600K, 32GB of RAM, running Windows 10 21H1. Those for the Top 200 data set were carried out on an AWS VPS with a 16-core Intel CPU and 32 GB of memory, running Ubuntu 20.04.

The time spent on test execution was roughly linear in the number of data fields included in the response from the target API, as expected since our mutation strategy must necessarily mutate one field at a time. On average, about 8 test cases were executed per minute and this figure is consistent between the two data sets. However, computation time does not present a significant bottleneck, especially since our approach is trivially parallelised.

Regarding human effort, it took a maximum of twenty minutes per web site for us to identify an appropriate API endpoint that it made use of and to then compose a configuration file, representing minimal overhead.

While naturally some human effort is required to inspect the flagged fields, to determine which are sensitive, this again took no

Target	Data fields	Reported	Confirmed	TP	Preparation (min)	Execution (min)	Classification (min)	Sensitive	Non-sensitive
COMPANY-A	189	124	124	100.00%	10	11	5	0	124
COMPANY-B	18	16	14	87.50%	20	2	2	2	12
COMPANY-C	2600	2580	2504	97.05%	5	306	3	104	2400
COMPANY-D	545	506	479	94.66%	15	43	10	9	470
COMPANY-E	4249	4147	4127	99.52%	10	755	15	0	4127
COMPANY-F	778	749	749	100.00%	15	103	5	0	749
COMPANY-G	120	100	100	100.00%	5	12	3	0	100
COMPANY-H	1465	1066	1066	100.00%	15	79	20	19	1047

Table 2: Summary statistics from the Australian sites. Data fields reports the total number of fields contained in the API response of each target, Reported is the number of fields flagged by EDEFuzz as excessive; Confirmed is the number of fields manually confirmed to be excessive, i.e. true positives, TP. The time taken to configure EDEFuzz for each target is reported in Preparation, as is the duration of test execution (Duration) and the human effort required to manually classify the flagged fields as sensitive or not (Classification), all measured in minutes. We also report (Sensitive) the number of fields we classified as containing sensitive data, after manual inspection.

longer than 20 minutes per web site, even when EDEFuzz reported many thousands of fields as excessive. This was because many API responses contained large numbers of repeated structures, which allowed us to quickly classify thousands of flagged fields. However, we found certain flagged data fields required lengthier and more comprehensive analysis. We hypothesise that this is a fundamental limitation on automation (for the near future) as deciding whether a field is indeed sensitive is an exercise of human judgement, involving considering the application’s function, what data is already publicly available, and privacy expectations, etc.

Overall we conclude therefore that our approach requires only a modest amount of human effort.

RQ4. Prevalence of Sensitive Data in EDEs

Finally, our results allow us to draw conclusions about the prevalence of sensitive data leakage via excessive data exposure. Of course such conclusions necessarily *underestimate* the true extent of sensitive data leakage, even on the sites used in our evaluation, since we applied our tool on each site to only one—highly-visible and, hence, likely to be widely-tested—API.

Among the Australian websites, we find that sensitive data leakage is much more prevalent (present in 3 out of the 8 cases evaluated) than among the Alexa Top 200 sites (where it is present in only one of the 53 cases successfully evaluated). We conjecture that this should be expected, since popular sites are more widely used (and thus tested) by definition. Yet even among very popular sites, EDEFuzz still found sensitive data leakage.

We already discussed sensitive data leakage discovered by EDEFuzz in the Australian websites COMPANY-C, COMPANY-D, and COMPANY-E in Section 3. (We also discussed vulnerabilities it found in COMPANY-I and COMPANY-J during testing, which are not part of our evaluation set). EDEFuzz also identified sensitive data leakage in COMPANY-B, the learning management system with the largest market share ($\approx 34\%$). COMPANY-B has a feature to create student groups within a subject. Instructors of a subject can view and assign group members of each group. Our tool flagged the API that lists group members. While the web page only displayed a list of names in a group, the API response contained the full list of subjects each student is enrolled into. We further found that this API is accessible from a student account as well, allowing any student to gain knowledge about into which subjects their classmates have ever enrolled.

The one instance of sensitive data leakage found by EDEFuzz in the Alexa Top 200 dataset (Appendix A, Rank 91) affected an API called by a web page for downloading device drivers, which inadvertently exposed employee names as excessive data, as well as device hardware IDs.

Summary.

We conclude overall that EDEs appear prevalent, but many EDEs are relatively harmless. However, much like memory corruption vulnerabilities (whose severity can range from simple denial-of-service via crashes through to remote code execution), they can also be severe and leak very sensitive information. EDEFuzz is effective at diagnosing such vulnerabilities via its highly accurate metamorphic relation, requiring modest human effort and computational cost, while being widely applicable.

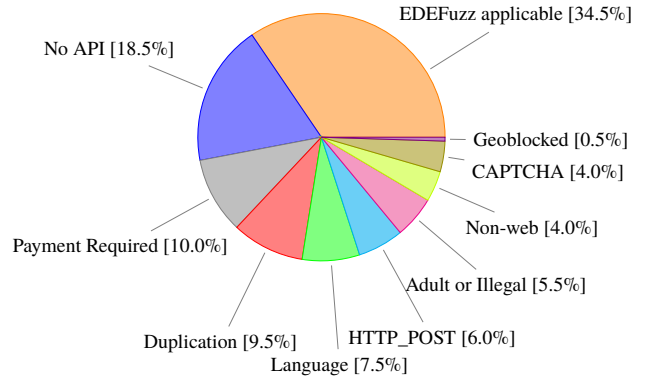


Figure 7: Determining applicable websites from Alexa Top-200. Of the top 200, we found 69 websites (34.5%) appropriate for our testing-set. We excluded domains for the following reasons: duplication of a single service across domains, adult and illegal content, geoblocking, payment required for access, lack of an API, foreign language and encoding of parameters in POST requests (discussed in main text).

6 RELATED WORK

Detecting Vulnerabilities in Web Applications Researchers have made satisfying progress in detecting and preventing *certain classes* of webapp vulnerabilities. Much work [21]–[25] exists for detecting cross-site scripting [26]. The techniques vary, including black-box [22], [25], grey-box [23] and white-box [21] approaches. Very recently, Trickle, ET AL. [27] proposed a novel grey-box fuzzing approach to detecting SQL and command injections.

However, excessive data exposure has received comparatively little attention despite being one of the most common vulnerabilities [28]. To the best of our knowledge, there is no published research focusing on an automated approach to detect this class of vulnerability in web applications: our tool EDEFuzz is the first of its kind.

Koch, Chaabane, Egele, Robertson, AND Kirda [29] studied a white-box and semi-automated mechanism to identify EDE vulnerabilities in Android applications—not in web applications. Unlike EDEFuzz which runs the program on two different outputs from the web server (one with a data field deleted) and looks for the absence of difference in the DOM to detect leakage, their approach requires (decompiled) source code of the applications to do instrumentation and static data-flow analysis. Its static analysis identifies potential EDEs by flagging data received by the app over the network (source) that is then serialised to a Java object but that then never propagates to the user interface (sink). A subsequent dynamic analysis that relies on program instrumentation and manual app interaction is used to confirm potential vulnerabilities, wherein the human analyst must manually generate tests that attempt to trigger the EDE. EDEFuzz also requires manual effort to interact with a web application to trigger the web API under test, and like Koch et al. also to confirm the sensitivity of leaked information. So [29] and our approach are complementary. As demonstrated in fuzzing research [13], combinations of complementary approaches could yield better results and we leave that for future work.

Metamorphic Testing/Fuzzing As discuss in Section 2, one of the most important steps of metamorphic testing is to identify metamorphic relation(s). This requires creativity and a good understanding of the system under test. To ease this crucial step, Segura, Parejo, Troya, AND Ruiz-Cortés [30] proposed six abstract relations from which concrete relations can be defined. Specifically, the authors identified 60 API-specific metamorphic relations in their work. Their relations specify how related web requests should produce related responses, and so are inapplicable to detecting EDE. The fundamental insight of EDEFuzz that shows how metamorphic fuzzing is applicable to detecting EDE is not to mutate the *request* (as in all prior web fuzzing work, including those cited below), but to mutate the *response* instead.

RESTful Web API Testing RESTler [6]—the state-of-the-art RESTful API fuzzing approach—used server states, relying on response codes to identify server crashes on APIs used by cloud services. Their tool infers dependencies among requested APIs to guide the generation of new test cases. Atlidakis, Godefroid, AND Polishchuk [11] suggested an extension to RESTler to report the violation of four rules commonly applied to REST services, in addition to server crashes. [31] improved RESTler’s test generation algorithm by representing the payloads in a tree structure on which structure-aware mutation operators can be applied. Pythia [10] augmented RESTler

with coverage-guided feedback and it implemented a learning-based mutation strategy. Specifically, it utilised a statistical model to gain knowledge about frequent ordering of calling APIs from seed inputs. It used a regular grammar to encode an API request and perform mutation by adding noise to the request. Neither RESTler nor its follow-up works can detect EDE vulnerabilities. Moreover, this line of work focuses on mutating the API requests while EDEFuzz modifies the API responses.

Record-replay Mechanism in Web Application Testing Record-replay models are popular in testing web applications and services. We use two types of record-replay in our work. The first bears similarity to WaRR [32], which records the interaction between a user and a web application. It allows the recorded traces to be later replayed to simulate the user interacting with the web application. Another similar work is Timelapse [33], in which researchers log unexpected behaviours in web applications to help developers visualise, demonstrate and better understand bugs. We follow their mechanism, automating interactions with a web application through a headless web-driver. The second form of record-replay tools capture communications between a server and client, to be replayed at a later time [7]. While existing work focuses on producing an exact replication during a replay stage, EDEFuzz uses a simulated server to instead supply mutated server responses.

Web Change Detection The components of a web application may change over time, hindering research and testing that relies on consistency. Researchers have looked into different strategies to compare two pages and identify their differences. One strategy was proposed over twenty years ago and relies on the HTML DOM tree to monitor structural changes on the web page [34]. Other relevant work includes X-Diff [35] which aimed at detecting changes in an XML document, and [36] which improved the efficiency of Hungarian algorithm in detecting web page changes. Modern web applications have increased in complexity and often break from prior design paradigms. As a result, past approaches for page comparison are less effective than they once were. To address this challenge, Waterfall [37] uses two versions of the same web application, in detecting locator changes and applying fixes. WebEvo [38] attempts to identify evolution of a web application through detecting semantic structure changes. Both approaches aim at matching contents between two structural different web pages, while our work focus on identifying both structural difference and content difference.

7 DISCUSSION AND FUTURE WORK

Simple ideas are often the best. From our evaluation we conclude that EDEs appear prevalent, and that EDEFuzz is effective at finding them, including sensitive data leakage, with acceptable efficiency and requiring a modest amount of human work. Its metamorphic relation yields precise results in practice (a TP rate of 98.65%). It is also generally applicable, and it can be parallelized easily.

At the same time, our results suggest avenues for improvement. One trivial improvement would be to handle HTTP POST requests, by parsing request bodies, which affected 6% of the evaluation sample from the Top-200.

More interesting avenues for future work include:

Improving Efficiency. Even though our Simulated Server helps EDEFuzz achieve a reasonable fuzzing throughput, we can improve it

further by leveraging the recent advancement in the topic of snapshot-based fuzzing [39]. As the design of EDEFuzz is modular, the change could be minimal. Specifically, we can take a snapshot of the client at the state S_1 when a request to the target API has just departed (See Section 4). We can then restore the snapshot for each fuzzing iteration instead of replaying requests using the Web Driver.

Mutation Algorithm. In this work, we only apply data field deletion to mutate the server responses. It would be interesting to study other mutation strategies and update/improve our metamorphic relation accordingly. For instance, consider a web site that queries the available stock of an item and converts the numeric response into one of two answers it displays to the user: “out-of-stock”, and “in stock”. Suppose deleting this field causes neither answer to be displayed. While this case didn’t arise in our evaluation, EDEFuzz would consider this a false negative, even though the response leaks more information than is displayed to the user. A mutation strategy that modifies this response value without deleting it would detect this form of EDE.

REFERENCES

- [1] OWASP API Top 10: 2019, 2019. [Online]. Available: <https://owasp.org/www-project-api-security/> (cit. on p. 1).
- [2] Microsoft announces new Project OneFuzz framework, 2020. [Online]. Available: <https://www.microsoft.com/security/blog/2020/09/15/microsoft-onefuzz-framework-open-source-developer-tool-fix-bugs/> (cit. on p. 1).
- [3] E. T. Barr, M. Harman, P. McMinn, M. Shahbaz, and S. Yoo, The oracle problem in software testing: A survey, *IEEE transactions on software engineering*, vol. 41, no. 5, 507–525, 2014 (cit. on p. 1).
- [4] T. Y. Chen, S. C. Cheung, and S. M. Yiu “Metamorphic testing: A new approach for generating next test cases,” Tech. Rep. HKUST-CS98-01, 1998, arXiv preprint arXiv:2002.12543 (cit. on pp. 2, 3).
- [5] Using burp to test for sensitive data exposure issues, 2022. [Online]. Available: <https://portswigger.net/support/using-burp-to-test-for-sensitive-data-exposure-issues> (cit. on pp. 2, 5).
- [6] V. Atlidakis, P. Godefroid, and M. Polishchuk Restler: Stateful rest api fuzzing, in *2019 IEEE/ACM 41st International Conference on Software Engineering (ICSE)*, IEEE, 2019, 748–758 (cit. on pp. 2, 3, 12).
- [7] R. Netravali, A. Sivaraman, S. Das, ET AL. Mahimahi: Accurate {record-and-replay} for {http}, in *2015 USENIX Annual Technical Conference (USENIX ATC 15)*, 2015, 417–429 (cit. on pp. 2, 12).
- [8] S. Ikeda, Massive optus data leak prompts new privacy rules in australia, *CPO Magazine*, 2022 (cit. on p. 2).
- [9] Api3:2019 excessive data exposure, 2019. [Online]. Available: <https://github.com/OWASP/API-Security/blob/master/2019/en/src/0xa3-excessive-data-exposure.md> (cit. on p. 3).
- [10] V. Atlidakis, R. Geambasu, P. Godefroid, M. Polishchuk, and B. Ray, Pythia: Grammar-based fuzzing of rest apis with coverage-guided feedback and learning-based mutations, *arXiv preprint arXiv:2005.11498*, 2020 (cit. on pp. 3, 12).
- [11] V. Atlidakis, P. Godefroid, and M. Polishchuk Checking security properties of cloud service rest apis, in *2020 IEEE 13th International Conference on Software Testing, Validation and Verification (ICST)*, IEEE, 2020, 387–397 (cit. on pp. 3, 12).
- [12] OpenAPI Initiative *Openapi specification*, Available online: <https://swagger.io/resources/open-api/>, 2020 (cit. on p. 3).
- [13] V. J. M. Manès, H. Han, C. Han, ET AL., The art, science, and engineering of fuzzing: A survey, *TSE*, 2019 (cit. on pp. 3, 12).
- [14] Google clusterfuzz, 2022. [Online]. Available: <https://google.github.io/clusterfuzz/> (cit. on p. 3).
- [15] P. He, C. Meister, and Z. Su Testing machine translation via referential transparency, in *2021 IEEE/ACM 43rd International Conference on Software Engineering (ICSE)*, IEEE, 2021, 410–422 (cit. on p. 3).
- [16] M. Rigger, and Z. Su Testing database engines via pivoted query synthesis, in *14th USENIX Symposium on Operating Systems Design and Implementation (OSDI 20)*, 2020, 667–682 (cit. on p. 3).
- [17] What is social engineering? 2022. [Online]. Available: <https://www.kaspersky.com.au/resource-center/definitions/what-is-social-engineering> (cit. on p. 4).
- [18] Webdriver, 2022. [Online]. Available: <https://www.selenium.dev/documentation/webdriver/> (cit. on p. 6).
- [19] American fuzzy lop. [Online]. Available: <https://lcamtuf.coredump.cx/afl/> (cit. on p. 7).
- [20] A. Zeller, Yesterday, my program worked. today, it does not. why? *ACM SIGSOFT Software engineering notes*, vol. 24, no. 6, 253–267, 1999 (cit. on p. 7).
- [21] R. Wang, G. Xu, X. Zeng, X. Li, and Z. Feng, Tt-xss: A novel taint tracking based dynamic detection framework for dom cross-site scripting, *Journal of Parallel and Distributed Computing*, vol. 118, 100–106, 2018 (cit. on p. 12).
- [22] F. Duchene, S. Rawat, J.-L. Richier, and R. Groz Kameleonfuzz: Evolutionary fuzzing for black-box xss detection, in *Proceedings of the 4th ACM conference on Data and application security and privacy*, 2014, 37–48 (cit. on p. 12).
- [23] O. v. Rooij, M. A. Charalambous, D. Kaizer, M. Papaevripides, and E. Athanasiopoulos Webfuzz: Grey-box fuzzing for web applications, in *European Symposium on Research in Computer Security*, Springer, 2021, 152–172 (cit. on p. 12).
- [24] U. Sarmah, D. Bhattacharyya, and J. K. Kalita, A survey of detection methods for xss attacks, *Journal of Network and Computer Applications*, vol. 118, 113–143, 2018 (cit. on p. 12).
- [25] A. Doupé, L. Cavedon, C. Kruegel, and G. Vigna Enemy of the state: A {state-aware}{black-box} web vulnerability scanner, in *21st USENIX Security Symposium (USENIX Security 12)*, 2012, 523–538 (cit. on p. 12).
- [26] M. C. Martin, and M. S. Lam Automatic generation of xss and sql injection attacks with goal-directed model checking. In *USENIX Security symposium*, 2008, 31–44 (cit. on p. 12).
- [27] E. Trickle, F. Pagani, C. Zhu, ET AL. Toss a fault to your witcher: Applying grey-box coverage-guided mutational fuzzing to detect sql and command injection vulnerabilities, in *2023 IEEE Symposium on Security and Privacy (SP)*, IEEE Computer Society, 2022, 116–133 (cit. on p. 12).
- [28] Owasp top 10: 2021, 2021. [Online]. Available: <https://owasp.org/Top10/> (cit. on p. 12).
- [29] W. Koch, A. Chaabane, M. Egele, W. Robertson, and E. Kirda Semi-automated discovery of server-based information oversharing vulnerabilities in android applications, in *Proceedings of the 26th ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2017, 147–157 (cit. on p. 12).
- [30] S. Segura, J. A. Parejo, J. Troya, and A. Ruiz-Cortés, Metamorphic testing of restful web apis, *IEEE Transactions on Software Engineering*, vol. 44, no. 11, 1083–1099, 2017 (cit. on p. 12).
- [31] P. Godefroid, B.-Y. Huang, and M. Polishchuk Intelligent rest api data fuzzing, in *Proceedings of the 28th ACM Joint Meeting on European Software Engineering Conference and Symposium on the Foundations of Software Engineering*, 2020, 725–736 (cit. on p. 12).
- [32] S. Andrica, and G. Candea Warr: A tool for high-fidelity web application record and replay, in *2011 IEEE/IFIP 41st International Conference on Dependable Systems & Networks (DSN)*, IEEE, 2011, 403–410 (cit. on p. 12).
- [33] B. Burg, R. Bailey, A. J. Ko, and M. D. Ernst Interactive record/replay for web application debugging, in *Proceedings of the 26th annual ACM symposium on User interface software and technology*, 2013, 473–484 (cit. on p. 12).
- [34] S. Flesca, F. Furfaro, and E. Masciari Monitoring web information changes, in *Proceedings International Conference on Information Technology: Coding and Computing*, IEEE, 2001, 421–425 (cit. on p. 12).
- [35] Y. Wang, D. J. DeWitt, and J.-Y. Cai X-diff: An effective change detection algorithm for xml documents, in *Proceedings 19th international conference on data engineering (Cat. No. 03CH37405)*, IEEE, 2003, 519–530 (cit. on p. 12).
- [36] I. Khoury, R. M. El-Mawas, O. El-Rawas, E. F. Mounayar, and H. Artail, An efficient web page change detection system based on an optimized hungarian algorithm, *IEEE Transactions on Knowledge and Data Engineering*, vol. 19, no. 5, 599–613, 2007 (cit. on p. 12).
- [37] M. Hammoudi, G. Rothermel, and A. Stocco Waterfall: An incremental approach for repairing record-replay tests of web applications, in *Proceedings of the 2016 24th ACM SIGSOFT International Symposium on Foundations of Software Engineering*, 2016, 751–762 (cit. on p. 12).
- [38] F. Shao, R. Xu, W. Haque, ET AL. Webevo: Taming web application evolution via detecting semantic structure changes, in *Proceedings of the 30th ACM SIGSOFT International Symposium on Software Testing and Analysis*, 2021, 16–28 (cit. on p. 12).
- [39] S. Schumilo, C. Aschermann, A. Jemmett, A. Abbasi, and T. Holz, Nyx-net: Network fuzzing with incremental snapshots, *arXiv preprint arXiv:2111.03013*, 2021 (cit. on p. 13).

Appendix A FULL EXPERIMENTAL RESULTS FOR THE ALEXA TOP 200 DATA SET

Alexa Rank	Data fields	Reported	Preparation (min)	Execution (min)	Classification (min)	Sensitive	Reason
2	2150	—	—	—	—	—	B
4	75	39	8	15	5	0	
5	211	91	13	38	5	0	
6	4656	—	—	—	—	—	F
7	146	120	16	44	5	0	
8	33	26	10	2	5	0	
9	798	—	—	—	—	—	B
10	2547	—	—	—	—	—	B
11	345	264	6	17	10	0	
12	1132	942	10	394	15	0	
13	547	0	13	496	0	0	
19	216	144	15	84	15	0	
25	42	—	—	—	—	—	F
29	60	3	13	9	5	0	
34	23,995	—	—	—	—	—	B
36	262	210	8	52	10	0	
37	124	106	20	13	5	0	
40	1909	1770	25	131	20	0	
42	1291	362	15	174	15	0	
46	1133	—	—	—	—	—	B
48	118	92	25	4	5	0	
59	4736	156	13	1032	20	0	
64	268	—	—	—	—	—	F
66	81	—	—	—	—	—	F
67	12	0	15	1	2	0	
69	629	362	20	45	10	0	V
74	16	2	14	2	5	0	
78	1607	0	25	525	15	0	
79	1391	—	—	—	—	—	B
80	389	349	18	13	5	0	
81	618	582	15	28	5	0	
82	3332	1203	8	297	10	0	
88	448	35	6	186	2	0	
91	1037	786	11	78	30	24	
94	8351	7386	16	1434	15	0	
96	155	148	10	21	10	0	
97	7637	7287	10	972	20	0	
98	384	318	15	66	5	0	
99	21	—	—	—	—	—	B
100	197	175	13	24	5	0	
104	774	328	13	142	15	0	
111	1034	0	13	182	15	0	
112	14	13	11	5	2	0	
118	1028	925	17	284	5	0	
120	304	—	—	—	—	—	B
121	18	5	9	1	2	0	
124	446	356	13	98	5	0	
125	131	56	18	20	5	0	
127	3063	—	—	—	—	—	F
128	124	87	11	6	5	0	
133	1263	300	16	146	10	0	
134	13,920	—	—	—	—	—	F
135	2458	1980	15	172	15	0	
136	39	37	17	3	2	0	
141	151	—	—	—	—	—	S
144	153	83	8	9	5	0	
148	1267	868	15	199	5	0	V
150	160	152	15	17	5	0	
158	590	150	13	54	5	0	
167	904	601	10	45	5	0	
169	85	59	11	11	5	0	
171	1591	—	—	—	—	—	B
172	294	230	20	37	5	0	
173	283	93	11	138	10	0	
183	364	290	11	16	10	0	
186	88	57	20	15	5	0	
187	2	0	20	0	2	0	
192	4831	3591	12	793	15	0	V
198	310	146	10	24	5	0	

Table 3: Summary statistics from the Top 200 data set. We report the Alexa Rank for each site; the total number of Data fields returned by the API response from each site and the number of fields EDEFuzz Reported as excessive. We also include test Execution duration, manual Preparation time (the human effort required for identifying a target API and preparing the configuration file) as well as Classification time (time spent manually inspecting the flagged fields to determine which contained sensitive data), as well as the number of flagged fields that were determined to contain Sensitive data. Where EDEFuzz did not successfully apply or its results did not pass validation, we indicate the Reason: B means the target did not pass the pre-processing step as explained in Section 4.4; F means EDEFuzz failed the execution process, as explained in Section 5.2; S means the target used a shadow root, which we also explained in Section 5.2; V means removing all reported fields would produce a different page, as explained in Section 5.2.