

Chapter 1

Applications and Challenges of SA in Real-life Scenarios

Diptesh Kanojia^a and Aditya Joshi^b

^aSurrey Institute for People-centred AI, United Kingdom, ^bSEEEK, Australia

ABSTRACT

Sentiment analysis has benefited from the availability of lexicons and benchmark datasets created over decades of research. However, its applications to the real world are a driving force for research in SA. This chapter describes some of these applications and related challenges in real-life scenarios. In this chapter, we focus on five applications of SA: health, social policy, e-commerce, digital humanities and other areas of NLP. This chapter is intended to equip an NLP researcher with the ‘what’, ‘why’ and ‘how’ of applications of SA: what is the application about, why it is important and challenging and how current research in SA deals with the application. We note that, while the use of deep learning techniques is a popular paradigm that spans these applications, challenges around privacy and selection bias of datasets is a recurring theme across several applications.

The previous chapter describes sentiment (SA) and its allied sub-problems via the perspective of computational intelligence. At its heart, SA is a prediction problem over text. Given a piece of text, the task is to predict sentiment (positive/negative/neutral) or emotion (happy/sad/angry and so on), *etc.* Aspect-based SA, domain-specific SA can be viewed as sub-tasks in SA- each bringing additional challenges providing opportunities for innovative architectures.

However, any area of technology is centred around two pillars: innovation and usefulness. The two are interleaved in that one drives the other. The case is no different for SA. The innovation and advancements in SA can be attributed to the availability of benchmark datasets, most notably for English as a part of the GLUE benchmark [Wang et al. \(2018\)](#) or Sentiment Treebank. SA witnessed a development of large-scale datasets and lexicons. For example, Amazon made their review dataset public ([Ni et al., 2019a](#)) providing an impetus to research in aspect-based SA. Sentiment tree bank provided a tree-based dataset of sentences and phrases labelled for sentiment. As a result, SA attracted attention [Socher et al. \(2013\)](#). There were datasets to train large-scale neural models, and the public availability of the datasets meant reproducibility and comparison of proposed approaches.

While availability of benchmark datasets spawned innovation in SA, this chapter is about the second pillar: usefulness. We visualise usefulness of SA

in the form of its last mile applications. The phrase ‘last mile’ is often used in the context of e-commerce websites: websites that sell products to consumers. The Cambridge dictionary describes ‘last mile’ as the last stage in a process, especially of a customer buying goods. In the context of SA, the last mile are the applications of SA to the real world. The usefulness of SA is manifested in the real-world applications of SA: from helping stock traders make purchase decisions to mining continuous streams of social media data for intelligence on public health outbreaks. In this chapter, we cover these applications of SA in real-life scenarios: health, culture, social policy, human safety and other areas of NLP research.

Figure 1.1 is a perspective of what constitutes as an application of SA. SA is at the centre of the figure. It is conflated to mean SA, emotion analysis, aspect-based SA and other sub-areas of SA. The focus of this chapter is, however, the connections of SA with these other areas that are positioned around it: society, health, safety, culture, business and other areas of NLP¹. Each of these form forthcoming sections of the chapter. In each section, we address questions pertinent to the specific domain. For example, how can SA be applied to improve health of individuals and community? How can SA be applied to aid businesses achieve their objectives? The areas discussed in the paper are real life scenarios: scenarios impacting individuals, communities or organisations.


At the outset, it is important to note that an application does not only mean the domain of the dataset used. A new application domain may provide unique opportunities to improve SA. For example, ontologies created by medical experts are unique to the health domain and have shown to be immensely useful as structured knowledge bases for SA applications in health. Therefore, in addition to applications of SA, we also highlight peculiar challenges and opportunities for these applications to demonstrate that an effective application often needs application-based understanding and adaptation of SA.

In each of the following sections, we describe applications and challenges of SA in real-world scenarios, as illustrated in the Figure above.

1.1 HEALTH

Advances in science and technology have been applied and deployed to improve health and well-being of individuals and the society have always received attention. SA is no exception. Health-related textual datasets may be generated by medical professionals in the form of clinical notes or by individuals in the form of social media posts. SA applied to each of these can be useful in many ways. In this section, we now discuss some of these applications.

1. This is not the complete list of applications of SA. Few applications such as education technology or disaster management are not included in the chapter. However, we believe that the applications covered in the chapter are representative of majority of the applications, and provide a sense of the utility of SA.

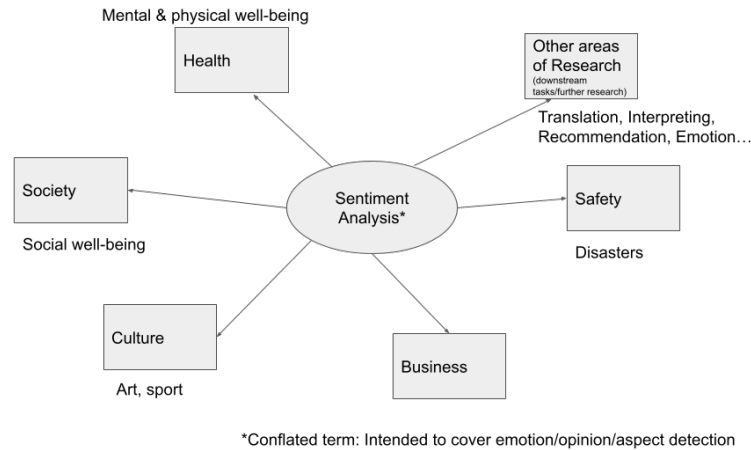**FIGURE 1.1** Applications of SA

1.1.1 Challenges

The immediately apparent difficulty in applying SA to health-related problems is the availability of datasets. Medical datasets may not always be available in digitised form in some regions of the world. Similarly, privacy and confidentiality of medical data prevents making it accessible for research or deployment. However, some benchmark datasets such as MIMIC are available for research purposes. An alternative to the medical datasets are user-generated datasets such as tweets. Since official medical datasets are confidential, tweets posted by people can be a useful alternative. The epidemiology community, therefore, refers to tweets as ‘open-source data’.

However, using tweets for healthcare applications of SA has its own challenges. Social media usage is popular in certain demographics, potentially based on their age or acquaintance with technology. As a result, as a volume, social media-based datasets may not be representative of a community, reflecting a selection bias.

1.1.2 Applications

In situations where medical transcripts and data by medical practitioners is available, [Denecke and Deng \(2015\)](#) identify the following avenues for application of SA using medical transcripts:

1. Change in health status: The medical practitioner may note whether a patient felt better or worse. This may be done using sentiment words. This sentiment may be expressed towards entities such as the pharmacological interventions used for treatment.

2. Critical events: Medical emergencies can be reported through strong negative sentiment.
3. Patient experience: A medical practitioner may report patient experience as the patient describes how they are feeling during an appointment.

The points above hold true for user-generated medical data as well. Discussion forums on the internet for people suffering from certain medical conditions allow people to share experiences with each other. SA applied on these discussion forums can help to identify what measures are working for people - and what are not.

In addition, since social media is widely used, people often report their health conditions in the form of social media posts such as tweets. Social media-based epidemic intelligence is the use of social media posts to monitor initiation, prevalence and spread of epidemics in the real world (Joshi et al., 2019). By its very definition, the word ‘disease’ signifies a situation where a person is not (‘dis’) at ‘ease’ with themselves. As a result, people experiencing illnesses typically express negative sentiment, at least implicitly negative. Social media-based epidemic intelligence (SMEI) is a quintessential application of SA applied to the world of health/healthcare.

At the heart of SMEI is the task of predicting whether a tweet mentioning an illness-related word is a report of the illness. Such a tweet has been called a personal health mention. For example, a tweet ‘This fever is killing me’ is a report of an illness, while ‘Fever, cough and loss of taste are common symptoms of COVID-19’ is not a report of an illness although both contain the symptom word ‘fever’. The task of computationally detecting personal health mentions is called personal health mention classification. Personal health mention classification uses features based on sentiment, as given in Joshi et al. (2019): the number of negative words, the implied sentiment and so on. Alternatively, sentiment information can be incorporated into a neural architecture. Biddle et al. (2020) concatenate word representations with sentiment distributions obtained from three sentiment lexicons. This is then passed to sequential layers such as LSTM before the prediction is made.

The second step in SMEI is health event detection. It uses time series monitoring in order to predict an outbreak in number of personal health mentions (say, within a time period). SMEI can potentially detect short-term outbreaks as well as beginning of long-term epidemics. SMEI can eventually be deployed in a dashboard that monitors social media posts in a geography of interest. One such dashboard is ‘Watch The Flu’ (Jin et al., 2020) that automatically monitors tweets posted from within Australia, identifies the ones that are personal health mentions (via classification) for influenza symptoms and then detects potential spikes in symptoms reports (via time series monitoring). A screenshot from their paper is given in Figure 1.2.

SA also assumes importance in terms of the aspects towards which the sentiment is expressed. For example, vaccination sentiment detection involves

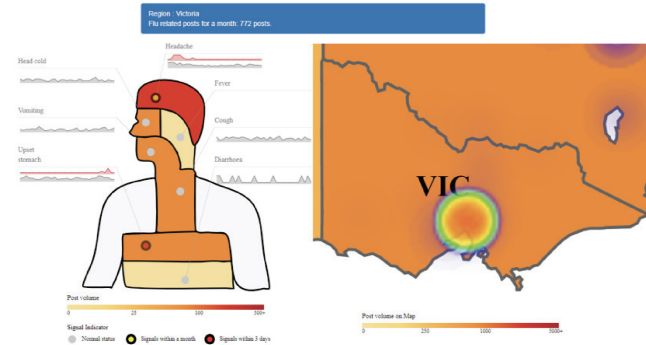


FIGURE 1.2 Social Media-based Epidemic Intelligence

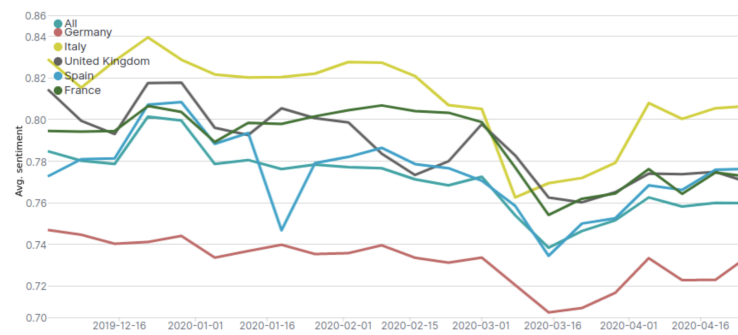


FIGURE 1.3 Sentiment changes in different countries during the COVID-19 pandemic

detection of sentiment towards vaccines (Kummervold et al., 2021). Similarly, Social Media Monitoring 4 Health (SMM4H) workshop conducts shared tasks for health-related tweets (Magge et al., 2021). The reported systems regularly report the use of SA-based enhancements for tasks such as adverse drug reaction detection, vaccination behaviour detection and so on.

The COVID-19 pandemic is an unprecedented pandemic that resulted in worldwide infections, deaths, lockdowns and economic slowdowns. In Kruspe et al. (2020), SA (using a neural network) is applied to multi-lingual tweets from around the world. The paper shows how sentiment towards the pandemic changed in different parts over the world over time. An application of SA such as this provides a zeitgeist of the impact of the COVID-19 pandemic. A figure from this paper is included as Figure 1.3.

SA of tweets during the time of a pandemic can help to understand issues being experienced by people. An example in the context of COVID-19 is Kleinberg et al. (2020). The paper reports a COVID-19 Real-world Worry

Dataset. The datasets contains tweets posted from within UK during the time of the COVID-19 pandemic. In the introductory paper, the authors use topic modeling and lexical analysis using Linguistic Inquiry and Word Count (LIWC) in order to understand issues and concerns as expressed in the tweets.

1.2 SOCIAL POLICY

SA holds an important place in the social conversation space as combined with text mining from the social media domain. It can be a really powerful tool to gather public opinion. Early research in this area ([Karamibekr and Ghorbani, 2012](#)) argues that this is an interdisciplinary field that crosses the boundaries of artificial intelligence and natural language processing- the domains to which it is known to belong to. As the digitisation of public opinion via forums like Reddit and Twitter are becoming more popular, with more and more people getting access to the internet, we see a shift in the strategies employed by governments of the world that take these digital media into account. The analysis of sentiment towards political discourse is also important as sentiment/emotion expressed towards a political scenario are polar in nature. People express opinions in favour or against a political decision or even the rulings of courts in many countries. Therefore, it is widely believed and also already acceptable to use SA-based tools and research for measuring the sentiment of people towards social policy. A social issue is an issue that relates to people's personal lives and interactions. The impact of public opinion on social issues and on policy makers operates in a similar manner to those of product reviews for manufacturers. Current governments and organisations engaging with social issues can analyse public criticisms or supports for a particular policy and consider public opinions in making decisions. Politicians can receive electorates' opinions concerning important issues and their expectations. However, social issues are very different from products and services. The divide on social issues can be much larger in people compared to the divide in opinion on a product. Such opinions can also be very nuanced and may be expressed neither in complete favour nor completely against a social policy, which is also a challenge faced by SA research when applied to the social policy domain. People who voice their opinions on social media platforms also tend to use *hashtags*, *slangs*, *mixed language*, *i.e.*, code-mixing/switching, and inconsistent *variants of words* in a language which are technical challenges to further mining the social opinion of a populace. There are conversations in comments and on Twitter threads that imbibe a context for humans, whereas this context combined with the background knowledge of the subject matter is impossible for machines to comprehend and take into account, which is mining social opinions. Despite these challenges, the applications of SA research to the social policy domain continues to thrive and has allowed so many research questions to stem from this field which we will discuss further in the next subsection.

1.2.1 Applications in Social Policy

Social media provides opportunities for policy makers to gauge public opinion. However, the large volume and a variety of expressions on social media have changed traditional policy analysis and public sentiment assessment. The applications of SA research in this area has an immense contribution in gauging the social and political sentiment of a populace. For example, [Adams-Cohen \(2020\)](#) show how public opinion shifted post-legalisation of same-sex marriage in the United States. They use Twitter to analyse public opinion after the Supreme court ruling and observe how states affected by the ruling carried a more negative sentiment towards the subject. Court rulings on social policy can polarise the public as the mandate might not be culturally acceptable by the layman. [Crossley et al. \(2017\)](#) propose a tool they call SEANCE for sentiment, social cognition and social-order analysis. This tool offers various features for the analysis of data collected from various social media forums. Existing research has also presented arguments that political scientists have done little in the way of rigorous analysis towards the sentiment/mood of the general public ([Durr, 1993](#)). However, SA research, due to automated computational approaches, is able to do this without the manually-conducted political surveys and opinion polls. With the rapid growth of social media content and usage, policy makers and even ordinary citizens are able to efficiently obtain voluminous data about public sentiment. Opinion leaders, authorities, and activists who share their ideas on Twitter are often followed closely by thousands of users. These leaders provide valuable content as well as linkage information that can offer insights for policy decision making ([Chung and Zeng, 2016](#)). It is well documented that online forums like Twitter affect the political discourse and raises questions that need answers from the governments ([Parmelee and Bichard, 2011](#)). These questions can be related to incidents that happen rarely or can be related to the long-term political decisions or a potential problem for the country in the long-term (ageing population ([Petonito and Muschert, 2015](#))). SA research has focused on public opinion about rural issues as well- issues pertaining to a section of the population that has limited to the internet where these issues are discussed, which is ironic to think about ([Vagrani et al., 2020](#); [Botterill, 2009](#); [Singh et al., 2018, 2019](#); [Li et al., 2021](#)). Social or political campaigns run by the governments/politicians are also topics of discussion amongst the online population which can help predict the public opinion towards a campaign ([Tayal and Yadav, 2017](#); [Sandoval-Almazan and Valle-Cruz, 2020](#); [Hoffmann, 2018](#); [Budiharto and Meiliana, 2018](#); [Chen et al., 2021](#)). The analysis of online text or opinion can help create a positive impact on the policy as governments can be better informed about public opinion. Such content can be useful for government agencies, as it can help them understand the needs and problems of society to formulate effective public policies. The constantly increasing complexity of social problems and needs makes this political content even more valuable, as it contains extensive knowledge concerning such problems, which can be quite useful for understanding and

managing their complexity (Charalabidis et al., 2015). Online media can affect and help form social policies, as evident by these significant number of studies in this domain. However, the mining of sentiment/opinion from public forums does not come without its own set of challenges which we discuss in brief in the next subsection.

1.2.2 Challenges in Social Policy

Social media is full of opinions, emotions, and sentiments expressed largely in the forms of text. This voluminous amount of text, however, can be expressed in different ways, which is largely considered a challenge by the researchers in the SA domain (Tsou, 2015). A whole subspace of SA researchers have dedicated themselves to identifying genuine users and account holders as compared to what are known as fake or ‘troll’ accounts online. Fake accounts on social media are run via politically motivated organisations with the help of a large number of employees and also by ‘bots’ which can help further any agenda. Here are some of the research challenges faced by SA researchers when collecting the data from social media forums:

Identification of Users: While traditional data collection methods like surveying and interviewing largely relied upon manual collection of data, it could collect authentic data. However, with the advent and easy access to social media, it is an important challenge to find out which accounts carry the opinions of genuine social media users. Flores-Saviaga et al. (2018) note that political trolls initiate online discord not only for the laughs but also for ideological reasons. They uncover that the most active users employed distinct discursive strategies to mobilise participation and also deployed technical tools like bots to create a shared identity and sustain engagement. In fact, they themselves face a challenge as they build their own ‘troll’ community while simultaneously disrupting others.

User Privacy: Privacy concerns and related risks are a cause of concern for researchers and for the public. The danger of spatial information disclosure becomes more serious when people use mobile devices and “check-in” through social media to reveal their physical locations. Although a large-scale opinion mining research practice may ignore such data, released datasets may contain sensitive information, and hence, researchers face an additional challenge in terms of anonymisation of data streams used for research. This information can at times also reveal medical records and public health data, which should not be shared without ensuring either- the consent of the patient or proper anonymisation techniques.

Noisy Data: Rapid growth of social media has also led to a rapid increase in spam and online marketing of content which is prevalent in social conversations. This noise may create a hurdle for SA research that tries to capture a genuine opinion of social media users. Non-relevant posts and comments, marketing messages, bots, ‘clickbait’ and advertisements lead to a lot of

noisy data, which needs to be removed before the analysis of user data generated via social media forums.

Mental Health: Mental illness is a serious and widespread health challenge in today's day and age. Many people suffer from depression, and only a fraction opt to receive adequate treatment. The role of this need for validation via social media posts has been investigated by many researchers (De Choudhury, 2013; Berryman et al., 2018). Advocates of mental health and policy makers have expressed concerns regarding the potential negative impact of social media on an overall young population. Although much of the public narrative on such negative effects implies that its mere exposure is related to common mental health problems, the evidence suggests that quality rather than quantity of use is more crucial. For example, existing research argues that the use of social media for negative social comparison, which, alongside rumination, leads to depression.

Language: SA research is a part of the NLP domain and suffers from similar technical challenges in terms of the language used to express opinions on the internet. Automatically detecting the sentiment or opinion from online forums is challenging in terms of the language used on social media. For example, emotions are not stated explicitly with the content. Social media text can express frustration, depression, anger, joy, sarcasm and so on in varying degrees which are implicitly captured in the text. Certain words which carry negation towards the sentence can be very impactful towards the sentiment but are not used to capture the sentence polarity. The use of creative and non-standard language, which includes hashtags and abbreviations, popular among a young generation can also convey sentiment and emotion which need to be captured. Para-linguistic information like facial expressions is often ignored as SA research primarily deals with text, but this information also carries sentiment which should be captured. Cross-cultural differences in emotions expressed towards a particular situation can also lead to ambiguity which sometimes, even humans can not comprehend. Of course, the lack of labelled sentiment data is also a huge challenge which leads to the use of semi-supervised and unsupervised approaches which can not be relied upon fully.

The mining of opinion or sentiment from the social media text, especially when social policy is concerned, faces hurdles due to such challenges. As research in SA progresses, new sub-problems like aggression/hate-speech detection, offensive language identification, and emotion analysis have emerged, which attempt to tackle these in a very “one-problem-at-a-time” way. Hopefully, in the near future, the solutions to these challenges will also emerge slowly and help us garner actual public opinion about social policies from the internet.

1.3 E-COMMERCE / INDUSTRY

Customer reviews over online e-commerce platforms have become a common source of product feedback for consumers and manufacturers alike. Similarly, services like Yelp (www.yelp.com), Zomato (www.zomato.com), and TripAdvisor (www.tripadvisor.com) are commonly available for customer feedback on restaurants and travel destinations. Social media platforms like Facebook and Instagram are also known hosts to pages and channels which provide feedback on restaurants and travel destinations. These review sources also act as an important part of the ‘*feedback loop*’ for e-commerce platforms and manufacturers to improve the overall product quality based on certain aspect-level reviews. Recent research shows that fine-grained aspect-based SA has penetrated SA research in NLP (Fan et al., 2018; Angelidis and Lapata, 2018; Schmitt et al., 2018; Hoang et al., 2019; Jiang et al., 2021). In this section, we discuss how SA has gained importance in the e-commerce domain and also provide an outline of the challenges posed for this research.

1.3.1 Applications in E-Commerce

Customers who buy products online often rely on other customers’ reviews found over e-commerce platforms, more than reviews found in specialist magazines. These reviews often prove to be important recommendations for books, mobiles, laptops, clothing *etc.*, and seem reliable as they are written by product users, in most of the cases. In fact, short reviews form a separate category of their own and are known as ‘tips’. For example, “*I love this phone! The battery life and camera quality have won me over.*” can be considered a review whereas “*Great battery. Nice camera. Photos are good*” is considered a ‘tip’ or short recommendation (Ni et al., 2019a). The significantly increased exposure to digital technology and the penetration of the Internet in rural areas in recent years has led to a vast amount of expressed opinions over products. In particular, customers express opinions on several aspects of products, services, blogs, and comments which are deemed to be influential, especially when making purchase decisions based on product reviews (Schouten and Frasincar, 2015). This is in contrast with the traditional surveys and questionnaires that participants had to fill without any personal motivation, thus resulting in the sub-optimal collected information.

Many potential consumers read these opinionated reviews resulting in an influenced buying behaviour (Bickart and Schindler, 2001). From the point of view of a consumer, the information provided by past consumers of a product is regarded as more trustworthy than the information provided by its manufacturer. Also, from a manufacturer point of view, 1) understanding the product performance in a real-world setting, 2) improving some aspects of existing products, and furthermore, 3) understanding how the information in product reviews interacts with each aspect of the product or the service, enables the manufacturer

to take advantages of these reviews and improve sales.

Recent NLP research on aspect-based SA (ABSA) has been driving the efforts of the e-commerce industry to analyse product reviews and gain the insights discussed above. While performing aspect-based SA, three distinguishable processing steps can be 1) identification of aspects and sentiment expressed, 2) classification of sentiment for each aspect, and 3) aggregation of the overall sentiment in the review. However, some studies only focus on one of them and do not perform all three of these steps. **The first step** involves the detection of aspects from the review text, which can be performed with the help of different approaches *viz.* frequency-based, syntax-based, supervised machine learning-based, unsupervised machine learning-based, and hybrid approaches. **The second step** which entails the classification of sentiment, can also be performed with the help of various approaches, *viz.* dictionary-based, supervised machine learning-based and unsupervised machine learning-based approaches. Additionally, there are methods that perform the detection of aspects and the analysis of sentiment using a joint method via different approaches such as syntax-based, supervised machine learning-based, unsupervised machine learning-based and hybrid approaches. We will discuss each of these approaches in brief here.

[Hu and Liu \(2004c,a\)](#) observe that reviews contain a limited set of vocabulary, which is used more often, as likely aspects, in the reviews. Such frequent words inspired a straightforward approach for aspect detection based on nouns and compound nouns in the review. However, such an approach has clear shortcomings in terms of the existence of other nouns in the review, which are frequently used but are not aspects. Similarly, there are implicit aspects in the reviews that can not be detected via such an approach. [Hai et al. \(2011\)](#) propose an approach to detect such implicit aspects with the help of association rule mining. They restrict sentiment words in the text to appear as rule antecedents only, and aspect words to appear as rule consequents, and generate association rules to find aspects based on pre-identified sentiment words.

Syntax-based methods, on the other hand, focus on syntactical relations to find aspects present in a review text. One of the simplest approaches is to tag the text with part-of-speech categories for each token in the review and then identify the adjectives which modify a potential ‘aspect’. For example, the phrase ‘lovely ambience’ where the ‘ambience’ of a location is the aspect. [Zhao et al. \(2010\)](#) discuss how syntactic patterns in the text could be utilised to extract aspects using a tree kernel function. Similarly, [Qiu et al. \(2009\)](#), propose a method for aspect extraction which uses a double propagation algorithm for sentiment word expansion and aspect detection (later extended by [Zhang et al. \(2010\)](#) and [Qiu et al. \(2011\)](#)). This method treats aspect detection and sentiment lexicon expansion as interrelated problems and features the use of sentiment lexicon to find more aspects, and with additional aspects, this method is able to further find more sentiment lexicon.

Among the machine learning-based methods to detect aspects in a text, a limited number of supervised methods have been explored. Aspect detection

can be modelled as a sequence labelling problem but supervised learning heavily relies on features extracted from the text; features that can provide more information than simple bag-of-words or part-of-speech tagged tokens in the text. However, a Conditional Random Field (CRF) -based method has been utilised to perform this task (Jakob and Gurevych, 2010). This method utilises multiple features from the text, including the tokens, their part-of-speech tags, dependency relations between aspect token and sentiment lexicon, and the context of the aspect token. However, as compared to supervised learning-based methods, unsupervised learning-based methods have been more popular for the task of aspect detection. Most of the unsupervised methods utilise some variation of Latent Dirichlet Association (LDA) to explore the review text (Blei et al., 2003).

The use of LDA to detect fine-grained aspects in a review text is not straightforward, as it is more suited to work with large documents which have multiple topics. LDA utilises a bag-of-words approach at the document level and hence end up detecting global topics, which is not very useful for detecting aspects. Therefore, for finding local aspects to a particular review, researchers combine LDA with Hidden Markov Model (HMM) to distinguish between aspect tokens and other background lexicon (Lakkaraju et al., 2011). An extension to LDA, known as Multi-grain LDA (MG-LDA), also attempts to solve the global vs. local topics by having a fixed set of global topics and a dynamic set of local topics. For the local topics, the document is modelled as a set of sliding windows. This allows for a window overlap to sample one topic from multiple windows and the inherent bag-of-words modelling in LDA to have a larger set of words (Blei and Moreno, 2001; Mei et al., 2007). Then, there are the other variants that try to apply LDA at the sentence level (Lu et al., 2011), estimating the emphasis of aspects (Wang et al., 2011), adding syntactic dependencies (Zhan and Li, 2011), aspect taxonomy construction based on syntactic rules (Luo et al., 2018) and incorporating product categories to alleviate the ‘cold-start’ problem caused due to a limited number of reviews (Moghaddam and Ester, 2013). These efforts towards mining fine-grained aspects from reviews on e-commerce platforms show how research in SA is directly applicable in a real-world setting. At this point in the chapter, we encourage the reader to find out more about hybrid methods for aspect mining from reviews. These methods combine multiple approaches like serial hybridization (Popescu and Etzioni, 2007; Yu et al., 2011; Raju et al., 2009), and parallel hybridization (Blair-Goldensohn et al., 2008) to mine aspects. We shall now move on to discussing the second part of ABSA, which is SA/classification.

SA, in the context of this discussion, becomes the task of assigning a sentiment label or a score to each aspect in the review text. On E-Commerce platforms, each review text may contain multiple aspects or, in some cases, none of them. Therefore, SA research applied to such reviews should be robust to be able to handle any corner cases. The earlier methods for this task attempted to utilise dictionaries like Wordnets to find adjectives and label them as sentiment class (*i.e.*, positive or negative). There are various heuristics among the

early dictionary-based methods where the distance from a sentiment word would determine the appropriate sentiment class for the sentence (Moghaddam and Ester, 2010; Hu and Liu, 2004b; Zhu et al., 2009). However, as compared to aspect detection, sentiment classification can be easily modelled as a supervised learning task due to the reduction in the number of labels. Hence, we discuss the supervised machine- and deep learning-based methods briefly below.

Supervised methods for machine and deep learning have been significantly more successful for SA in the e-commerce domain. These methods can easily incorporate information from the tokens in the review text as features, and raw scores based on the sentiment lexicon can be used to compute additional feature values. Blair-Goldensohn et al. (2008) employ such a method and a MaxEnt classifier to obtain sentiment scores. Similarly, SVM is used by Yu et al. (2011) to classify text into positive or negative labels by using a parse tree and reasonably assuming that each sentiment word found in the text should be within a distance of five ‘parse-steps’ of an aspect. Choi and Cardie (2008) perform SA on very short expressions and associate these short expressions to aspects in the text. A lot of researchers use bag-of-words as features for supervised sentiment classification, but many argue that such models are too simple to be applied to a domain as vast as e-commerce. We highlight the challenges of using such approaches in the e-commerce domain in the next subsection and also discuss some solutions proposed. However, as opposed to the consistently tested classification-based methods, various researchers have attempted at using a regression-based method for obtaining sentiment scores. This does allow the sentiment score generation to be a little more fine-grained, but the eventually authors try to club the sentiment scores in five classes akin to the five star rating system. Lu et al. (2011) use a support vector regression model to obtain a sentiment score for each aspect. This model allows the sentiment score to be modelled as a real number in the zero to five rating interval. Similarly, with the help of PRanking (Crammer et al., 2001), a perceptron-based online learning method, Titov and McDonald (2008) perform SA given the topic clusters using an LDA-like model. The input to this method is different n-grams along with binary features which describe LDA clusters. This method is interesting as it involves the construction of a feature vector for each sentence based on the absence or presence of a certain word-topic-probability combination and then groups these probabilities into ‘buckets’. The PRanking algorithm takes the feature vector and learned weights as an input to arrive at a number, which is checked against the boundary value to be divided into one of the five classes for a sentiment score.

Unsupervised methods, however, are not significantly used for sentiment classification. With the help of parsed syntactic dependencies, one can find a potential sentiment phrase in the vicinity of a pre-detected aspect. Such a sentiment word carrying a polarity can be used to arrive at a decision regarding the overall sentiment of the aspect, viz., positive or negative (Popescu and Etzioni, 2007). The research in SA has also attempted to borrow from the area of computer vision, specifically, an unsupervised method known as relaxation

labelling (Hummel and Zucker, 1983). The relaxation labelling technique helps assign a polarity label to each sentiment phrase while adhering to a set of specified constraints, which can be obtained based on the semantic orientation of adjectives (Hatzivassiloglou and McKeown, 1997). The final output for any unsupervised method is also the same, either a positive or a negative label for each review text.

The methods discussed above provide an insight into the research area of aspect-based SA and how they can be used in the e-commerce domain. Depending on the availability of data samples and available methods- SA research has been prevalent in shaping the online platforms which are now a part of our daily lives. Improving customer experience and building product brands are two very simple use-cases of this research in a real-world scenario. E-commerce giants also use SA to gain a competitive edge and engage with customers based on their SA research. However, no area of research or research methodologies exist without challenges of their own. In the upcoming section, we discuss these challenges in detail and show how SA research has tried to tackle some of them.

1.3.2 Challenges in E-Commerce

The premise for the SA research carried out by NLP researchers and e-commerce industries is the trustworthiness and reliability of these reviews posted by customers. However, the trust in these reviews is often misplaced due to ‘fake reviews’. For example, some authors glorify their own books in reviews on an e-commerce platform. This phenomenon is also known as ‘**sock-puppetry**’. Unfortunately, fake reviews can be produced in different ways such as,

- product manufacturers may hire a group of individuals to post positive reviews of their products on online platforms,
- service providers like hoteliers and restaurant owners may glorify their services from multiple accounts/handles,
- authors who can post glorifying reviews about their work on online platforms via different handles/channels/social media influencers, and lastly,
- any of these parties can also hire people to post negatively about their competition’s products and rate them lower on purpose.

Such fake reviews need to be identified and filtered before processing product reviews for the sentiment. One of the major challenges for SA research is the identification of these deceptive reviews. The essence of generating a sentiment towards a product/service is trusting the ‘crowd-sourcing’ phenomenon, and this trust can easily be broken with deceptive content on e-commerce platforms. Such phenomena have been exposed by campaigners such as crime writer Jeremy Duns, who found a number of fellow authors involved in such practices².

2. Amy Harmon, “Amazon Glitch Unmasks War Of Reviewers”, New York Times, February 14, 2004.

Consider a scenario where you are trying to launch a product as a startup, and you have established competitors in the market. If a competitor decides to hire a chain of people who post negatively about your product/service, your product may not be able to penetrate the market at all. To make matters worse, this can lead actual users to believe your product is not worth investing their money in at all.

Identification of fake reviews has been addressed as a problem by the research community in various papers (Feng et al., 2012; Ott et al., 2011). However, the research in this area had been limited to the identification of deceptive language (Newman et al., 2003; Mihalcea and Strapparava, 2009) whether they were computational methods or linguistic approaches to style detection. However, Fornaciari and Poesio (2014) discuss a large dataset containing ‘real-life’ examples of deceptive uses of language in a corpus they call “DeRev” (abbreviated from “Deceptive Reviews”). They created this dataset in collaboration with Jeremy Duns and other ‘sock-puppet hunters’ and showed how computational approaches to identify fake reviews can be helped with such a dataset. Similarly, Liu et al. (2017) identify some indicators of fake reviews in the text based on spammer behaviour. More recently, research has attempted at identifying fake reviews in the e-commerce domain using a dataset containing text from multiple sub-domains and using an integrated neural network to help resolve the problem (Alsubari et al., 2021).

Apart from a social challenge like ‘sock-puppetry’, there are always computational and linguistic challenges to any problem. For example, the domain specificity in product reviews has always existed as a ‘hard-to-swallow pill’ for the researchers in the ABSA domain. Reviews in different domains adhere to different vocabulary and terminology, which makes it a challenge. Researchers have also attempted to find suitable cross-domain training which can help save time by training SA models in a particular domain and utilising it for another domain (Sheoran et al., 2020; Schultz et al., 2018). The ABSA task is a very complex endeavour in itself, and the addition of cross-domain challenges to it just makes it more challenging. Narayanan et al. (2009) has proposed that instead of focusing on a one-size-fits-all solution, researchers should focus on the many sub-problems.

There are many critical issues when implementing an LDA-based method for ABSA (Titov and McDonald, 2008). The simple bag-of-words approach discussed in the section above also presents different challenges, and researchers have tried to use compositional semantics to help resolve some of them. Compositional semantics states that the meaning of an expression is a function of the meaning of its parts and the syntactic rules by which these are combined. Wilson et al. (2005) propose a learning algorithm that combines multiple lexicons (positive, negative, neutral) and use a compositional inference model with rules incorporated to update the deployed SVM algorithm for this task. Moreover, the language used by a genuine user of a product can be sarcastic towards the product while writing a review that seems positive at the outset. Computational

approaches struggle at detecting sarcasm/irony in text, and sarcasm detection is a known challenge for researchers in the area of SA (Joshi et al., 2017). Irony in the written text is a pervasive characteristic of reviews found online, and the subjectivity (or ambiguity) in the language used with online reviews is also a major challenge (Reyes and Rosso, 2012; Reyes et al., 2012). Despite the challenge described above, there has been a constant push by research in the NLP and the SA domain to help come up with generic models which can help solve the challenges in this domain. We hope that this push to solve multiple sub-problems eventually leads to solving these problems.

1.4 DIGITAL HUMANITIES

Digital humanities is the confluence of computational methods (such as NLP) and areas of humanities. Digital humanities in the context of text-based datasets may analyse these datasets to understand evolution of languages, evolution of biases within the datasets. However, in the context of this chapter, we focus on approaches that use SA for digital humanities. Literary works such as books, plays and movies may be sources of entertainment, but are also reflective of the prevalent society. Analysis of literary works using computational methods can be useful to understand these literary works, compare them and analyse patterns between literary works of the same period or by the same author. For example, an interesting question may be to understand underlying common patterns and similarities between characters and plays by William Shakespeare. Similarly, another interesting application would be to analyse the Indian epics, Ramayana and Mahabharata, and compare their storylines in the context of emotion trajectories of the characters. Closer to a deployment setting, Martinez et al. (2019) show how violence rating can be predicted using the script of a movie. Each utterance is represented as a concatenation of lexical and sentiment/violence-related features. A recurrent neural network captures the linear nature of utterances in a conversation. The final prediction is an attention-based classifier based on the neural representations of the utterances.

However, in the rest of this section, we discuss the applications of SA to applications in digital humanities. Specifically, we focus on works that focus on literature, sport and art.

Datasets used for the purpose of emotion analysis may be provided for other areas of NLP. For example, Gorinski and Lapata (2015) present a corpus of movie scripts and use it for the purpose of summarisation. Similarly, online portals such as the Internet Movie Script Database (<https://www.imsdb.com/>) (for movie scripts), Project Gutenberg (<https://www.gutenberg.org/>) (for books) may also be crawled in order to create relevant datasets.

1.4.1 Applications

Application of SA to art works can help to understand potential user experience. For example, what is the trajectory of emotions that a user will experience when reading a certain book or watching a certain movie? Understanding this may be useful to understand the impact of an art work on a person experiencing it. [Kim and Klinger \(2018\)](#) present a detailed survey of sentiment and emotion analysis approaches applied to literary works. They highlight broad categories of approaches in the area as:

1. **Classification-based formulations:** This includes tasks such as prediction of emotion of a literary work (for example, a poem), or whether or not a story has a happy ending.
2. **Temporal sentiment changes:** This involves tasks dealing with understanding how sentiment changes over time in a given literary work. The word ‘time’ here refers to the course of the literary work.
3. **Relationships between characters:** This involves tasks dealing with understanding relationships between characters in a literary work. This may be interlayed with temporality where the change in relationships between characters are tracked over time.
4. **Understanding prevalent biases:** SA applied to literary works may uncover underlying biases. For example, an emotion analysis of characters followed by marginalisation (in the probabilistic sense) over certain attributes may help to understand their portrayal. For example, it may help to understand if people of certain genders are portrayed as more angry or sad as others.

In order to analyse emotion-related dynamics in literary works, [Hipson and Mohammad \(2021\)](#) present a set of metrics known as utterance emotion dynamics (UED). They show how UED metrics can be calculated and can be useful in order to understand emotion dynamics in a narrative such as a book, play or a movie. Some UED metrics that can be used to analyse emotion in a literary work are:

1. **Emotion word density:** This is the proportion of emotion words uttered by a character within a certain time interval.
2. **Emotional arc:** The emotional arc of a character is the path taken by the character over the course of the literary work. For example, the character may start off in a happy state. Then, during the course of the narrative, an unpleasant incident occurs with them, following which they become sad and angry. As the events unfold, the character becomes happy at the end of the story.
3. **Home base, variability & displacement count:** The three metrics indicate (respectively): what is the most common emotional state of a character, how much does their emotional state vary, and how often does it vary. Home base can be viewed as the most common emotional state of a character while variability indicates how much their emotional state differs in the story. Displacement count is the number of times the character experiences an

emotion displacement in the story.

4. Peak distance and rise/recovery rates: Peak distance indicates how far a character in a play deviates from their most common emotional state. Rise rate indicates how soon they achieve the peak distance while recovery rate indicates how quickly they come back to their home base. This metric potentially refers to the ups and downs in a story.

The metrics above provide a structured framework to analyse literary works using emotion analysis. [Nalisnick and Baird \(2013\)](#) apply SA to analyse Shakespeare's plays. The SA approach in itself is rather simple. The sentiment values of words in an utterance are looked up in a sentiment lexicon, and the sentiment is attributed as a directed relationship between the character who spoke a certain utterance and the character who spoke the next utterance in the conversation. However, the key analysis proceeds in two dimensions: relationships between characters and time in the play. As a result, the paper describes how sentiment and affinity relationships between characters change over the course of a play. [Joshi et al. \(2016b\)](#) perform a similar temporal analysis for the commentary of a cricket match. A cricket match is played over a sequence of delivery of balls. The commentary captures what happens in each of the balls. Based on what the commentator said to report each of the deliveries, the EmoGram analyses how exciting different cricket matches were.

Literary works may also provide a proxy for real life. If a dataset of real-world data is not available, creative works can serve as a useful dataset. For example, [Joshi et al. \(2016a\)](#) present an approach for sarcasm detection in conversations. Since a dataset from conversational data is not available and since they hope for a certain class distribution in the dataset, they use transcripts of the TV Show 'Friends'. Every utterance in this dataset is manually annotated with sarcasm label. Then, sequence labeling algorithms are used to predict sarcasm in every utterance, using features from the utterance and utterances in its neighbourhood.

Finally, digital humanities can also use SA to create a multimedia anthology of the society. An example of this is the 'We Feel' dashboard ([Larsen et al., 2015](#)). We Feel is an interactive dashboard maintained by the State Library of New South Wales, Australia. In order to maintain a historical anthology as seen on social media, We Feel monitors tweets, detects topics from the tweets and also records the emotion experienced by people. The We Feel dashboard contains an emotion flower - which visualises emotion changes in tweets posted from Australia and around the world.

1.5 OTHER RESEARCH AREAS

There are multiple other areas of research where the analysis of sentiment can help improve the output. In this section, we delineate such areas and try to cover the known applications of SA to other research areas and the challenges it brings forth in the said research domain. Many of the research areas we cover here belong to the NLP domain but not all. As we discussed earlier, the

recent SA research-based models attempt to determine the text's polarity and intensiveness. Various algorithms divide the text into different polarities and try to learn a sentiment towards a product, a topic, a policy, and so on. However, we have not yet discussed how this research applies to other areas and how these areas use automatic SA of text to perform the tasks pertaining to these areas. Let us briefly discuss such areas and see how SA applies to them.

1.5.1 Applications to Other Research Areas

SA (SA) can benefit many research areas, including research in the non-computational domain. As deployable sentiment-based models become easier to use, researchers in various domains like psychology, interpreting studies, translation, explainability and so on have used these models to build up their research. One of the more recently investigated areas by many NLP and Deep Learning researchers is Explainable AI (XAI). XAI research has used SA as a classification task which can help explain the decision of a neural network-based model in past research (Arras et al., 2017; Han et al., 2020). Explaining and justifying recommendations to users has the potential to increase the transparency and reliability of such models (Ni et al., 2019b). Existing research has tried to learn user preferences and writing styles from crowd-sourced reviews to generate explanations in the form of natural language, i.e., synthesised review generation (Ni and McAuley, 2018; Dong et al., 2017). However, a large portion of the review text used for the SA task does not contain many features that can help identify the cause of decision-making towards either the positive or the negative class. Therefore, Ni et al. (2019b) extract fine-grained aspects from justifications provided in the sentiment text to come up with user personas and item profiles consisting of a set of representative aspects. They discuss two different neural network-based models that can provide justifications based on different aspects as a reference and provide justifications based on existing justification templates in the data for the sentiment text/instances that do not provide justifications. Similarly, Han et al. (2020) contrast between the use of gradient-based saliency maps (Li et al., 2015) and the use of Influence Functions to provide explanations for decisions made by SA models. Gradient-based saliency maps can also be visualised with the help of existing tools like LIME (Ribeiro et al., 2016). This method computes squared partial derivatives obtained by standard gradient back-propagation. On the other hand, Layer-wise Relevance Propagation (LRP) has also been commonly used to explain the decisions of a SA model (Sánchez-Rada et al., 2014; Zucco et al., 2018; Ito et al., 2019; Kaur et al., 2021). With this method, each layer neuron in the neural network is provided with a relevance score back-propagating from the final layer to the input layer neurons. However, XAI is not the only research area SA has been utilised for further research. Let us delve into some of the other past research where SA has proven to be a useful area in terms of existing research and model deployability:

Psychology: Jo et al. (2017) argue how the sentiment expressed in a text can

be used to predict the emotional state of a person and not the sentiment of a text. They build neural network-based models to perform SA and attempt to model the emotional state of a person. Based on a similar context, [Provoost et al. \(2019\)](#) present an exploratory study on how SA can allow more empathetic automatic feedback in online cognitive behavioural therapy (iCBT) interventions for people with psychological disorders, including depression.

Translation: The translation of sentiment is a known problem within the deep learning-based translation models. Much research has shown that perturbing the input to such translation models, *i.e.*, reversing the polarity or the sentiment carried by the original input sentence results in incorrect output translation where the correct sentiment or polarity (especially negation) is not carried forward ([Salameh et al., 2015](#); [Mohammad et al., 2016](#); [Hossain et al., 2020](#); [Saadany and Orasan, 2020](#); [Kanojia et al., 2021](#); [Saadany et al., 2021](#); [Tang et al., 2021](#)) including research from statistical machine translation era ([Wetzel and Bond, 2012](#)).

Interpreting: [Carstensen and Dahlberg \(2017\)](#) argue how interpreting during a court session, *i.e.*, legal interpreting required the use of emotions by human interpreters to make it better. As automated methods for interpreting become more used in this area, such models will need to take the ‘sentiment’ expressed by various parties into stock. Similarly, interpreting in the healthcare domain can lead to situations of distress among both the interpreter ([Korpál and Jasielska, 2019](#)) and the person describing their illness ([Tiselius et al., 2020](#)). The person describing their illness can modify their emotions if they feel distressed describing their ailment to the medical professional, which is being interpreted due to a language barrier ([Out et al., 2020](#); [Valero-Garcés, 2016](#)).

Sociology: [Karamibekr and Ghorbani \(2012\)](#) discuss the use of SA for social issues. They discuss how SA of social issues can affect social policy and the political scenario of a country. They present their views on how SA is not only important to the product review domain, and the applications of SA research should not be limited to the e-commerce domain. A more descriptive discussion on how SA is essential for social policy can be found in Section 1.2 in this chapter.

With the aforementioned applications of SA research in various domains, we further discuss some challenges towards applying sentiment research in these areas.

1.5.2 Challenges for SA Research in Other Areas

Applying SA research in other domains comes ubiquitously for NLP research domains like Translation, Question Answering, Conversational Agents and so on. However, it is incredibly challenging if SA research is used for the XAI domain. Visualisation of neural models in NLP is a challenge because of the following factors ([Li et al., 2015](#)):

Compositionality: It is not clear how vector-based models achieve ‘compositionality’ *i.e.*, building sentence vector/meaning from the vector/meaning of words and phrases.

Interpretability: The ‘interpretability’ and ‘causality’ of the decision-making is questioned on many occasions making them less ‘reliable’ for real-world applications like decisions on parole applications³ and many more.

Complexity: Deep learning models have become increasingly complex, and unfortunately, their inscrutability has grown in tandem with their predictive power (Doshi-Velez and Kim, 2017). As multi-layered neural models (*e.g.*, BiLSTM, Multimodal models) are deployed for solving problems in the AI domain; they become more and more complex to explain.

Hidden Layers: The very black-box nature of neural models is due to the existence of hidden layers in the neural architectures constantly used for solving NLP problems/tasks.

Researchers have argued upon the very definition of *interpretability* or *causality* for neural models. *Interpretability* is used to confirm other important desiderata of ML/DL-based models or NLP systems. There exist many auxiliary criteria like the notion of *fairness* or *unbiasedness* towards protected groups which needs further investigation to ensure they are not discriminated against by other groups. *Causality* is sometimes defined as the predicted change in output due to a perturbation that may occur in the input for a real-world NLP system, and SA research has always played a prominent role in the development of important XAI concepts which are now fundamental to the NLP research in the XAI domain. Some areas such as *fairness* and *privacy* have formalised the criteria for causality in their research. These formalisations have allowed for more rigorous research in these fields. In many areas such as psychology, however, such formalisation remain elusive, and arguments are presented on the lines of “explanations may highlight an incompleteness” (Keil et al., 2004). But research from the SA domain combined with XAI can assist in qualitatively ascertaining whether other desiderata such as fairness, reliability, transparency and so on, are met. Given that much SA research is performed on limited datasets, there are many challenges towards actually using these models in a real-world scenario but nonetheless, this research can be used as a proof-of-concept to build more “mature” DL-based models which can help solve real-world problems. In the next section, we summarise this chapter and briefly discuss the research presented above.

1.6 SUMMARY

Applications of sentiment analysis (SA) to real-life scenarios are the last mile for SA: they make the research in SA useful for specific real-world tasks. In this chapter, we describe five applications of SA. The first one is health. In

3. MIT Technology Review: Criminal Justice

terms of health, we describe applications such as social media-based epidemic intelligence, while highlighting challenges around selection bias. The next application is social policy, wherein we describe how SA can be used that understand public sentiment about social issues while highlighting issues such as noisy data and privacy. The next application is e-commerce which focuses on the use of SA for business objectives. This area in particular witnesses a breadth of SA techniques for specific business problems such as aspect-based SA. It is also important, however, to note that fake reviews are an issue that such an application must deal with. The next application of SA is digital humanities where we describe approaches that use SA on literary works and other cultural artifacts for an improved understanding of the artwork. Finally, we also describe how SA has impacted other areas of NLP such as translation and interpretation, requiring a focus on compositionality and interpretability that are crucial for both SA and the related NLP task.

As SA continues to be deployed in several applications impacting businesses, individuals and the society, the applications described in this chapter provide an introductory perspective to the breadth of SA and the impact SA has had on several real-life scenarios.

BIBLIOGRAPHY

- Adams-Cohen, N.J., 2020. Policy change and public opinion: Measuring shifting political sentiment with social media data. *American Politics Research* 48, 612–621. URL: <https://doi.org/10.1177/1532673X20920263>, doi:10.1177/1532673X20920263, arXiv:<https://doi.org/10.1177/1532673X20920263>.
- Alsubari, S.N., Deshmukh, S.N., Al-Adhaileh, M.H., Alsaade, F.W., Aldhyani, T.H., 2021. Development of integrated neural network model for identification of fake reviews in e-commerce using multidomain datasets. *Applied Bionics and Biomechanics* 2021.
- Angelidis, S., Lapata, M., 2018. Summarizing opinions: Aspect extraction meets sentiment prediction and they are both weakly supervised, in: *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, Association for Computational Linguistics, Brussels, Belgium. pp. 3675–3686. URL: <https://aclanthology.org/D18-1403>, doi:10.18653/v1/D18-1403.
- Arras, L., Montavon, G., Müller, K.R., Samek, W., 2017. Explaining recurrent neural network predictions in sentiment analysis. arXiv preprint arXiv:1706.07206 .
- Berryman, C., Ferguson, C.J., Negy, C., 2018. Social media use and mental health among young adults. *Psychiatric quarterly* 89, 307–314.
- Bickart, B., Schindler, R.M., 2001. Internet forums as influential sources of consumer information. *Journal of interactive marketing* 15, 31–40.
- Biddle, R., Joshi, A., Liu, S., Paris, C., Xu, G., 2020. Leveraging sentiment distributions to distinguish figurative from literal health reports on twitter, in: *Proceedings of The Web Conference 2020*, pp. 1217–1227.
- Blair-Goldensohn, S., Hannan, K., McDonald, R., Neylon, T., Reis, G., Reynar, J., 2008. Building a sentiment summarizer for local service reviews .
- Blei, D.M., Moreno, P.J., 2001. Topic segmentation with an aspect hidden markov model, in: *Proceedings of the 24th annual international ACM SIGIR conference on Research and development in information retrieval*, pp. 343–348.
- Blei, D.M., Ng, A.Y., Jordan, M.I., 2003. Latent dirichlet allocation. *the Journal of machine Learning research* 3, 993–1022.
- Botterill, L., 2009. The role of agrarian sentiment in australian rural policy. *Tracking Rural Change: Community, Policy and Technology in Australia, New Zealand and Europe*, ANU E Press, Canberra , 59–78.
- Budiharto, W., Meiliana, M., 2018. Prediction and analysis of indonesia presidential election from twitter using sentiment analysis. *Journal of Big data* 5, 1–10.
- Carstensen, G., Dahlberg, L., 2017. Court interpreting as emotional work: A pilot study in swedish law courts. *No Foundations: An Interdisciplinary Journal of Law and Justice* 14, 45–64.
- Charalabidis, Y., Maragoudakis, M., Loukis, E., 2015. Opinion mining and sentiment analysis in policy formulation initiatives: The eu-community approach, in: *International Conference on Electronic Participation*, Springer. pp. 147–160.
- Chen, Y., Silva, E.A., Reis, J.P., 2021. Measuring policy debate in a regrowing city by sentiment analysis using online media data: A case study of leipzig 2030. *Regional Science Policy & Practice* 13, 675–692.
- Choi, Y., Cardie, C., 2008. Learning with compositional semantics as structural inference for subsentential sentiment analysis, in: *Proceedings of the 2008 Conference on Empirical Methods in Natural Language Processing*, pp. 793–801.
- Chung, W., Zeng, D., 2016. Social-media-based public policy informatics: Sentiment and network analyses of us immigration and border security. *Journal of the Association for Information Science*

- and Technology 67, 1588–1606.
- Crammer, K., Singer, Y., et al., 2001. Pranking with ranking., in: Nips, pp. 641–647.
- Crossley, S.A., Kyle, K., McNamara, D.S., 2017. Sentiment analysis and social cognition engine (seance): An automatic tool for sentiment, social cognition, and social-order analysis. Behavior research methods 49, 803–821.
- De Choudhury, M., 2013. Role of social media in tackling challenges in mental health, in: Proceedings of the 2nd international workshop on Socially-aware multimedia, pp. 49–52.
- Denecke, K., Deng, Y., 2015. Sentiment analysis in medical settings: New opportunities and challenges. Artificial intelligence in medicine 64, 17–27.
- Dong, L., Huang, S., Wei, F., Lapata, M., Zhou, M., Xu, K., 2017. Learning to generate product reviews from attributes, in: Proceedings of the 15th Conference of the European Chapter of the Association for Computational Linguistics: Volume 1, Long Papers, pp. 623–632.
- Doshi-Velez, F., Kim, B., 2017. Towards a rigorous science of interpretable machine learning. [arXiv:1702.08608](https://arxiv.org/abs/1702.08608).
- Durr, R.H., 1993. What moves policy sentiment? American Political Science Review 87, 158–170.
- Fan, F., Feng, Y., Zhao, D., 2018. Multi-grained attention network for aspect-level sentiment classification, in: Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics, Brussels, Belgium. pp. 3433–3442. URL: <https://aclanthology.org/D18-1380>, doi:10.18653/v1/D18-1380.
- Feng, S., Banerjee, R., Choi, Y., 2012. Syntactic stylometry for deception detection, in: Proceedings of the 50th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), pp. 171–175.
- Flores-Saviaga, C., Keegan, B., Savage, S., 2018. Mobilizing the trump train: Understanding collective action in a political trolling community. Proceedings of the International AAAI Conference on Web and Social Media 12. URL: <https://ojs.aaai.org/index.php/ICWSM/article/view/15024>.
- Fornaciari, T., Poesio, M., 2014. Identifying fake amazon reviews as learning from crowds .
- Gorinski, P., Lapata, M., 2015. Movie script summarization as graph-based scene extraction, in: Proceedings of the 2015 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, pp. 1066–1076.
- Hai, Z., Chang, K., Kim, J.J., 2011. Implicit feature identification via co-occurrence association rule mining, in: International Conference on Intelligent Text Processing and Computational Linguistics, Springer. pp. 393–404.
- Han, X., Wallace, B.C., Tsvetkov, Y., 2020. Explaining black box predictions and unveiling data artifacts through influence functions. arXiv preprint arXiv:2005.06676 .
- Hatzivassiloglou, V., McKeown, K., 1997. Predicting the semantic orientation of adjectives, in: 35th annual meeting of the association for computational linguistics and 8th conference of the european chapter of the association for computational linguistics, pp. 174–181.
- Hipson, W.E., Mohammad, S.M., 2021. Emotion dynamics in movie dialogues. arXiv preprint arXiv:2103.01345 .
- Hoang, M., Bihorac, O.A., Rouces, J., 2019. Aspect-based sentiment analysis using BERT, in: Proceedings of the 22nd Nordic Conference on Computational Linguistics, Linköping University Electronic Press, Turku, Finland. pp. 187–196. URL: <https://aclanthology.org/W19-6120>.
- Hoffmann, T., 2018. “too many americans are trapped in fear, violence and poverty”: a psychology-informed sentiment analysis of campaign speeches from the 2016 us presidential election. Linguistics Vanguard 4.
- Hossain, M.M., Anastasopoulos, A., Blanco, E., Palmer, A., 2020. It’s not a non-issue: Negation as

- a source of error in machine translation. arXiv preprint arXiv:2010.05432 .
- Hu, M., Liu, B., 2004a. Mining and summarizing customer reviews, in: Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining, pp. 168–177.
- Hu, M., Liu, B., 2004b. Mining and summarizing customer reviews, in: Proceedings of the tenth ACM SIGKDD international conference on Knowledge discovery and data mining, pp. 168–177.
- Hu, M., Liu, B., 2004c. Mining opinion features in customer reviews, in: AAAI, pp. 755–760.
- Hummel, R.A., Zucker, S.W., 1983. On the foundations of relaxation labeling processes. *IEEE Transactions on Pattern Analysis and Machine Intelligence* , 267–287.
- Ito, T., Tsubouchi, K., Sakaji, H., Yamashita, T., Izumi, K., 2019. Concept cloud-based sentiment visualization for financial reviews, in: *The International Conference on Decision Economics*, Springer. pp. 183–191.
- Jacob, N., Gurevych, I., 2010. Extracting opinion targets in a single and cross-domain setting with conditional random fields, in: Proceedings of the 2010 conference on empirical methods in natural language processing, pp. 1035–1045.
- Jiang, J., Wang, A., Aizawa, A., 2021. Attention-based relational graph convolutional network for target-oriented opinion words extraction, in: Proceedings of the 16th Conference of the European Chapter of the Association for Computational Linguistics: Main Volume, Association for Computational Linguistics, Online. pp. 1986–1997. URL: <https://aclanthology.org/2021.eacl-main.170>, doi:10.18653/v1/2021.eacl-main.170.
- Jin, B., Joshi, A., Sparks, R., Wan, S., Paris, C., MacIntyre, C.R., 2020. ‘watch the flu’: A tweet monitoring tool for epidemic intelligence of influenza in australia, in: Proceedings of the AAAI Conference on Artificial Intelligence, pp. 13616–13617.
- Jo, H., Kim, S.M., Ryu, J., 2017. What we really want to find by sentiment analysis: the relationship between computational models and psychological state. arXiv preprint arXiv:1704.03407 .
- Joshi, A., Bhattacharyya, P., Carman, M.J., 2017. Automatic sarcasm detection: A survey. *ACM Computing Surveys (CSUR)* 50, 1–22.
- Joshi, A., Karimi, S., Sparks, R., Paris, C., Macintyre, C.R., 2019. Survey of text-based epidemic intelligence: A computational linguistics perspective. *ACM Comput. Surv.* 52. URL: <https://doi.org/10.1145/3361141>, doi:10.1145/3361141.
- Joshi, A., Tripathi, V., Bhattacharyya, P., Carman, M., 2016a. Harnessing sequence labeling for sarcasm detection in dialogue from tv series ‘friends’, in: Proceedings of The 20th SIGNLL Conference on Computational Natural Language Learning, pp. 146–155.
- Joshi, A., Tripathi, V., Soni, R., Bhattacharyya, P., Carman, M.J., 2016b. Emogram: an open-source time sequence-based emotion tracker and its innovative applications, in: Workshops at the Thirtieth AAAI Conference on Artificial Intelligence.
- Kanojia, D., Fomicheva, M., Ranasinghe, T., Blain, F., Orăsan, C., Specia, L., 2021. Pushing the right buttons: Adversarial evaluation of quality estimation, in: Proceedings of the Sixth Conference on Machine Translation, Association for Computational Linguistics, Online. pp. 625–638. URL: <https://aclanthology.org/2021.wmt-1.67>.
- Karamibekr, M., Ghorbani, A.A., 2012. Sentiment analysis of social issues, in: 2012 International Conference on Social Informatics, IEEE. pp. 215–221.
- Kaur, H., Ahsaan, S.U., Alankar, B., Chang, V., 2021. A proposed sentiment analysis deep learning algorithm for analyzing covid-19 tweets. *Information Systems Frontiers* , 1–13.
- Keil, F., Rozenblit, L., Mills, C., 2004. What lies beneath? understanding the limits of understanding. *Thinking and seeing: Visual metacognition in adults and children* .
- Kim, E., Klinger, R., 2018. A survey on sentiment and emotion analysis for computational literary studies. arXiv preprint arXiv:1808.03137 .
- Kleinberg, B., van der Vegt, I., Mozes, M., 2020. Measuring Emotions in the COVID-19 Real

- World Worry Dataset, in: Proceedings of the 1st Workshop on NLP for COVID-19 at ACL 2020, Association for Computational Linguistics, Online. URL: <https://aclanthology.org/2020.nlpCOVID19-acl.11>.
- Korpai, P., Jasielska, A., 2019. Investigating interpreters' empathy: Are emotions in simultaneous interpreting contagious? *Target. International Journal of Translation Studies* 31, 2–24.
- Kruspe, A., Häberle, M., Kuhn, I., Zhu, X.X., 2020. Cross-language sentiment analysis of european twitter messages during the covid-19 pandemic. *arXiv preprint arXiv:2008.12172*.
- Kummervold, P.E., Martin, S., Dada, S., Kilich, E., Denny, C., Paterson, P., Larson, H.J., 2021. Categorizing vaccine confidence with a transformer-based machine learning model: Analysis of nuances of vaccine sentiment in twitter discourse. *JMIR medical informatics* 9, e29584.
- Lakkaraju, H., Bhattacharyya, C., Bhattacharya, I., Merugu, S., 2011. Exploiting coherence for the simultaneous discovery of latent facets and associated sentiments, in: Proceedings of the 2011 SIAM international conference on data mining, SIAM. pp. 498–509.
- Larsen, M.E., Boonstra, T.W., Batterham, P.J., O'Dea, B., Paris, C., Christensen, H., 2015. We feel: mapping emotion on twitter. *IEEE journal of biomedical and health informatics* 19, 1246–1252.
- Li, J., Chen, X., Hovy, E., Jurafsky, D., 2015. Visualizing and understanding neural models in nlp. *arXiv preprint arXiv:1506.01066*.
- Li, Y.H., Zheng, J., Fan, Z.P., Wang, L., 2021. Sentiment analysis-based method for matching creative agri-product scheme demanders and suppliers: A case study from china. *Computers and Electronics in Agriculture* 186, 106196.
- Liu, P., Xu, Z., Ai, J., Wang, F., 2017. Identifying indicators of fake reviews based on spammer's behavior features, in: 2017 IEEE International Conference on Software Quality, Reliability and Security Companion (QRS-C), pp. 396–403. doi:10.1109/QRS-C.2017.72.
- Lu, B., Ott, M., Cardie, C., Tsou, B.K., 2011. Multi-aspect sentiment analysis with topic models, in: 2011 IEEE 11th international conference on data mining workshops, IEEE. pp. 81–88.
- Luo, Z., Huang, S., Xu, F.F., Lin, B.Y., Shi, H., Zhu, K., 2018. Extra: Extracting prominent review aspects from customer feedback, in: Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, pp. 3477–3486.
- Magge, A., Klein, A., Miranda-Escalada, A., Ali Al-Garadi, M., Alimova, I., Miftahutdinov, Z., Farre, E., Lima López, S., Flores, I., O'Connor, K., Weissenbacher, D., Tutubalina, E., Sarker, A., Banda, J., Krallinger, M., Gonzalez-Hernandez, G., 2021. Overview of the sixth social media mining for health applications (#SMM4H) shared tasks at NAACL 2021, in: Proceedings of the Sixth Social Media Mining for Health (#SMM4H) Workshop and Shared Task, Association for Computational Linguistics, Mexico City, Mexico. pp. 21–32. URL: <https://aclanthology.org/2021.smm4h-1.4>, doi:10.18653/v1/2021.smm4h-1.4.
- Martinez, V.R., Somandepalli, K., Singla, K., Ramakrishna, A., Uhls, Y.T., Narayanan, S., 2019. Violence rating prediction from movie scripts, in: Proceedings of the AAAI Conference on Artificial Intelligence, pp. 671–678.
- Mei, Q., Ling, X., Wondra, M., Su, H., Zhai, C., 2007. Topic sentiment mixture: modeling facets and opinions in weblogs, in: Proceedings of the 16th international conference on World Wide Web, pp. 171–180.
- Mihalcea, R., Strapparava, C., 2009. The lie detector: Explorations in the automatic recognition of deceptive language, in: Proceedings of the ACL-IJCNLP 2009 conference short papers, pp. 309–312.
- Moghaddam, S., Ester, M., 2010. Opinion digger: an unsupervised opinion miner from unstructured product reviews, in: Proceedings of the 19th ACM international conference on Information and knowledge management, pp. 1825–1828.
- Moghaddam, S., Ester, M., 2013. The flda model for aspect-based opinion mining: Addressing the

- cold start problem, in: Proceedings of the 22nd international conference on World Wide Web, pp. 909–918.
- Mohammad, S.M., Salameh, M., Kiritchenko, S., 2016. How translation alters sentiment. *Journal of Artificial Intelligence Research* 55, 95–130.
- Nalisnick, E.T., Baird, H.S., 2013. Character-to-character sentiment analysis in shakespeare's plays, in: Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), pp. 479–483.
- Narayanan, R., Liu, B., Choudhary, A., 2009. Sentiment analysis of conditional sentences, in: Proceedings of the 2009 conference on empirical methods in natural language processing, pp. 180–189.
- Newman, M.L., Pennebaker, J.W., Berry, D.S., Richards, J.M., 2003. Lying words: Predicting deception from linguistic styles. *Personality and social psychology bulletin* 29, 665–675.
- Ni, J., Li, J., McAuley, J., 2019a. Justifying recommendations using distantly-labeled reviews and fine-grained aspects, in: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), Association for Computational Linguistics, Hong Kong, China. pp. 188–197. URL: <https://aclanthology.org/D19-1018>, doi:10.18653/v1/D19-1018.
- Ni, J., Li, J., McAuley, J., 2019b. Justifying recommendations using distantly-labeled reviews and fine-grained aspects, in: Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pp. 188–197.
- Ni, J., McAuley, J., 2018. Personalized review generation by expanding phrases and attending on aspect-aware representations, in: Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers), pp. 706–711.
- Ott, M., Choi, Y., Cardie, C., Hancock, J.T., 2011. Finding deceptive opinion spam by any stretch of the imagination. *arXiv preprint arXiv:1107.4557*.
- Out, C., Goudbeek, M., Krahmer, E., 2020. Do speaker's emotions influence their language production? studying the influence of disgust and amusement on alignment in interactive reference. *Language Sciences* 78, 101255. URL: <https://www.sciencedirect.com/science/article/pii/S0388000119302815>, doi:<https://doi.org/10.1016/j.langsci.2019.101255>.
- Parmelee, J.H., Bichard, S.L., 2011. Politics and the Twitter revolution: How tweets influence the relationship between political leaders and the public. Lexington books.
- Petronito, G., Muschert, G.W., 2015. Silver alert programs: An exploration of community sentiment regarding a policy solution to address the critical wandering problem in an aging population, in: *Handbook of community sentiment*. Springer, pp. 253–266.
- Popescu, A.M., Etzioni, O., 2007. Extracting product features and opinions from reviews, in: *Natural language processing and text mining*. Springer, pp. 9–28.
- Provoost, S., Ruwaard, J., van Breda, W., Riper, H., Bosse, T., 2019. Validating automated sentiment analysis of online cognitive behavioral therapy patient texts: An exploratory study. *Frontiers in Psychology* 10. URL: <https://www.frontiersin.org/article/10.3389/fpsyg.2019.01065>, doi:10.3389/fpsyg.2019.01065.
- Qiu, G., Liu, B., Bu, J., Chen, C., 2009. Expanding domain sentiment lexicon through double propagation, in: *Twenty-First International Joint Conference on Artificial Intelligence*.
- Qiu, G., Liu, B., Bu, J., Chen, C., 2011. Opinion word expansion and target extraction through double propagation. *Computational linguistics* 37, 9–27.
- Raju, S., Pingali, P., Varma, V., 2009. An unsupervised approach to product attribute extraction, in: *European Conference on Information Retrieval*, Springer. pp. 796–800.
- Reyes, A., Rosso, P., 2012. Making objective decisions from subjective data: Detecting irony in

- customer reviews. *Decision support systems* 53, 754–760.
- Reyes, A., Rosso, P., Buscaldi, D., 2012. From humor recognition to irony detection: The figurative language of social media. *Data & Knowledge Engineering* 74, 1–12.
- Ribeiro, M.T., Singh, S., Guestrin, C., 2016. "Why Should I Trust You?" explaining the predictions of any classifier, in: *Proceedings of the 22nd ACM SIGKDD international conference on knowledge discovery and data mining*, pp. 1135–1144.
- Saadany, H., Orasan, C., 2020. Is it great or terrible? preserving sentiment in neural machine translation of arabic reviews. *arXiv preprint arXiv:2010.13814*.
- Saadany, H., Orasan, C., Mohamed, E., Tantawy, A., 2021. Sentiment-aware measure (sam) for evaluating sentiment transfer by machine translation systems. *arXiv preprint arXiv:2109.14895*.
- Salameh, M., Mohammad, S., Kiritchenko, S., 2015. Sentiment after translation: A case-study on arabic social media posts, in: *Proceedings of the 2015 conference of the North American chapter of the association for computational linguistics: Human language technologies*, pp. 767–777.
- Sánchez-Rada, J.F., Vulcu, G., Iglesias, C.A., Buitelaar, P., 2014. Eurosentiment: Linked data sentiment analysis., in: *International Semantic Web Conference (Posters & Demos)*, pp. 145–148.
- Sandoval-Almazan, R., Valle-Cruz, D., 2020. Sentiment analysis of facebook users reacting to political campaign posts. *Digital Government: Research and Practice* 1, 1–13.
- Schmitt, M., Steinheber, S., Schreiber, K., Roth, B., 2018. Joint aspect and polarity classification for aspect-based sentiment analysis with end-to-end neural networks, in: *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing, Association for Computational Linguistics, Brussels, Belgium*. pp. 1109–1114. URL: <https://aclanthology.org/D18-1139>, doi:10.18653/v1/D18-1139.
- Schouten, K., Frasincar, F., 2015. Survey on aspect-level sentiment analysis. *IEEE Transactions on Knowledge and Data Engineering* 28, 813–830.
- Schultz, L.R., Loog, M., Esfahani, P.M., 2018. Distance based source domain selection for sentiment classification. *arXiv preprint arXiv:1808.09271*.
- Sheoran, A., Kanojia, D., Joshi, A., Bhattacharyya, P., 2020. Recommendation chart of domains for cross-domain sentiment analysis: Findings of a 20 domain study, in: *Proceedings of the 12th Language Resources and Evaluation Conference, European Language Resources Association, Marseille, France*. pp. 4982–4990. URL: <https://aclanthology.org/2020.lrec-1.613>.
- Singh, M., Goyal, V., Raj, S., 2019. Sentiment analysis of english-punjabi code mixed social media content for agriculture domain, in: *2019 4th International Conference on Information Systems and Computer Networks (ISCON)*, IEEE. pp. 352–357.
- Singh, P., Sawhney, R.S., Kahlon, K.S., 2018. Sentiment analysis of demonetization of 500 & 1000 rupee banknotes by indian government. *ICT Express* 4, 124–129.
- Socher, R., Perelygin, A., Wu, J., Chuang, J., Manning, C.D., Ng, A.Y., Potts, C., 2013. Recursive deep models for semantic compositionality over a sentiment treebank, in: *Proceedings of the 2013 conference on empirical methods in natural language processing*, pp. 1631–1642.
- Tang, G., Rönchen, P., Sennrich, R., Nivre, J., 2021. Revisiting negation in neural machine translation. *Transactions of the Association for Computational Linguistics* 9, 740–755.
- Tayal, D.K., Yadav, S.K., 2017. Sentiment analysis on social campaign "swachh bharat abhiyan" using unigram method. *AI & SOCIETY* 32, 633–645.
- Tiselius, E., Hägglund, E., Pergert, P., 2020. Distressful situations, non-supportive work climate, threats to professional and private integrity: Healthcare interpreting in sweden, in: *Handbook of research on medical interpreting*. IGI Global, pp. 54–79.
- Titov, I., McDonald, R., 2008. Modeling online reviews with multi-grain topic models, in: *Proceedings of the 17th international conference on World Wide Web*, pp. 111–120.

- Tsou, M.H., 2015. Research challenges and opportunities in mapping social media and big data. *Cartography and Geographic Information Science* 42, 70–74.
- Vagrani, A., Bijarnia, S., Ilavarasan, P.V., Masiero, S., 2020. Appraising whatsapp in the indian context: Understanding the rural sentiment, in: *International Conference on Social Implications of Computers in Developing Countries*, Springer. pp. 142–156.
- Valero-Garcés, C., 2016. Emotional and psychological effects on interpreters in public services a critical factor to bear in mind.
- Wang, A., Singh, A., Michael, J., Hill, F., Levy, O., Bowman, S., 2018. Glue: A multi-task benchmark and analysis platform for natural language understanding, in: *Proceedings of the 2018 EMNLP Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pp. 353–355.
- Wang, H., Lu, Y., Zhai, C., 2011. Latent aspect rating analysis without aspect keyword supervision, in: *Proceedings of the 17th ACM SIGKDD international conference on Knowledge discovery and data mining*, pp. 618–626.
- Wetzel, D., Bond, F., 2012. Enriching parallel corpora for statistical machine translation with semantic negation rephrasing, in: *Proceedings of the Sixth Workshop on Syntax, Semantics and Structure in Statistical Translation*, pp. 20–29.
- Wilson, T., Wiebe, J., Hoffmann, P., 2005. Recognizing contextual polarity in phrase-level sentiment analysis, in: *Proceedings of human language technology conference and conference on empirical methods in natural language processing*, pp. 347–354.
- Yu, J., Zha, Z.J., Wang, M., Chua, T.S., 2011. Aspect ranking: identifying important product aspects from online consumer reviews, in: *Proceedings of the 49th annual meeting of the association for computational linguistics: human language technologies*, pp. 1496–1505.
- Zhan, T.J., Li, C.H., 2011. Semantic dependent word pairs generative model for fine-grained product feature mining, in: *Pacific-Asia Conference on Knowledge Discovery and Data Mining*, Springer. pp. 460–475.
- Zhang, L., Liu, B., Lim, S.H., O'Brien-Strain, E., 2010. Extracting and ranking product features in opinion documents, in: *Coling 2010: Posters*, pp. 1462–1470.
- Zhao, Y., Qin, B., Hu, S., Liu, T., 2010. Generalizing syntactic structures for product attribute candidate extraction, in: *Human Language Technologies: The 2010 Annual Conference of the North American Chapter of the Association for Computational Linguistics*, pp. 377–380.
- Zhu, J., Wang, H., Tsou, B.K., Zhu, M., 2009. Multi-aspect opinion polling from textual reviews, in: *Proceedings of the 18th ACM conference on Information and knowledge management*, pp. 1799–1802.
- Zucco, C., Liang, H., Di Fatta, G., Cannataro, M., 2018. Explainable sentiment analysis with applications in medicine, in: *2018 IEEE International Conference on Bioinformatics and Biomedicine (BIBM)*, IEEE. pp. 1740–1747.