LTL Reactive Synthesis with a Few Hints

Mrudula Balachander *, Emmanuel Filiot **, and Jean-François Raskin

Université libre de Bruxelles, Brussels, Belgium ***

Abstract. We study a variant of the problem of synthesizing Mealy machines that enforce LTL specifications against all possible behaviours of the environment including hostile ones. In the variant studied here, the user provides the high level LTL specification φ of the system to design, and a set E of examples of executions that the solution must produce. Our synthesis algorithm works in two phases. First, it generalizes the decisions taken along the examples E using tailored extensions of automata learning algorithms. This phase generalizes the user-provided examples in E while preserving realizability of φ . Second, the algorithm turns the (usually) incomplete Mealy machine obtained by the learning phase into a complete Mealy machine that realizes φ . The examples are used to guide the synthesis procedure. We provide a completness result that shows that our procedure can learn any Mealy machine M that realizes φ with a small (polynomial) set of examples. We also show that our problem, that generalizes the classical LTL synthesis problem (i.e. when $E = \emptyset$, matches its worst-case complexity. The additional cost of learning from E is even polynomial in the size of E and in the size of a symbolic representation of solutions that realize φ . This symbolic representation is computed by the synthesis algorithm implemented in ACACIA-BONZAI when solving the plain LTL synthesis problem. We illustrate the practical interest of our approach on a set of examples.

1 Introduction

Reactive systems are notoriously difficult to design and even to specify correctly [1,15]. As a consequence, formal methods have emerged as useful tools to help designers to built reactive systems that are correct. For instance, model-checking asks the designer to provide a model, in the form of a Mealy machine \mathcal{M} , that describes the reactions of the system to events generated by its environment, together with a description of the *core correctness properties* that must be enforced. Those properties are expressed in a logical formalism, typically as an LTL formula φ_{CORE} . Then an algorithm decides if $\mathcal{M} \models \varphi_{\text{CORE}}$, i.e. if all executions of the system in its environment satisfy the specification. Automatic reactive synthesis is more ambitious: it aims at automatically generating

^{*} Mrudula Balachander: Mrudula Balachander is a Research Fellow at F.R.S-FNRS.

^{**} Emmanuel Filiot: Emmanuel Filiot is a senior research associate at F.R.S-FNRS.

^{***} This work was partially supported by the Fonds de la Recherche Scientifique – F.R.S.-FNRS under the MIS project F451019F and by the ASP-Fellowship grant.

a model from a high level description of the "what" needs to be done instead of the "how" it has to be done. Thus the user is only required to provide an LTL specification φ and the algorithm automatically generates a Mealy machine \mathcal{M} such that $\mathcal{M} \models \varphi$ whenever φ is *realizable*. Unfortunately, it is most of the time not sufficient to provide the core correctness properties φ_{CORE} to obtain a Mealy machine \mathcal{M} that is useful in practice, as illustrated next.

Example 1. [Synthesis from φ_{CORE} - Mutual exclusion] Let us consider the classical problem of *mutual exclusion*. In the simplest form of this problem, we need to design an arbiter that receives requests from two processes, modeled by two atomic propositions r_1 and r_2 controlled by the environment, and that grants accesses to the critical section, modeled as two atomic propositions g_1 and g_2 controlled by the system. The core correctness properties (the *what*) are: (i) mutual access, i.e. it is never the case that the access is granted to both processes at the same time, (ii) fairness, i.e. processes that have requested access eventually get access to the critical section. These core correctness specifications for mutual exclusion (ME) are easily expressed in LTL as follows: $\varphi_{\mathsf{CORE}}^{\mathsf{ME}} \equiv \Box(\neg g_1 \vee \neg g_2) \land \Box(r_1 \to \Diamond g_1) \land \Box(r_2 \to \Diamond g_2).$ Indeed, this formula expresses the core correctness properties that we would model check no matter how \mathcal{M} implements mutual exclusion, e.g. Peterson, Dedekker, Backery algorithms, etc. Unfortunately, if we submit $\varphi_{\text{CORE}}^{\text{ME}}$ to an LTL synthesis procedure, implemented in tools like ACACIA-BONZAI [10], BOSY [19], or STRIX [27], we get the solution \mathcal{M} depicted in 1-(left) (all three tools return this solution). While this solution is perfectly correct and realizes the specification $\varphi_{\text{CORE}}^{\text{ME}}$, the solution ignores the inputs from the environment and grants access to the critical sections in a round robin fashion. Arguably, it may not be considered as an efficient solution to the mutual exclusion problem. This illustrates the limits of the synthesis algorithm to solve the design problem by providing *only* the core correctness specification of the problem, i.e. the *what*, only. To produce useful solutions to the mutual exclusion problem, more guidance must be provided.

The main question is now: how should we specify these additional properties ? Obviously, if we want to use the "plain" LTL synthesis algorithm, there is no choice: we need to reinforce the specification $\varphi_{\text{CORE}}^{\text{ME}}$ with additional lower level properties $\varphi_{\text{LOW}}^{\text{ME}}$. Let us go back to our running example.

Example 2. [Synthesis from $\varphi_{\mathsf{CORE}}^{\mathsf{ME}}$ and $\varphi_{\mathsf{LOW}}^{\mathsf{ME}}$] To avoid solutions with unsolicited grants, we need to reinforce the core specification. The Strix online demo website proposes to add the following 3 LTL formulas $\varphi_{\mathsf{LOW}}^{\mathsf{ME}}$ to $\varphi_{\mathsf{CORE}}^{\mathsf{ME}}$ (see Full arbitrer n = 2, at https://meyerphi.github.io/strix-demo/): (1) $\bigwedge_{i \in \{1,2\}} \Box((g_i \land \Box \neg r_i) \rightarrow \Diamond \neg g_i), (2) \bigwedge_{i \in \{1,2\}} \Box(g_i \land \bigcirc (\neg r_i \land \neg g_i) \rightarrow \bigcirc (r_i \mathsf{R} \neg g_i)), \text{ and (3)} \bigwedge_{i \in \{1,2\}} (r_i \mathsf{R} \neg g_i).$ Now, while the specification $\varphi_{\mathsf{CORE}}^{\mathsf{ME}} \land \varphi_{\mathsf{LOW}}^{\mathsf{ME}}$ allows Strix to provide us with a better solution, it is more complex than needed (it has 9 states and can be seen in App. C) and clearly does not look like an optimal solution to our mutual exclusion problem. For instance, the model of Fig. 1-(right) is arguably more natural. How can we get this model without coding it into the




Fig. 1: (Left) The solution provided by Strix to the mutual exclusion problem for the high level specification φ_{LOW}^{ME} . Edge labels are of the form φ/ψ where φ is a Boolean formula on the input atomic propositions (the Boolean variables controlled by the environment) and ψ is a maximally consistent conjunction of literals over the set of output propositions (the Boolean variables controlled by the system). (Right) A natural solution that we would write by hand, and is automatically produced by our learning and synthesis algorithm for the same specification together with two simple examples.

LTL specification, which would diminish greatly the interest of using a synthesis procedure in the first place?

In general, higher level properties are ones that are concerned with safety and are the ones needed to be verified on all implementations. In contrast, lower level properties are more about a specific implementation, i.e., they talk more about expected behaviour and are concerned with the efficiency of the implementation. At this point, it is legitimate to question the adequacy of LTL as a specification language for *lower level* properties, and so as a way to guide the synthesis procedure towards relevant solutions to realize φ_{CORE} . In this paper, we introduce an alternative to guide synthesis toward useful solutions that realize φ_{CORE} : we propose to use examples of executions that illustrate behaviors of expected solutions. We then restrict the search to solutions that *generalize* those examples. Examples, or scenarios of executions, are accepted in requirement engineering as an adequate tool to elicit requirements about complex systems [14]. For reactive system design, examples are particularly well-suited as they are usually much easier to formulate than full blown solutions, or even partial solutions. It is because, when formulating examples, the user controls both the inputs and the outputs, avoiding the main difficulty of reactive system design: having to cope with all possible environment inputs. We illustrate this on our running example.

Example 3. [Synthesis from $\varphi_{\text{CORE}}^{\text{ME}}$ and examples] Let us keep, as the LTL specification, $\varphi_{\text{CORE}}^{\text{ME}}$ only, and let us consider the following simple prefix of executions that illustrate how solutions to mutual exclusion should behave:

- (1) $\{!r_1, !r_2\}.\{!g_1, !g_2\}\#\{r_1, !r_2\}.\{g_1, !g_2\}\#\{!r_1, r_2\}.\{!g_1, g_2\}$
- (2) $\{r_1, r_2\}.\{g_1, !g_2\}\#\{!r_1, !r_2\}.\{!g_1, g_2\}$

These prefixes of traces prescribe reactions to typical *fixed* finite sequences of inputs: (1) if there is no request initially, then no access is granted (note that this excludes already the round robin solution), if process 1 requests and subsequently

process 2 requests, process 1 is granted first and then process 2 is granted after, (2) if both process request simultaneously, then process 1 is granted first and then process 2 is granted after. Given those two simple traces together with φ_{CORE} , our algorithm generates the solution of Fig. 1-(right). Arguably, the solution is now simple and natural.

Contributions First, we provide a synthesis algorithm SYNTHLEARN that, given an LTL specification φ_{CORE} and a finite set E of prefixes of executions, returns a Mealy machine \mathcal{M} such that $\mathcal{M} \models \varphi_{\text{CORE}}$, i.e. \mathcal{M} realizes φ_{CORE} , and $E \subseteq \text{Prefix}(L(\mathcal{M}))$, i.e. \mathcal{M} is compatible with the examples in E, if such a machine \mathcal{M} exists. It returns *unrealizable* otherwise. Additionally, we require SYNTHLEARN to generalize the decisions illustrated in E. This learnability requirement is usually formalized in automata learning with a *completeness criterium* that we adapt here as follows: for all specifications φ_{CORE} , and for all Mealy machines \mathcal{M} such that $\mathcal{M} \models \varphi_{\text{CORE}}$, there is a small set of examples E (polynomial in $|\mathcal{M}|$) such that $L(\text{SYNTHLEARN}(\varphi_{\text{CORE}}, E)) = L(\mathcal{M})$. We prove this completeness result in Theorem 4 for safety specifications and extend it to ω -regular and LTL specifications in Section 4, by reduction to safety.

Second, we prove that the worst-case execution time of SYNTHLEARN is 2EX-PTIME (Theorem 7), and this is worst-case optimal as the plain LTL synthesis problem (when $E = \emptyset$) is already known to be 2EXPTIME-COMPLETE [29]. SYNTHLEARN first generalizes the examples provided by the user while maintaining realizability of φ_{CORE} . This generalization leads to a Mealy machine with possibly missing transitions (called a preMealy machine). Then, this preMealy machine is extended into a (full) Mealy machine that realizes φ_{CORF} against all behaviors of the environment. During the completion phase, SYNTHLEARN reuses as much as possible decisions that have been generalized from the examples. The generalization phase is essential to get the most out of the examples. Running classical synthesis algorithms on $\varphi_{\mathsf{CORE}} \land \varphi_E$, where φ_E is an LTL encoding of E, often leads to more complex machines that fail to generalize the decisions taken along the examples in E. While the overall complexity of SYNTH-LEARN is 2EXPTIME and optimal, we show that it is only polynomial in the size of E and in a well-chosen symbolic representation a set of Mealy machines that realize φ_{CORE} , see Theorem 6. This symbolic representation takes the form of an antichain of functions and tends to be compact in practice [21]. It is computed by default when ACACIA-BONZAI is solving the plain LTL synthesis problem of φ_{CORF} . So, generalizing examples while maintaining realizability only comes at a marginal polynomial cost. We have implemented our synthesis algorithm in a prototype, which uses ACACIA-BONZAI to compute the symbolic antichain representation. We report on the results we obtain on several examples.

Related works Scenarios of executions have been advocated by researchers in requirements engineering to elicite specifications, see e.g. [14,16] and references therein. In [30], learning techniques are used to transform examples into LTL formulas that generalize them. Those methods are complementary to our work, as they can be used to obtain the high level specification φ_{CORE} .

In non-vacuous synthesis [7], examples are added automatically to an LTL specification in order to force the synthesis procedure to generate solutions that are non-vacuous in the sense of [25]. The examples are generated directly from the syntax of the LTL specification and they cannot be proposed by the user. This makes our approach and this approach orthogonal and complementary. Indeed, we could use the examples generated automatically by the non-vacuous approach and ask the user to validate them as desirable or not. Our method is more flexible, it is semi-automatic and user centric: the user can provide any example he/she likes and so it offers more flexibility to drive the synthesis procedure to solutions that the user deems as interesting. Furthermore, our synthesis procedure is based on learning algorithms, while the algorithm in [7] is based on constraint solving and it does not offer guarantees of generalization contrary to our algorithm (see Theorem 4).

Supplementing the formal specification with additional user-provided information is at the core of the syntax-guided synthesis framework (SyGuS [3]), implemented for instance in program by sketching [33]: in SyGuS, the specification is a logical formula and candidate programs are syntactically restricted by a user-provided grammar, to limit and guide the search. The search is done by using counter-example guided inductive synthesis techniques (CEGIS) which rely on learning [34]. In contrast to our approach, examples are not user-provided but automatically generated by model-checking the candidate programs against the specification. The techniques are also orthogonal to ours: SyGuS targets programs syntactically defined by expressions over a decidable background theory, and heavily relies on SAT/SMT solvers. Using examples to synthesise programs (programming by example) has been for instance explored in the context of string processing programs for spreadsheets, based on learning [32], and is a current trend in AI (see for example [28] and the citations therein). However this approach only relies on examples and not on logical specifications.

[4] explores the use of formal specifications and scenarios to synthesize distributed protocols. Their approach also follows two phases: first, an incomplete machine is built from the scenarios and second, it is turned into a complete one. But there are two important differences with our work. First, their first phase does not rely on learning techniques and does not try to generalize the provided examples. Second, in their setting, all actions are controllable and there is no adversarial environment, so they are solving a satisfiability problem and not a realizability problem as in our case. Their problem is thus computationally less demanding than the problem we solve: PSPACE versus 2EXPTIME for LTL specs.

The synthesis problem targeted in this paper extends the LTL synthesis problem. Modern solutions for this problem use automata constructions that avoid Safra's construction as first proposed in [26], and simplified in [31,20], and more recently in [18]. Efficient implementations of Safraless constructions are available, see e.g. [8,19,27,17]. Several previous works have proposed alternative approaches to improve on the quality of solutions that synthesis algorithms can offer. A popular research direction, orthogonal and complementary to the one

proposed here, is to extend the formal specification with quantitative aspects, see e.g. [5,9,24,2], and only synthesize solutions that are optimal.

The first phase of our algorithm is inspired by automata learning techniques based on state merging algorithms like RPNI [23,22]. Those learning algorithms need to be modified carefully to generate partial solutions that preserve realizability of φ_{CORE} . Proving completeness as well as termination of the completion phase in this context requires particular care.

2 Preliminaries on the reactive synthesis problem

Words, languages and automata An alphabet is a finite set of symbols. A word u (resp. ω -word) over an alphabet Σ is a finite (resp. infinite sequence) of symbols from Σ . We write ϵ for the empty word, and denote by $|u| \in \mathbb{N} \cup \{\infty\}$ the length of u. In particular, $|\epsilon| = 0$. For $1 \leq i \leq j \leq |u|$, we let u[i:j] be the infix of u from position i to position j, both included, and write u[i] instead of u[i:i]. The set of finite (resp. ω -) words over Σ is denoted by Σ^* (resp. Σ^{ω}). We let $\Sigma^{\infty} = \Sigma^* \cup \Sigma^{\omega}$. Given two words $u \in \Sigma^*$ and $v \in \Sigma^{\infty}$, u is a prefix of v, written $u \leq v$, if v = uw for some $w \in \Sigma^{\infty}$. The set of prefixes of v is denoted by Prefs(v). Finite words are linearly ordered according to the length-lexicographic order \preceq_{u} , assuming a linear order $<_{\Sigma}$ over Σ : $u \preceq_{u} v$ if |u| < |v| or |u| = |v| and $u = p\sigma_1 u', v = p\sigma_2 v'$ for some $p, u', v' \in \Sigma^*$ and some $\sigma_1 <_{\Sigma} \sigma_2$. In this paper, whenever we refer to the order \preceq_{u} for words over some alphabet. A language (resp. ω -language) over an alphabet Σ is a subset $L \subseteq \Sigma^*$ (resp. $L \subseteq \Sigma^{\omega}$).

In this paper, we fix two alphabets \mathcal{I} and \mathcal{O} whose elements are called inputs and outputs respectively. Given a word $u \in (\mathcal{IO})^{\infty}$, we let $in(u) \in \mathcal{I}^{\infty}$ be the word obtained by erasing all \mathcal{O} -symbols from u. We define out(u) similarly and naturally extend both functions to languages.

Automata over ω -words A parity automaton is a tuple $\mathcal{A} = (Q, Q_{\text{init}}, \Sigma, \delta, d)$ where Q is a finite non empty set of states, $Q_{\text{init}} \subseteq Q$ is a set of initial states, Σ is a finite non empty alphabet, $\delta : Q \times \Sigma \to 2^Q \setminus \{\emptyset\}$ is the transition function, and $d : Q \to \mathbb{N}$ is a parity function. The automaton \mathcal{A} is deterministic when $|Q_{\text{init}}| = 1$ and $|\delta(q, \sigma)| = 1$ for all $q \in Q$. The transition function is extended naturally into a function $\text{Post}^* : Q \times \Sigma^* \to 2^Q \setminus \{\emptyset\}$ inductively as follows: $\text{Post}^*(q, \epsilon) = \{q\}$ for all $q \in Q$ and for all $(u, \sigma) \in \Sigma^* \times \Sigma$, $\text{Post}^*(q, u\sigma) = \bigcup_{q' \in \text{Post}^*(q, u)} \delta(q', \sigma)$.

A run of \mathcal{A} on an ω -word $w = w_0 w_1 \dots$ is an infinite sequence of states $r = q_0 q_1 \dots$ such that $q_0 \in Q_{\text{init}}$, and for all $i \in \mathbb{N}$, $q_{i+1} \in \delta(q_i, w_i)$. The run r is said to be *accepting* if the minimal colour it visits infinitely often is even, i.e. $\liminf(d(q_i))_{i\geq 0}$ is even. We say that \mathcal{A} is a *Büchi automaton* when $\operatorname{dom}(d) = \{0, 1\}$ (1-coloured states are called accepting states), a *co-Büchi automaton* when $\operatorname{dom}(d) = \{1, 2\}$, a *safety automaton* if it is a Büchi automaton such that the set of 1-coloured states, called *unsafe states* and denoted Q_{usf} , forms a *trap*: for all $q \in Q_{usf}$, for all $\sigma \in \Sigma$, $\delta(q, \sigma) \subseteq Q_{usf}$, and a *reachability automaton* if it is $\{0, 1\}$ -coloured and the set of 0-coloured states forms a trap.

Finally, we consider the existential and universal interpretations of nondeterminism, leading to two different notions of ω -word languages: under the *existential (resp. universal) interpretation*, a word $w \in \Sigma^{\omega}$ is in the language of \mathcal{A} , if there exists a run r on w such that r is accepting (resp. for all runs r on w, ris accepting). We denote the two languages defined by these two interpretations $L^{\exists}(\mathcal{A})$ and $L^{\forall}(\mathcal{A})$ respectively. Note that if \mathcal{A} is deterministic, then the existential and universal interpretations agree, and we write $L(\mathcal{A})$ for $L^{\forall}(\mathcal{A}) = L^{\exists}(\mathcal{A})$. Sometimes, for a deterministic automaton \mathcal{A} , we change the initial state to a state $q \in Q$, and note $\mathcal{A}[q]$ for the deterministic automaton \mathcal{A} where the initial state is fixed to the singleton $\{q\}$.

For a co-Büchi automaton, we also define a strengthening of the acceptance condition, called K-co-Büchi, which requires, for $K \in \mathbb{N}$, that a run visits at most K times a state labelled with 1 to be accepting. Formally, a run $r = q_0q_1 \dots q_n \dots$ is accepting for the K-co-Büchi acceptance condition if $|\{i \geq 0 \mid d(q_i)\} = 1\}| \leq K$. The language defined by \mathcal{A} for the K-co-Büchi acceptance condition and universal interpretation is denoted by $L_K^{\forall}(\mathcal{A})$. Note that this language is a safety language because if a prefix of a word $p \in \Sigma^*$ is such that \mathcal{A} has a run prefix on p that visits more than K times a states labelled with color 1, then all possible extensions $w \in \Sigma^{\omega}$ of p are rejected by \mathcal{A} .

(Pre)Mealy machines Given a (partial) function f from a set X to a set Y, we denote by dom(f) its domain, i.e. the of elements $x \in X$ such that f(x) is defined. A preMealy machine \mathcal{M} on an input alphabet \mathcal{I} and output alphabet \mathcal{O} is a triple $(M, m_{\text{init}}, \Delta)$ such that M is a non-empty set of states, $m_{\text{init}} \in M$ is the initial state, $\Delta : Q \times \mathcal{I} \to \mathcal{O} \times M$ is a partial function. A pair (m, i) is a hole in \mathcal{M} if $(m, i) \notin \text{dom}(\Delta)$. A Mealy machine is a preMealy machine such that Δ is total, i.e., dom $(\Delta) = M \times \mathcal{I}$.

We define two semantics of a preMealy machine $\mathcal{M} = (\mathcal{M}, m_{\text{init}}, \Delta)$ in terms of the languages of finite and infinite words over $\mathcal{I} \cup \mathcal{O}$ they define. First, we define two (possibly partial functions) $\mathsf{Post}_{\mathcal{M}} : \mathcal{M} \times \mathcal{I} \to \mathcal{M}$ and $\mathsf{Out}_{\mathcal{M}} : \mathcal{M} \times \mathcal{I} \to \mathcal{O}$ such that $\Delta(m, \mathbf{i}) = (\mathsf{Post}_{\mathcal{M}}(m, \mathbf{i}), \mathsf{Out}_{\mathcal{M}}(m, \mathbf{i}))$ for all $(m, \mathbf{i}) \in \mathcal{M} \times \mathcal{I}$ if $\Delta(m, \mathbf{i})$ is defined. We naturally extend these two functions to any sequence of inputs $u \in \mathcal{I}^+$, denoted $\mathsf{Post}_{\mathcal{M}}^*$ and $\mathsf{Out}_{\mathcal{M}}^*$. In particular, for $u \in \mathcal{I}^+$, $\mathsf{Post}_{\mathcal{M}}^*(m, u)$ is the state reached by \mathcal{M} when reading u from m, while $\mathsf{Out}_{\mathcal{M}}^*(m, u)$ is the last output in \mathcal{O} produced by \mathcal{M} when reading u. The subcript \mathcal{M} is ommitted when \mathcal{M} is clear from the context. Now, the language $L(\mathcal{M})$ of finite words in $(\mathcal{I}\mathcal{O})^*$ accepted by \mathcal{M} is defined as $L(\mathcal{M}) = \{i_1 \mathsf{o}_1 \dots i_n \mathsf{o}_n \mid \forall 1 \leq j \leq$ n, $\mathsf{Post}_{\mathcal{M}}^*(m_{\text{init}}, i_1 \dots i_j)$ is defined and $\mathsf{o}_j = \mathsf{Out}_{\mathcal{M}}^*(m_{\text{init}}, i_1 \dots i_j)\}$. The language $L_{\omega}(\mathcal{M})$ of infinite words accepted by \mathcal{M} is the topological closure of $L(\mathcal{M})$: $L_{\omega}(\mathcal{M}) = \{w \in (\mathcal{I}\mathcal{O})^{\omega} \mid \mathsf{Prefs}(w) \cap (\mathcal{I}\mathcal{O})^* \subseteq L(\mathcal{M})\}.$

The reactive synthesis problem A specification is a language $S \subseteq (\mathcal{IO})^{\omega}$. The reactive synthesis problem (or just synthesis problem for short) is the problem of constructing, given a specification S, a Mealy machine \mathcal{M} such that $L_{\omega}(\mathcal{M}) \subseteq S$ if it exists. Such a machine \mathcal{M} is said to realize the specification S, also written

 $\mathcal{M} \models \mathcal{S}$. We also say that \mathcal{S} is *realizable* if some Mealy machine \mathcal{M} realizes it. The induced decision problem is called the *realizability problem*.

It is well-known that if S is ω -regular (recognizable by a parity automaton [35]) the realizability problem is decidable [1] and moreover, a Mealy machine realizing the specification can be effectively constructed. The realizability problem is 2ExpTIME-COMPLETE if S is given as an LTL formula [29] and ExpTIME-COMPLETE if S is given as a universal coBüchi automaton.

Theorem 1 ([6]). The realizability problem for a specification S given as a universal coBüchi automaton A is EXPTIME-COMPLETE. Moreover, if S is realizable and A has n states, then S is realizable by a Mealy machine with $2^{O(nlog_2n)}$ states.

We generalize this result to the following realizability problem which we describe first informally. Given a specification S and a preMealy machine \mathcal{P} , the goal is to decide whether \mathcal{P} can be completed into a Mealy machine which realizes S. We now define this problem formally. Given two preMealy machines $\mathcal{P}_1, \mathcal{P}_2$, we write $\mathcal{P}_1 \preceq \mathcal{P}_2$ if \mathcal{P}_1 is a subgraph of \mathcal{P}_2 in the following sense: there exists an injective mapping Φ from the states of \mathcal{P}_1 to the states of \mathcal{P}_2 which preserves the initial state (s_0 is the initial state of \mathcal{P}_1 iff $\Phi(s_0)$ is the initial state of \mathcal{P}_2) and the transitions ($\Delta_{\mathcal{P}_1}(p, \mathbf{i}) = (\mathbf{o}, q)$ iff $\Delta_{\mathcal{P}_2}(\Phi(p), \mathbf{i}) = (\mathbf{o}, \Phi(q))$). As a consequence, $L(\mathcal{P}_1) \subseteq L(\mathcal{P}_2)$ and $L_{\omega}(\mathcal{P}_1) \subseteq L_{\omega}(\mathcal{P}_2)$. Given a preMealy machine \mathcal{P} , we say that a specification S is \mathcal{P} -realizable if there exists a Mealy machine \mathcal{M} such that $\mathcal{P} \preceq \mathcal{M}$ and \mathcal{M} realizes S. Note that if \mathcal{P} is a (complete) Mealy machine, S is \mathcal{P} -realizable iff \mathcal{P} realizes S.

Theorem 2. Given a universal co-Büchi automaton \mathcal{A} with n states defining a specification $\mathcal{S} = L^{\forall}(\mathcal{A})$ and a preMealy machine \mathcal{P} with m states and n_h holes, deciding whether \mathcal{S} is \mathcal{P} -realizable is EXPTIME-hard and in EXPTIME (in n and polynomial in m). Moreover, if \mathcal{S} is \mathcal{P} -realizable, it is \mathcal{P} -realizable by a Mealy machine with $m + n_h 2^{O(n \log_2 n)}$ states. Hardness holds even if \mathcal{P} has two states and \mathcal{A} is a deterministic reachability automaton.

Brought proof from Appendix to here. Before proving Theorem 2, let us note that the \mathcal{P} -realizability problem generalizes the classical realizability, as the latter is equivalent to the \mathcal{P}_0 -realizability where \mathcal{P}_0 is the preMealy machine composed of single state (which is initial) without any transition. So, we inherit the EXPTIME lower bound of Theorem 1. However, we prove that the \mathcal{P} -realizability problem is intrinsically harder: indeed, we show that the EXPTIME hardness holds even if \mathcal{P} is a fixed preMealy machine and \mathcal{S} is given as a *deterministic reachability* automaton. This is in contrast to the classical realizability problem: deciding the realizability of a specification given as a deterministic reachability automaton is in PTIME [11]. Our synthesis algorithm from specifications and examples extensively rely on successive calls to a \mathcal{P} -realizability checker, for various preMealy machines \mathcal{P} . However, we show in Sec 4 that modulo pre-computing, in worst-case exponential time, some symbolic (and in practice compact) representation of some realizable configurations of the specification automaton, all those calls can be done in polynomial time in this representation. Proof of theorem 2. We first prove the upper-bound. Let $Q_{\mathcal{P}}$ be the set of states of \mathcal{P} , $\Delta_{\mathcal{P}}$ its transition function and p_0 its initial state. For any $p \in Q_{\mathcal{P}}$, we define its *left language* Left_p as

$$Left_{p} = \{ u \in (I.O)^{*} \mid Post_{\mathcal{P}}^{*}(p_{0}, u) = p \}$$

Then, \mathcal{P} -realizability is characterized by the following property:

Claim. S is \mathcal{P} -realizable iff, $L_{\omega}(\mathcal{P}) \subseteq S$ and for every hole h = (p, i) of P, there exists $o_h \in \mathcal{O}$ and a Mealy machine \mathcal{M}_h such that for all $u \in \mathsf{Left}_p$, \mathcal{M}_h realizes $(uio_h)^{-1}S^{.1}$

Proof of claim. For the 'if' direction, we prove that \mathcal{P} can be extended into a Mealy machine \mathcal{M} which \mathcal{P} -realizes \mathcal{S} as follows: \mathcal{M} consists of \mathcal{P} taken in disjoint union, for all holes h of \mathcal{P} , with the Mealy machine \mathcal{M}_h , extended with the transition $\Delta_{\mathcal{M}}(h) = (\mathbf{o}_h, \mathsf{init}_h)$ where init_h is the initial state of \mathcal{M}_h . Clearly, \mathcal{P} is a subgraph of \mathcal{M} . We prove that \mathcal{M} realizes \mathcal{S} . Let $w \in L_{\omega}(\mathcal{M})$. Suppose that $w \notin \mathcal{S}$ and let us derive a contradiction. Since $L_{\omega}(\mathcal{P}) \subseteq L^{\forall}(\mathcal{A}), w \notin L_{\omega}(\mathcal{P})$. It implies that the execution of \mathcal{M} on w necessarily visits a hole $h = (p, \mathsf{i})$ of \mathcal{P} . So, w can be decomposed as $w = u\mathsf{io}_h v$ where u is the longest prefix of w such that $u \in \mathsf{Left}_p$. Since $w \notin \mathcal{S}$, we get that $v \notin (u\mathsf{io}_h)^{-1}\mathcal{S}$. By definition of \mathcal{M} , we have $v \in L_{\omega}(\mathcal{M}_h)$, so \mathcal{M}_h does not realize $(u\mathsf{io}_h)^{-1}\mathcal{S}$, which is a contradiction.

Conversely, suppose that S is \mathcal{P} -realizable by some Mealy machine \mathcal{M} . Since $L_{\omega}(\mathcal{P}) \subseteq L_{\omega}(\mathcal{M})$ and $L_{\omega}(\mathcal{M}) \subseteq S$, we get $L_{\omega}(\mathcal{P}) \subseteq S$. Now, consider a hole $h = (p, \mathbf{i})$. Since \mathcal{P} is a subgraph of \mathcal{M} , p is a state of \mathcal{M} and since $\Delta_{\mathcal{M}}$ is total, there exists $\mathbf{o}_h \in \mathcal{O}$ such that $\Delta_{\mathcal{M}}(h) = (\mathbf{o}_h, p')$ for some state p' of \mathcal{M} . Consider the machine $\mathcal{M}_{p'}$ which is identical to \mathcal{M} except that its initial state is $p' \colon \mathcal{M}_{p'}$ is a Mealy machine which realizes $(uio_h)^{-1}S$ for all $u \in \mathsf{Left}_p$. Indeed, let $v \in L_{\omega}(\mathcal{M}_{p'})$. By definition of $\mathcal{M}_{p'}$, we have $uio_h v \in L_{\omega}(\mathcal{M}) \subseteq S$. Hence, $v \in (uio_h)^{-1}S$.

It remains to show that the characterization of the claim can be decided in EXPTIME. First, deciding whether $L_{\omega}(\mathcal{P}) \subseteq L^{\forall}(\mathcal{A}) = \mathcal{S}$ is a standard automata inclusion problem. Indeed, \mathcal{P} is can be viewed as a deterministic Büchi automaton all states of which are accepting, and \mathcal{A} is a universal co-Büchi automaton, which can be complemented in linear-time into a non-deterministic Büchi automaton \mathcal{B} . Then, it suffices to test whether $L_{\omega}(\mathcal{P}) \cap L^{\exists}(\mathcal{B}) = \emptyset$. This is doable in PTIME in the size of both machines. So, testing whether $L_{\omega}(\mathcal{P}) \subseteq L^{\forall}(\mathcal{A}) = \mathcal{S}$ can be done in PTIME.

Now, we want to decide the second part of the characterization. Note that given a hole $h = (p, \mathbf{i})$ and $\mathbf{o}_h \in \mathcal{O}$, there exists a Mealy machine \mathcal{M}_h such that for all $u \in \text{Left}_p$, \mathcal{M}_h realizes $(u\mathbf{i}\mathbf{o}_h)^{-1}\mathcal{S}$, iff the specification $\bigcap_{u \in \text{Left}_p} (u\mathbf{i}\mathbf{o}_h)^{-1}\mathcal{S}$ is realizable. Given h and \mathbf{o}_h , we construct in linear-time a universal co-Büchi automaton recognizing $\bigcap_{u \in \text{Left}_n} (u\mathbf{i}\mathbf{o}_h)^{-1}\mathcal{S}$. First, we compute the set of states

$$R_p^{\mathcal{A},\mathcal{P}} = \{q \in Q_{\mathcal{A}} \mid \exists u \in (I.O)^*, \mathsf{Post}_{\mathcal{P}}^*(p_0, u) = p \land \mathsf{Post}_{\mathcal{A}}^*(q_0, u\mathsf{io}_h) = q\}$$

¹ For an alphabet Σ , a set $A \subseteq \Sigma^{\omega}$ and $u \in \Sigma^*$, $u^{-1}A = \{v \in \Sigma^{\omega} \mid uv \in A\}$.

This can be done in ptime. Then, we define the universal co-Büchi automaton denoted \mathcal{A}_p which is exactly \mathcal{A} where the set of initial states is set to $R_p^{\mathcal{A},\mathcal{P}}$. We have $L^{\forall}(\mathcal{A}_p) = \bigcap_{u \in \mathsf{Left}_p} (u \mathsf{io}_h)^{-1} \mathcal{S}$, and then we use Theorem 1 to decide, in EXPTIME in the size of \mathcal{A}_p , which is linear in the size of \mathcal{A} , whether $L^{\forall}(\mathcal{A}[p])$ is realizable.

If S is \mathcal{P} -realizable, then it is \mathcal{P} -realizable by the machine \mathcal{M} as constructed in the proof of the claim. For each hole $h = (p, \mathbf{i})$ of \mathcal{P} , by Theorem 1, we can bound the size of the machine \mathcal{M}_h by $2^{O(nlog_2n)}$ where n is the number of states of \mathcal{A}_p , which is exactly the number of states of \mathcal{A} . So, if \mathcal{P} has n_h holes, S is \mathcal{P} -realizable by a Mealy machine with $m + n_h 2^{O(nlog_2n)}$ states.

For the lower bound, we reduce the problem of deciding whether the intersection of n languages of finite trees is non-empty, when those languages are defined by deterministic top-down tree automata. This problem is known to be EXPTIME-c [13]. This allows us to show the lower bound for \mathcal{P} -realizability even for specifications given by deterministic reachability automata. This is in contrast to plain realizability, which is solvable in PTIME for this class of specifications [12]. Intuitively, high-level reason why \mathcal{P} -realizability is harder than realizability is because \mathcal{P} imposes strong constraints on the solution. In particular, it enforces that the system which \mathcal{P} -realizes \mathcal{S} behaves the same after any prefix which reaches the same state of \mathcal{P} . This is why in the EXPTIME solution above one needs to check realizability of intersection of specifications of the form $\bigcap_{u \in \mathsf{Left}_p} (uio_h)^{-1}\mathcal{S}$, which is a harder problem than trying to realize monolithic specifications.

We now give the detailed proof to obtain the lower-bound. It reduces the following EXPTIME-c problem [13]: given n deterministic top-down tree automata $(\mathcal{T}_i)_{i=1}^n$, decide whether $\bigcap_{i=1}^n L(\mathcal{T}_i) \neq \emptyset$. The main idea is already captured by the restricted problem where the \mathcal{T}_i are DFA, known to be PSPACE-c, so we first expose that case. Let $(\mathcal{D}_i = (Q_i, in_i, F_i, \delta_i))_{i=1}^n$ be n DFA over some alphabet Σ . We let $\mathcal{I} = \{i_1, \ldots, i_n\}$ and $\mathcal{O} = \Sigma \cup \{\text{skip, exit}\}$. For all $j \in \{1, \ldots, n\}$, we let $\mathcal{I} \otimes L(\mathcal{D}_j)$ the set of words of the form $\lambda_1 \sigma_1 \lambda_2 \sigma_2 \ldots \lambda_k \sigma_k \in (\mathcal{IO})^*$ such that $\sigma_1 \ldots \sigma_k \in L(\mathcal{D}_j)$. Consider the following specification:

$$\mathcal{S} = \bigcup_{j=1}^{n} \{ i_j.skip.u.i.exit.x \mid u \in \mathcal{I} \otimes L(\mathcal{D}_j), i \in \mathcal{I}, x \in (\mathcal{IO})^{\omega} \}$$

We also define the following 2-states preMealy machine \mathcal{P} : from its initial state m_0 , whenever it reads i_j for any $j = 1, \ldots, n$, it outputs skip and move to its second state m, which is a hole.

We prove that:

- 1. S is recognizable by a deterministic reachability automaton \mathcal{A}_S of polynomial size
- 2. S is \mathcal{P} -realizable iff $\bigcap_{i=1}^{n} L(\mathcal{D}_i) \neq \emptyset$.

First, note that S is recognizable by a deterministic reachability automaton \mathcal{A}_S of polynomial size. Informally, each automaton \mathcal{D}_i is modified in such a way that any input symbol from \mathcal{I} can be read in between two output letters, so that

it recognizes $\mathcal{I} \otimes L(\mathcal{D}_i)$. Let us write $\mathcal{I} \otimes \mathcal{D}_i$ the modified automaton, and assume all the automata $\mathcal{I} \otimes \mathcal{D}_i$ have disjoint sets of states. From its single initial state, $\mathcal{A}_{\mathcal{S}}$ can read for all $j = 1, \ldots, n$ the sequence of two symbols i_j .skip and go the initial state of $\mathcal{I} \otimes \mathcal{D}_j$. Additionally, we add a single state q_{reach} , the unique state to be accepting (in the sense that it has colour 0 while any other state has colour 1). From q_{reach} , any sequence is accepting (it is a trap). Finally, for all accepting states q_f of \mathcal{D}_j , and all inputs $i \in \mathcal{I}$, we make $\mathcal{A}_{\mathcal{S}}$ transition to q_{reach} when reading i.exit from state q_f .

For the second assertion, the main intuitive idea behind its proof is that \mathcal{P} transitions to the same state m for any possible initial input while $\mathcal{A}_{\mathcal{S}}$ transitions to different states. Therefore, \mathcal{P} enforces that whatever the initial input i_j , the same strategy should be played afterwards, while on the other hand, the definition of \mathcal{S} is dependent on the initial input. Formally, suppose that \mathcal{M} is a Mealy machine \mathcal{P} -realizing \mathcal{S} . Then, since \mathcal{P} is a subgraph of \mathcal{M} , the language of \mathcal{M} is necessarily of the form

$$L_{\omega}(\mathcal{M}) = \mathcal{I}.\mathsf{skip}.L' \tag{1}$$

for some L' such that $\mathcal{I}.\mathsf{skip}.L' \subseteq \mathcal{S}$. Let $w \in L_{\omega}(\mathcal{M})$. It is necessarily of the form $w = \mathsf{i}_j.\mathsf{skip}.u.\mathsf{i.exit}.x$ for some $j = 1, \ldots, n, u \in (\mathcal{I} \otimes L(\mathcal{D}_j), \mathsf{i} \in \mathcal{I} \text{ and } x \in (\mathcal{IO})^{\omega}$. From (1), we get that for any other $j' \neq j, w' = \mathsf{i}_{j'}.\mathsf{skip}.u.\mathsf{i.exit}.x \in L_{\omega}(\mathcal{M})$ and therefore, $u \in (\mathcal{I} \otimes L(\mathcal{D}_{j'})$. So, $\bigcap_{i=1}^n L(\mathcal{D}_j) \neq \emptyset$. The converse is proved similarly: if $v \in \bigcap_{i=1}^n L(\mathcal{D}_j)$, then to \mathcal{P} -realize \mathcal{S} , it

The converse is proved similarly: if $v \in \bigcap_{i=1}^{n} L(\mathcal{D}_j)$, then to \mathcal{P} -realize \mathcal{S} , it suffices for the system to play skip, then v, and then exit forever. This strategy can easily be described by a Mealy machine extending \mathcal{P} .

This shows PSPACE-hardness. The extension of the latter reduction to deterministic top-down tree automata (over finite binary Σ -trees) is standard: the environment picks the direction $\{1, 2\}$ in the tree while the system picks the labels. We let $\mathcal{I} = \{i_1, \ldots, i_j\} \cup \{1, 2\}$ and $\mathcal{O} = \Sigma \cup \{\text{exit}, \text{skip}\}$ as before. The specification \mathcal{S} is modified as follows: $\mathcal{S} = \bigcup_{j=1}^n \mathcal{S}_j$ where each \mathcal{S}_j is the set of words of the form $i_j.\text{skip.}u.\text{i.exit.}x$ such that there exists finite binary tree $t \in L(\mathcal{T}_j)$ such that u is a root-to-leaf branch of t, i.e. $u = d_1\sigma_1 \ldots d_k\sigma_k$ where each $d_i \in \{1, 2\}$ is a direction, and each σ_i is the label of the node of t identified by the root-to-node path $d_1 \ldots d_i$. The preMealy machine \mathcal{P} is the same as before, and it is easily seen that the new specification \mathcal{S} is definable by a deterministic reachability automaton of polynomial size: this is due to the fact that the tree automata are deterministic top-down, and the path languages of deterministic top-down tree automata are regular, recognizable by DFA of polynomial size [13].

Let us sketch the correctness of the construction. If $t \in \bigcap_{i=1}^{n} L(\mathcal{T}_i)$, then \mathcal{P} can be extended into a full Mealy machine which after the state m exactly mimics the structure of t: states are paths in t and when getting a new direction as input, it outputs the label of t reached following that direction. If instead, the current path is a leaf of t, then the Mealy machine, whatever it receives as input in the future, outputs exit foreover. This machine is guaranteed to realize the specification, because whatever the initial input, all the branches of the tree induced by the choices of the environment are accepted by all the tree automata.

Conversely, if there is a Mealy machine \mathcal{M} extending \mathcal{P} and realizing the specification, then whatever the initial input, it plays the same strategy afterwards. It is then possible to reconstruct a tree accepted by all tree automata using the choices made by the environment (directions), which describe paths in the tree, and the choices made by the system, which correspond to the labels of nodes identified by those paths. Since exit must eventually be output on all outcomes, the tree construct in such a way is guaranteed to be finite.

3 Synthesis from safety specifications and examples

In this section, we present the learning framework we use to synthesise Mealy machines from examples, and safety specifications. Its generalization to any ω -regular specification is described in Section 4 and solved by reduction to safety specifications. It is a two-phase algorithm that is informally described here:(1) it tries to generalize the examples as much as possible while maintaining realizability of the specification, and outputs a preMealy machine, (2) it completes the preMealy machine into a full Mealy machine.

3.1 Phase 1: Generalizing the examples

This phase exploits the examples by generalizing them as much as possible while maintaining realizability of the specification. It outputs a preMealy machine which is consistent with the examples and realizes the specification, if it exists. It is an RPNI-like learning algorithm [23,22] which includes specific tests to maintain realizability of the specification.

The first step of this phase involves building a tree-shaped preMealy machine whose accepted language is exactly the set of prefixes Prefs(E) of the given set of examples E, called a *prefix-tree acceptor* (PTA). Formally, we define PTA as follows:

Prefix Tree Acceptor A set $E \subseteq (\mathcal{IO})^*$ (not necessarily finite) is consistent if for all $e \in \mathsf{Prefs}(E) \cap (\mathcal{IO})^*\mathcal{I}$, there exists a unique output denoted $\mathsf{o}_E(e) \in \mathcal{O}$ such that $e.\mathsf{o}_E(e) \in \mathsf{Prefs}(E)$. When E is consistent and finite, we can canonically associate with E a tree-shaped preMealy machine denoted $\mathsf{PTA}(E)$ such that $L(\mathsf{PTA}(E)) = \mathsf{Prefs}(E) \cap (\mathcal{IO})^*$, as follows:

$$\mathsf{PTA}(E) = (\mathsf{Prefs}(E) \cap (\mathcal{IO})^*, \epsilon, (e, \mathsf{i}) \mapsto (\mathsf{o}_E(e\mathsf{i}), e\mathsf{io}_E(e\mathsf{i})))$$

Example 4. Let $\mathcal{I} = \{i, i'\}$ and $\mathcal{O} = \{o, o'\}$ and consider $E_0 = \{i'o, ioioi'o'\}$. Then E_0 is consistent and $\mathsf{PTA}(E_0)$ is depicted on the left of Figure 2. For conciseness, we denote its states by $0, \ldots, 4$ where $0 = \epsilon, 1 = i'o, 2 = io, 3 = ioio$ and 4 = ioioi'o'.

In the next step of this phase, the algorithm tries to merge as many as possible states of the PTA. The strategy used to select a state to merge another given




Fig. 2: The preMealy machine $PTA(\{i'o, ioioi'o'\})$ of Example 4 and its quotient by the equivalence relation induced by the partition $\{\{0, 1\}, \{2, 3, 4\}\}$ as described in Example 6.

state with, is a parameter of the algorithm, and is called a *merging strategy* σ_G . Formally, a *merging* strategy σ_G is defined over 4-tuples (\mathcal{M}, m, E, X) where \mathcal{M} is a preMealy machine, m is a state of \mathcal{M} , E is a set of examples and X is subset of states of \mathcal{M} (the candidate states to merge m with), and returns a state of X, i.e., $\sigma_G(\mathcal{M}, m, E, X) \in X$. The formal definition is as follows:

State merging We now define the classical state merging operation of RPNI adapted to Mealy machines. An equivalence relation ~ over M is called a congruence for \mathcal{M} if for all $x \sim x'$ and $i \in \mathcal{I}$, if $\Delta_{\mathcal{M}}(x, i)$ and $\Delta_{\mathcal{M}}(x', i)$ are both defined, then $\mathsf{Post}_{\mathcal{M}}(x, i) \sim \mathsf{Post}_{\mathcal{M}}(x', i)$. It is *Mealy-congruence* for \mathcal{M} if additionally, $\mathsf{Out}_{\mathcal{M}}(x, i) = \mathsf{Out}_{\mathcal{M}}(x', i)$. When \mathcal{M} is clear from the context, we simply say congruence and Mealy-congruence. If ~ is an Mealy-congruence, then the following preMealy machine (called the quotient of \mathcal{M} by ~) is a welldefined preMealy machine (it does not depend on the choice of representatives): $\mathcal{M}/_{\sim} = (\mathcal{M}/_{\sim}, [m_{\text{init}}], ([s], i) \mapsto (\mathsf{Out}(s, i), [\mathsf{Post}(s, i)]))$. In this definition, [s] denotes the class of s by ~, and we take a representative s such that $\Delta(s, i)$ is defined. If no such representative exists, the transition is undefined on i.

The pseudo-code for Phase 1 is given by Algo 1. We provide here a running example to better illustrate the working of algorithm. Initially, the algorithm tests whether the set of examples E is consistent² and if that is the case, whether $\mathsf{PTA}(E)$ can be completed into a Mealy machine realizing the given specification S, thanks to Theorem 2.

Example 5. [Synthesis from $\varphi_{\text{CORE}}^{\text{ME}}$ and examples] Let us consider the classical problem of mutual exclusion described in Example 3 with the LTL specification, $\varphi_{\text{CORE}}^{\text{ME}}$, and the prefixes of executions:

(1) $\{!r_1, !r_2\}.\{!g_1, !g_2\}\#\{r_1, !r_2\}.\{g_1, !g_2\}\#\{!r_1, r_2\}.\{!g_1, g_2\}$

(2) $\{r_1, r_2\}.\{g_1, !g_2\}\#\{!r_1, !r_2\}.\{!g_1, g_2\}$

We begin by building the PTA as shown in Fig. 3 and then check if φ_{CORE}^{ME} is PTA – realizable.

² E is consistent if outputs uniquely depends on prefixes. Formally, it means for all prefixes $u \in \mathsf{Prefs}(E) \cap (\mathcal{IO})^*\mathcal{I}$, there is a unique output $\mathsf{o} \in \mathcal{O}$ such that $u\mathsf{o} \in \mathsf{Prefs}(E)$.


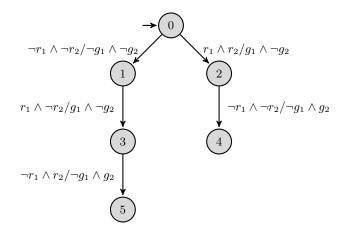


Fig. 3: The preMealy machine PTA of Example 5. Here, we find that φ_{CORE}^{ME} is PTA-realizable


If that is the case, then it takes all prefixes of E as the set of examples, and enters a loop which consists in iteratively coarsening again and again some congruence \sim over the states of $\mathsf{PTA}(E)$, by merging some of its classes. The congruence \sim is initially the finest equivalence relation. It does the coarsening in a specific order: examples (which are states of PTA(E)) are taken in lengthlexicographic order. When entering the loop with example e, the algorithm computes at line 5 all the states, i.e., all the examples e' which have been processed already by the loop $(e' \prec_{ll} e)$ and whose current class can be merged with the class of e (predicate Mergeable(PTA(E), \sim, e, e')). State merging is a standard operation in automata learning algorithms which intuitively means that merging the \sim -class of e and the \sim -class of e', and propagating this merge to the descendants of e and e', does not result any conflict. At line 6, it filters the previous set by keeping only the states which, when merged with e, produce a preMealy machine which can be completed into a Mealy machine realizing \mathcal{S} (again by Theorem 2). If after the filtering there are still several candidates for merge, one of them is selected with the merging strategy σ_G and the equivalence relation is then coarsened via class merging (operation $\mathsf{MergeClass}(\mathsf{PTA}(E), \sim, e, e')$). At the end, the algorithm returns the quotient of PTA(E) by the computed Mealycongruence. As a side remark, when S is universal, i.e. $S = (IO)^{\omega}$, then it is realizable by any Mealy machine and therefore line 6 does not filter any of the candidates for merge. So, when S is universal, Algo 1 can be seen as an RPNI variant for learning preMealy machines.

Example 5 contd: Synthesis from $\varphi_{\mathsf{CORE}}^{\mathsf{ME}}$ and examples We note that each state m of the PTA in Fig. 3 are \sim -class e, where e is the shortest prefix such that $\Delta(q_{\mathsf{init}}, e) = m$. We then check if $\varphi_{\mathsf{CORE}}^{\mathsf{ME}}$ is PTA – realizable³ which we find to be

³ Refer Checking PTA – realizablity of a specification S in Section 4



(a) We begin by merging states 0 and 1 of the preMealy machine PTA, i.e., we merge classes $[\epsilon]$ and $[\{\neg r_1 \land \neg r_2\}\{\neg g_1 \land \neg g_2\}]$. We then check for PTA – realizability which is found to be true. The resulting machine is shown here.




(b) We then proceed by merging states $\{0, 1\}$ and 2 of the preMealy machine PTA, i.e., we merge classes $[\epsilon]$ and $[r_1 \wedge r_2/g_1 \wedge \neg g_2]$. We then check for PTA – realizability which is found to be false. We corraborate by observing the trace $(r_1 \wedge r_2/g_1 \wedge \neg g_2)^{\omega}$ does not satisfy the LTL subformula $G(r_2 \implies Fg_2)$. Thus the merge is unsuccesful and is reversed.

Fig. 4: The merging phase of preMealy machine PTA of Example 5.

the case. We note that each state is labelled in the length-lexicographic order. We then begin the process of merging states in the aforementioned order as shown in Fig. 4 and Fig. 5.

3.2 Phase 2: completion of preMealy machines into Mealy machines

As it only constructs the PTA and tries to merge its states, the generalization phase might not return a (complete) Mealy machine. In other words, the machine it returns might still contain some holes (missing transitions). The objective of this second phase is to complete those holes into a Mealy machine, while realizing the specification. More precisely, when a transition is not defined from some state m and some input $i \in \mathcal{I}$, the algorithm must select an output symbol $o \in \mathcal{O}$ and a state m' to transition to, which can be either an existing state or a new state to be created (in that case, we write m' = fresh to denote the fact that m' is a fresh state). In our implementation, if it is possible to reuse a state m' that was created during the generalization phase, it is favoured over other states, in order to exploit the examples. However, the algorithm for the completion phase we describe now does not depend on any particular strategy to pick states. Therefore, it is parameterized by a *completion strategy* σ_C , defined over all triples (\mathcal{M}, m, i, X) where \mathcal{M} is a preMealy machine with set of states

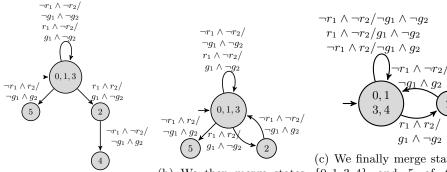

(a) We then merge states $\{0,1\}$ and 3 of the pre-Mealv machine PTA, i.e., we merge classes $[\epsilon]$ and $[\{\neg r_1 \land \neg r_2\}\{\neg g_1 \land$ $\neg g_2\} \# \{r_1 \land \neg r_2\} \{g_1 \land \neg g_2\}].$ We then check for PTA - realizability which is found to be true. The resulting machine is shown here.

(b) We then merge states which is found to be true. PTA - realizability shown here.

(c) We finally merge states $\{0, 1, 3, 4\}$ and 5 of the $\{0, 1, 3\}$ and 4 of the pre- preMealy machine PTA, Mealy machine PTA, i.e., i.e., we merge classes $[\epsilon]$ we merge classes $[\epsilon]$ and and $[\{\neg r_1 \land \neg r_2\}\{\neg q_1 \land$ $[\{r_1 \land r_2\}\{g_1 \land \neg g_2\}\#\{\neg r_1 \land \neg g_2\}\#\{r_1 \land \neg r_2\}\{g_1 \land$ $\neg r_2 \{ \neg g_1 \land g_2 \}].$ We then $\neg g_2 \}] \# \{ \neg r_1 \land r_2 \} \{ \neg g_1 \land$ check for $\mathsf{PTA} - \mathsf{realizability} \ g_2$]. We then check for which The resulting machine is is found to be true. The resulting machine is shown here.

Fig. 5: The merging phase of preMealy machine PTA of Example 5 contd.

M, (m, i) is a hole of \mathcal{M} , and $X \subseteq \mathcal{O} \times (M \cup \{\mathsf{fresh}\})$ is a list of candidate pairs (o, m'). It returns an element of X, i.e., $\sigma_C(\mathcal{M}, m, i, X) \in X$.

In addition to σ_C , the completion algorithm takes as input a preMealy machine \mathcal{M}_0 and a specification \mathcal{S} , and outputs a Mealy machine which \mathcal{M}_0 -realizes \mathcal{S} , if it exists. The pseudo-code is given in Algo 2. Initially, it tests whether \mathcal{S} is \mathcal{M}_0 -realizable, otherwise it returns UNREAL. Then, it keeps on completing holes of \mathcal{M}_0 . The computation of the list of output/state candidates is done at the loop of line 5. Note that the **for**-loop iterates over $M \cup \{\mathsf{fresh}()\}$, where fresh() is a procedure that returns a fresh state not in M. The algorithm maintains the invariant that at any iteration of the while-loop, S is \mathcal{M} -realizable, thanks to the test at line 7, based on Theorem 2. Therefore, the list of candidates is necessarily non-empty. Amongst those candidates, a single one is selected and the transition on (m, i) is added to \mathcal{M} accordingly at line 10.

3.3 Two-phase synthesis algorithm from specifications and examples

The two-phase synthesis algorithm for safety specifications and examples, called SYNTHSAFE $(E, \mathcal{S}, \sigma_G, \sigma_C)$ works as follows: it takes as input a set of examples E, a specification \mathcal{S} given as a deterministic safety automaton, a generalizing and completion strategies σ_G, σ_C respectively. It returns a Mealy machine \mathcal{M} which realizes \mathcal{S} and such that $E \subseteq L(\mathcal{M})$ if it exists. In a first steps, it calls $GEN(E, S, \sigma_G)$. If this calls returns UNREAL, then SYNTHSAFE return Algorithm 1: $GEN(E, S, \sigma_G)$ – generalization algorithm

Input: A finite set of examples $E \subseteq (\mathcal{I}.\mathcal{O})^*$, a specification $\mathcal{S} \subseteq (\mathcal{I}.\mathcal{O})^{\omega}$ given as a deterministic safety automaton, a merging strategy σ_G **Output:** A preMealy machine \mathcal{M} s.t. $E \subseteq L(\mathcal{M})$ and \mathcal{S} is \mathcal{M} -realizable, if it exists, otherwise UNREAL. 1 if E is not consistent or S is not PTA(E)-realizable then return UNREAL 2 $E \leftarrow \mathsf{Prefs}(E) \cap (\mathcal{IO})^*;$ $\mathbf{3} \sim \leftarrow \{(e, e) \mid e \in E\};$ $// \sim = diaq_E$ 4 for $e \in E$ in length-lexicographic order \prec_{ll} do $mergeCand \leftarrow \{e' \mid \mathsf{Mergeable}(\mathsf{PTA}(E), \sim, e, e') \land e' \prec_{ll} e\}$ 5 $mergeCand \leftarrow \{e' \in mergeCand \mid S \text{ is } \mathsf{MergeStates}(\mathsf{PTA}(E), \sim e^{-it})\}$ 6 $, e, e') - realizable \}$ if $mergeCand \neq \emptyset$ then 7 $e' \leftarrow \sigma_G(\mathcal{M}, e, mergeCand)$ 8 $\sim \leftarrow \mathsf{MergeClass}(\mathsf{PTA}(E), \sim, e, e')$ 9 10 return $PTA(E)/\sim$

UNREAL as well. Otherwise, the call to GEN returns a preMealy machine \mathcal{M}_0 . In a second step, SYNTHSAFE calls $\text{COMP}(\mathcal{M}_0, \mathcal{S}, \sigma_C)$. If this call returns UN-REAL, so does SYNTHSAFE, otherwise SYNTHSAFE returns the Mealy machine computed by COMP. The pseudo-code of SYNTHSAFE can be found in Algo. 3.

The completion procedure may not terminate for some completion strategies. It is because the completion strategy could for instance keep on selecting pairs of the form (\mathbf{o}, m') where m' is a fresh state. However we prove that it always terminates for *lazy* completion strategies. A completion strategy σ_C is said to be *lazy* if it favours existing states, which formally means that if $X \setminus (\mathcal{O} \times \{\mathsf{fresh}\}) \neq \emptyset$, then $\sigma_C(\mathcal{M}, m, \mathsf{i}, X) \notin \mathcal{O} \times \{\mathsf{fresh}\}$. The first theorem establishes correctness and termination of the algorithm for lazy completion strategies (we assume that the functions σ_G and σ_C are computable in worst-case exponential time in the size of their inputs).

Theorem 3 (termination and correctness). For all finite sets of examples $E \subseteq (\mathcal{I}.\mathcal{O})^*$, all specifications $\mathcal{S} \subseteq (\mathcal{I}.\mathcal{O})^{\omega}$ given as a deterministic safety automaton \mathcal{A} with n states, all merging strategies σ_G and all completion strategies σ_C , if SYNTHSAFE $(E, \mathcal{S}, \sigma_G, \sigma_C)$ terminates then, it returns a Mealy machine \mathcal{M} such that $E \subseteq L(\mathcal{M})$ and \mathcal{M} realizes \mathcal{S} , if it exists, otherwise it returns UNREAL. Moreover, SYNTHSAFE $(E, \mathcal{S}, \sigma_G, \sigma_C)$ terminates if σ_C is lazy, in worst-case exponential time (polynomial in the size⁴ of E and exponential in n).

The proof of the latter theorem is a consequence of several results proved on the generalization and completion phases, and is given in App. D.9. Intuitively, the complexity is dominated by the complexity of checking \mathcal{P} -realizability (Theorem 2) and the termination time of the completion procedure, which we prove to be worst-case exponential in n. The assumption that the specification is a

⁴ The size of E is the sum of the lengths of the examples of E.

Algorithm 2: $COMP(\mathcal{M}_0, \mathcal{S}, \sigma_C)$: preMealy machine completion algorithm


Input: A preMealy machine $\mathcal{M}_0 = (M, m_{\text{init}}, \Delta)$, a specification $\mathcal{S} \subseteq (\mathcal{I}.\mathcal{O})^*$
given as a deterministic safety automaton, a completion strategy σ_C
Output: A (complete) Mealy machine \mathcal{M} such that \mathcal{S} is \mathcal{M}_0 -realizable,
otherwise UNREAL.
1 if S is not \mathcal{M}_0 -realizable then return UNREAL
$2 \hspace{0.1in} \mathcal{M} \leftarrow \mathcal{M}_0$
3 while there exists a hole $(m, i) \in M \times \mathcal{I}$ do
$4 candidates \leftarrow \varnothing$
5 for $(\mathbf{o}, m') \in \mathcal{O} \times (M \cup \{ fresh() \})$ do
// fresh() denotes a new state not in M
$6 \left \mathcal{M}_{o,m'} \leftarrow (M \cup \{m'\}, m_{init}, \Delta \cup \{(m,i) \mapsto (o,m')\}\right)$
7 if S is $\mathcal{M}_{o,m'}$ -realizable then
8 $ $ candidates \leftarrow candidates $\cup \{(o, m')\}$
9 $(o, m') \leftarrow \sigma_C(\mathcal{M}, m, i, candidates)$
$10 (M, \Delta) \leftarrow (M \cup \{m'\}, \Delta \cup \{(m, i) \mapsto (o, m')\})$
11 $\[\mathcal{M} \leftarrow (M, m_{init}, \Delta) \]$
12 return \mathcal{M}

deterministic safety automaton \mathcal{A} is used when proving termination of the completion algorithm. Intuitively, to any state m of the so far constructed preMealy machine \mathcal{M} , we associate the subset of states Q_m of \mathcal{A} which are reachable in \mathcal{A} when reading prefixes that reach m in \mathcal{M} . We prove that when a transition to a fresh state m' is added to \mathcal{M} and $Q_{m'} \subseteq Q_m$, then m could have been reused instead of m' (Lemma 11 in App. D.6). This is possible as such subsets are sufficient to summarize the behaviour of \mathcal{A} on infinite suffixes, because it is a safety condition. We also show some monotonicity property of the subsets Q_m when more transitions are added to \mathcal{M} , allowing to bound the termination time by the length of the longest chain of \subseteq -antichains of subsets, which is worst-case exponential in the number of states of \mathcal{A} (Lemma 13 in App. D.6).

A Mealy machine \mathcal{T} is minimal if for all Mealy machine \mathcal{M} such that $L(\mathcal{T}) = L(\mathcal{M})$, the number of states of \mathcal{M} is at least that of \mathcal{T} . The next result, proved in App. D.10, states that any minimal Mealy machine realizing a specification \mathcal{S} can be returned by our synthesis algorithm, providing representative examples.

Theorem 4 (Mealy completeness). For all specifications $S \subseteq (\mathcal{I}.\mathcal{O})^{\omega}$ given as a deterministic safety automaton, for all minimal Mealy machines \mathcal{M} realizing S, there exists a finite set of examples $E \subseteq (\mathcal{I}.\mathcal{O})^*$, of size polynomial in the size of \mathcal{M} , such that for all generalizing strategies σ_G and completion strategies σ_C , and all sets of examples E' s.t. $E \subseteq E' \subseteq L(\mathcal{M})$, SYNTHSAFE $(E', S, \sigma_G, \sigma_C) = \mathcal{M}$.

The polynomial upper bound given in the statement of Theorem 4 is more precisely the following: the cardinality of E is $O(m + n^2)$ where n is the number of states of \mathcal{M} while m is its number of transitions. Moreover, each example $e \in E$ has length $O(n^2)$. More details can be found in Remark 1. Algorithm 3: SYNTHSAFE $(E, S, \sigma_G, \sigma_C)$ – synthesis algorithm from specification and examples

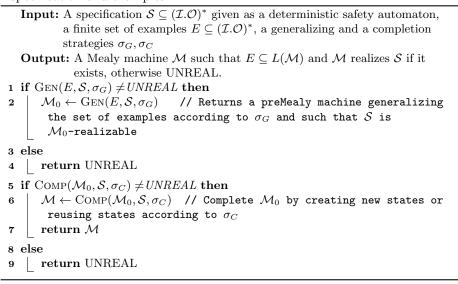

Remark 1. We bound here the size of the characteristic sample $E_{\mathcal{T}}$. Let n and m be the number of states and transitions of \mathcal{T} respectively. Then, for all states t, s_t has length at most n-1, and so for all p = (t, i) such that $\Delta(p)$ is defined, $e_p = f_{io}^{\mathcal{T}}(s_t)$ has length at most 2n. Given two different states $t \neq t'$, $d_{t,t'}$ has length at most n^2 . Therefore, $v_{t,t'}$ has length at most $2(n + n^2)$. There are at most m words e_p and n^2 words $v_{t,t'}$. So overall, the cardinality of $E_{\mathcal{T}}$ is bounded by $m + n^2$ and its size is bounded by $mn + 2(n^3 + n^4)$.

4 Synthesis from ω -regular specifications and examples

We now consider the case where the specification S is given as universal coBüchi automaton, in Section 4. We consider this class of specifications as it is complete for ω -regular languages and allow for compact symbolic representations. Further in this section, we consider the case of LTL specifications.

Specifications given as universal coBüchi automata Our solution for ω -regular specifications relies on a reduction to the safety case treated in Sec. 3. It relies on previous works that develop so called Safraless algorithms for ω -regular reactive synthesis [26,31,20]. The main idea is to strengthen the acceptance condition of the automaton from coBüchi to K-coBüchi, which is a safety acceptance condition. It is complete for the plain synthesis problem (w/o examples) if K is large enough (in the worst-case exponential in the number of states of the automaton, see for instance [20]). Moreover, it allows for incremental synthesis algorithms: if

the specification defined by the automaton with a k-coBüchi acceptance condition is realizable, for $k \leq K$, so is the specification defined by taking K-coBüchi acceptance. Here, as we also take examples into account, we need to slightly adapt the results.

Theorem 5. Given a universal co-Büchi automaton \mathcal{A} with n states defining a specificaton $\mathcal{S} = L^{\forall}(\mathcal{A})$ and a preMealy machine \mathcal{P} with m states, we have that \mathcal{S} is \mathcal{P} -realizable if and only if $\mathcal{S}' = L_K^{\forall}(\mathcal{A})$ is \mathcal{P} -realizable for $K = nm|\mathcal{I}|2^{\mathbf{O}(n\log_2 n)}$.

Proof. According to Theorem 2, given a universal co-Büchi automaton \mathcal{A} with n states defining a specification \mathcal{S} , and a preMealy machine \mathcal{P} with m states and n_h holes, \mathcal{S} is \mathcal{P} -realizable iff it is \mathcal{P} -realizable by a Mealy machine with $m + n_h 2^{O(nlog_2n)}$ states. Let \mathcal{M} be such a Mealy machine. The rest of the proof relies on the following lemma:

Lemma 1 ([20]). Let \mathcal{A} be a universal coBüchi automaton with α states and \mathcal{M} a Mealy machine with β states, we have that $L_{\omega}(\mathcal{M}) \subseteq L^{\forall}(\mathcal{A})$ iff $L_{\omega}(\mathcal{M}) \subseteq L_{k}^{\forall}(\mathcal{A})$ for $k = \alpha \times \beta$.

Therefore, we get that \mathcal{M} realizes $L_K^{\forall}(\mathcal{A})$ for $K = n \times (m + n_h 2^{O(nlog_2n)}) \leq nm |\mathcal{I}| 2^{O(nlog_2n)}$. Conversely, any machine realizing $L_k^{\forall}(\mathcal{A})$, for any k, also realizes $L^{\forall}(\mathcal{A})$.

The below lemma follows immediately:

Lemma 2. For all co-Büchi automata \mathcal{A} , for all preMealy machines \mathcal{P} , for all $k_1 \leq k_2$, we have that $L_{k_1}^{\forall}(\mathcal{A}) \subseteq L_{k_2}^{\forall}(\mathcal{A})$ and so if $L_{k_1}^{\forall}(\mathcal{A})$ is \mathcal{P} -realizable then $L_{k_2}^{\forall}(\mathcal{A})$ is \mathcal{P} -realizable. Furthermore for all $k \geq 0$, if $\mathcal{S}' = L_k^{\forall}(\mathcal{A})$ is \mathcal{P} -realizable then $\mathcal{S} = L^{\forall}(\mathcal{A})$ is \mathcal{P} -realizable.

Thanks to the latter two results applied to $\mathcal{P} = \mathsf{PTA}(E)$ for a set E of examples of size m, we can design an algorithm for synthesising Mealy machines from a specification defined by a universal coBüchi automaton \mathcal{A} with n states and E: it calls SYNTHSAFE on the safety specification $L_k^{\forall}(\mathcal{A})$ and E for increasing values of k, until it concludes positively, or reach the bound $K = 2^{\mathbf{O}(mn \log_2 mn)} + 1$. In the latter case, it returns UNREAL. However, to apply SYNTHSAFE properly, $L_k^{\forall}(\mathcal{A})$ must be represented by a deterministic safety automaton. This is possible as k-coBüchi automata are determinizable [20].

Determinization The determinization of k-co-Büchi automata \mathcal{A} relies on a simple generalization of the subset construction: in addition to remembering the set of states that can be reached by a prefix of a run while reading an infinite word, the construction counts the maximal number of times a run prefix that reaches a given state q has visited states labelled with color 1 (remember that a run can visit at most k such states to be accepting). The states of the deterministic automaton are so-called *counting functions*, formally defined for a co-Büchi automaton $\mathcal{A} = (Q, q_{\text{init}}, \Sigma, \delta, d)$ and $k \in \mathbb{N}$, as the set

noted $CF(\mathcal{A}, k)$ of functions $f : Q \to \{-1, 0, 1, \ldots, k, k+1\}$. If f(q) = -1 for some state q, it means that q is inactive (no run of \mathcal{A} reach q on the current prefix). The initial counting function f_{init} maps all 1-colored initial states to 1, all 0-colored initial states to 0 and all other states to -1. We denote by $\mathcal{D}(\mathcal{A}, k) = (Q^{\mathcal{D}} = CF(\mathcal{A}, k), q_{\text{init}}^{\mathcal{D}} = f_{\text{init}}, \Sigma, \delta^{\mathcal{D}}, Q_{\text{usf}}^{\mathcal{D}})$ the deterministic automaton obtained by this determinization procedure. We now provide a formal description below:

Definition 1 (Determinization with $CF(\mathcal{A}, k)$). Let $\mathcal{A} = (Q, q_{\text{init}}, \Sigma, \delta, d)$ be a co-Büchi automaton and $k \in \mathbb{N}$. We associate to the pair (\mathcal{A}, k) , the deterministic safety automaton $\mathcal{D}(\mathcal{A}, k) = (Q^{\mathcal{D}}, q_{\text{init}}^{\mathcal{D}}, \Sigma, \delta^{\mathcal{D}}, Q_{\text{usf}}^{\mathcal{D}})$ where:

- 1. $Q^{\mathcal{D}} = CF(\mathcal{A}, k)$ is the set of k-counting functions for \mathcal{A} .
- 2. $q_{\text{init}}^{\mathcal{D}} = f_0$ where $f_0(q) = -1$ for all $q \neq q_{\text{init}}$, and $f_0(q) = 0$ for $q = q_{\text{init}}$ and $d(q_{\text{init}}) = 2$, and $f_0(q) = 1$ for $q = q_{\text{init}}$ and $d(q_{\text{init}}) = 1$. Informally, the states that have been assigned the value -1 are inactive. Initially, only $q = q_{\text{init}}$ is active. If it is labelled with color 1, its counter equals 1, otherwise it is equal to 0.
- 3. For all $f \in CF(\mathcal{A}, k)$, and $\sigma \in \Sigma$, the transition function $\delta^{\mathcal{D}}$ is defined as follows: $\delta^{\mathcal{D}}(f_1, \sigma) = f_2$ where for all $q \in Q$, $f_2(q) =$

$$\min\left(\left(\max_{q'\in Q: f_1(q')\geq 0 \land q\in\delta(q',\sigma)} f_1(q')\right) + x, k+1\right), \text{ with } x = 1 \text{ if } d(q) = 1, \text{ and } x = 0 \text{ if } d(q) = 2.$$

4. The set of unsafe counting functions is defined⁵ as $Q_{usf}^{\mathcal{D}} = \{f \mid \exists q \in Q \cdot f(q) = k+1\}.$

The language defined by $\mathcal{D}(\mathcal{A}, k)$ is the set of infinite words $w \in \Sigma^{\omega}$ such that the unique run of $\mathcal{D}(\mathcal{A}, k)$ on w never visits a state (counting function) f such that d(f) = 1. This (safety) language of infinite words is denoted by $L(\mathcal{D}(\mathcal{A}, k))$. The size of $\mathcal{D}(\mathcal{A}, k)$ is bounded by $k^{\mathbf{O}(|\mathcal{A}|)}$.

Lemma 3 ($\mathcal{D}(\mathcal{A}, k)$ correctness, [20]). For all universal co-Büchi automaton \mathcal{A} , for all $k \in \mathbb{N}$, $L_k^{\forall}(\mathcal{A}) = L(\mathcal{D}(\mathcal{A}, k))$.

We can now give algorithm SYNTHLEARN, in pseudo-code, as Algo 4.

Complexity considerations and improving the upper-bound As the automaton $\mathcal{D}(\mathcal{A}, k)$ is in the worst-case exponential in the size of the automaton \mathcal{A} , a direct application of Theorem 3 yields a doubly exponential time procedure. This complexity is a consequence of the fact that the \mathcal{P} -realizability problem is Exptime in the size of the deterministic automaton as shown in Theorem 2, and that the termination of the completion procedure is also worst-case exponential in the size of the deterministic automaton.

We show that we can improve the complexity of each call to SYNTHSAFE and obtain an optimal worst-case (single) exponential complexity. We provide an algorithm to check \mathcal{P} -realizability of a specification $\mathcal{S} = L_k^{\forall}(\mathcal{A})$ that runs in

⁵ It is easy to check that $Q_{\mathsf{usf}}^{\mathcal{D}}$ is a trap as required.

Algorithm 4: SYNTHLEARN $(E, \mathcal{A}, \sigma_G, \sigma_C)$ – synthesis algorithm from ω -regular specification and examples by a reduction to safety

Input: A universal co-Büchi automaton \mathcal{A} with n states, a finite set of
examples $E \subseteq (\mathcal{I}.\mathcal{O})^*$, a generalizing strategy σ_G and a completion
strategy σ_C .Output: A Mealy machine \mathcal{M} realizing $L^{\forall}(\mathcal{A})$ and such that $E \subseteq L(\mathcal{M})$ if it
exists, otherwise UNREAL.1 $K \leftarrow nm |\mathcal{I}| 2^{\mathbf{O}(n \log_2 n)}; k \leftarrow 0;$ // m is the size of E2 while $k \leq K$ do// m is the size of E3if SYNTHSAFE $(E, \mathcal{D}(\mathcal{A}, k), \sigma_C, \sigma_G) \neq UNREAL$ then4 \lfloor return SYNTHSAFE $(E, \mathcal{D}(\mathcal{A}, k), \sigma_C, \sigma_G)$ 5 $k \leftarrow k + 1;$ 6return UNREAL

time singly exponential in the size of \mathcal{A} and polynomial in k and the size of \mathcal{P} . Second, we provide a finer complexity analysis for the termination of the completion algorithm, which exhibits a worst case exponential time in $|\mathcal{A}|$. Those two improvements lead to an overall complexity of SYNTHLEARN which is exponential in the size of the specification \mathcal{A} and polynomial in the set of examples |E|. This is provably worst-case optimal because for $E = \emptyset$ the problem is already EXPTIME-COMPLETE.

We explain next the first improvement, the upper-bound for termination.

We establish an upper-bound on the number of iterations needed to complete the preMealy machine output by the procedure GEN at the end of the first phase of our synthesis algorithm (in the case of a specification given by a k-coBüchi automaton \mathcal{A} is realizable). To obtain the required exponential bound, we rely on the maximal length of chains of antichains of counting functions partially ordered as follows: let $A \in \mathcal{AC}_{\preceq}(CF(\mathcal{A}, k))$ and $B \in \mathcal{AC}_{\preceq}(CF(\mathcal{A}, k))$, then $A \trianglelefteq_{\mathsf{CF}} B$ if and only if $\forall f \in A \cdot \exists g \in B \cdot f \preceq g$. The length of those chains is bounded by $k^{\mathbf{O}(n)}$:

Lemma 4. Any $\triangleleft_{\mathsf{CF}}$ -chain in $(\mathcal{AC}_{\preceq}(CF(\mathcal{A}, k)), \trianglelefteq_{\mathsf{CF}})$ has length at most $k^{\mathbf{O}(n)}$ where n is the number of states in \mathcal{A} .

Proof. Just as in the proof of Lemma 12, for an antichain $X = \{f_1, \ldots, f_n\}$ of counting functions, we define $\downarrow X$ its downward closure with respect to \preceq . Then, given another antichain Y, we get that $X \triangleleft_{\mathsf{CF}} Y$ iff $\downarrow X \subsetneq \downarrow Y$. Therefore the maximal length of a $\triangleleft_{\mathsf{CF}}$ -chain is bounded by the number of counting functions, which is $k^{\mathbf{O}(n)}$.

Checking \mathcal{P} -realizability of a specification $\mathcal{S} = L_k^{\forall}(\mathcal{A})$ To obtain a better complexity, we exploit some structure that exists in the deterministic automaton $\mathcal{D}(\mathcal{A}, k)$. First, the set of counting functions $CF(\mathcal{A}, k)$ forms a complete lattice for the partial order \leq defined by $f_1 \leq f_2$ if $f_1(q) \leq f_2(q)$ for all states q. We denote by $f_1 \bigsqcup f_2$ the least upper-bound of f_1, f_2 , and by $W_k^{\mathcal{A}}$ the set of counting functions f such that the specification $L(\mathcal{D}(\mathcal{A}, k)[f])$ is realizable (i.e. the specification defined by $\mathcal{D}(\mathcal{A}, k)$ with initial state f). It is known that $W_k^{\mathcal{A}}$ is downward-closed for $\leq [20]$, because for all $f_1 \leq f_2$, any machine realizing $L(\mathcal{D}(\mathcal{A}, k)[f_2])$ also realizes $L(\mathcal{D}(\mathcal{A}, k)[f_1])$. Therefore, $W_k^{\mathcal{A}}$ can be represented compactly by the antichain $\lceil W_k^{\mathcal{A}} \rceil$ of its \leq -maximal elements. Now, the first improvement is obtained thanks to the following result:

Lemma 5. Given a preMealy $\mathcal{P} = (M, m_0, \Delta)$, a co-Büchi automata \mathcal{A} , and $k \in \mathbb{N}$. For all states $m \in M$, we let $F^*(m) = \bigsqcup \{f \mid \exists u \in (\mathcal{IO})^* \cdot \mathsf{Post}_{\mathcal{P}}^*(m_0, u) = m \land \mathsf{Post}_{\mathcal{D}}(f_0, u) = f\}$. Then, $L(\mathcal{D}(\mathcal{A}, k))$ is \mathcal{P} -realizable iff there does not exist $m \in M$ such that $F^*(m) \notin W_k^{\mathcal{A}}$.

It is easily shown that the operator F^* can be computed in ptime. Thus, the latter lemma implies that there is a polynomial time algorithm in $|\mathcal{P}|, |\mathcal{A}|, k \in \mathbb{N}$, and the size of $[W_k^{\mathcal{A}}]$ to check the \mathcal{P} -realizability of $L^{\forall}(\mathcal{A})$. Formal details can be found in App. E.1.

We end this subsection by summarizing the behavior of our synthesis algorithm for ω -regular specifications defined as universal co-Büchi automata.

Theorem 6. Given a universal coBüchi automaton \mathcal{A} and a set of examples E, the synthesis algorithm SYNTHLEARN returns, if it exists, a Mealy machine \mathcal{M} such that $E \subseteq L(\mathcal{M})$ and $L_{\omega}(\mathcal{M}) \subseteq L^{\forall}(\mathcal{A})$, in worst-case exponential time in the size of \mathcal{A} and polynomial in the size of E. Otherwise, it returns UNREAL.

Notice that Alg. 4 calls Alg. 1 which itself calls the procedure that checks \mathcal{P} -realizability and checking \mathcal{P} -realizability is in polynomial time as we compute the fixpoint and check if it is safe.

Specifications given as an LTL formula We are now in position to apply Alg. 4 to a specification given as LTL formula φ . Indeed, thanks to the results of the subsection above, to provide an algorithm for LTL specifications, we only need to translate φ into a universal co-Büchi automaton. This can be done according to the next lemma. It is well-known (see [26]), that given an LTL formula φ over two sets of atomic propositions $P_{\mathcal{I}}$ and $P_{\mathcal{O}}$, we can construct in exponential time a universal co-Büchi automaton \mathcal{A}_{φ} such that $L^{\forall}(\mathcal{A}_{\varphi}) = [\varphi]$, i.e. \mathcal{A} recognizes exactly the set of words $w \in (2^{P_{\mathcal{I}}} 2^{P_{\mathcal{O}}})^{\omega}$ that satisfy φ . We then get the following theorem that gives the complexity of our synthesis algorithm for a set of examples E and an LTL formula φ , complexity which is provably worst-case optimal as deciding if $[\varphi]$ is realizable with $E = \emptyset$, i.e. the plain LTL realizability problem, is already 2EXPTIME-COMPLETE [29].

Theorem 7. Given an LTL formula φ and a set of examples E, the synthesis algorithm SYNTHLEARN returns a Mealy machine \mathcal{M} such that $E \subseteq L(\mathcal{M})$ and $L_{\omega}(\mathcal{M}) \subseteq [\varphi]$ if it exists, in worst-case doubly exponential time in the size of φ and polynomial in the size of E. Otherwise it returns UNREAL.

5 Implementation and Case study

We have implemented the algorithm SYNTHLEARN of the previous section in a prototype tool, in Python, using the tool ACACIA-BONZAI [10] to manipulate

antichains of counting functions. We first explain the heuristics we have used to define state-merging and completion strategies, and then demonstrate how our implementation behaves on a case study whose goal is to synthesize the controller for an elevator. The interested reader can find in App. A other case studies, including a controller for an e-bike and two variations on mutual exclusion.

5.1 Merging and completion strategies

To implement the algorithms of previous sections, we need to fix strategies to choose among candidates for possible merges during the generalization phase and possible choices of outputs during the completion phase. The strategies that we have implemented are as follows.

First, we consider a merging strategy σ_G which is defined over 4-tuples (\mathcal{M}, m, E, X) where \mathcal{M} is a preMealy machine, m is a state of \mathcal{M} , E is a set of examples and X is subset of states of \mathcal{M} for which a merge is possible, and returns a state of X with the following properties. Given an example e that leads in the current preMealy machine to a state m and a set of candidates $\{m_1, m_2, \ldots, m_k\}$ for merging as computed in line 7 of Algorithm 1, we associate to each state m_i the counting functions computed by the fixed point F^* on the current preMealy machine. Our merging strategy then choose one state m_i labelled with a \preceq -minimal elements in this set. Intuitively, favouring minimal counting functions preserves as much as possible the set of behaviors that are possible after the example e. Indeed, by Lemma 15, we know that if $f_1 \leq f_2$ then $L(\mathcal{D}(\mathcal{A}, k)[f_2]) \subseteq L(\mathcal{D}(\mathcal{A}, k)[f_1])$.

Second, we consider a completion strategy σ_C which is a function defined over all triples (\mathcal{M}, m, i, X) where \mathcal{M} is the current preMealy machine with set of states M, (m, i) is a hole of \mathcal{M} , and $X \subseteq \mathcal{O} \times (M \cup \{\text{fresh}\})$ is a list of candidate pairs (\mathbf{o}, m') . It returns an element of X, i.e., $\sigma_C(\mathcal{M}, m, i, X) \in$ X and it has the following properties. Remember that, for ensuring termination, the completion strategy σ_C must be *lazy*, i.e. if $X \setminus (\mathcal{O} \times \{\text{fresh}\}) \neq \emptyset$, then $\sigma_C(\mathcal{M}, m, i, X) \notin \mathcal{O} \times \{\text{fresh}\}$. Then among the set of possible candidates $\{(\mathbf{o}_1, m_1), (\mathbf{o}_2, m_2), \dots, (\mathbf{o}_k, m_k)\}$, we again favour states associated with \preceq -minimal counting functions computed by F^* on the current preMealy machine.

Merging and completion strategies implemented in our prototype Our tool implements a merging strategy σ_G where, given an example e that leads in the current preMealy machine to a state m and a set $\{m_1, m_2, \ldots, m_k\}$ of candidates for merging, as computed in line 7 of Algorithm 1, we choose state m_i with a \leq -minimal counting function $F^*(m_i)$, as defined in Lemma 5. Intuitively, favouring minimal counting functions preserves as much as possible the set of behaviors that are possible after the example e.

Our tool also implements a *completion strategy* σ_C , where for every hole (m, i) of the preMealy machine \mathcal{M} and out of the list of candidate pairs, selects an element which again favour states associated with \preceq -minimal counting functions.




Fig. 6: Machine returned by our tool on the elevator specification w/o examples. Here, q0 represents the state where f0 is served when required, q1 represents the state where b1 is pending, q2 represents state where f1 is served, q3 represents the state where b0 is pending.

5.2 Case Studies

Lift Controller Example We illustrate how to use our tool to construct a suitable controller for a two-floor elevator system.

Considering two floors is sufficient enough to illustrate most of the main difficulties of a more general elevator. Inputs of the controller are given by two atomic propositions b0 and b1, which are true whenever the button at floor 0 (resp. floor 1) is pressed by a user. Outputs are given by the atomic propositions f0 and f1, true whenever the elevator is at floor 0 (resp. floor 1); and ser, true whenever the elevator is serving the current floor (i.e. doors are opened). This controller should ensure the following core properties:

1. Functional Guarantee: whenever a button of floor 0 (resp. floor 1) is pressed, the elevator must eventually *serve* floor 0 (resp. floor 1):

G(b0 -> F (f0 & ser)) & G(b1 -> F (f1 & ser))

- 2. Safety Guarantee: The elevator is always at one floor exactly: G(fO<->!f1)
- 3. Safety Guarantee: The elevator cannot transition between two floors when doors are opened: G((f0 & ser) -> X(!f1)) & G((f1 & ser) -> X(!f0))
- 4. Initial State: The elevator should be in floor 0 initially: f0

Additionally, we make the following assumption: whenever a button of floor 0 (or floor 1) is pressed, it must remain pressed until the floor has been served, i.e., $G(b0 \rightarrow (b0 \ \text{W} \ (f0 \ \text{ser}))) \& G(b1 \rightarrow (b1 \ \text{W} \ (f1 \ \text{ser})))$.

Before going into the details of this example, let us explain the methodology that we apply to use our tool on this example. We start by providing only the high level specification φ_{CORE} for the elevator given above. We obtain a first Mealy machine from the tool. We then observe the machine to identify prefix of behaviours that we are unhappy with, and for which we can provide better alternative decisions. Then we run the tool on φ_{CORE} and the examples that we have identified, and we get a new machine, and we proceed like that up to a point where we are satisfied with the synthesized Mealy machine.

Let us now give details. When our tool is provided with this specification without any examples, we get the machine depicted in fig. 6. This solution makes the controller switch between floor 0 and floor 1, sometimes unnecessarily. For instance, consider the trace s # {!b0 & !b1}{!f0 & f1 & !ser} # {!b0 & !b1}{f0 & !f1 & !ser}, where we let s = {!b0 & b1}{f0 & !f1 & !ser}

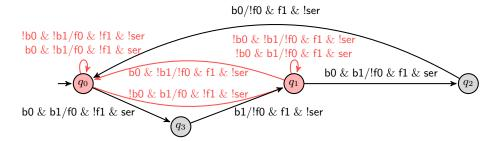


Fig. 7: Mealy machine returned by our tool on the elevator specification with additional examples. The preMealy machine obtained after generalizing the examples and before completion is highlighted in red. This took 3.10s to be generated.

{!b0 & b1}{!f0 & f1 & ser}. Here, we note that the transition goes back to state q_0 , where the elevator is at floor 0, when the elevator could have remained at floor 1 after serving floor 1. The methodology described above allows us to identify the following three examples:

- 1. The 1st trace states that after serving floor 1, the elevator must remain
 at floor 1 as b0 is false: s # {!b0 & !b1}{!f0 & f1 & !ser} # {!b0 &
 !b1}{!f0 & f1 & !ser}
- 2. The 2nd trace states that the elevator must remain at floor 0, as b1 is false: {!b0 & !b1}{f0 & !f1 & !ser} # {!b0 & !b1}{f0 & !f1 & !ser}
- 3. The 3rd trace ensures that after s, there is no unnecessary delay in serving floor 0 after floor 1 is served in s: s # {b0 & !b1}{!f0 & f1 & !ser} # {b0 & !b1}{f0 & !f1 & ser}

With those additional examples, our tool outputs the machine of fig. 7, which generalizes them and now ensures that moves of the elevator occur only when required. For example, the end of the first trace has been generalized into a loop on state q_1 ensuring that the elevator does not go to floor 0 from floor 1 unless b0 is pressed. We note that the number of examples provided here is much smaller than the theoretical (polynomial) upper bound proved in Theorem 4.

6 Conclusion

In this paper, we have introduced the problem of *synthesis with a few hints*. This variant of the synthesis problem allows the user to guide synthesis using examples of expected executions of high quality solutions. Existing synthesis tools may not provide natural solutions when fed with high-level specifications only, and as providing complete specification goes against the very goal of synthesis, we believe that our algorithm has a greater potential in practice.

On the theoretical side, we have studied in details the computational complexity of problems that need to be solved during our new synthesis procedure. We have proved that our algorithm is *complete* in the sense that any Mealy machine \mathcal{M} that realizes a specification φ can be obtained by our algorithm from φ and a sufficiently rich example set E, whose size is bounded polynomially in the size of \mathcal{M} . On the practical side, we have implemented our algorithm in a prototype tool that extends Acacia-Bonzai [10] with tailored state-merging learning algorithms. We have shown that only a small number of examples are necessary to obtain high quality machines from high-level LTL specifications only. The tool is not fully optimized yet. While this is sufficient to demonstrate the relevance of our approach, we will work on efficiency aspects of the implementation.

As future works, we will consider extensions of the user interface to interactively and concisely specify sets of (counter-)examples to solutions output by the tool. In the same line, an interesting future direction is to handle parametric examples (e.g. elevator with the number of floors given as parameter). This would require to provide a concise syntax to define parametric examples and to design efficient synthesis algorithm in this setting. We will also consider the possibility to formulate negative examples, as our theoretical results readily extend to this case and their integration in the implementation should be easy.

References

- Abadi, M., Lamport, L., Wolper, P.: Realizable and unrealizable specifications of reactive systems. In: Automata, Languages and Programming, 16th International Colloquium, ICALP89, Stresa, Italy, July 11-15, 1989, Proceedings. Lecture Notes in Computer Science, vol. 372, pp. 1–17. Springer (1989)
- Almagor, S., Kupferman, O., Velner, Y.: Minimizing expected cost under hard boolean constraints, with applications to quantitative synthesis. In: 27th International Conference on Concurrency Theory, CONCUR 2016, August 23-26, 2016, Québec City, Canada. LIPIcs, vol. 59, pp. 9:1–9:15. Schloss Dagstuhl - Leibniz-Zentrum für Informatik (2016)
- Alur, R., Bodík, R., Dallal, E., Fisman, D., Garg, P., Juniwal, G., Kress-Gazit, H., Madhusudan, P., Martin, M.M.K., Raghothaman, M., Saha, S., Seshia, S.A., Singh, R., Solar-Lezama, A., Torlak, E., Udupa, A.: Syntax-guided synthesis. In: Dependable Software Systems Engineering, pp. 1–25 (2015)
- Alur, R., Martin, M.M.K., Raghothaman, M., Stergiou, C., Tripakis, S., Udupa, A.: Synthesizing finite-state protocols from scenarios and requirements. In: Hardware and Software: Verification and Testing - 10th International Haifa Verification Conference, HVC 2014, Haifa, Israel, November 18-20, 2014. Proceedings. Lecture Notes in Computer Science, vol. 8855, pp. 75–91. Springer (2014)
- Bloem, R., Chatterjee, K., Henzinger, T.A., Jobstmann, B.: Better quality in synthesis through quantitative objectives. In: Computer Aided Verification, 21st International Conference, CAV 2009, Grenoble, France, June 26 July 2, 2009. Proceedings. Lecture Notes in Computer Science, vol. 5643, pp. 140–156. Springer (2009)
- Bloem, R., Chatterjee, K., Jobstmann, B.: Graph games and reactive synthesis. In: Handbook of Model Checking, pp. 921–962. Springer (2018)
- Bloem, R., Chockler, H., Ebrahimi, M., Strichman, O.: Synthesizing non-vacuous systems. In: Bouajjani, A., Monniaux, D. (eds.) Verification, Model Checking, and Abstract Interpretation. pp. 55–72. Springer International Publishing, Cham (2017)

- Bohy, A., Bruyère, V., Filiot, E., Jin, N., Raskin, J.: Acacia+, a tool for LTL synthesis. In: Computer Aided Verification - 24th International Conference, CAV 2012, Berkeley, CA, USA, July 7-13, 2012 Proceedings. Lecture Notes in Computer Science, vol. 7358, pp. 652–657. Springer (2012)
- Bruyère, V., Filiot, E., Randour, M., Raskin, J.: Meet your expectations with guarantees: Beyond worst-case synthesis in quantitative games. Inf. Comput. 254, 259–295 (2017). https://doi.org/10.1016/j.ic.2016.10.011, https://doi.org/10.1016/j.ic.2016.10.011
- Cadilhac, M., Pérez, G.A.: Acacia-bonsai: A modern implementation of downsetbased LTL realizability. CoRR abs/2204.06079 (2022). https://doi.org/10. 48550/arXiv.2204.06079, https://doi.org/10.48550/arXiv.2204.06079
- Chandra, A.K., Kozen, D., Stockmeyer, L.J.: Alternation. J. ACM 28(1), 114–133 (1981). https://doi.org/10.1145/322234.322243, https://doi.org/10.1145/ 322234.322243
- Clarke, E.M., Henzinger, T.A., Veith, H., Bloem, R. (eds.): Handbook of Model Checking. Springer (2018). https://doi.org/10.1007/978-3-319-10575-8, https://doi.org/10.1007/978-3-319-10575-8
- Comon, H., Dauchet, M., Gilleron, R., Jacquemard, F., Lugiez, D., Löding, C., Tison, S., Tommasi, M.: Tree automata techniques and applications (2007)
- 14. Damas, C., Lambeau, B., van Lamsweerde, A.: Scenarios, goals, and state machines: a win-win partnership for model synthesis. In: Proceedings of the 14th ACM SIGSOFT International Symposium on Foundations of Software Engineering, FSE 2006, Portland, Oregon, USA, November 5-11, 2006. pp. 197–207. ACM (2006)
- D'Ippolito, N., Braberman, V.A., Piterman, N., Uchitel, S.: Synthesizing nonanomalous event-based controllers for liveness goals. ACM Trans. Softw. Eng. Methodol. 22(1), 9:1-9:36 (2013). https://doi.org/10.1145/2430536.2430543, https://doi.org/10.1145/2430536.2430543
- Dupont, P., Lambeau, B., Damas, C., van Lamsweerde, A.: The QSM algorithm and its application to software behavior model induction. Appl. Artif. Intell. 22(1&2), 77–115 (2008). https://doi.org/10.1080/08839510701853200, https://doi.org/10.1080/08839510701853200
- Duret-Lutz, A., Renault, E., Colange, M., Renkin, F., Gbaguidi, A., Schlehuber-Caissier, P., Medioni, T., Martin, A., Dubois, J., Gillard, C., Lauko, H.: From spot 2.0 to spot 2.10: What's new? CoRR abs/2206.11366 (2022). https://doi.org/10.48550/arXiv.2206.11366, https://doi.org/10.48550/arXiv.2206.11366
- Esparza, J., Kretínský, J., Raskin, J., Sickert, S.: From LTL and limit-deterministic Büchi automata to deterministic parity automata. In: Tools and Algorithms for the Construction and Analysis of Systems - 23rd International Conference, TACAS 2017, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS 2017, Uppsala, Sweden, April 22-29, 2017, Proceedings, Part I. Lecture Notes in Computer Science, vol. 10205, pp. 426–442 (2017)
- Faymonville, P., Finkbeiner, B., Tentrup, L.: Bosy: An experimentation framework for bounded synthesis. In: Majumdar, R., Kuncak, V. (eds.) Computer Aided Verification - 29th International Conference, CAV 2017, Heidelberg, Germany, July 24-28, 2017, Proceedings, Part II. Lecture Notes in Computer Science, vol. 10427, pp. 325-332. Springer (2017). https://doi.org/10.1007/978-3-319-63390-9_ 17, https://doi.org/10.1007/978-3-319-63390-9_17
- Filiot, E., Jin, N., Raskin, J.: An antichain algorithm for LTL realizability. In: Computer Aided Verification, 21st International Conference, CAV 2009, Grenoble,

France, June 26 - July 2, 2009. Proceedings. Lecture Notes in Computer Science, vol. 5643, pp. 263–277. Springer (2009)

- Filiot, E., Jin, N., Raskin, J.: Antichains and compositional algorithms for LTL synthesis. Formal Methods Syst. Des. 39(3), 261-296 (2011). https://doi.org/10.1007/s10703-011-0115-3, https://doi.org/10.1007/s10703-011-0115-3
- Giantamidis, G., Tripakis, S., Basagiannis, S.: Learning Moore machines from input-output traces. Int. J. Softw. Tools Technol. Transf. 23(1), 1–29 (2021)
- Heinz, J., de la Higuera, C., van Zaanen, M.: Grammatical Inference for Computational Linguistics. Synthesis Lectures on Human Language Technologies, Morgan & Claypool Publishers (2015). https: //doi.org/10.2200/S00643ED1V01Y201504HLT028, https://doi.org/10.2200/ S00643ED1V01Y201504HLT028
- Kupferman, O.: On high-quality synthesis. In: Computer Science Theory and Applications 11th International Computer Science Symposium in Russia, CSR 2016, St. Petersburg, Russia, June 9-13, 2016, Proceedings. Lecture Notes in Computer Science, vol. 9691, pp. 1–15. Springer (2016)
- Kupferman, O., Vardi, M.Y.: Vacuity detection in temporal model checking. In: Pierre, L., Kropf, T. (eds.) Correct Hardware Design and Verification Methods. pp. 82–98. Springer Berlin Heidelberg, Berlin, Heidelberg (1999)
- Kupferman, O., Vardi, M.Y.: Safraless decision procedures. In: 46th Annual IEEE Symposium on Foundations of Computer Science (FOCS 2005), 23-25 October 2005, Pittsburgh, PA, USA, Proceedings. pp. 531–542. IEEE Computer Society (2005)
- Meyer, P.J., Sickert, S., Luttenberger, M.: Strix: Explicit reactive synthesis strikes back! In: Computer Aided Verification - 30th International Conference, CAV 2018, Held as Part of the Federated Logic Conference, FloC 2018, Oxford, UK, July 14-17, 2018, Proceedings, Part I. Lecture Notes in Computer Science, vol. 10981, pp. 578–586. Springer (2018)
- Natarajan, N., Simmons, D., Datha, N., Jain, P., Gulwani, S.: Learning natural programs from a few examples in real-time. In: Chaudhuri, K., Sugiyama, M. (eds.) The 22nd International Conference on Artificial Intelligence and Statistics, AIS-TATS 2019, 16-18 April 2019, Naha, Okinawa, Japan. Proceedings of Machine Learning Research, vol. 89, pp. 1714–1722. PMLR (2019), http://proceedings. mlr.press/v89/natarajan19a.html
- Pnueli, A., Rosner, R.: On the synthesis of an asynchronous reactive module. In: Automata, Languages and Programming, 16th International Colloquium, ICALP89, Stresa, Italy, July 11-15, 1989, Proceedings. Lecture Notes in Computer Science, vol. 372, pp. 652–671. Springer (1989)
- 30. Raha, R., Roy, R., Fijalkow, N., Neider, D.: Scalable anytime algorithms for learning fragments of linear temporal logic. In: Fisman, D., Rosu, G. (eds.) Tools and Algorithms for the Construction and Analysis of Systems 28th International Conference, TACAS 2022, Held as Part of the European Joint Conferences on Theory and Practice of Software, ETAPS 2022, Munich, Germany, April 2-7, 2022, Proceedings, Part I. Lecture Notes in Computer Science, vol. 13243, pp. 263-280. Springer (2022). https://doi.org/10.1007/978-3-030-99524-9_14, https://doi.org/10.1007/978-3-030-99524-9_14
- Schewe, S., Finkbeiner, B.: Bounded synthesis. In: Automated Technology for Verification and Analysis, 5th International Symposium, ATVA 2007, Tokyo, Japan, October 22-25, 2007, Proceedings. Lecture Notes in Computer Science, vol. 4762, pp. 474–488. Springer (2007)

- 32. Singh, R., Gulwani, S.: Transforming spreadsheet data types using examples. In: Proceedings of the 43rd Annual ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages, POPL 2016, St. Petersburg, FL, USA, January 20 - 22, 2016. pp. 343–356 (2016). https://doi.org/10.1145/2837614.2837668, https://doi.org/10.1145/2837614.2837668
- Solar-Lezama, A.: Program sketching. STTT 15(5-6), 475-495 (2013), https:// doi.org/10.1007/s10009-012-0249-7
- Solar-Lezama, A., Tancau, L., Bodík, R., Seshia, S.A., Saraswat, V.A.: Combinatorial sketching for finite programs. In: Shen, J.P., Martonosi, M. (eds.) Proceedings of the 12th International Conference on Architectural Support for Programming Languages and Operating Systems, ASPLOS 2006, San Jose, CA, USA, October 21-25, 2006. pp. 404–415. ACM (2006). https://doi.org/10.1145/1168857.1168907, https://doi.org/10.1145/1168857.1168907
- 35. Thomas, W.: Automata on infinite objects. In: Handbook of Theoretical Computer Science, Volume B: Formal Models and Sematics (1991)

A Additonal examples

In this appendix, we provided the interested reader with three additional examples.

A.1 Electric Bike Example

Here, we aim to synthesize a Mealy machine for the controller of an electric bike, in charge of regulating the braking system as well as the e-assistance. Its inputs are the following atomic propositions: brake, which is true whenever the cyclist activates the handbrake; full, true when the battery sensor indicates the battery is fully charged; and speedy, true whenever the bike speed is above 25 km/h. Its outputs are the following atomic propositions: rim, which is set to true whenever the rim brake is activated, recharge, true whenever the motor brake is activated and recharging the battery, and assist, whenever the motor is assisting the cyclist. This controller should ensure the properties:

1. whenever the battery is full, it cannot be recharged:

G(full -> !recharge)

2. when the cyclist does not brake, none of the braking system is activated:

G(!brake -> (!rim & !recharge))

3. whenever the speed of the bike is above 25 km/h, the assistance is inactive:

G(speedy -> !assist)

4. if the cyclist brakes for at least three cycles, then one of the two braking systems should be active until the cyclist does not brake anymore:

G((brake & X brake & XX brake) -> XX((recharge | rim) W !brake))

5. if the cyclist does not brake for at least three cycles, then the assistance should be active unless the speed is above the limit, and until she brakes again

G((!brake & X(!brake) & XX(!brake)) -> ((XX((!speedy -> assist) W brake))))

6. whenever the motor status changes, it should be idle for at least one cycle:

G(recharge -> X(!assist)) & G(assist -> X(!recharge))

7. assistance and brakes are mutually exclusive:

G((recharge | rim) -> !assist)

```
brk/!as & !re & ri
!brk & !spd/as & !re & !ri
!brk & spd/idle
\rightarrow q_0
```

Fig. 8: Preliminary machine obtained by our tool (without additional examples) and Strix, on the e-bike specification.

When provided with this specification without any example to our tool, or to Strix, we get a solution which never recharges the battery. It has a single state on which it loops with the labels⁶ brk/!as & !re & ri, !brk & !spd/as & !re & !ri, and !brk & spd/idle. It is depicted in Fig. 8. To obtain a better machine, without specifying formally when exactly the battery should or should not be recharged, we provide the next two simple scenarios to our tool (that are counter-examples to the first machine):

1. The first scenario describes a trace where, when the cyclist activates the handbrake (brk becomes true), and the battery is not fully charged (ful is false), then the motor brake is activated to recharge the battery while braking (re is set to true):

```
{!brk,spd}{!as,!re,!ri} # {brk,!ful}{!as,re,!ri}
# {brk,!ful}{!as,re,!ri}
```

2. The second scenario describes a trace where, when the cyclist activates the handbrake (brk becomes true), and the battery is fully charged (ful is true), then the rim brake is activated (ri is set to true):

{brk,ful}{!as,!re,ri}

Note that, unlike outputs, inputs are not complete in those two examples: the first example does not specify whether at the first step, ful is true or not. Similarly, the notation {brk,!ful} does not specify whether spd is true or not. The set notation here is a syntax provided by the tool allowing to specify non-maximal sets. So, the first trace actually corresponds to 8 examples, because there are 3 possible Boolean symbols (brk, spd and ful), and the second trace to 2 examples. This offers to the user a way to compactly represent several examples at once, and to focus on relevant Boolean signals she wants to provide as input to the tool.

With that additional information, our tool outputs the machine of Fig. 9 which recharges the battery when braking and whenever it is possible. Here, we note that the first trace has been generalized to the following: whenever

⁶ For the sake of readability, we have replaced:

⁻ the output edge label <code>!as & !re & !ri</code> with the term <code>idle</code>

⁻ the labels assist with as, recharge with re, rim with ri, brake with br and full with ful.




Fig. 9: Mealy machine returned by our tool on the e-bike specification with examples provided by the user as explained. The preMealy machine obtained after generalizing the examples and before completion is highlighted in red. Remember that our algorithm tries to reuse as much as possible states that were created during the generalizing phase, and as a consequence on this example the completion phase creates one additional state only.

the cyclist activates the handbrake and the batteries are not fully charged, the controller uses the motor brake and recharges the batteries. Likewise, the second trace has been generalized to: whenever the cyclist activates the handbrake and the batteries are fully charged, then the controller uses the rim brake.

A.2 Mututal Exclusion with a prioritized process (Prioritized Arbiter)

Here, we aim to synthesize a Mealy machine for mutual exclusion with three processes: 0, 1 and m and process m is prioritized. This could be useful in situations where we would like to prioritize one process over the others, i.e., have a *master* process. Here is the high level specification for this system:

- 1. $G(request_0 \rightarrow F grant_0)$
- 2. $G(request_1 \rightarrow F grant_1)$
- 3. G(request_m -> grant_m)
- 4. G((!grant_0 ~ !grant_1)|(!grant_0 ~ !grant_m)|(!grant_m ~ !grant_1))

The above formulas correspond to the typical mutual exclusion specification with the additional constraint that the *master* request must be granted immediately.

Providing these specifications to Strix results in the machine depicted in fig. $10(\text{request} \text{ and } \text{grant} \text{ have been abbreviated into } \mathbf{r} \text{ and } \mathbf{g})$.

We note here that the requests of the non-prioritized processes are not taken into account, thereby making this an unviable solution. Our tool provides a machine depicted in fig. 11 which is slightly better, but still has traces which provide unsolicited grants. One such example of a trace would be {rm & !r0 & r1}{!g0 & !g1 & gm} # {!rm & !r0 & !r1}{g0 & !g1 & gm}, where process 1 granted access but was never requested.

To obtain a satisfactory solution, we we additionally provide the following scenarios of executions. We start with traces which follow the pattern of two requests in the first step and no requests in the second step. We resolve this trace by granting one process in the first step and the second process in the second step.:

1. {!rm & r0 & r1}{g0 & !g1 & !gm} # {!rm & !r0 & !r1}




Fig. 10: Mealy Machine for Prioritized Arbiter returned by Strix

{!g0 & g1 & !gm} 2. {rm & !r0 & r1}{!g0 & !g1 & gm} # {!rm & !r0 & !r1} {!g0 & g1 & !gm}

Now, we handle one example of a trace where all three process are requested at once:

1. {rm & r0 & r1}{!g0 & !g1 & gm} # {!rm & !r0 & !r1} {g0 & !g1 & !gm}

Finally, we examine traces where both rm and r0 are requested at once:

- 1. {rm & r0 & !r1}{!g0 & !g1 & gm} # {!rm & r0 & r1}{g0 & !g1 & !gm} # {!rm & !r0 & !r1}{!g0 & g1 & !gm}
- 2. {rm & r0 & !r1}{!g0 & !g1 & gm} # {!rm & !r0 & !r1}{g0 & !g1 & !gm} # {!rm & r0 & !r1}{g0 & !g1 & !gm}
- 3. {rm & r0 & !r1}{!g0 & !g1 & gm} # {!rm & !r0 & r1}{g0 & !g1 & !gm} # {!rm & !r0 & !r1}{!g0 & g1 & !gm}

We then obtain the machine in fig. 12. We note that there are no spurious grants and the order of requests of process 0 and 1 are noted and respected. This ensures fairness amongst the non-prioritized processes.

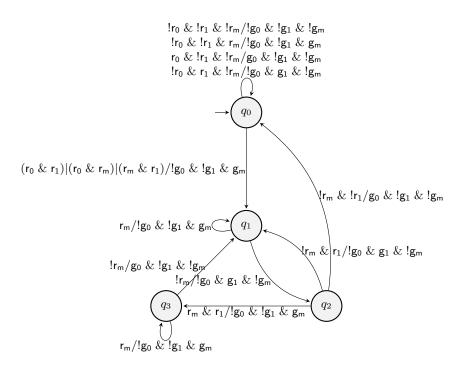


Fig. 11: Preliminary machine obtained by our tool (without additional examples) on the Prioritized Arbiter specification

A.3 Mutual Exclusion with no subsequent grants

Here, we aim to synthesize a Mealy machine for mutual exclusion with additional property that the implementation should never grant twice in a row. This could be useful in situations where we would like to give the granting process a bit of a *break* so as to execute other instructions. Here is the high-level specification for this system:

- 1. $G(request_0 \rightarrow F grant_0)$
- 2. $G(request_1 \rightarrow F grant_1)$
- 3. G(!grant_0 | !grant_1)
- 4. G(grant_0 -> X (!grant_1 & !grant_0))
- 5. G(grant_1 -> X (!grant_1 & !grant_0))

The first three formulas correspond to a typical mutual exclusion problem and the last two specify that no two subsequent grants can take place.

Providing these high-level specification to Strix returns the machine in fig. 13 (request and grant have been abbreviated into r and g). As for the example in Introduction, we can see that the solution proposed by Strix does not take into account the requests, so it cannot be considered as an efficient solution to our problem. Our tool provides a similar machine when no examples are given.

To obtain a satisfactory solution, we additionally provide the following scenarios of executions. First, let

 $s = \{!r_0 \& !r_1\}\{!g_0 \& !g_1\} \# \{r_0 \& !r_1\}\{g_0 \& !g_1\}$

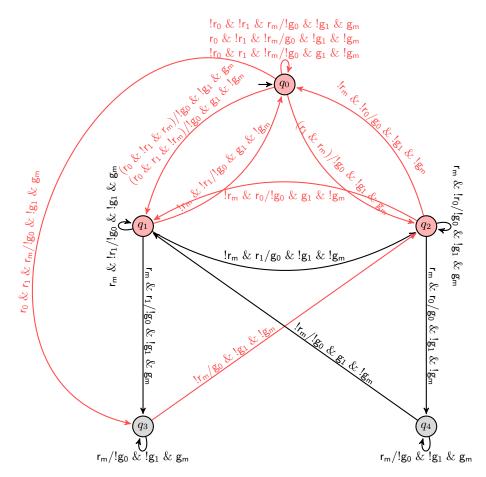


Fig. 12: Mealy machine returned by our tool on the prioritized arbiter specification with additional examples. The preMealy machine obtained after generalizing the examples and before completion is highlighted in red. In state q0, there are no pending requests. In state q1, r_0 is pending and correspondingly in state q2, r_1 is pending. In states q3 and q4, both requests r_0 and r_1 are pending, but however, the order in which the requests are granted matter. In q3, we grant r_0 and then r_1 and in q4, we grant r_1 and then r_0 .

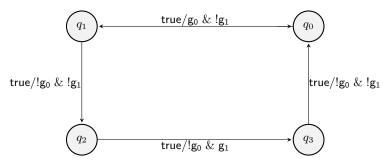


Fig. 13: Mealy Machine for No Subsequent Grants returned by Strix

Then, we complete this simple scenario by the following five different continuations that exhibit relevant reactions of efficient solutions to the problem:

- this scenario asks to favour r_1 when two requests are made after s (in which process 0 has been granted):

```
s # {!r0}{!g_0 & !g_1} # {r_0 & r_1}{!g_0 & g_1}
```

- even if r_0 has been granted in s, if the first process after s making a request is process 0, then it should have priority over the other:

- however, if both processes make a request simultaneously after s, then process 1 gets the priority:
 - s # {r_0 & r_1}{!g_0 & !g_1} # {!r_0 & !r_1}{!g_0 & g_1}

We finally obtain the machine in fig. 14 which is a natural solution. Let us describe the states of this machine. State q_0 means that there is no pending request and a grant can be executed at the next step. In state q_1 , there is no pending request but a grant can be executed at the next step. In state q_2 , r_1 is pending and a grant can be done at the next step. Symmetrically, in state q_3 , r_0 is pending and a grant can be executed at the next step. In state q_4 , both processes are pending and a grant can be done at the next step. In state q_4 , both

B LTL syntax and semantics

To be self-contained, we define here the syntax and semantics of the linear temporal logic (LTL).

Given a set of atomatic propositions P, the formulas of LTL are built according to the following syntax:

$$\varphi := \mathsf{true} \mid p \mid \neg \varphi \mid \varphi_1 \lor \varphi_2 \mid \mathbf{X}\varphi \mid \varphi_1 \mathsf{U}\varphi_2$$

where $p \in P$ is an atomic proposition, φ , φ_1 and φ_2 are LTL formulas, "X" is the *next* operator and "U" is the until operator.

The truth value of a LTL formula along an infinite word $w \in (2^P)^{\omega}$ is defined inductively as follows:

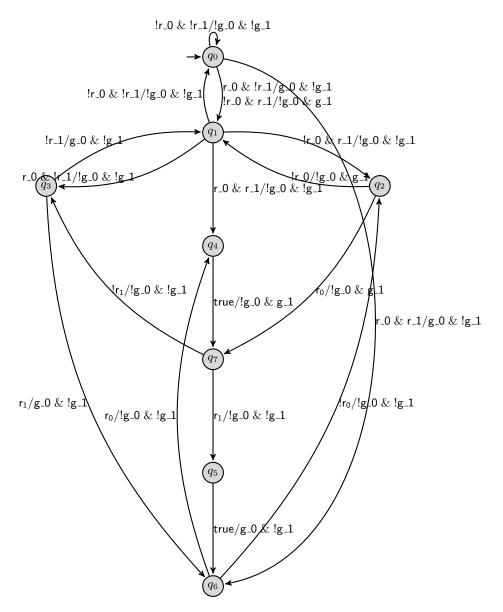


Fig. 14: Mealy Machine for the specification of mutual exclusion without consecutive grants produced by our tool.




Fig. 15: Output of Strix on the full arbitr specification n = 2.

 $-w \models \mathsf{true}$

- $-w \models p \text{ iff } p \in w[0]$
- $-w \models \neg \varphi \text{ iff } w \not\models \varphi$
- $-w \models \varphi_1 \lor \varphi_2$ iff $w \models \varphi_1$ or $w \models \varphi_2$
- $-w \models \mathsf{X}\varphi$ iff $w[1...] \models \varphi$ (w[1...] denotes the suffix of w that exclude the first letter w[0])
- $-w \models \varphi_1 \cup \varphi_2$ iff there exists $i \ge 0$, such that $w[i \dots] \models \varphi_2$, and for all j, $0 \le j < i, w[j \dots] \models \varphi_1$

We also consider the following abbrevations:

- "Eventually": $F\varphi \equiv TrueU\varphi$
- "Always": $G\varphi \equiv \neg F \neg \varphi$
- "Weak until": $\varphi_1 \mathsf{W} \varphi_2 \equiv \varphi_1 \mathsf{U} \varphi_2 \lor \mathsf{G} \varphi_1$
- "Release": $\varphi_1 \mathsf{R} \varphi_2 \equiv \neg (\neg \varphi_1 \mathsf{U} \neg \varphi_2)$

C Output of Strix on full arbitre example n = 2

The output of Strix on the complete mutual exclusion specification of the introduction is given on Fig. 15.

D Details and Proofs for Section 3

D.1 Additional notations for (pre)-Mealy machines

Definition 2 (Notation f_{io}). Given a preMealy machine $\mathcal{M} = (M, m_{init}, \Delta)$, we define the (possibly partial) function $f_{io} : M \times \mathcal{I}^* \to (\mathcal{IO})^*$ by $f_{io}(m, i_1 \dots i_k) =$ $i_1 o_1 \dots i_k o_k$ such that for $1 \leq j \leq k$, $Post_{\mathcal{M}}(m, i_1 \dots i_j)$ is defined and $o_j =$ $Out_{\mathcal{M}}(m, i_1 \dots i_j)$. For all $u \in \mathcal{I}^*$, we write $f_{io}(u)$ instead of $f_{io}(m_{init}, u)$. Note that the language accepted by \mathcal{M} satisfies $L(\mathcal{M}) = \{f_{io}(u) \in (\mathcal{IO})^* \mid f_{io}(u) \text{ is defined}\}$.

Remark 2. A Mealy machine is a preMealy machine without holes. If \mathcal{M} is Mealy machine then the domain of $f_{io}^{\mathcal{M}}$ is $M \times \mathcal{I}^*$.

D.2 Generalization phase: prefix-tree acceptor and state-merging

Example 6. Consider the preMealy machine $\mathsf{PTA}(E_0)$ where E_0 has been defined in Example 4. The equivalence relation \sim_0 defined by the state partition $\{\{0, 2, 3\}, \{1, 4\}\}$ is a congruence for $\mathsf{PTA}(E_0)$, however it is not a Mealy-congruence because we have $0 \sim_0 3$ but for input i', $\mathsf{Out}_{\mathsf{PTA}(E_0)}(0, i') = \mathbf{o} \neq \mathbf{o}' = \mathsf{Out}_{\mathsf{PTA}(E_0)}(3, i')$.

However, the equivalence relation \sim'_0 defined by the state partition $\{\{0, 1\}, \{2, 3, 4\}\}$ is a Mealy-congruence for $\mathsf{PTA}(E_0)$. The quotient $\mathsf{PTA}(E_0)/_{\sim'_0}$ is depicted on the right of Figure 2 and it turns out to be a (complete) Mealy machine. Its language L is denoted by the regexp $(\mathbf{i}' + \mathbf{i})\mathbf{o}(\mathbf{io} + \mathbf{i}'\mathbf{o}')^*$. Note that $E_0 \subset L$.

The following lemma states that the quotient of a preMealy machine \mathcal{M} by a Mealy-congruence for \mathcal{M} is a preMealy machine which generalizes \mathcal{M} .

Lemma 6. If ~ is a Mealy-congruence for \mathcal{M} , then $\mathcal{M}/_{\sim}$ is a preMealy machine s.t. $L(\mathcal{M}) \subseteq L(\mathcal{M}/_{\sim})$.

Proof. It is because any execution of \mathcal{M} over a sequence of inputs v corresponds to a unique execution of $\mathcal{M}/_{\sim}$ (whose sequence of states is the sequence of equivalence classes of states of \mathcal{M} over v), and which produces the same outputs.

A non-congruent point for an equivalence relation \sim over the states of a preMealy machine \mathcal{M} is a triple $(x, x', i) \in \mathcal{M} \times \mathcal{M} \times \mathcal{I}$ such that $x \sim x'$, $\mathsf{Post}(x, i)$ and $\mathsf{Post}(x', i)$ are both defined but $\mathsf{Post}(x, i) \not\sim \mathsf{Post}(x', i)$. Given a non-congruent point p = (x, x', i), the equivalence relation \sim can be updated to remove p, to a coarser equivalence relation $U(\sim, p)$ defined for all $y, y' \in \mathcal{M}$ as $yU(\sim, p)y'$ if $y \sim y'$, or $y \sim \mathsf{Post}(x, i)$ and $y' \sim \mathsf{Post}(x', i)$, or $y' \sim \mathsf{Post}(x, i)$ and $y \sim \mathsf{Post}(x', i)$.

Example 7. As an example, consider the preMealy machine $\mathsf{PTA}(E_0)$ defined in Example 4, and the equivalence relation \sim_1 induced by the state-partition $\{\{0,2\},\{1\},\{3\},\{4\}\}$. Then, $p_1 = (0,2,i)$ is a non-congruent point, because $\mathsf{Post}_{\mathsf{PTA}(E_0)}(0,i) = 2 \not\sim_1 3 = \mathsf{Post}_{\mathsf{PTA}(E_0)}(2,i)$. Then, $\sim_2 = U(\sim_1, p_1)$ is induced by the partition $\{\{0,2,3\},\{1\},\{4\}\}$. Then, $p_2 = (0,3,i')$ is a non-congruent point for \sim_2 , and $U(\sim_2, p_2)$ is exactly \sim_0 as defined in Example 6, which is a congruence, so, does not contain any non-congruent point.

We denote that an equivalence relation \sim is finer than some equivalence relation \sim' by $\sim \sqsubseteq \sim'$. The following proposition is (easily) proved in App. D.4:

Proposition 1. $U(\sim, p)$ is an equivalence relation such that $\sim \sqsubseteq U(\sim, p)$.

Given an equivalence relation \sim over M, we now want to define a procedure which keeps on removing non-congruent points, i.e., keeps on applying the function U iteratively until there is no non-congruent points anymore. Therefore the resulting equivalence relation is a congruence for \mathcal{M} . We prove in Lemma 7 that the order in which those points are removed does not matter. We formalize this via the notion of *choice function*, which is a function ch which, given any equivalence relation on the states of a preMealy machine, outputs a non-congruent point (if it exists), otherwise it is undefined. Given an equivalence relation \sim , a choice function ch and two states m, m', we denote by $\sim_{ch}^{m,m',0}$ the fixpoint of the sequence $(\sim^{m,m',n})_{n\geq 0}$ where for all $x, x' \in M$, $x \sim^{m,m',0} x'$ if $x \sim x'$, or $x \sim m$ and $x' \sim m'$, or $x \sim m'$ and $x' \sim m$

(in terms of equivalence classes, $\sim^{m,m',0}$ merges $[m]_{\sim}$ and $[m']_{\sim}$). For all n > 0, $\sim^{m,m',n} = U(\sim^{m,m',n-1}, ch(\mathcal{M}, \sim^{m,m',n-1}))$ if $ch(\mathcal{M}, \sim^{m,m',n-1})$ is defined, otherwise $\sim^{m,m',n} = \sim^{m,m',n-1}$.

Example 8. This converging sequence is already illustrated in Example 7 for some particular choice function which first picks $p_1 = (0, 2, i)$ and then $p_2 = (0, 3, i')$, starting from the equivalence relation \sim induced by the partition $\{\{s\} \mid s = 0, \ldots, 4\}$. Then, $\sim^{0,2,0} = \sim_1$, $\sim^{0,2,1} = U(\sim_1, p_1) = \sim_2$ and $\sim^{0,2,3} = U(\sim_2, p_2) = \sim_0$ which is the fixpoint of the sequence. Note that taking a different order, first p_2 and then p_1 , we would get the same fixed point: $U(\sim_1, p_2)$ is induced by the partition $\{\{0, 2, 3\}, \{1, 4\}\}$ and $U(U(\sim_1, p_1))$ is induced by the partition $\{\{0, 2, 3\}, \{1, 4\}\}$, so, $U(U(\sim_1, p_1), p_2) = U(U(\sim_1, p_2), p_1)$. This observation can be generalized, as shown by the following lemma (proved in App. D.5).

Lemma 7. For any equivalence relation \sim and choice functions ch_1, ch_2 , we have that $\sim_{ch_1}^{m,m'} = \sim_{ch_2}^{m,m'}$.

By the previous lemma, given an equivalence relation \sim over the states of a preMealy-machine \mathcal{M} , we can define $\sim^{m,m'}$ as $\sim^{m,m'}_{ch}$ for any choice function ch. Note that $\sim^{m,m'}$ is a congruence for \mathcal{M} because it is does not contain non-congruent points anymore, but it is not necessarily a Mealy-congruence for \mathcal{M} . We say that two states m, m' of \mathcal{M} are \sim -mergeable if $\sim^{m,m'}$ is a Mealy-congruence for \mathcal{M} . We say that m and m' are mergeable if they are $diag_{\mathcal{M}}$ -mergeable, where $diag_{\mathcal{M}}$ is the finest equivalence relation over \mathcal{M} , i.e. $diag_{\mathcal{M}} = \{(m,m) \mid m \in M\}$.

Example 9. As an example, state 0 and 2 are not mergeable in Example 4, because $diag_{E_0}^{0,2} = \sim_0$ is not a Mealy-congruence, as illustrated in Example 7. However, 2 and 3 are mergeable, 3 and 4, and 1 and 4.

We denote by $\mathsf{Mergeable}(\mathcal{M}, \sim, m, m')$ (resp. $\mathsf{Mergeable}(\mathcal{M}, m, m')$) the predicate which holds true whenever m and m' are \sim -mergeable (resp. mergeable). When m and m' are \sim -mergeable, we let $\mathsf{MergeClass}(\mathcal{M}, \sim, m, m') = \sim^{m,m'}$ and $\mathsf{MergeStates}(\mathcal{M}, \sim, m, m') = \mathcal{M}/_{\sim^{m,m'}}$.

Lemma 8. For all preMealy machine \mathcal{M} , all equivalence relation \sim over the states of \mathcal{M} , all \sim -mergeable states m, m', we have $\sim \sqsubseteq \mathsf{MergeClass}(\mathcal{M}, \sim, m, m')$ and therefore $L(\mathcal{M}) \subseteq L(\mathsf{MergeStates}(\mathcal{M}, \sim, m, m'))$. Moreover, if $m \not\sim m'$, then $\sim \sqsubset \mathsf{MergeClass}(\mathcal{M}, \sim, m, m')$ and therefore $\mathsf{MergeStates}(\mathcal{M}, \sim, m, m')$ has strictly less states than $\mathcal{M}/_{\sim}$.

Proof. Immediate by Lemma 6 and the definition of \sim -mergeable states. \Box

D.3 Termination and correctness of Algorithm GEN(Algo. 1)

We first prove that algorithm GEN indeed generalizes the examples while preserving realizability of the specification. **Lemma 9.** For all merging strategy σ_G , all finite set of examples E and all specification S given as a deterministic safety automaton A, if $\text{GEN}(E, S, \sigma_G) \neq UNREAL$, then $\text{GEN}(E, S, \sigma_G)$ is a preMealy machine \mathcal{M} such that S is \mathcal{M} -realizable and $E \subseteq L(\mathcal{M})$. If $\text{GEN}(E, S, \sigma_G) = UNREAL$, then there is no such preMealy machine. Moreover, $\text{GEN}(E, S, \sigma_G)$ terminates in time polynomial in the size⁷ of E and exponential in n the number of states of \mathcal{A} .

Proof. Suppose that $\operatorname{GEN}(E, \mathcal{S}, \sigma_G) \neq UNREAL$. Then E is necessarily consistent and \mathcal{S} is $\mathsf{PTA}(E)$ -realizable. By Lemma 8, the loop at line 4 computes coarser and coarser Mealy-congruences for $\mathsf{PTA}(E)$. Therefore, if we denote by \sim_E the relation computed by the algorithm after exiting the loop, we have $diag_E \sqsubseteq \sim_E$ and hence $L(\mathsf{PTA}(E)/_{diag_E}) = L(\mathsf{PTA}(E)) = E \subseteq L(\mathsf{PTA}(E)/_{\sim_E})$. Moreover, line 6 also ensures that \mathcal{S} is $\mathsf{PTA}(E)/_{\sim}$ -realizable for all equivalence relation \sim computed during iterations of the loop, and in particular for \sim_E .

Now, suppose that $\operatorname{GEN}(E, \mathcal{S}, \sigma_G) = UNREAL$, then either E is not consistent, in which case it is clear that no preMealy machine \mathcal{M} satisfies $E \subseteq L(\mathcal{M})$, or \mathcal{S} is not $\mathsf{PTA}(E)$ -realizable. For the second case, assume that there is a pre-Mealy machine \mathcal{M} such that $E \subseteq L(\mathcal{M})$ and \mathcal{S} is \mathcal{M} -realizable by some machine \mathcal{P} , and let us derive a contradiction. We show that \mathcal{S} is $\mathsf{PTA}(E)$ -realizable by some Mealy machine \mathcal{P}' obtained by taking the synchronized product of \mathcal{P} and $\mathsf{PTA}(E)$: a state of \mathcal{P}' is either a state p of \mathcal{P} or a pair (p, e) where e a state of $\mathsf{PTA}(E)$. The initial state of the product is (p_0, ϵ) where p_0 is the initial state of \mathcal{P} . From a state (p, e) and an input $i \in \mathcal{I}$, if $\mathsf{Out}_{\mathcal{P}}(p, i) = \mathsf{Out}_{\mathsf{PTA}(E)}(e, i) = \mathsf{o}$ for some $\mathsf{o} \in \mathcal{O}$, then the product transitions to $(\mathsf{o}, (\mathsf{Post}_{\mathcal{P}}(p, i), \mathsf{Post}_{\mathsf{PTA}(E)}))$, otherwise, it transitions to $\mathcal{\Delta}_{\mathcal{P}}(p, i)$. This is correct since $L(\mathsf{PTA}(E)) = \mathsf{Prefs}(E) \subseteq L(\mathcal{P})$. Moreover by definition of the product, $\mathsf{PTA}(E)$ is a subgraph of \mathcal{P}' (up to state renaming).

For the complexity, there are $|\operatorname{Prefs}(E)|$ visits to the loop. Line 5 takes polynomial time (the computation of $\sim^{m,m'}$ for any two states m, m' of a preMealy machine is in ptime). According to 2, each realizability test at Line 6 takes time polynomial in the number of states of the preMealy machine and exponential in n. Here, the number of states of the preMealy machine is smaller than the size of E. Overall, this gives the claimed complexity.

D.4 Proof of Proposition 1

Proof. For all $y \in M$, $y \sim y$ hence $y \ U(\sim, p) \ y$. Symmetry is also immediate by definition. Let us prove transitivity. If $y \ U(\sim, p) \ y'$ and $y' \ U(\sim, p) \ y''$, then there are several cases:

- 1. $y \sim y'$ and $y' \sim y''$: hence $y \sim y''$ and so $y \ U(\sim, p) \ y''$.
- 2. $y \sim y'$ and $y' \sim \mathsf{Post}(x, \mathsf{i})$ and $y'' \sim \mathsf{Post}(x', \mathsf{i})$: hence $y \sim \mathsf{Post}(x, \mathsf{i})$ and $y'' \sim \mathsf{Post}(y, \mathsf{i})$, so $y \ U(\sim, p) \ y''$.
- 3. $y \sim y'$ and $y'' \sim \mathsf{Post}(x, \mathsf{i})$ and $y' \sim \mathsf{Post}(x', \mathsf{i})$: hence $y'' \sim \mathsf{Post}(x, \mathsf{i})$ and $y \sim \mathsf{Post}(x', \mathsf{i})$, so $y \ U(\sim, p) \ y''$.

⁷ The size of E is defined as the cardinality of $\mathsf{Prefs}(E)$

- 4. $y \sim \mathsf{Post}(x, \mathsf{i})$ and $y' \sim \mathsf{Post}(x', \mathsf{i})$ and $y' \sim y''$: therefore $y'' \sim \mathsf{Post}(x', \mathsf{i})$ and so $y \ U(\sim, p) \ y''$.
- 5. $y \sim \mathsf{Post}(x, \mathsf{i})$ and $y' \sim \mathsf{Post}(x', \mathsf{i})$ and $y' \sim \mathsf{Post}(x, \mathsf{i})$ and $y'' \sim \mathsf{Post}(x', \mathsf{i})$: so, $y \sim y'$ and $y' \sim y''$, which implies $y \sim y''$ and so $y \ U(\sim, p) \ y''$.
- 6. $y \sim \mathsf{Post}(x, \mathsf{i})$ and $y' \sim \mathsf{Post}(x', \mathsf{i})$ and $y'' \sim \mathsf{Post}(x, \mathsf{i})$ and $y' \sim \mathsf{Post}(x', \mathsf{i})$: we directly get $y \sim y''$ and so $y \ U(\sim, p) \ y''$.

The remaining cases are symmetrical to the cases already proved by substituting y by y'' and y'' by y.

D.5 Proof of Lemma 7

Proof. We define a relation \rightarrow between equivalence relations as follows: $\sim \rightarrow \sim'$ if $\sim' = U(\sim, p)$ for some some non-congruent point p (if it exists). We prove that \rightarrow is locally confluent, which by Newman's lemma implies that \rightarrow is globally confluent. In other words, the reflexive and transitive closure \rightarrow^* of \rightarrow satisfies that whenever $\sim \rightarrow^* \sim_1$ and $\sim \rightarrow^* \sim_2$, then there exists \sim' such that $\sim_1 \rightarrow^* \sim'$ and $\sim_2 \rightarrow^* \sim'$. The proof of local confluence is not difficult but technical, as many cases have to be considered. The main idea is to show that if p and p'are two different non-congruent points of \sim , then p' is a non-congruent point of $U(\sim, p)$ and p' is a non-congruent point of $U(\sim, p')$, and then we show that $U(U(\sim, p), p') = U(U(\sim, p'), p)$.

Formally, let p = (x, y, i), p = (x', y', i') be two different non-congruent points for \sim . Let $\sim_p = U(\sim, p)$ and $\sim_{p'} = U(\sim, p')$. So, $\sim \rightarrow \sim_p$ and $\sim_{\rightarrow} \sim_{p'}$. Assume that $\sim_p \neq \sim_{p'}$. We prove that p' is a non-congruent point of \sim_p (and symmetrically pis a non-congruent point of $\sim_{p'}$). Suppose that p' is not a non-congruent point of \sim_p . Then, $\mathsf{Post}_{\mathcal{M}}(x',i) \sim_p \mathsf{Post}_{\mathcal{M}}(y',i)$. We also know that $\mathsf{Post}_{\mathcal{M}}(x',i) \not\sim_p \mathsf{Post}_{\mathcal{M}}(y',i)$ because p' is a non-congruent point of \sim . By definition of \sim_p , it implies that the following symmetrical two cases can happen:

1. $\mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$, or

2. $\mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i}) \text{ and } \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i}).$

We show that both cases imply that $\sim_p = \sim_{p'}$ which is a contradiction. Consider the first case. Then,

 $u \sim_p v$ iff

 $u \sim v$, or $u \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$, or $v \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $u \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$ iff

 $u \sim v$, or $u \sim \mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}')$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$, or $v \sim \mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}')$ and $u \sim \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$ iff

 $u \sim_{p'} v.$

The second case is symmetrical. We have just shown that p' is a non-congruent point of \sim_p and by symmetry, p is a non-congruent point of $\sim_{p'}$. We finally prove that $U(\sim_p, p') = U(\sim_{p'}, p)$, concluding that \rightarrow is locally confluent. We show that $U(\sim_p, p')$ is finer than $U(\sim_{p'}, p)$, the other direction being completly symmetrical. Suppose that $u \ U(\sim_p, p') \ v$ and let us show that $u \ U(\sim_{p'}, p) \ v$. Therefore, we have one the following cases:

- 1. $u \sim_p v$,
- 2. $u \sim_p \mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}')$ and $v \sim_p \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$,
- 3. $u \sim_p \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$ and $v \sim_p \mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}')$.
- Let us consider the first two cases (the third being symmetrical to the second): 1. $u \sim_p v$ implies that one of the following three cases holds:
 - (a) $u \sim v$: then $u \sim_{p'} v$, and $uU(\sim_{p'}, p)v$.
 - (b) $u \sim \mathsf{Post}_{\mathcal{M}}(x, i)$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y, i)$: then $u \sim_{p'} \mathsf{Post}_{\mathcal{M}}(x, i)$ and $v \sim_{p'}$ $\mathsf{Post}_{\mathcal{M}}(y,\mathsf{i})$, and so $u \ U(\sim_{p'}, p) \ v$.
 - (c) $u \sim \mathsf{Post}_{\mathcal{M}}(y, i)$ and $v \sim \mathsf{Post}_{\mathcal{M}}(x, i)$: this case is symmetric to the former.
- 2. $u \sim_p \mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$ and $v \sim_p \mathsf{Post}_{\mathcal{M}}(y', \mathbf{i}')$ implies that one of the following cases hold:
 - (a) $u \sim \mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y', \mathbf{i}')$: so, $u \sim_{p'} v$ and hence $u \ U(\sim_{p'} v)$,p) v.
 - (b) $u \sim \mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$ and $v \sim \mathsf{Post}_{\mathcal{M}}(x, \mathbf{i})$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathbf{i}') \sim \mathsf{Post}_{\mathcal{M}}(y, \mathbf{i})$: hence $v \sim_{p'} \mathsf{Post}_{\mathcal{M}}(x,i)$ and $\mathsf{Post}_{\mathcal{M}}(y',i') \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y,i)$. By definition of $\sim_{p'}$, we also have $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim_{p'} \mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}')$. Since $u \sim$ $\mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$, we have $u \sim_{v'} \mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$ and from the latter statement, we get $u \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$ and hence $u \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$. All this imply that $u \ U(\sim_{p'}, p) \ v$.
 - (c) $u \sim \mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}')$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y, \mathbf{i})$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathbf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathbf{i})$: this case is symmetrical to the latter by substituting y by x and x by y.
 - (d) $u \sim \mathsf{Post}_{\mathcal{M}}(x, i)$ and $\mathsf{Post}_{\mathcal{M}}(x', i') \sim \mathsf{Post}_{\mathcal{M}}(y, i)$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y', i')$: by definition of $\sim_{p'}$, we have $\mathsf{Post}_{\mathcal{M}}(x', \mathbf{i}') \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y', \mathbf{i}')$ from which we get $v \sim \mathsf{Post}_{\mathcal{M}}(y,\mathsf{i})$ and therefore $v \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y,\mathsf{i})$. From $u \sim$ $\mathsf{Post}_{\mathcal{M}}(x,\mathsf{i})$ we get $u \sim_{p'} \mathsf{Post}_{\mathcal{M}}(x,\mathsf{i})$. Therefore, $u \ U(\sim_{p'}, p) \ v$.
 - (e) $u \sim \mathsf{Post}_{\mathcal{M}}(x, i)$ and $\mathsf{Post}_{\mathcal{M}}(x', i') \sim \mathsf{Post}_{\mathcal{M}}(y, i)$ and $v \sim \mathsf{Post}_{\mathcal{M}}(x, i)$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$: we immediately get $u \sim v$, so $u \sim_{p'} v$ and hence $u \ U(\sim_{p'}, p) \ v$.
 - (f) $u \sim \mathsf{Post}_{\mathcal{M}}(x, i)$ and $\mathsf{Post}_{\mathcal{M}}(x', i') \sim \mathsf{Post}_{\mathcal{M}}(y, i)$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y, i)$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$: from $u \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ we get $u \sim_{p'}$ $\mathsf{Post}_{\mathcal{M}}(x,\mathsf{i})$ and from $v \sim \mathsf{Post}_{\mathcal{M}}(y,\mathsf{i})$ we get $v \sim_{p'} \mathsf{Post}_{\mathcal{M}}(y,\mathsf{i})$, hence $u U(\sim_{p'}, p) v.$
 - (g) $u \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}')$: symmetric of case (d) by swapping x and y.
 - (h) $u \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $v \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$: symmetric of case (e) by swapping x and y.
 - (i) $u \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(x', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$ and $v \sim \mathsf{Post}_{\mathcal{M}}(y, \mathsf{i})$ and $\mathsf{Post}_{\mathcal{M}}(y', \mathsf{i}') \sim \mathsf{Post}_{\mathcal{M}}(x, \mathsf{i})$: symmetric of case (f) by swapping x and y.

D.6 Details and results on the completion phase

Our goal in this section is to prove correctness of $\text{COMP}(\mathcal{M}_0, \mathcal{S}, \sigma_C)$ and termination. The completion procedure may not terminate for some completion strategies. It is because the completion strategy could for instance keep on selecting a pairs of the form (o, m') where m' is a fresh state. However we prove that it always terminates for *lazy* completion strategies, as defined in Section 3.3. Recall that lazy strategies always favour existing states. We first start by proving correctness.

Lemma 10. If the algorithm $\text{COMP}(\mathcal{M}_0, \mathcal{S}, \sigma_C)$ terminates and returns a Mealy machine \mathcal{M} , then \mathcal{S} is \mathcal{M}_0 -realized by \mathcal{M} ., i.e., \mathcal{S} is realizable by \mathcal{M} and \mathcal{M}_0 is a subgraph of \mathcal{M} ($\mathcal{M}_0 \leq \mathcal{M}$).

Proof. Let \mathcal{M}_i be the machine computed after the *i*th iteration of the **while**loop. As explained before, the tests at lines 1 and 7 ensures the invariant that each $\mathcal{M}_i \mathcal{M}_0$ -realizes \mathcal{S} . It is trivial for the test at line 1. Since iteration i + 1 of the algorithm completes the machine \mathcal{M}_i into a machine \mathcal{M}_{i+1} , we get $\mathcal{M}_0 \preceq \mathcal{M}_1 \preceq \mathcal{M}_2 \ldots$. Therefore, if \mathcal{S} is \mathcal{M}_i -realizable, it is also \mathcal{M}_0 -realizable by \mathcal{M}_i , so the test at line 1 guarantees that all the machines $\mathcal{M}_i \mathcal{M}_0$ -realize \mathcal{S} . Moreover, the list of candidates at line 9 is guaranteed to be non-empty. Indeed, by the invariant, \mathcal{M}_i can always be completed into a Mealy machine realizing \mathcal{S} . So the selection at line 9 is well-defined. Hence, if the algorithm returns a machine, this machine is necessarily a Mealy machine, because it has no holes, and moreover it \mathcal{M}_0 -realizes \mathcal{S} .

In the sequel, our goal is to prove termination for lazy strategies. The following technical lemma is a key lemma towards showing termination. It gives a sufficient condition for which a state of a preMealy machine can be reused to complete a hole. We need some notation. Given a preMealy machine $\mathcal{M} = (M, m_0, \Delta)$ and a deterministic parity automaton $A = (Q, q_0, \mathcal{I} \cup \mathcal{O}, \delta_A, d)$, for all $m \in M$, we let $R_m^{A,\mathcal{M}} \subseteq Q$ (or just R_m if A and \mathcal{M} are clear from the context, all the states of A reachable from its initial state when reading words that reach state m when read by \mathcal{M} . Formally,

$$R_m^{A,\mathcal{M}} = \{ \mathsf{Post}_A^*(q_0, u) \mid u \in (\mathcal{IO})^*, \mathsf{Post}_{\mathcal{M}}^*(m_0, u) = m \}$$

Given a subset $Q' \subseteq Q$ and some input $u \in (\mathcal{IO})^*$, we let $\mathsf{Post}^*_A(Q, u) = \{\mathsf{Post}^*_A(q, u) \mid q \in Q'\}.$

Lemma 11. Let S be a safety specification given as a (complete⁸) deterministic safety automaton $A = (Q, Q_{usf}, q_0, \delta_A)$. Let $\mathcal{M} = (\mathcal{M}, m_0, \delta)$ be a preMealymachine such that S is \mathcal{M} -realizable. Let (m, i) be a hole of \mathcal{M} (if it exists). For all $o \in \mathcal{O}$ and $m' \in \mathcal{M}$, if $\mathsf{Post}^*_A(R_m, io) \subseteq R_{m'}$, then S is \mathcal{M}' -realizable for $\mathcal{M}' = (\mathcal{M}, m_0, \delta \cup \{(m, i) \mapsto (o, m')\}).$

Proof. We keep the same notations as in the statement of the lemma. Let $\mathcal{M}_t = (\mathcal{M}_t, m_0, \Delta_t)$ be a Mealy machine which realizes \mathcal{S} and such that \mathcal{M} is a subgraph

⁸ Automata in this paper are complete by definition, i.e. there is always a transition from any state on any input, but we stress it here as it is a necessary requirement for the statement to hold.

of \mathcal{M}_t , i.e., $\mathcal{M} \preceq \mathcal{M}_t$. The subscript t stands for the fact that the transition function of \mathcal{M}_t is total. We assume without loss of generality that \mathcal{M}_t has a special form: when $\mathcal{M} \subseteq \mathcal{M}_t$ is left, it is never visited again. Formally, for all $u \in \mathcal{I}^*$, if $\mathsf{Post}^*_{\mathcal{M}_t}(m_0, u) \notin \mathcal{M}$, then for all $v \in \mathcal{I}^*$, $\mathsf{Post}^*_{\mathcal{M}_t}(m_0, uv) \notin \mathcal{M}$. The machine \mathcal{M}_t can be modified, using one additional bit of memory, so that it satisfies this assumption.

Let $\mathbf{o} = \operatorname{Out}_{\mathcal{M}_t}(m, \mathbf{i})$ and let $\mathcal{M}' = (M, m_0, \delta' := \delta \cup \{(m, \mathbf{i}) \mapsto (\mathbf{o}, m')\})$. We modify \mathcal{M}_t into a Mealy machine \mathcal{M}'_t by redirecting the transition from (m, \mathbf{i}) to (\mathbf{o}, m') . Formally, $\mathcal{M}'_t = (M_t, m_0, \Delta'_t)$ where

$$\Delta'_t = (\Delta_t \setminus \{(m, \mathsf{i}) \to \Delta_t(m, \mathsf{i})\}) \cup \{(m, \mathsf{i}) \mapsto (\mathsf{o}, m')\}$$

Clearly, \mathcal{M}' is a subgraph of \mathcal{M}'_t because \mathcal{M} is a subgraph of \mathcal{M}_t . It remains to show that \mathcal{M}'_t realizes \mathcal{S} .

Assume that it is not the case and let us derive a contradiction. In other words, there exists $w \in L_{\omega}(\mathcal{M}'_t)$ (*u* is a finite word) such that $w \notin L(A)$. Let $u \in (\mathcal{IO})^*$ be the shortest unsafe prefix of *w*, i.e. the prefix of *w* such that the states visited by the execution of *A* on *u* are safe but the last one. We decompose *u* according to its execution in \mathcal{M}'_t and the visit to the new transition $(m, \mathbf{i}) \mapsto (\mathbf{o}, m')$ (call it t_{new}). By our assumption on the form of \mathcal{M}_t , whenever \mathcal{M} is left, it is never visited again. By definition of \mathcal{M}'_t , we therefore have that whenever \mathcal{M}' is left, it is never visited again. So, the execution of \mathcal{M}'_t on *u* visits t_{new} a couple of times (at least once) while staying in \mathcal{M} and after the last visit to t_{new} , is continued by the execution of \mathcal{M}_t on the remaining suffix of *u*, ending in an unsafe state. Formally, there exist $u_1, \ldots, u_k \in (\mathcal{IO})^*$ and $p_1, p'_1, \ldots, p_{k-1}, p'_{k-1}, p_k \in Q$ such that $u = u_1 \mathbf{io} u_2 \mathbf{io} \ldots \mathbf{io} u_k$ and

$$\begin{array}{cccc} q_0 \xrightarrow{u_1}_{A} & p_1 \xrightarrow{\mathrm{io}}_{A} p_1' \xrightarrow{u_2}_{\operatorname{assist}} p_2 \dots p_{k-1}' \xrightarrow{u_k} & p_k \in Q_{usf} \\ m_0 \xrightarrow{u_1}_{\mathcal{M}} m \xrightarrow{\mathrm{i}|_{O}} & m' \xrightarrow{u_2}_{\mathcal{M}} & m \dots m' \xrightarrow{u_k}_{\mathcal{M}_t} m'' \end{array}$$

We prove that for all $1 \leq j \leq k-1$, there exists $x_j \in (\mathcal{IO})^*$ such that $\mathsf{Post}_{\mathcal{M}}(m_0, x_j) = m'$ and $\mathsf{Post}_{\mathcal{A}}(p_0, x_j) = p'_j$. We prove by induction on j. For j = 1, note that we have $p_1 \in R_m^{\mathcal{A},\mathcal{M}}$, and so $p'_1 \in \mathsf{Post}_{\mathcal{A}}(R_m^{\mathcal{A},\mathcal{M}}, \mathsf{io})$. So, $p'_1 \in R_{m'}^{\mathcal{A},\mathcal{M}}$. It implies that there exists $x_1 \in (\mathcal{IO})^*$ satisfying the claim. Suppose it is true at rank j-1. So, there exists x_{j-1} such that $\mathsf{Post}_{\mathcal{M}}(m_0, x_{j-1}) = m'$ and $\mathsf{Post}_{\mathcal{A}}(p_0, x_{j-1}) = p'_{j-1}$. Therefore, $\mathsf{Post}_{\mathcal{M}}(m_0, x_{j-1}u_j) = m$ and $\mathsf{Post}_{\mathcal{A}}(p_0, x_{j-1}u_j) = p_j$. This implies that $p_j \in R_m^{\mathcal{A},\mathcal{M}}$, and so $p'_j \in \mathsf{Post}_{\mathcal{A}}(R_m^{\mathcal{A},\mathcal{M}}, \mathsf{io})$, and so there exists $x_j \in (\mathcal{IO})^*$ satisfying the claim at rank j.

Now, consider the word $x_{k-1}u_k$: $\mathsf{Post}_A(p_0, x_{k-1}u_k) = p_k \in Q_{usf}$ and $\mathsf{Post}_{\mathcal{M}_t}(m_0, x_{k-1}u_k) = m''$. This contradicts that \mathcal{M}_t realizes L(A).

We are now ready to prove termination of Algo 2. To establish the complexity, we need to introduce some notions about chains and antichains of subsets. Let Ybe a finite set of cardinality n. It is well-known that the set 2^Y is partially ordered by inclusion. Therefore, an antichain of elements of 2^Y is a set $\mathcal{Y} \subseteq 2^Y$ such that for all $Y_1, Y_2 \in \mathcal{Y}$, Y_1 and Y_2 are incomparable by \subseteq . We denote by $\mathcal{AC}_{\subseteq}(Y)$ the set of \subseteq -antichains over Y. The set $\mathcal{AC}_{\subseteq}(Y)$ can be partially ordered by the partial order denoted \trianglelefteq : for all $\mathcal{Y}_1, \mathcal{Y}_2 \in \mathcal{AC}_{\subseteq}(Y), \mathcal{Y}_1 \trianglelefteq \mathcal{Y}_2$ if for all $Y_1 \in \mathcal{Y}_1$, there exists $Y_2 \in \mathcal{Y}_2$ such that $Y_1 \subseteq Y_2$. It is well-known that $(\mathcal{AC}_{\subseteq}(Y), \trianglelefteq)$ is a lattice. A chain in $(\mathcal{AC}_{\subseteq}(Y), \trianglelefteq)$ is a sequence $\mathcal{Y}_1 \lhd \mathcal{Y}_2 \lhd \cdots \lhd \mathcal{Y}_m$ (note that all relations are strict). The following lemma is key to bound the termination time:

Lemma 12. Let Y be a set of cardinality n. Any \triangleleft -chain in $(\mathcal{AC}_{\subseteq}(Y), \trianglelefteq)$ has length at most 2^n .

Proof. Given an antichain $\mathcal{Y} \in \mathcal{AC}_{\subseteq}(Y)$, we let $\downarrow \mathcal{Y}$ be the downward closure of \mathcal{Y} , i.e., $\downarrow \mathcal{Y} = \{X \subseteq Y \mid \exists X' \in \mathcal{Y}, X \subseteq X'\}$. Now, observe that for all $\mathcal{Y}_1, \mathcal{Y}_2 \in \mathcal{AC}_{\subseteq}(Y)$, we have $\mathcal{Y}_1 \triangleleft \mathcal{Y}_2$ iff $\downarrow \mathcal{Y}_1 \subsetneq \downarrow \mathcal{Y}_2$. Indeed, for the 'only if' direction, assume that $\mathcal{Y}_1 \triangleleft \mathcal{Y}_2$ and take $X_1 \in \downarrow \mathcal{Y}_1$. Hence there exists $Y_1 \in \mathcal{Y}_1$ s.t. $X_1 \subseteq Y_1$. So, there exists $Y_2 \in \mathcal{Y}_2$ s.t. $Y_1 \subseteq Y_2$, which implies that $X_1 \in \downarrow \mathcal{Y}_2$. Conversely, suppose that $\downarrow \mathcal{Y}_1 \subsetneq \downarrow \mathcal{Y}_2$. Let $Y_1 \in \mathcal{Y}_1$. Then, $Y_1 \in \downarrow \mathcal{Y}_1$, so $Y_1 \in \downarrow \mathcal{Y}_2$, which means that there exists $Y_2 \in \mathcal{Y}_2$ s.t. $Y_1 \subseteq Y_2$. This observation implies that the length of any \triangleleft -chain of antichains is at most the length of a maximal \subsetneq -chain of subsets of 2^Y , which is at most $2^{|Y|}$. \Box

We now prove termination (assuming the completion strategy σ_C is computable in exptime).

Lemma 13. If σ_C is lazy, COMP $(\mathcal{M}_0, S, \sigma_C)$ terminates in time polynomial in $|\mathcal{I}|$ and the number of holes in \mathcal{M}_0 , and exponential in the number of states of the deterministic safety automaton defining S, and the number of states of \mathcal{M}_0 .

Proof. Let $A = (Q, q_0, \delta, d)$ be a deterministic parity automaton defining the specification. Let $\mathcal{M}_0 = (\mathcal{M}_0, m_0, \Delta_0)$ be a preMealy machine such that \mathcal{S} is \mathcal{M}_0 -realizable (otherwise the algorithm terminates at line 1). Suppose that the algorithm does not terminate and for all $i \geq 1$, let $\mathcal{M}_i = (\mathcal{M}_i, m_0, \Delta_i)$ be the preMealy-machine computed at the *i*th-iteration of the **while**-loop. For all $i \geq 0$ and $m \in \mathcal{M}_i$, we define R_m^i as a shortcut for $R_m^{\mathcal{A},\mathcal{M}_i}$. Since m is a state of \mathcal{M}_i and \mathcal{M}_i is a subgraph of \mathcal{M}_{i+1} , the set of words reaching m in \mathcal{M}_i is included in the set of words reaching m in \mathcal{M}_{i+1} . Therefore we obtain the following monotonicity property: $R_m^i \subseteq R_m^{i+1}$.

Let $\mathcal{X}_i = \{R_m^i \mid m \in M_i\}$. Let denote by $\lceil \mathcal{X}_i \rceil$ the maximal elements of \mathcal{X}_i for inclusion. By the monotonicity property, we get that the sequence $(\lceil \mathcal{X}_i \rceil)_{i\geq 0}$ eventually stabilizes: there exists α such that for all $i \geq \alpha$, $\lceil \mathcal{X}_i \rceil = \lceil \mathcal{X}_{i+1} \rceil$.

Consider a machine \mathcal{M}_j for $j \geq \alpha$ and the hole (m, \mathbf{i}) of \mathcal{M}_j completed at iteration j by the algorithm, i.e. $\Delta_{j+1}(m, \mathbf{i}) = (\mathbf{o}, m')$ for some $\mathbf{o} \in \mathcal{O}$ and $m' \in M_{j+1}$. We claim that $m' \in M_j$, i.e., the algorithm has reused some existing state of \mathcal{M}_j . Indeed, consider the set $R^j_{m,\mathbf{i},\mathbf{o}} = \mathsf{Post}^*_A(R^j_m, \mathbf{io})$. We have that $R^j_{m,\mathbf{i},\mathbf{o}} \subseteq R^{j+1}_{m'}$ because \mathcal{M}_{j+1} transitions from (m,\mathbf{i}) to (\mathbf{o},m') . Clearly, there exists $X \in [\mathcal{X}_{j+1}]$ such that $R^j_{m,\mathbf{i},\mathbf{o}} \subseteq R^{j+1}_{m'} \subseteq X$ and since $[\mathcal{X}_j] = [\mathcal{X}_{j+1}], X \in$ $[\mathcal{X}_j]$. By definition of $\mathcal{X}_j, X = R^j_{m''}$ for some $m'' \in \mathcal{M}_j$. Hence, $R^j_{m,\mathbf{i},\mathbf{o}} \subseteq R^j_{m''}$. Let $\mathcal{M}' = (\mathcal{M}_j, m_0, \delta_i \cup \{(m,\mathbf{i}) \mapsto (\mathbf{o}, m'')\}$. By Lemma 11, \mathcal{S} is \mathcal{M}' -realizable, therefore at iteration j, the set *candidates* at line 9 contains the pair (o, m''). Since the selection strategy is lazy, if $m' \notin M_j$, it would favour m''. Hence, $m' \in M_j$.

We have just proved that \mathcal{M}_{j+1} has strictly one less hole than \mathcal{M}_j , for all $j \geq \alpha$. It implies that if \mathcal{M}_{α} has k holes, then $\mathcal{M}_{\alpha+k}$ has no holes, and the algorithm terminates, contradiction.

We now bound the number of iterations of the **while**-loop before termination. We only give the main ideas. For all iteration j of the algorithm, we let H_j be the number of holes of \mathcal{M}_j . The following claim is proved in App. D.7:

Claim. For all $j < \alpha$, either $H_{j+1} = H_j - 1$ and $\lceil \mathcal{X}_j \rceil \trianglelefteq \lceil \mathcal{X}_{j+1} \rceil$, or $H_{j+1} = H_j + |\mathcal{I}| - 1$ and $\lceil \mathcal{X}_j \rceil \triangleleft \lceil \mathcal{X}_{j+1} \rceil$.

Call the first case of the claim a *decrease step* and the other case an *increase step*. Thanks to Lemma 12, the maximal number of increase steps is bounded by $2^{|Q|}$. This allows us to bound the number of decrease steps as well. A simple calculation detailed in App. D.8 entails that the number of iterations before termination is bounded by $2^{|Q|} + k_0 + (2^{|Q|} + 1)(|\mathcal{I}| - 1) \in O(k_0 + |\mathcal{I}| \cdot 2^{|Q|})$.

The overall time complexity for COMP to terminate is then the number of iterations bounded by the expression above, multiplied by the time complexity of each inner-computation of the **while**-loop, which is dominated by the complexity of checking $\mathcal{M}_{o,m'}$ -realizability, which is polynomial in the number of states of $\mathcal{M}_{o,m'}$ and exponential in the number of states of A, by Theorem 2. \Box

D.7 Proof of the claim used in Lemma 13

We first start by proving the claim:

Claim At each iteration $j < \alpha$, either $H_{j+1} = H_j - 1$ and $\lceil \mathcal{X}_j \rceil \leq \lceil \mathcal{X}_{j+1} \rceil$, or $H_{j+1} = H_j + |\mathcal{I}| - 1$ and $\lceil \mathcal{X}_j \rceil < \lceil \mathcal{X}_{j+1} \rceil$.

Proof. By the monotonicity property, we always have that $\lceil \mathcal{X}_j \rceil \trianglelefteq \lceil \mathcal{X}_{j+1} \rceil$. Now, suppose that at step j some of the states of \mathcal{M}_j can be reused to complete the selected hole, then $H_{j+1} = H_j - 1$.

Suppose now that at step j, a new state has been created, and let h = (m, i) be the hole selected for completion. Clearly, $H_{j+1} = H_j + |\mathcal{I}| - 1$ since adding a new state creates $|\mathcal{I}|$ holes. Since no state could be reused, it implies by Lemma 11 that for all $\mathbf{o} \in \mathcal{O}$ and all $m' \in M_j$, $\mathsf{Post}^*_A(R^j_m, \mathsf{io}) \not\subseteq R^j_{m'}$. So, in particular, $\mathsf{Post}^*_A(R^j_m, \mathsf{io}) \not\subseteq X$ for all $X \in [\mathcal{X}_j]$. Let $(m, \mathsf{i}) \mapsto (\mathsf{o}, f)$ be the new transition added to \mathcal{M}_j , where $f \notin M_j$. Note that $R^{j+1}_f = \mathsf{Post}^*_A(R^j_m, \mathsf{io})$. Therefore, $R^{j+1}_f \not\subseteq X$ for all $X \in [\mathcal{X}_j]$. Since $R^{j+1}_f \in \mathcal{X}_{j+1}$, there exists $Y \in [\mathcal{X}_{j+1}]$ such that $R^{j+1}_f \subseteq Y$. Necessarily, $Y \notin [\mathcal{X}_{j+1}]$, proving that $[\mathcal{X}_j] \neq [\mathcal{X}_{j+1}]$. So, $[\mathcal{X}_j] \lhd [\mathcal{X}_{j+1}]$.

D.8 Proof of the upper-bound given in the proof of Lemma 13

The following proof details the calculation done to bound the number of iterations, call it β , of the **while**-loop before termination.

Proof. Let $j_1 < j_2 < \cdots < j_t \le \alpha$ be the iterations corresponding to an increase step. We also let $j_{t+1} = \beta$ and $j_0 = 0$. For all $0 \le \ell \le t+1$, let x_ℓ be the

number of holes in the machine $\mathcal{M}_{j_{\ell}}$. In particular, $x_{t+1} = 0$. Then, we have the following relation:

$$x_0 = k_0$$
 $x_{\ell+1} = x_{\ell} - (j_{\ell+1} - j_{\ell} - 1) + |\mathcal{I}| - 1$

Indeed, in between two increase steps j_{ℓ} and $j_{\ell+1}$, there is $j_{\ell+1} - j_{\ell} - 1$ decrease steps and the increase step $j_{\ell+1}$ adds $|\mathcal{I}| - 1$ holes.

Clearly, β is bounded by the maximal number of increase steps plus the maximal number of decrease steps. The latter corresponds to

$$\sum_{\ell=0}^{t} (j_{\ell+1} - j_{\ell} - 1) = \sum_{\ell=0}^{t} (x_{\ell} - x_{\ell+1} + |\mathcal{I}| - 1)$$
$$x_0 - x_{t+1} + (t+1)(|\mathcal{I}| - 1) = k_0 + (t+1)(|\mathcal{I}| - 1)$$

Moreover, t is bounded by $2^{|Q|}$, and therefore

$$\beta \le 2^{|Q|} + k_0 + (2^{|Q|} + 1)(|\mathcal{I}| - 1) \in O(k_0 + |\mathcal{I}| \cdot 2^{|Q|})$$

D.9 Proof of Theorem 3

The proof of this theorem is based on a series of Lemmas proved in App. D. Let us give an overview of how this appendix is structured:

- 1. App. D.2 formally defines the notions used in algorithm GEN: prefix-tree acceptor, state merging, and in particular the notions of mergeable classes and the result of merging them, together with examples. Lemma 8 states properties about merging.
- 2. Lemma 9 in App. D.3 proves correctness properties about the generalization phase (algorithm GEN), and provides an analysis of its termination time.
- 3. App. D.6 establishes correctness of the completion phase (Lemma 10). Then, it provides a complexity analysis when the completion strategy is lazy (Lemmas 11, 12 and 13).

We now have all the ingredients to prove Theorem 3. First, we prove the correctness part of the statement. Suppose that $\text{SYNTHSAFE}(E, S, \sigma_G, \sigma_C)$ terminates, then there are two cases:

- 1. SYNTHSAFE $(E, S, \sigma_G, \sigma_C)$ = UNREAL, then either GEN (E, S, σ_G) = UNREAL, and we get the result by Lemma 9, or GEN (E, S, σ_G) returns some preMealy machine \mathcal{M}_0 such that S is not \mathcal{M}_0 -realizable. This case is impossible: by Lemma 9, S is necessarily \mathcal{M}_0 -realizable.
- 2. SYNTHSAFE $(E, S, \sigma_G, \sigma_C)$ returns a Mealy machine \mathcal{M} . Let \mathcal{M}_0 be the pre-Mealy machine returned by $\text{GEN}(E, S, \sigma_G)$. Then by Lemma 9, S is \mathcal{M}_0 realizable and $E \subseteq L(\mathcal{M}_0)$. From Lemma 10 we get that S is \mathcal{M}_0 -realizable by \mathcal{M} . Therefore, $E \subseteq L(\mathcal{M})$ and S is realizable by \mathcal{M} .

We now prove termination in the case of lazy strategies, together with the complexity. First, $\text{GEN}(E, S, \sigma_G)$ always terminate, in time polynomial in the size of E and exponential in n the number of states of \mathcal{A} , according to Lemma 9. If $\text{GEN}(E, S, \sigma_G) \neq UNREAL$, then it outputs a preMealy machine \mathcal{M}_0 obtained by merging states of PTA(E), hence it has less states than the size of E. From Lemma 13, $\text{COMP}(\mathcal{M}_0, S, \sigma_c)$ terminates, in time polynomial in $|\mathcal{I}|$ and the number of holes of \mathcal{M}_0 (which is bounded by |E|), and exponential in n. This yields the claimed complexity.

D.10 Proof of Theorem 4

Proof. We prove that the generalizing phase of SYNTHLEARN is already complete, i.e., given a well-chosen set of examples, it already returns \mathcal{M} . So, the completion phase immediately returns \mathcal{M} as well, as there is no holes in \mathcal{M} . The Mealy completeness result for the generalizing phase is stated in Lemma 14 below.

The next result states that any minimal Mealy machine realizing a given specification can be learnt when given as input a set of examples which includes a characteristic set of examples of polynomial size in the size of the machine.

Lemma 14. For all specification S given as a det. safety automaton and all minimal Mealy machine T realizing S, there exists $E_T \subseteq (\mathcal{IO})^*$ of polynomial size (in the number of states and transitions of T) such that for all merging strategy σ_G and all finite set E s.t. $E_T \subseteq E \subseteq L(T)$, $GEN(E, S, \sigma_G) = T$.

Proof. We start by defining the characteristic sample and we provide an overview of the proof. Then, we give more formal details. Let $\mathcal{T} = (T, t_0, \Delta_{\mathcal{T}})$ and for all $t \in T$, let $s_t \in \mathcal{I}^*$ be a \leq_{ll} -minimal word to reach t, i.e. such that $\mathsf{Post}^*_{\mathcal{T}}(t_0, s_t) =$ t. Note that $s_{t_0} = \epsilon$. Since \mathcal{T} is minimal, then for any two states t, t' such that $t \neq t'$, there exists a unique \leq_{ll} -minimal word $d_{t,t'} \in \mathcal{I}^+$ distinguishing t and t', i.e. such that the sequences of outputs produced by \mathcal{T} from t and t' respectively, when reading $d_{t,t'}$, are different. Formally, it means that if $d_{t,t'} = i_1 \dots i_n$, there exists $1 \leq j \leq n$ such that $\mathsf{Out}_{\mathcal{T}}(t, i_1 \dots i_j) \neq \mathsf{Out}_{\mathcal{T}}(t', i_1 \dots i_j)$. Note that $d_{t,t'} =$ $d_{t',t}$. Let us now define $E_{\mathcal{T}}$ (the characteristic sample). For any pair p = (t, i)such that $\Delta_{\mathcal{T}}(t, i)$ is defined, let $e_p = f_{i_0}^{\mathcal{T}}(s_t i)$ (the notation f_{i_0} has been defined in App. D.1). In other words, we have one example per transition of the machine. Now, we also define examples that prevent some states of the PTA to be merged. For all $t \neq t' \in T$, we define the example $v_{t,t'} = f_{i_0}^{\mathcal{T}}(s_t d_{t,t'})$ and finally let

$$E_{\mathcal{T}} = \{ v_{t,t'} \mid t, t' \in T, t \neq t' \} \cup \{ e_p \mid p \in T \times \mathcal{I}, \Delta_{\mathcal{T}}(p) \text{ is defined} \}$$

Let E be a finite set such that $E_{\mathcal{T}} \subseteq E \subseteq L(\mathcal{T})$. To prove that $\mathsf{GEN}(E, \mathcal{S}, \sigma_G) = \mathcal{T}$ (up to state renaming), for any specification \mathcal{S} and strategy σ_G , we prove the following invariant: the equivalence relation \sim_e computed at iteration e of the algorithm is coarser than the equivalence relation $\sim_{\mathcal{T}}$ which identifies two states of $\mathsf{PTA}(E)$, i.e., two examples of E, whenever they reach the same state in \mathcal{T} . Moreover, both equivalence relations coincide when restricted to all examples

 $e' \preceq e$. To show this result, we prove that a \sim_e -class $[e_1]$ can be merged with another \sim_e -class $[e_2]$ iff $e_1 \sim_{\mathcal{T}} e_2$.

We now give the formal proof. In the sequel, we assume that E is prefixclosed, in the sense that $E = \operatorname{Prefs}(E) \cap (\mathcal{IO})^*$. This is wlog as the algorithm first computes the prefix closure of E at line 2. We first prove some useful claim.

For all $e \in E$, we let $\Phi(e) \in T$ such that $\mathsf{Post}^*_{\mathcal{T}}(t_0, e) = \Phi(e)$. Given $e, e' \in E$, we say that e and e' are \mathcal{T} -equivalent, denoted $e \sim_T e'$, if $\Phi(e) = \Phi(e')$. The following claim states that \sim_T is a Mealy-congruence for $\mathsf{PTA}(E)$ and quotienting the latter by \sim_T yields exactly \mathcal{T} (up to state renaming).

Claim 1 \sim_T is a Mealy-congruence for $\mathsf{PTA}(E)$ and $\mathcal{T} = \mathsf{PTA}(E)/_{\sim_T}$ (up to state renaming).

We give a few intuitions for proving that claim. The detailed proof can be found in App. D.11. Since $E \subseteq L(\mathcal{T})$, it can be proved that $\Phi(\mathsf{Post}_{\mathsf{PTA}(E)}(e,i)) =$ $\mathsf{Post}_{\mathcal{T}}(\Phi(e),i)$ (if there exists $\mathbf{o} \in \mathcal{O}$ such that $ei\mathbf{o} \in E$, otherwise $\mathsf{Post}_{\mathsf{PTA}(E)}(e,i)$ is undefined). This entails that \sim_T is a congruence. Similarly, we also get that $\mathsf{Out}_{\mathsf{PTA}(E)}(e,i) = \mathsf{Out}_{\mathcal{T}}(\Phi(e),i)$ (if defined) which entails that \sim_T is a Mealycongruence for $\mathsf{PTA}(E)$. To show that the quotient of $\mathsf{PTA}(E)$ by \sim_T is \mathcal{T} , we first use the fact that E contains one example per state of \mathcal{T} , and so \sim_T has as many equivalence classes as the number of states of \mathcal{T} . We have already seen that the output produced by a transition of $\mathsf{PTA}(E)/\sim_T$ is consistent with the output produced by \mathcal{T} , when the transition is defined, because \sim_T is a Mealycongruence. We prove that for all classes of \sim_T and all inputs, the transition of $\mathsf{PTA}(E)/\sim_T$ is defined, because E contains one example e_p per transition of \mathcal{T} .

Now, let us come back to the proof of the lemma. For all $e \in E$, let \sim_e be the Mealy-congruence computed after iteration e of the loop at line 4. We prove that \sim_T is coarser than any \sim_e for all e and \sim_T is equal to \sim_e if restricted to the \preceq_{ll} -downward closure of e. This will be sufficient to conclude that our algorithm returns \mathcal{T} (up to state renaming). Formally, given $e \in E$, we let $\downarrow e = \{e' \in (\mathcal{IO})^* \mid e' \preceq_{ll} e\}$. Note that $\downarrow e \subseteq E$. We prove the following two invariants, which states that \sim_e is always finer than \sim_T and that \sim_T and \sim_e coincides when restricted to $\downarrow e$.

- **INV 1** For all $e \in E$, $\sim_e \sqsubseteq \sim_T$.
- **INV 2** For all $e, \sim_e \cap (\downarrow e)^2 = \sim_T \cap (\downarrow e)^2$.

Before proving the invariants, let us show that **INV 2** implies the statement of the lemma. Indeed, let $e^* = \max_{\leq ll}(E)$. Then, $\downarrow e^* = E$, so $\sim_{e^*} \cap (\downarrow e^*)^2 = \sim_{e^*} = \sim_T$. Therefore, the machine returned by the algorithm is $\mathsf{PTA}(E)/_{\sim_T}$, so by *Claim 1* we get the desired result.

We rely on a useful claim which states that if \sim is finer than \sim_T , and $x \sim_T y$, then merging the \sim -class of x and the \sim -class of y yields an equivalence relation finer than \sim_T . Intuitively, it is because $[x]_{\sim}$ and $[y]_{\sim}$ are subsets of the same \sim_T class, and any merge occurring recursively when computing $\sim^{x,y}$ also preserves this property. The detailed proof can be found in App. D.11.

Claim 2: for all $x, y \in E$, if $x \sim_T y$ and $\sim \sqsubseteq \sim_T$, then $\sim^{x,y} \sqsubseteq \sim_T$.

It remains to prove INV 1 and INV 2. We prove them together by induction.

Initialisation The initial step $e = \epsilon$ is simple. Indeed, $\sim_{\epsilon} = diag_E$, so $\sim_{\epsilon} \sqsubseteq \sim_T$. Moreover, $\downarrow \epsilon = \{\epsilon\}$, so, $\sim_{\epsilon} \cap (\downarrow \epsilon)^2 = \{(\epsilon, \epsilon)\} = \sim_T \cap (\downarrow \epsilon)^2$.

Induction step We now prove that the invariants are preserved after one iteration. Suppose they are true for $e \in E$ and let us show it is true for $f \in E$ such that f is the immediate successor of e in E in llex-order. Let us give some intuitions before the formal details. Intuitively, we prove that a merge is possible between $[f]_{\sim_e}$ and some $[y]_{\sim_e}$ such that $y \preceq_{ll} e$, iff $f \sim_T y$. To prove the "only if" direction, we exploit the fact that when $f \not\sim_T y$, merging their \sim_e -classes would produce a congruence which is not a Mealy congruence, because $\Phi(f)$ and $\Phi(y)$ can be distinguished by $d_{\Phi(f),\Phi(y)}$.

Let us proceed with the formal proof. We distinguish between two cases, depending on whether mergeCand at line 5 is empty or not. If it is empty, then we prove that for all $y \leq_{ll} e, \Phi(y) \neq \Phi(f)$. If it is non-empty, we prove that any $y \in mergeCand$ satisfies $\Phi(y) = \Phi(f)$.

- CASE 1: $mergeCand = \emptyset$. In this case, there is no merge, therefore $\sim_e = \sim_f$. The induction hypothesis immediately gives **INV 1**. To prove **INV 2**, we need to show that for all $x, y \in \downarrow f$, if $x \sim_T y$ then $x \sim_f y$, i.e., $x \sim_e y$. It is the case by induction hypothesis whenever $x, y \in \downarrow e$. If x = y = f, then it is true by reflexivity of \sim_e . The remaining case is x = f and $y \preceq_{ll} e$. We show that this case is actually impossible, because Mergeable(PTA(E), $\sim_e, f, y)$ would hold otherwise (and hence $mergeCand \neq \emptyset$). So, assume that $\Phi(f) = \Phi(y)$ and let us prove that $\sim_e^{f:y}$ is a Mealy-congruence for PTA(E).

By Claim 2, we have that for all $\alpha \sim_e^{f,y} \beta$, $\Phi(\alpha) = \Phi(\beta)$. Now, suppose that there exist $\alpha io_1 \in E$ and $\beta io_2 \in E$, then, $o_1 = \operatorname{Out}_{\mathcal{T}}(\Phi(\alpha), i) =$ $\operatorname{Out}_{\mathcal{T}}(\Phi(\beta), i) = o_2$ (because $E \subseteq L(\mathcal{T})$). It means that $\sim_e^{f,y}$ is a Mealycongruence for $\mathsf{PTA}(E)$, and hence $mergeCand \neq \emptyset$, contradiction.

- CASE 2: mergeCand $\neq \emptyset$. In that case, there is a merge between f and some $y \leq_{ll} e$. Therefore $\sim_f = \sim_e^{f,y}$.
 - We first prove **INV 2**. We need to show that for all $\alpha, \beta \preceq_{ll} f$ such that $\alpha \sim_T \beta$, we have $\alpha \sim_f \beta$. If $\alpha, \beta \preceq_{ll} e$, then by IH, $\alpha \sim_e \beta$ and since $\sim_e \sqsubseteq \sim_f$, we get $\alpha \sim_f \beta$. If $\alpha = \beta = f$, then we are done by reflexivity. So, assume that $\alpha = f$ and $\beta \preceq_{ll} e$. We have $f \sim_T \beta$ and $y \sim_T f$, so $y \sim_T \beta$ and since $y, \beta \preceq_{ll} e$, by induction hypothesis, $y \sim_e \beta$. Now and informally, since \sim_f merges the \sim_e -class of f and that of y and propagates this merge, we get $\beta \sim_f f \sim_f y$. Formally, by definition of $\sim_e^{f,y,0}$, we get that $y \sim_e^{f,y,0} \beta$. Moreover, $f \sim_e^{f,y,0} y$, therefore $f \sim_e^{f,y,0} \beta$. By Proposition 1, the U is increasing for the order \sqsubseteq , hence, $\sim_e^{f,y,0} \sqsubseteq_f \alpha$ and therefore $f \sim_f \beta$ and we are done proving **INV 2**.

Let us now prove **INV 1**. First, if $\Phi(f) = \Phi(y)$, then by Claim 2, we get that for all $\alpha \sim_f \beta$, $\Phi(\alpha) = \Phi(\beta)$, i.e., $\alpha \sim_T \beta$. This shows $\sim_f \sqsubseteq \sim_T (\mathbf{INV}$ **1**). So, it remains to show that $\Phi(f) = \Phi(y)$. Suppose that $\Phi(f) \neq \Phi(y)$. We prove that $y \notin mergeCand$, which is a contradiction, i.e. that $\sim_e^{f,y}$ cannot be a Mealy-congruence for PTA(E). Remind that $s_{\Phi(y)}$ is the minimal word reaching $\Phi(y)$ in \mathcal{T} and $s_{\Phi(f)}$ is the minimal word reaching $\Phi(f)$ in \mathcal{T} . Hence $s_{\Phi(y)} \sim_T y$ and $s_{\Phi(f)} \sim_T f$. Since $s_{\Phi(f)} \preceq_{ll} y \preceq_{ll} e$ and $s_{\Phi(f)} \preceq_{ll} f$, by **INV 2** we get that $s_{\Phi(f)} \sim_f f$ and $s_{\Phi(y)} \sim_f y$. Moreover, by definition of $\sim_f, y \sim_f y$. Hence, $s_{\Phi(f)} \sim_f s_{\Phi(y)}$. Consider the input word $d_{\Phi(f),\Phi(y)}$ distinguishing $\Phi(f)$ and $\Phi(y)$ and decompose it as di. By definition of E, $f_{io}^{\mathcal{T}}(s_{\Phi(f)}di) \in E$ and $f_{io}^{\mathcal{T}}(s_{\Phi(y)}di) \in E$ ((the notation f_{io} has been defined in App. D.1)). There exists $o_1 \neq o_2 \in \mathcal{O}$ such that $f_{io}^{\mathcal{T}}(s_{\Phi(f)}di) = f_{io}^{\mathcal{T}}(s_{\Phi(f)}d) o_1$ and $f_{io}^{\mathcal{T}}(s_{\Phi(y)}di) = f_{io}^{\mathcal{T}}(s_{\Phi(y)}d) o_2$. Since \sim_f is a congruence, we get $f_{io}^{\mathcal{T}}(s_{\Phi(f)}d) \sim_f f_{io}^{\mathcal{T}}(s_{\Phi(y)}d)$ but $\operatorname{Out}_{\mathsf{PTA}(E)}(f_{io}^{\mathcal{T}}(s_{\Phi(f)}d), i) = o_1 \neq o_2 = \operatorname{Out}_{\mathsf{PTA}(E)}(f_{io}^{\mathcal{T}}(s_{\Phi(y)}d), i)$. This shows that \sim_f is not a Mealy-congruence for $\mathsf{PTA}(E)$ and hence y and f cannot be merged. Therefore, $\Phi(f) = \Phi(y)$ and we are done.

Note that the proof does not rely on any particular specification S nor any merging strategy σ_G .

D.11 Proofs of the claims in the proof of Lemma 14

Proof of Claim 1 First, let us prove that \sim_T is a congruence. Let $e \sim_T e'$ and $i \in \mathcal{I}$. Suppose that $\Delta_{\mathsf{PTA}(E)}(e,i)$ and $\Delta_{\mathsf{PTA}(E)}(e',i)$ are both defined, i.e., $eio \in E$ and $e'io' \in E$ for some $o, o' \in O$. Then, we get $\Phi(ei) = \mathsf{Post}_{\mathcal{T}}(\Phi(e), i) =$ $\mathsf{Post}_{\mathcal{T}}(\Phi(e'), \mathsf{i}) = \Phi(e'\mathsf{i})$. In other words, $e\mathsf{i} \sim_{\mathcal{T}} e'\mathsf{i}$. Let us show that $\mathsf{o} = \mathsf{o}'$. Clearly, $o = Out_{\mathcal{T}}(\Phi(e), i)$ because $E = L(PTA(E)) \subseteq L(\mathcal{T})$. Similarly, o' = $\operatorname{Out}_{\mathcal{T}}(\Phi(e'), \mathsf{i})$. So, $\mathsf{o} = \mathsf{o}'$ follows since $\Phi(e) = \Phi(e')$. Clearly, \sim_T has at most |T|equivalence classes. Since E contains for all states $t \in T$, an example s_t such that $\Phi(s_t) = t$, it follows that \sim_T has at least |T| equivalence classes. So far, we have proved that \sim_T is a Mealy-congruence for $\mathsf{PTA}(E)$ with the same number of equivalence classes as the number of states of \mathcal{T} . For $t \in T$, we let $\Phi^{-1}(t) = \{e \in \mathcal{T}\}$ $E \mid \Phi(e) = t$. Note that $\Phi^{-1}(t) = [e]$ for some representative $e \in E$. We finally show that \mathcal{T} and $\mathsf{PTA}(E)/_{\sim_{\mathcal{T}}}$ are equal, up to the state renamping Φ^{-1} . First, the initial state of \mathcal{T} maps to $[\epsilon]$, which is the initial state of $\mathsf{PTA}(E)/_{\sim \tau}$. Let us show that Φ^{-1} preserves the transitions of \mathcal{T} . Let $t, \mathbf{i}, \mathbf{o}, t'$ such that $\Delta_{\mathcal{T}}(t, \mathbf{i}) = (\mathbf{o}, t')$. We show that $\Delta_{\mathsf{PTA}(E)/_{\sim_{\mathcal{T}}}}(\Phi^{-1}(t), \mathsf{i}) = (\mathsf{o}, \Phi^{-1}(t'))$. First, $s_t \in \Phi^{-1}(t)$ since $\Phi(s_t) = t$. Moreover, by definition of E, $e_{t,i} = f_{io}^{\mathcal{T}}(s_t) = f_{io}^{\mathcal{T}}(s_t)$ io $\in E$, so $\Delta_{\mathsf{PTA}(E)}(f_{i0}^{\mathcal{T}}(s_t), \mathsf{i}) = (\mathsf{o}, f_{i0}^{\mathcal{T}}(s_t \mathsf{i})).$ Moreover, $\Phi(s_t \mathsf{i}) = t'$. This concludes that $\Delta_{\mathsf{PTA}(E)/\sim_T}(\Phi^{-1}(t),\mathsf{i}) = (\mathsf{o},\Phi^{-1}(t')).$ The converse is a consequence of \sim_T being a Mealy-congruence for $\mathsf{PTA}(E)$ and the fact that all outputs picked by $\mathsf{PTA}(E)$ are consistent with \mathcal{T} , i.e., $L(\mathsf{PTA}(E)) = E \subseteq L(\mathcal{T})$. End of proof of Claim 1.

Proof of Claim 2 By definition of $\sim^{x,y}$, there exist some non-congruent points $p_1, \ldots, p_n \in E \times E \times \mathcal{I}$ such that

$$\sim^{x,y} = U(U(\dots(U(\sim^{x,y,0}, p_1), \dots), p_{n-1}), p_n)$$

Let $\sim^0 = \sim^{x,y,0}$ and $\sim^j = U(\sim^{j-1}, p_j)$ for $1 \le j \le n$. We prove by induction on j that $\sim^j \sqsubseteq \sim_T$.

At rank j = 0, $\alpha \sim^0 \beta$ means that either (i) $\alpha \sim \beta$ or, (ii) $\alpha \sim x$ and $\beta \sim y$, or (iii) $\beta \sim x$ and $\alpha \sim y$. In case (i), by hypothesis, $\sim \Box \sim_T z$ so we are done. In case (ii), by assumption, $x \sim_T y$ and as $\sim \Box \sim_T, \alpha \sim_T x$ and $y \sim_T \beta$. So, $\alpha \sim_T \beta$. Case (iii) is symmetrical to (ii). At rank j > 0, if $p_j = (z_1, z_2, i)$, then $\alpha \sim^j \beta$ means that either $(i) \alpha \sim^{j-1} \beta$, or $(ii) \alpha \sim^{j-1} \mathsf{Post}_{\mathsf{PTA}(E)}(z_1, i)$ and $\beta \sim^{j-1} \mathsf{Post}_{\mathsf{PTA}(E)}(z_2, i)$, or (iii) symmetric of (ii) by swapping α and β . In case (i), we get the statement by IH. In case (ii), by IH, we get $\Phi(\alpha) = \Phi(\mathsf{Post}_{\mathsf{PTA}(E)}(z_1, i))$, and $\Phi(\beta) = \Phi(\mathsf{Post}_{\mathsf{PTA}(E)}(z_2, i))$. By definition of a non-congruent point, we also have $z_1 \sim^{j-1} z_2$, so, $\Phi(z_1) = \Phi(z_2)$. Now, $\Phi(\mathsf{Post}_{\mathsf{PTA}(E)}(z_1, i)) = \mathsf{Post}_{\mathcal{T}}(\Phi(z_1), i) = \mathsf{Post}_{\mathcal{T}}(\Phi(z_2), i') = \Phi(\mathsf{Post}_{\mathsf{PTA}(E)}(z_2, i))$ from which we get $\Phi(\alpha) = \Phi(\beta)$. Case (iii) is symmetrical to (ii). End of Proof of Claim 2.

E Details and results of Section 4

E.1 Optimizing \mathcal{P} -realizability checking for specifications $\mathcal{D}(\mathcal{A}, k)$

As said in the main body of the paper, a direct application of Theorem 2 on $\mathcal{D}(\mathcal{A}, k)$ to check its \mathcal{P} -realizability would yield a doubly exponential upperbound. We prove instead that one exponential can be saved by exploiting the structure of $\mathcal{D}(\mathcal{A}, k)$, as summarized by the following theorem:

Theorem 8. Given a universal co-Büchi automaton \mathcal{A} with n states and $k \in \mathbb{N}$ defining a safety specification $S = L_k^{\forall}(\mathcal{A}) = L(\mathcal{D}(\mathcal{A}, k))$ and a preMealy machine \mathcal{P} with m states and n_h holes, deciding whether \mathcal{S} is \mathcal{P} -realizable is EXPTIME-COMPLETE.

In this theorem, k is assumed to be given in binary. To establish the upper bound, we exploit the fact that the set of states of $\mathcal{D}(\mathcal{A}, k)$ forms a complete lattice with several interesting properties.

Definition 3 (Lattice of counting functions). For all co-Büchi automata \mathcal{A} and $k \in \mathbb{N}$, let $\preceq \subseteq CF(\mathcal{A}, k) \times CF(\mathcal{A}, k)$ be defined by $f_1 \preceq f_2$ if and only if $f_1(q) \leq f_2(q)$ for all $q \in Q$. The set $(CF(\mathcal{A}, k), \preceq)$ forms a complete lattice with minimal elements $\overline{-1} = \langle -1, -1, \ldots, -1 \rangle$, which denotes the function that assigns value -1 to each state $q \in Q$, and with least upper bound operator \sqcup defined as: $f_1 \sqcup f_2 = f$ such that $f(q) = \max(f_1(q), f_2(q))$ for all $q \in Q$. This upper bound operator generalizes to any finite set of counting functions $\mathcal{F} = \{f_1, f_2, \ldots, f_n\} \subseteq CF(\mathcal{A}, k)$, and the least upper bound of \mathcal{F} is denoted $\sqcup \mathcal{F}$.

The essence of the structure in $\mathcal{D}(\mathcal{A}, k)$ is captured in the following series of results.

Lemma 15. For all co-Büchi automata \mathcal{A} , for all $k \in \mathbb{N}$, for all counting functions $f_1, f_2 \in CF(\mathcal{A}, k)$, such that $f_1 \preceq f_2$, we have that $L(\mathcal{D}(\mathcal{A}, k)[f_2]) \subseteq L(\mathcal{D}(\mathcal{A}, k)[f_1])$, and thus if $L(\mathcal{D}(\mathcal{A}, k)[f_2])$ is realizable then $L(\mathcal{D}(\mathcal{A}, k)[f_1])$ is realizable.

Proof. As counting functions record the number of visits to accepting states so far, starting from f_2 is more constraining than from f_1 . So any word accepted from f_2 is accepted from f_1 .

Lemma 16 ([20]). For all co-Büchi automata \mathcal{A} , for all $k \in \mathbb{N}$, for all counting functions $f \in CF(\mathcal{A}, k)$, it is EXPTIME-COMPLETE to decide if $L_k^{\forall}(\mathcal{A}[f])$ is realizable.

Corollary 1. For all co-Büchi automata \mathcal{A} , for all $k \in \mathbb{N}$, the set of counting functions $W_k^{\mathcal{A}} = \{f \in CF(\mathcal{A}, k) \mid L(\mathcal{D}(\mathcal{A}, k)[f]) \text{ is realizable }\}$ is \leq -downward closed and can be represented by the \leq -antichain $[W_k^{\mathcal{A}}]$ of maximal elements in $W_k^{\mathcal{A}}$. This set of maximal elements can be computed in exponential time in the size of \mathcal{A} and the binary encoding of k.

We now formulate a lemma that will be instrumental, later in this section, to improve the upper bound of the algorithm that solves the \mathcal{P} -realizability problem for universal coBüchi specifications.

Lemma 17. For all co-Büchi automata \mathcal{A} , for all $k \in \mathbb{N}$, for all sets of counting functions $\mathcal{F} = \{f_1, f_2, \ldots, f_n\} \subseteq CF(\mathcal{A}, k)$:

$$L(\mathcal{D}(\mathcal{A},k)[\bigsqcup \mathcal{F}] = \bigcap_{f \in \mathcal{F}} L(\mathcal{D}(\mathcal{A},k)[f]).$$

Proof. As $CF(\mathcal{A}, k)$ is finite, it is sufficient to prove that for all $f_1, f_2 \in CF(\mathcal{A}, k)$, we have $L(\mathcal{D}(\mathcal{A}, k)[f_1 \sqcup f_2] = L(\mathcal{D}(\mathcal{A}, k)[f_1]) \cap L(\mathcal{D}(\mathcal{A}, k)[f_1])$. To establish this property, let us consider a word $w \in (\mathcal{IO})^{\omega}$ and the runs on w from f_1 , f_2 and $f_1 \sqcup f_2$. We denote those runs by r_1, r_2 , and $r_{1,2}$, respectively. Let $r_1 = g_0 g_1 \ldots g_n \ldots$ with $g_0 = f_1, r_2 = h_0 h_1 \ldots h_n \ldots$ with $h_0 = f_2$, and $r_{1,2} = l_0 l_1 \ldots l_n \ldots$ with $l_0 = f_1 \sqcup f_2$. It is easy to show by induction, using the definition of $\delta^{\mathcal{D}}$, that for all positions $i \geq 0$, for all $q \in \mathcal{A}$, we have that $l_i(q) = \max(g_i(q), h_i(q))$ and so $l_i = f_i \sqcup g_i$. Then clearly, we have that $r_{1,2}$ is accepting if and only if both r_1 and r_2 are accepting. This is because, for $l = f \sqcup g$, we have for $q \in Q$: l(q) = k + 1 iff f(q) = k + 1 or g(q) = k + 1. \Box

Proof of Theorem 8 We are now ready to provide a proof to the statement. Given a preMealy $\mathcal{P} = (M, m_0, \Delta)$, co-Büchi automata $\mathcal{A} = (Q, q_{\text{init}}, \Sigma, \delta, d), k \in \mathbb{N}$, we can compute according to corollary 1 the \preceq -antichain $[W_k^{\mathcal{A}}] \subseteq CF(\mathcal{A}, k)$ in exponential time. Then to decide if \mathcal{P} can be completed into a (full) Mealy machine that realizes $L(\mathcal{D}(\mathcal{A}, k))$, we construct a labelling of states of \mathcal{P} defined by the function $F^* : M \to CF(\mathcal{A}, k)$, for all $m \in M$, by

$$F^*(m) = \bigsqcup\{f \mid \exists u \in (\mathcal{IO})^* \cdot \mathsf{Post}^*_{\mathcal{P}}(m_0, u) = m \land \delta^{\mathcal{D}}(f_0, u) = f\}$$

Our goal is now to show that F^* can be computed in polynomial time. To do so, we first define the following sequence of functions $(F_j : M \to CF(\mathcal{A}, k))_{j \in \mathbb{N}}$:

- for all states $m \in M$ of \mathcal{P} , let $F_0(m) = f_0$ if $m = m_0$, and $F_0(m) = \overline{-1}$ otherwise.
- for j > 0, for all states $m \in M$ of \mathcal{P} , let $F_j(m) = \bigsqcup_{(m_1, \mathbf{i}, \mathbf{o}, m) \mid \Delta(m_1, \mathbf{i}) = (\mathbf{o}, m)} \delta^{\mathcal{D}}(F_{j-1}(m_1), (\mathbf{i}, \mathbf{o}))$, where $\delta^{\mathcal{D}}$ is the transition function of $\mathcal{D}(\mathcal{A}, k)$.

The following lemma formalizes properties of this sequence of functions.

Lemma 18. The sequence $(F_i : M \to CF(\mathcal{A}, k))_{i \in \mathbb{N}}$ satisfies:

- 1. The sequence stabilizes after at most $|M| \times |Q| \times (k+1)$ steps. We note G^* the function on which the sequence $(F_j)_{j \in \mathbb{N}}$ stabilizes.
- 2. Each iteration is computable in time bounded by $\mathbf{O}(|M|^2 \times |Q|)$.
- 3. For all $m \in M$, $F^* = G^*$.

Thus, there is a polynomial time algorithm in $|\mathcal{P}|$, $|\mathcal{A}|$, $k \in \mathbb{N}$, and the size of $[W_k^{\mathcal{A}}]$ to check the \mathcal{P} -realizability of $L^{\forall}(\mathcal{A})$.

Proof. For point (1), we first note that for all state m of \mathcal{M} the sequence of counting function $(F_j(\cdot))_{j\in\mathbb{N}}$ stabilizes after $|\mathcal{M}| \times |Q| \times (k+1)$. Indeed, for all $j \geq 0$, and for all $m \in \mathcal{M}$, we have that $F_j(m) \preceq F_{j+1}(m)$. As chains in the lattice of counting function $CF(\mathcal{A}, k)$ has length at most $|Q| \times (k+1)$, each m can be updated at most this number of times. The total number of iterations before stabilization of the $|\mathcal{M}|$ state labels defined by the F_j is thus at most $|\mathcal{M}| \times |Q| \times (k+1)$.

For point (2), we note that the counting function $F_j(m)$ is computed as the least upper bound applied of at most |M| counting functions obtained by applying the transition function of $\mathcal{D}(\mathcal{A}, k)$ on counting functions defined by F_{j-1} . It is important to note that we de not need to construct the entire automaton $\mathcal{D}(\mathcal{A}, k)$ for this purpose as we can compute transitions on-demand based according to Definition 1(3). So the complexity is bounded by $\mathbf{O}(|M| \times |Q|)$ for updating one state m and thus the overall complexity of one update of all the states is bounded by $\mathbf{O}(|M|^2 \times |Q|)$.

For (3) we reason by induction, using the definition of Δ and $\delta^{\mathcal{D}}$, to prove for all $j \geq 0$ and $m \in M$:

$$F_j(m) = \bigsqcup \{ f \mid 0 \le i \le j \land \exists u \in (\mathcal{IO})^i \cdot \mathsf{Post}^*(m_0, u) = m \land \delta^{\mathcal{D}}(f_0, u) = f \}.$$

We now show that $L(\mathcal{D}(\mathcal{A}, k))$ is \mathcal{P} -realizable if and only if there does not exist $m \in M$ such that $F^*(m) \notin W_k^{\mathcal{A}}$. Following the proof of Theorem 1, we know that $L(\mathcal{D}(\mathcal{A}, k))$ is \mathcal{P} -realizable iff, $L_{\omega}(\mathcal{P}) \subseteq L(\mathcal{D}(\mathcal{A}, k))$ and for every hole h = (p, i) of \mathcal{P} , there exists $\mathbf{o}_h \in \mathcal{O}$ and a Mealy machine \mathcal{M}_h such that for all $u \in \mathsf{Left}_p, \mathcal{M}_h$ realizes $(uio_h)^{-1}L(\mathcal{D}(\mathcal{A}, k))$.

 $u \in \operatorname{Left}_p, \mathcal{M}_h$ realizes $(uio_h)^{-1}L(\mathcal{D}(\mathcal{A}, k))$. First, checking whether $L_{\omega}(\mathcal{P}) \subseteq L(\mathcal{D}(\mathcal{A}, k))$ can be done by verifying that $F^*(m)(q) \neq k+1$ for all $m \in \mathcal{M}$. Second, checking the existence of \mathcal{M}_h is equivalent to check that $\bigcap_{ui\in\operatorname{Left}_p}(ui)^{-1}L(\mathcal{D}(\mathcal{A}, k))$ is realizable. In turn, this is equivalent, by Lemma 17 and point (3), to check that $L(\mathcal{D}(\mathcal{A}, k)[F^*(p)])$ is realizable, which is equivalent to check if $F^*(p) \in W_k^{\mathcal{A}}$. Both tests can be done in polynomial time in the size of \mathcal{A} and in the size of $[W_k^{\mathcal{A}}]$.

We have established that given a preMealy \mathcal{P} , co-Büchi automata $\mathcal{A}, k \in \mathbb{N}$, and the \preceq -antichain $[W_k^{\mathcal{A}}]$, we can compute the sequence of functions $(F_j : M \to CF(\mathcal{A}, k))_{j \in \mathbb{N}}$ in polynomial time in the size of those inputs, and thus decide (by point (4)) if the specification $L(\mathcal{D}(\mathcal{A}, k))$ is \mathcal{P} -realizable. According to Corollary 1, the antichain $[W_k^{\mathcal{A}}]$ can be computed in exptime in the size of \mathcal{A} and the encoding of k. We have thus established the upper-bound of Theorem 8. The lower bound is a direct consequence of Theorem 2 which establishes the lower bound for any specification given as a universal coBüchi automaton \mathcal{A} , and Theorem 5 which reduces the \mathcal{P} -realizability of $L^{\forall}(\mathcal{A})$ to the \mathcal{P} -realizability of $L_k^{\forall}(\mathcal{A})$ for a k which is exponential in the number of states of \mathcal{A} . Since k is in binary, its size remains polynomial, so the reduction is polynomial. This ends the proof of Theorem 8.