

Active Sequential Two-Sample Testing

Weizhi Li[†] Karthikeyan Natesan Ramamurthy[‡] Prad Kadambi[†] Pouria Saidi[†]
Gautam Dasarathy[†] Visar Berisha[†]

[†] Arizona State University [‡]IBM Research

Abstract

Two-sample testing tests whether the distributions generating two samples are identical. We pose the two-sample testing problem in a new scenario where the sample measurements (or sample features) are inexpensive to access, but their group memberships (or labels) are costly. We devise the first *active sequential two-sample testing framework* that not only sequentially but also *actively queries* sample labels to address the problem. Our test statistic is a likelihood ratio where one likelihood is found by maximization over all class priors, and the other is given by a classification model. The classification model is adaptively updated and then used to guide an active query scheme called bimodal query to label sample features in the regions with high dependency between the feature variables and the label variables. The theoretical contributions in the paper include proof that our framework produces an *anytime-valid p-value*; and, under reachable conditions and a mild assumption, the framework asymptotically generates a minimum normalized log-likelihood ratio statistic that a passive query scheme can only achieve when the feature variable and the label variable have the highest dependence. Lastly, we provide a *query-switching (QS)* algorithm to decide when to switch from passive query to active query and adapt bimodal query to increase the testing power of our test. Extensive experiments justify our theoretical contributions and the effectiveness of QS.

1 Introduction

A two-sample test is a statistical hypothesis test which is applied on data samples (or measurements) from two distributions. The goal is to test if the data support the hypothesis that the distributions are different. If one were to think of each data point as being composed of features and group membership labels (which tell us which distribution the data is from), then the two-sample test is equivalent to the problem of testing the dependence between the features and the labels. With these lens, the null hypothesis for the two-sample test claims the independence of feature variables and the label variables; the alternate hypothesis states the opposite. A decision maker must decide whether the observed data provides sufficient grounds to reject the null hypothesis. There is a rich literature [1–6] on two-sample tests. As stated in [7], the process of performing these two-sample tests is understood as follows: Collect data, collect statistical evidence from the observed data, and decide whether to reject the null based on the evidence. The statistical evidence is encapsulated in a statistic, which is then, conventionally, converted into a p -value to reflect the confidence of the null hypothesis being true. The p -value measures the probability of generating data samples at least as extreme as the one observed, assuming the null hypothesis is true. A test rejects the null if the p -value is smaller than a pre-defined significance level α , which implies the statistic is unlikely to have been generated under the null. A decision maker typically knows little about the difficulty of a two-sample testing problem before running the test. Fixing the sample size to any given value a priori may either result in a test that needs to collect additional evidence to arrive at a final decision (if the problem is hard) or in an inefficient test that has over-collected data (if the problem is simple). To address this dichotomy, the research community proposed sequential two-sample tests [1, 8–11] that allow the decision maker to sequentially collect data, monitor statistical evidence, i.e., a statistic is computed from the data, and the test can stop anytime when sufficient evidence has been accumulated to make a decision.

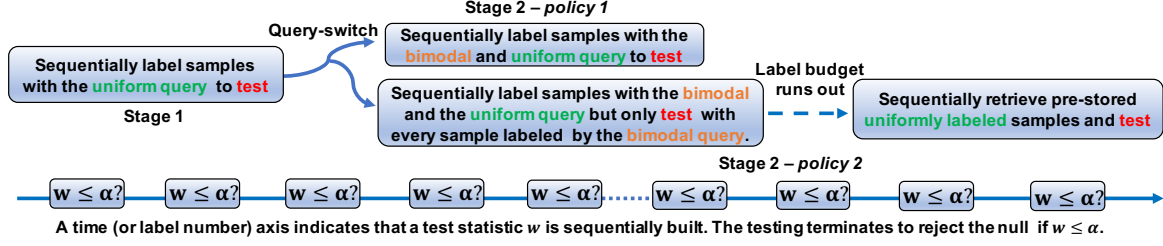


Figure 1: A two-stage *active sequential two-sample testing framework*. Both *policy 1* and *2* alternate between the bimodal and uniform query. *Policy 1* updates the test statistic with every sample labeled. In contrast, *policy 2* updates the test statistic only with the samples labeled with the bimodal query before the budget runs out and then starts to retrieve the pre-stored uniformly labeled samples to update the test statistic.

Existing sequential two-sample tests [1, 8–11] are devised to collect both sample features and sample labels simultaneously. This paper considers the sequential two-sample testing problem in a novel practical setting where sample features are inexpensive to access, but sample labels are costly. As a result, the decision maker is allowed to obtain a large collection of sample features and requires the decision maker to sequentially query the label of the samples in this collection to perform the two-sample testing. An immediate application is that doctors validate the dependency between a biomarker (label variables) and digital test results (feature variables) where the biomarker is expensive to access, and the digital test results are potentially inexpensive replacements for the biomarker; the doctors expect a sequential validation process that uses a reasonable amount of the label budget. Such a design is a special case of the active sequential hypothesis testing elaborated in [12]: A decision maker interacts with the environment and sequentially and actively collects information (sample labels in our case) to test a hypothesis. Existing active sequential hypothesis tests include [12–17]. However, these works require a clear parametric description of the statistical models of the hypotheses. Although two-sample tests such as the t-test [18] and the Hotelling test [6] assume normality of the feature variables, the problem addressed in our work is a general two-sample independence test, which does not assume a known statistical model.

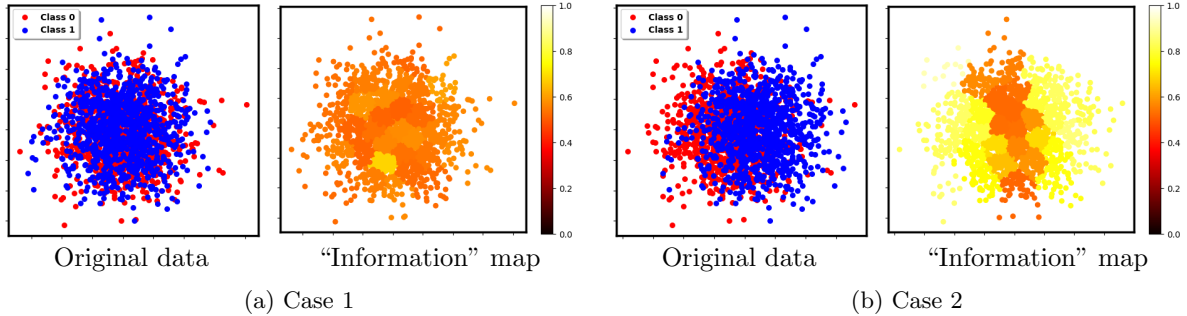


Figure 2: Two data cases under H_1 and their “information” maps. We compute the “information” maps by partitioning the data into 32 clusters and calculating the proportion of the dominant class samples in a cluster. The brighter color, the more informative samples. Case 1 favors *policy 1* as each cluster is similarly informative. Case 2 favors *policy 2* as the most distributionally different samples are far more informative than other samples.

This paper proposes the first **active sequential two-sample testing framework** to test the dependency between the feature variables S and the label variables Z in the setting that a significant number of features realizations s is available but the corresponding label realizations z is expensive to access (See Section 2 for a detailed problem statement). The proposed testing framework is developed based on a likelihood ratio statistic $\prod_{i=1}^n \frac{P(z_i)}{P(z_i|s_i)}$ where n indicates the size of samples participating in the testing so far. Given a feature space \mathbb{S} , $P(z) = P(z|s), \forall s \in \mathbb{S}$ and $P(z|s) \neq P(z), \exists s \in \mathbb{S}$ are the statistical models of the two label

generation processes, $S \perp\!\!\!\perp Z$ under the null, and $S \not\perp\!\!\!\perp Z$ under the alternative hypothesis, respectively. The true $P(z)$ and $P(z | s)$ are unknown to a decision maker. We replace $P(z)$ with a prior $\hat{P}(z)$ that maximizes the prior products (likelihood maximization under the null) given the observed labels. In addition, we model $P(z | s)$ with a class-probability predictor $Q(z | s, \cdot)$ ¹. A high-level description of the two-stage testing framework is shown in Figure 1. The framework sequentially builds $w_n = \prod_{i=1}^n \frac{\hat{P}(z_i)}{Q_i(z_i | s_i, \cdot)}$ and rejects the null if w_n is smaller than a significance level α . Specifically, in the first stage, a decision maker sequentially and uniformly labels samples and constructs the test statistic w . This stage is an exploration stage in which $Q(z | s, \cdot)$ gains enough training samples to guide the selection of informative examples for the second stage. During the second stage, we adopt an active query scheme called the bimodal query [19] to label the samples in regions with high dependency between feature and label variables. We propose one of two policies in the second stage. Both policies alternate between bimodal and uniform queries to label samples sequentially and update $Q(z | s, \cdot)$ with the uniformly labeled samples. However, *policy 1* updates w immediately after samples are labeled by the uniform or bimodal query, whereas *policy 2* updates w only with the samples labeled by the bimodal query before the label budget runs out. Both policies serve the purpose of producing a small w but are based on different approaches (as selected by a *query-switching (QS)* scheme): Under *Policy 1*, the QS scheme predicts that the majority of labeled samples (those acquired via bimodal query and via uniform query) are similarly informative and hence accumulatively multiplies every $\frac{P(z_i)}{Q_i(z_i | s_i, \cdot)}$ from both the bimodal and uniform query to produce a small w . In contrast, under *policy 2* the QS scheme predicts that only the most distributionally different samples are informative so as only to multiply $\frac{P(z_i)}{Q_i(z_i | s_i, \cdot)}$ from the bimodal query to generate a small w . One of the contributions of this work is a novel QS algorithm that determines when to switch from uniform query (first stage) to active query (second stage) and what policy to use in the second stage. For an intuition about when the QS scheme prefers *policy 1* over *policy 2* (and vice-versa), we refer the reader to Figure 2 that presents a pictorial case study to illustrate the two policies. We summarize the contributions of our work as follows:

- We devise the first *active sequential two-sample testing framework* loaded with the two policies following different heuristics.
- We prove that under H_0 , the framework produces an *anytime-valid* p -value to achieve Type I error control. Under H_1 and reachable conditions and a mild assumption, the framework asymptotically generates a normalized statistic that a passive query can only achieve in the simplest alternative hypothesis where the feature variable and the label variable have the highest dependence (Mutual information = 1).
- We introduce the *QS* algorithm to determine when to switch to the second stage and what policy to use in the second stage. While the first stage is proceeding, *QS* simulates *policy 1* and *2* as well as the uniform query by resampling the labeled samples. We compare the simulation results from the three schemes to decide the best parameters to use in the second stage.
- We perform extensive experiments on synthetic data, MNIST, and an application-specific dataset to evaluate the effectiveness of the proposed active sequential test.

Difference from previous work The authors of [19] devised a label-efficient two-sample test that trains a classifier, uses classifier prediction probabilities to guide the bimodal label query, and performs two-sample testing on the labeled samples. However, their test is a fixed sample size test, and it is unclear when to switch the uniform query to the bimodal query. [8] devised a non-parametric two-sample testing framework. However, their framework is devised to collect both features and labels simultaneously and sequentially. Furthermore, the framework requires a known prior probability of class (label) to construct its statistic. We devise an active sequential two-sample testing framework with a statistic similar to the one in [8] but combined with the bimodal query proposed in [19]. This test has multiple innovations listed in the above contribution section and overcomes the stated limitations of the two tests.

¹The training set used to build the class-probability predictor is abbreviated to the dot in $Q(z | s, \cdot)$

2 Problem Statement and Its Preliminaries

We use a pair of random variables $(S, Z) \in \mathbb{R}^d \times \{0, 1\}$ to denote a feature variable and its corresponding label variable, and the variable pair admits a joint distribution $p_{SZ}(s, z)$. Formally, a two-sample testing problem consists of null hypothesis H_0 that states $p_{S|Z=0}(s) = p_{S|Z=1}(s)$ and an alternative hypothesis H_1 that states $p_{S|Z=0}(s) \neq p_{S|Z=1}(s)$. Then, a decision maker collects a sequence $((s, z)_i)_{i=1}^N$ of N realizations of (S, Z) to test H_0 against H_1 . The problem is equivalent to testing the independency between S and Z . Therefore, we declare the following hypotheses for the two-sample testing problem:

$$\begin{aligned} H_0 &: p_{SZ}(s, z) = p_S(s)P_Z(z) \\ H_1 &: p_{SZ}(s, z) \neq p_S(s)P_Z(z) \end{aligned}$$

We omit the subscripts in $p_{SZ}(s, z)$, $P_Z(z)$ and $p_S(s)$ and write them as $p(s, z)$, $P(z)$ and $p(s)$. In addition, we use s^N , z^N and $(s, z)^N$ to denote sequences of samples $(s_i)_{i=1}^N$, $(z_i)_{i=1}^N$ and $((s, z)_i)_{i=1}^N$ respectively. We use similar notation throughout the paper.

In the typical setting of a sequential two-sample test, a decision maker does not have prior knowledge of sample features. The decision maker sequentially collects both sample features and their labels *simultaneously* with the corresponding random variable pair (S, Z) i.i.d. generated from a data-generating process, i.e., $p(s, z)$. We consider a variant of the setting in which accessing sample features is free/inexpensive. Consequently, the decision maker collects a large set \mathcal{S}_u of sample features before performing a sequential test. However, accessing the label of a feature in \mathcal{S}_u is costly. **We assume the following fact throughout the paper:** The pre-owned \mathcal{S}_u is the result of a sample feature collection process where all $s_i \in \mathcal{S}_u$ are realizations of random variables S_i i.i.d. generated from $p(s)$. There exists an oracle to return a label z_i of $s_i \in \mathcal{S}_u$ with the corresponding random variable Z_i and S_i admitting the posterior probability $P(z|s)$. We consider the following **new** sequential two-sample testing problem:

An active sequential two-sample testing problem: Suppose \mathcal{S}_u is an unlabeled feature set, there exists an oracle to return a label z of $s \in \mathcal{S}_u$, and N_q is a limit on the number of times the oracle can be queried (e.g. the label budget). A decision maker sequentially queries the oracle for the z of $s \in \mathcal{S}_u$. After querying a new z_n of s_n , for $1 \leq n \leq N_q$, the decision maker needs to decide whether to terminate the label querying process and make a decision (i.e., whether to reject H_0) or continue with the querying process if $n < N_q$.

A decision maker actively labeling $s_n \in \mathcal{S}_u$ may result in non-i.i.d pairs of (S, Z) , hence the distribution of (S, Z) is shifted away from $p(s, z)$. In contrast, the decision maker passively (or uniformly) labeling $s_n \in \mathcal{S}_u$ maintains $(S, Z) \sim p(s, z)$. As already generalized in many two-sample testing literature such as [1, 8, 10, 20, 21], a conventional procedure for sequential two-sample testing is to compute a p -value from sequentially observed samples and compare it to a pre-defined significance level $\alpha \in [0, 1]$ anytime. A decision maker rejects H_0 and stops the testing if $p \leq \alpha$. We refer readers to [22] for more details. A legitimate sequential two-sample test has the following three attributes:

- The test generates an *anytime-valid* p -value such that, under H_0 , $P_0(p \leq \alpha) \leq \alpha$ holds at anytime of the sequential testing process. P_0 is called a *Type I error* indicating the probability of making a mistake under the H_0 .
- The test has a high *testing power* $P_1(p \leq \alpha)$ (or low *Type II error* as *Type II error* = $1 - P_1$), which indicates the probability of making a correct decision under H_1 .
- The test is *consistent* such that $P_1(p \leq \alpha) = 1$ under H_1 when the size of test samples goes to infinity.

Bimodal query The authors of [19] proposed the bimodal query to label sample features $s \in \mathcal{S}$, $\mathcal{S} = \text{supp}(p(s))$ with the highest $P(Z = 0|s)$ or $P(Z = 1|s)$. They build a class-probability predictor $Q(z|s, \cdot)$ with uniformly labeled samples to model $P(z|s)$. Then, they query the labels of features with the highest $Q(Z = 0|s, \cdot)$ or $Q(Z = 1|s, \cdot)$ with a fair chance from an unlabeled feature set. A fixed sample size two-sample test in their work constructed by these labeled samples efficiently (in the sense of label query number) reveals the dependency between S and Z when H_1 is true.

3 A Sequential Two-Sample Testing Statistic

We follow the well-known likelihood ratio test [23] to construct a sequential testing statistic. To achieve this, we use the statistical models that characterize the label generation processes conditional on the observed sample features under H_0 and H_1 . More precisely, we have the posterior $P(z|s) = P(z)$ to indicate the statistical model under H_0 ; this says when S and Z are independent, the posterior probability $P(z|s)$ is the same for any s in the support \mathbb{S} of $p(s)$. In contrast, we have the following statistical model under H_1 : $\exists s \in \mathbb{S}, P(z|s) \neq P(z)$. We sequentially collect sample data (s, z) , and when a new observation (s_n, z_n) arrives, we construct a likelihood ratio w_n : With $w_0 = 1$, $w_n = w_{n-1} \frac{P(z_n)}{P(z_n|s_n)} = \frac{P(z^n)}{P(z^n|s^n)}$, $n \geq 1$ to assess H_0 against H_1 . However, the statistical models $P(z)$ and $P(z|s)$ are unknown. We will use a likelihood $\hat{P}(z^n)$ that is maximized over all the class priors to replace $P(z^n)$ and build a class-probability predictor $Q_n(z | s, (s, z)^t)$ with a past observed sample sequence $(s, z)^t$, $t < n$ to model $P(z_n | s_n)$. We omit $(s, z)^t$ to abbreviate $Q_n(z | s, (s, z)^t)$ to $Q_n(z | s, \cdot)$ and obviously $\sum_{z=0}^1 Q_n(z | s, \cdot) = 1$. We formally present our sequential testing statistic:

A sequential two-sample testing statistic: Considering (s, z) is sequentially observed, and as a new (s_n, z_n) arrives, then, for $n = 1, 2, \dots$, a decision maker constructs

$$w_n = \frac{\hat{P}(z^n)}{Q(z^n | s^n)} = \prod_{i=1}^n \frac{\hat{P}(z_i)}{Q_i(z_i | s_i, \cdot)} \quad (1)$$

where $\hat{P}(Z = 1) = \frac{\sum_{i=1}^n z_i}{n}$ is a class prior chosen to maximize $\hat{P}(z^n)$ and $Q_i(z_i | s_i, \cdot)$ is the output of a class-probability predictor built by any past sequence observed before i .

We accordingly use W_n to indicate a random variable of which w_n is a realization. Our test statistic (1) is a generalization of the statistic proposed in [8]. In contrast to that work, our test statistic does not require that the class prior be known, and we devise the statistic to address the practical scenario described in Section 2 where a decision maker has limited access to the label information. The authors of [8] proved that their statistic is an *anytime-valid* p -value; this is also true for our test statistic variant W_n used by our testing framework; we formalize this in Section 4.2. A decision maker compares w_n with a significance level α for any n and rejects H_0 if $w_n \leq \alpha$. As a result, a small w_n is favored under H_1 to reject H_0 to endow a sequential two-sample test with the testing power. The class-probability predictor $Q_i(z|s, \cdot)$ can be instantiated with classification algorithms such as logistic regression, k-nearest neighbors (KNN), and a support vector machine.

4 Active Sequential Two-Sample Testing

In this section, we propose an active sequential two-sample testing framework that combines the sequential testing statistic in (1) with the bimodal query. Then, we introduce the theorems related to *anytime-valid* p -value and the asymptotic properties. Lastly, we provide the query-switching scheme to determine the parameters to use in the second stage of the proposed framework. We interchangeably use the time to indicate the number of labels progressively queried.

4.1 An Active sequential two-sample testing framework

We propose the active sequential two-sample testing framework shown in Figure 1. Our framework consists of two stages. In the first stage, a decision maker sequentially and uniformly labels samples to update the statistic w (1). In the second stage, the decision maker proceeds either with *policy 1* or *2* to alternatively take M^1 steps of the bimodal query and M^2 steps of the uniform query (i.e. M^1 bimodal queries $\rightarrow M^2$ uniform queries $\rightarrow M^1$ bimodal queries $\rightarrow M^2$ uniform queries \dots) to label samples sequentially to update w . *Policy 1* updates w after querying a new label with the bimodal query or uniform query. *Policy 2* updates

w only using the samples labeled by the bimodal query, and the uniformly labeled samples are stored; when the label budget runs out, it starts retrieving the uniformly labeled samples to update w . In both stages, the decision maker sequentially builds w , updates the class-probability predictor $Q(z|s, \cdot)$ only with samples labeled by the uniform query, and rejects H_0 if $w \leq \alpha$.

To precisely introduce our framework, we use the following notations. We write \mathcal{S}_u to denote an unlabeled feature set, write \mathcal{S}_w to denote a labeled feature sequence collected from the uniform query, write \mathcal{Z}_w to denote the corresponding label sequence, and \mathcal{S}_q to denote a sequence of all labeled features. In addition, we write \mathcal{S}_u^* to denote a set of features that the uniform query has not visited. \mathcal{S}_u^* is a feature collection that remained after the original feature set (Combines \mathcal{S}_u and \mathcal{S}_q) with \mathcal{S}_w uniformly sampled out. This says, S in \mathcal{S}_u^* and \mathcal{S}_u both follow $p(s)$. **A decision maker uses the bimodal query on \mathcal{S}_u to label features that are most distributionally different, whereas he/she uses the uniform query on \mathcal{S}_u^* to ensure every uniformly queried (S, Z) follows $p(s, z)$.** Such design serves the purpose of producing an *anytime-valid* p -value (see Section 4.2). Since accumulating $(z_i, Q_i(z_i|s_i, \cdot))$ from a labeled sample leads to the test statistic (1), we call each $(z_i, Q_i(z_i|s_i, \cdot))$ by the name *test unit*. We use $\mathcal{R}_0 = ((z_i, Q_i(z_i|s_i, \cdot)))_{i=1}^{n_0}$ to denote a test unit sequence that collects the test units immediately used to build w , e.g. $(z_i, Q_i(z_i|s_i, \cdot))$ from the bimodal and uniform query in *stage 2-policy 1*. Similarly, we use $\mathcal{R}_1 = ((z_i, Q_i(z_i|s_i, \cdot)))_{i=1}^{n_1}$ to denote a backup test unit sequence that stores the test units from the uniform query *stage 2-policy 2*, as these test units are not used to build w until the label budget runs out. In the following, we introduce each stage of our framework, supposing a decision maker will query the n^{th} new label next for $n \in [1, N_q]$. We omit i in $Q_i(z|s, \cdot)$ and use $Q(z|s, \cdot)$ to represent the latest class-probability predictor.

- **First stage** Continuously perform uniform query operation¹ until H_0 is rejected, the label budget runs out or the decision maker decides to enter the second stage.
- **Second stage – policy 1:** Alternatively perform M^1 steps of bimodal query operation and M^2 steps of uniform query operation¹.
- **Second stage – policy 2:** Alternatively perform M^1 steps of bimodal query operation and M^2 steps of uniform query operation²; if the label budget is exhausted, perform the retrieval operation.
- **The bimodal query operation:** Label z_n of a sample s_n from \mathcal{S}_u by the bimodal query. Add $(z_n, Q(z_n | s_n, \cdot))$ to \mathcal{R}_0 . Construct the test statistic w_{n_0} with \mathcal{R}_0 and compare it with α . Update $\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_u^*$.
- **The uniform query operation¹:** Uniformly sample s_n from \mathcal{S}_u^* . If z_n of s_n is not queried, query z_n , add $(z_n, Q(z_n | s_n, \cdot))$ to \mathcal{R}_0 , and construct the test statistic w_{n_0} with \mathcal{R}_0 and compare it with α . Update $\mathcal{S}_u, \mathcal{S}_w, \mathcal{S}_q, \mathcal{Z}_w, \mathcal{S}_u^*$; update $Q(z | s, \cdot)$ with \mathcal{S}_w and \mathcal{Z}_w .
- **The uniform query operation²:** Uniformly sample s_n from \mathcal{S}_u^* . If z_n of s_n is not queried, query z_n and add $(z_n, Q(z_n | s_n, \cdot))$ to \mathcal{R}_1 . Update $\mathcal{S}_u, \mathcal{S}_w, \mathcal{S}_q, \mathcal{Z}_w, \mathcal{S}_u^*$. Update $Q(z | s, \cdot)$ with \mathcal{S}_w and \mathcal{Z}_w .
- **The retrieval operation:** Remove the first element r_1 from \mathcal{R}_1 and add r_1 to \mathcal{R}_0 . Construct the test statistic w_{n_0} with \mathcal{R}_0 and compare it with α .

The uniform query operations need to verify if the selected feature is labeled, as some features of \mathcal{S}_u^* might already be labeled by the bimodal query. The two policies adopt different heuristics. *Policy 1* constructs the test statistic with \mathcal{R}_0 in which $(z_i, Q_i(z_i | s_i, \cdot))$ is immediately returned after a sample is labeled by the bimodal query or the uniform query, under the assumption that more test samples lead to a higher testing power. In contrast, *policy 2* only adds $(z_i, Q_i(z_i | s_i, \cdot))$ returned by the bimodal query to \mathcal{R}_0 immediately to construct test statistic. Only if the label budget is exhausted, and H_0 is not rejected, does the *policy 2* starts to retrieve $(z_i, Q_i(z_i | s_i, \cdot))$ from \mathcal{R}_1 to construct the test statistic. *Policy 2* is based on including only the most distributionally different samples in the two-sample to maximize testing power. The retrieval operation in *policy 2* uses the stored uniformly labeled samples that have not participated in the testing to update the test statistic when the label budget runs out, and H_0 is not rejected, in order to exploit the statistical evidence in the unused uniformly labeled samples. With these preliminaries, we formally introduce our active sequential two-sample testing framework.

An active sequential two-sample testing framework: Suppose N_q is a label budget and α is a significance level. A decision maker uses the proposed framework that switches to either policy 1 or 2 at some query-switching time N_{sw} with the step sizes M^1 and M^2 to sequentially build the test unit sequence \mathcal{R}_0 . As the n_0^{th} $(z_{n_0}, Q(z_{n_0}|s_{n_0}, \cdot))$ is added to \mathcal{R}_0 , then for $1 \leq n_0 \leq N_q$, we construct the following statistic with $\mathcal{R}_0 = ((z_i, Q_i(z_i | s_i, \cdot)))_{i=1}^{n_0}$

$$w_{n_0} = \prod_{i=1}^{n_0} \frac{\hat{P}(z_i)}{Q_i(z_i | s_i, \cdot)}. \quad (2)$$

H_0 is rejected if $w_{n_0} \leq \alpha$ or not rejected if $n_0 = N_q$, otherwise the test continues.

There are several design parameters in the test, including at what time N_{sw} to switch, which policy should be used, and what values of M^1 and M^2 should be used. In Section 4.4, we will propose a practical query-switching algorithm that helps a decision maker decide on these parameters.

4.2 The proposed framework controls the Type I error

Our framework rejects H_0 if the statistic $w_{n_0} \leq \alpha$ (2). The following theorem states that under H_0 , w_{n_0} is an *anytime-valid* p -value.

Theorem 1. Suppose N_q is a label budget, and α is a significance level. A decision maker uses the proposed framework to sequentially query the oracle for Z of $S \in \mathcal{S}_u$ resulting in $\mathcal{R}_0 = ((Z_i, Q_i(Z_i|S_i, \cdot)))_{i=1}^{N_0}$. Then for $1 \leq N_0 \leq N_q$, we have the following under H_0 ,

$$P_0 \left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha \right) \leq \alpha$$

Theorem 1 implies the probability P_0 (or Type I error) that our framework mistakenly rejects H_0 is upper-bounded by α . The sketch of the proof for Theorem 1 is as follows: The decision maker updates $Q_i(z|s, \cdot)$ only with past observations collected from the uniform query. It ensures that no label realizations of Z_i for $S_i \in \mathcal{S}_u$ leak to the decision maker. Therefore, $\forall S \in \mathcal{S}_u$ and the newly queried Z is independent under H_0 . Furthermore, as $\prod_{i=1}^{N_0} \hat{P}(Z_i)$ is a likelihood maximized over class priors, we use the Ville's maximum inequality [24, 25] to develop Theorem 1. We refer readers to Appendix A.2 for complete proof.

4.3 Asymptotic properties of the proposed framework

Policy 1 and *2* both use the bimodal query to label samples, and H_0 and H_1 can be differentiated faster by constructing a small w_{n_0} (2) with the labeled samples under H_1 . In the following, we prove that both policies generate a normalized w_{n_0} which asymptotically approaches the minimum that a uniform query can only achieve under the simplest H_1 (i.e. when the feature variable and the label variable have the highest mutual information). Before that, we first define two concepts:

Definition 1. (λ -hard) H_1 is a λ -hard alternative hypothesis if the mutual information (MI) $I(S, Z) = 1 - \lambda, \forall \lambda \in [0, 1]$.

MI is well-known to measure the dependency between features and labels [26]. Under the null H_0 , $I(S, Z) = 0$, and under the alternative H_1 , $I(S, Z) > 0$. Therefore, $I(S, Z)$ reflects how much H_1 deviates from H_0 . As a result, in Definition 1, we naturally use $I(S, Z)$ to measure the intrinsic difficulty of detecting H_1 by the two-sample testing if H_1 is true.

Definition 2. $Q_i(z|s, \cdot)$ is a pointwise consistent class-probability predictor (*p.c.c.p*) if $\lim_{i \rightarrow \infty} Q_i(z|s, \cdot) \rightarrow P(z|s)$.

Suppose there is a sequence $(S, Z)^N$ with every (S, Z) i.i.d. generated from $p(s, z)$. The authors of [8] and [27] suggest that $Q(z|s, (S, Z)^N)$ constructed by partitioning, kernel, and nearest neighbor estimates of $P(z|s)$ achieves the point-wise consistency defined in 2 with proper scales (e.g. number of nearest neighbors) as N goes to infinity. We need to make one additional assumption before stating the final result as follows,

Assumption 2. Suppose \mathbb{S} is the support of $p(s)$. Under H_1 , there exists regions $\mathbb{S}_0 \subset \mathbb{S}$ and $\mathbb{S}_1 \subset \mathbb{S}$ such that $P(Z = 0|s) = 1, \forall s \in \mathbb{S}_0$ and $P(Z = 1|s) = 1, \forall s \in \mathbb{S}_1$.

Assumption 2 states that under H_1 there are at least two regions with absolute class prediction $p(z|s) = 1$ for class 0 and 1. The same assumption was used in [28] to address a nearest neighbor classification problem.

Now, we introduce the asymptotic property of our framework. Considering a test statistic unit sequence \mathcal{R}_0 built by the *policy 1* or *2* in the second stage of our framework, a normalized version $\overline{W}_{N_0}^q$ of the test statistic in (2) is expressed as $\overline{W}_{N_0}^q = \frac{1}{N_0} \sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}$ with each $(Z_i, Q_i(Z_i|S_i, \cdot))$ is an element of $\mathcal{R}_0 = ((Z_i, Q_i(Z_i|S_i, \cdot)))_{i=1}^{N_0}$. Similarly, we use $\overline{W}_{N_p}^p$ to indicate the same normalized statistic produced by a passive (or uniform) query scheme. It is completely constructed from $\{S, Z\}^{N_p}$ with its labels sequentially and uniformly queried: $\overline{W}_{N_p}^p = \frac{1}{N_p} \sum_{i=1}^{N_p} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}, \forall (S_i, Z_i) \sim p(s, z)$. We compare $\overline{W}_{N_0}^q$ to $\overline{W}_{N_p}^p$ and introduce the following:

Theorem 3. Suppose a decision maker uses the framework with a p.c.c.p. $Q_i(z|s, \cdot)$, and with the step sizes M^1 and M^2 having $\lim_{N_0 \rightarrow \infty} \frac{M^2}{M^1} \rightarrow 0$. Then, under Assumption 2, we have the following under H_1 ,

$$\begin{aligned} \lim_{N_p \rightarrow \infty} \overline{W}_{N_p}^p &\rightarrow -(H(Z) - H(Z|S)) = -I(S, Z) \\ &\quad (S, Z) \sim p(s, z) \\ \lim_{N_0 \rightarrow \infty} \overline{W}_{N_0}^q &\rightarrow -(H^*(Z) - H^*(Z|S)) = -I^*(S, Z) \\ &= -1, \quad (S, Z) \sim p^*(s, z) \end{aligned}$$

where $I(S, Z)$ is MI resulting from original H_1 that is $1 - I(S, Z)$ hard, and $I^*(S, Z)$ is MI constructed with $(S, Z) \sim p^*(s, z)$ which is a joint distribution corresponding to the 0-hard H_1 ($I^*(S, Z) = 1$).

We brief the proof of Theorem 3 in the following: As $Q_i(z|s, \cdot)$ asymptotically converges to the true $P(z|s)$ and both *policy 1* and *2* only label features with highest $Q_i(0|s, \cdot)$ and $Q_i(1|s, \cdot)$, when N_0 is very large, with Assumption 2 made, our framework asymptotically modifies the joint distribution of (S, Z) to $p^*(s, z)$ by only labelling samples in \mathbb{S}_0 and \mathbb{S}_1 where $P(0|s) = 1, \forall s \in \mathbb{S}_0$ and $P(1|s) = 1, \forall s \in \mathbb{S}_1$, resulting to $-\overline{W}_{N_0}^q = I^*(S, Z) = 1, (S, Z) \sim p^*(s, z)$. In contrast, the asymptotic value of $-\overline{W}_{N_p}^p$ from the uniform query remains as $I(S, Z)$ with $(S, Z) \sim p(s, z)$ and $p(s, z)$ is the original distribution. Please refer to Appendix A.3 for complete proof.

Remark 1. Theorem 3 states that $\overline{W}_{N_p}^p$ constructed with the uniform label query converges to $-I(S, Z)$ determined by the original $p(s, z)$. In contrast, our framework asymptotically leads to $\overline{W}_{N_0}^q = -1$, which is a lower bound of $-I(S, Z) = -(H(Z) - H(Z|S)) \geq -(1 - 0) = -1$. This equivalently says that, under H_1 , our framework converts the original λ_p -hard H_1 to the simplest 0-hard H_1 .

Theorem 4. Under H_1 and the same conditions of Theorem 3, the proposed testing framework is also consistent as

$$\lim_{N_0 \rightarrow \infty} P_1 \left(\prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)} \leq \alpha \right) = \lim_{N_0 \rightarrow \infty} P(\overline{W}_{N_0}^q \leq \frac{1}{N_0} \log(\alpha)) = P_1(-1 \leq 0) = 1$$

We refer readers to Appendix A.4 for the elaborated proof.

4.4 Query-switching

In this section, we propose a query-switching (QS) algorithm and refer readers to Algorithm 1 in Appendix for the algorithmic details. During the first stage of our framework, *QS* simulates *policy 1* and *2* as well as the uniform query by resampling the labeled samples, thereby resulting in collections of the statistic from the three schemes. We compare the statistic means of the collections from the uniform query, *policy 1* and *2* to decide what time N_{sw} to switch to stage 2, what policy to use, and what step sizes M^1 and M^2 of the queries to use in the second stage.

In the first stage, a decision maker periodically uses the QS algorithm for every T_{sw} label query, and T_{sw} is a pre-selected parameter. For instance, after $n = T_{sw}$ uniform label queries in the first stage, the QS algorithm takes the following inputs: A uniformly labeled sample features sequence $(s_i)_{i=1}^n$, the corresponding label sequence $(z_i)_{i=1}^n$, a class-probability predictor sequence $(Q_i(z|s, \cdot))_{i=1}^n$ and a candidate set of step sizes $\{(M^1, M^2)_i\}_{i=1}^L$. Then, the QS algorithm randomly generates a set of index $\mathcal{T} = \{t_1, \dots, t_I\}, \forall t \in \mathcal{T}, 1 \leq t < n$ and each $t \in \mathcal{T}$ indicates an element index for the sequences $(s_i)_{i=1}^n$, $(z_i)_{i=1}^n$ and $(Q_i(z|s, \cdot))_{i=1}^n$. Subsequently, elements in these sequences with the index from $t \in \mathcal{T}$ to the end are used to form I subsequences $(s_i)_{i=t}^n$, $(z_i)_{i=t}^n$ and $(Q_i(z|s, \cdot))_{i=t}^n, \forall t \in \mathcal{T}$. We use these subsequences to evaluate the statistics (2) generated from the uniform query, *policies 1* and *2* with L different step sizes M^1 and M^2 . As we will see, these statistics do not participate in the two-sample testing and are only used to predict and compare the performance of the uniform query and the two policies. Thus we call them *QS statistics*. Suppose there are N_u unlabeled samples remaining, and the current label budget is N_q . The decision maker uses I recorded $(s_i)_{i=t}^n$, $(z_i)_{i=t}^n$ and $(Q_i(z|s, \cdot))_{i=t}^n, \forall t \in \mathcal{T}$ to simulate the uniform query, *policy 1* and *2* with different step sizes assuming a label budget of $(n - t + 1) \frac{N_q}{N_u}$ to generate the *QS statistics*. Next, obtain the *QS statistic means* of the I *QS statistics* for the uniform query, *policy 1* and *2*. The decision maker either remains in the first stage if the uniform *QS statistic mean* is the smallest or enters the second stage by switching to the policy with $(M^1, M^2) \in \{(M^1, M^2)_i\}_{i=1}^L$ that generates the smallest *QS statistic mean*. Our QS scheme is a variation on bootstrapping [29] since it repeatedly draws samples from a population to estimate a population parameter. The difference is that our QS scheme resamples a subsequence segment from a random starting index to the end of the original sequence. It provides the benefit of reusing past class-probability predictors such that there is no need to rebuild them and that newer $Q_i(z | s, \cdot)$'s have higher chance to participate in the decision of QS.

Algorithm 1 Query-switching

- 1: **Input:** $(s_i)_{i=1}^n, (z_i)_{i=1}^n, (Q_i(z|s, \cdot))_{i=1}^n$,
 - 2: $\{(M^1, M^2)_i\}_{i=1}^L, N_q, N_u, I$
 - 3: **Output:** Stay in stage 1 or enter stage 2 with a selected policy with proper M^1 and M^2 .
 - 4: **Initialization:** Set W^u , all W^1 in $(W_i^1)_{i=1}^L$ and all W^2 in $(W_i^2)_{i=1}^L$ to **zero**, and set the ratio of the label budget N_q to the unlabeled sample number N_u to $r = \frac{N_q}{N_u}$
 - 5: **for** $T = 1, \dots, I$ **do**
 - 6: **Sample** an element t from $[1, n]$
 - 7: **Get subsequences** $(s_i)_{i=t}^n, (z_i)_{i=t}^n, (Q_i(z|s, \cdot))_{i=t}^n$
 - 8: **Set a label budget** $N'_q = \lfloor (n - t + 1) * r \rfloor$ in terms of the subsequence length $n - t + 1$
 - 9: **Compute the QS statistics** $w^u, (w_i^1)_{i=1}^L$ and $(w_i^2)_{i=1}^L$ by applying the uniform query, *policy 1* and *policy 2* with all $(M^1, M^2) \in \{(M^1, M^2)_i\}_{i=1}^L$ respectively to the subsequences $(s_i)_{i=t}^n, (z_i)_{i=t}^n$, and $(Q_i(z|s, \cdot))_{i=t}^n$ for the label budget N'_q .
 - 10: **Use element-wise addition** to add the resulting w^u to W^u , $(w_i^1)_{i=1}^L$ to $(W_i^1)_{i=1}^L$ and $(w_i^2)_{i=1}^L$ to $(W_i^2)_{i=1}^L$
 - 11: **end for**
 - 12: **Divide** $W^u, (W_i^1)_{i=1}^L, (W_i^2)_{i=1}^L$ **by** I **respectively** to get the QS statistic means: $\bar{W}^u, (\bar{W}_i^1)_{i=1}^L, (\bar{W}_i^2)_{i=1}^L$
 - 13: **Compare** $\bar{W}^u, (\bar{W}_i^1)_{i=1}^L, (\bar{W}_i^2)_{i=1}^L$
 - 14: **Return:** Stay in stage 1 if \bar{W}^u is the smallest, or enter stage 2 with policy 1 with M_i^1 and M_i^2 if \bar{W}_i^1 from $(\bar{W}_i^1)_{i=1}^L$ is the smallest, or with policy 2 with M_i^1 and M_i^2 if \bar{W}_i^2 from $(\bar{W}_i^2)_{i=1}^L$ is the smallest
-

5 Experimental Results

Implementing the proposed active sequential two-sample testing framework with the QS algorithm requires setting up the following five hyper-parameters: A period T_{sw} of using the QS algorithm in the first stage, a set of step sizes (M^1, M^2) from which QS can select, an algorithm \mathcal{A} to construct the class-probability predictor $Q(z | s, \cdot)$, the size N_0 of samples to initialize $Q(z | s, \cdot)$ and a significance level α . We refer readers to Algorithm 2 in Appendix for full algorithmic details. We compare our framework with a sequential testing baseline designed by modifying the sequential test in [8] to evaluate our proposed framework fairly. As the authors of [8] devise their framework assuming the class priors are known, we replace their statistic with our statistic in (1) that addresses the unknown class priors scenario to build our sequential testing baseline. This baseline is a standard sequential two-sample test that passively labels samples. In addition, we use our framework to build another two tests that perform *Policy 1* and *Policy 2*, respectively, from the beginning of the testing without QS. This is to verify the effectiveness of the proposed QS algorithm. We perform our experiments on synthetic datasets, MNIST and Alzheimer’s Disease Neuroimaging Initiative (ADNI) database [30]. We set $T_{sw} = 100$ and set (M^1, M^2) to $\{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and $\{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$ respectively. We build $Q(z | s, \cdot)$ with logistic regression, SVM, or KNN classifiers and set $N_0 = 10$ and $\alpha = 0.05$. We present the representative experimental results with the following notations: **Baseline** – A passive sequential two-sample test [8]. **Ours-NoQS¹/Ours-NoQS²** – Proposed testing frameworks with *policy 1/policy 2* used at the beginning without *QS*. **Ours-QS¹/Ours-QS²** – Proposed testing frameworks combined with QS with the two candidate step sets $\{(M^1, M^2)_i\}_{i=1}^L$.

Label budget	200	400	600	800	1000
Baseline	0.83	0.53	0.30	0.11	0.04
Ours-NoQS ¹	0.55	0.35	0.26	0.19	0.14
Ours-NoQS ²	0.50	0.35	0.26	0.19	0.14
Ours-QS ¹	0.50	0.16	0.04	0.01	0.02
Ours-QS ²	0.50	0.16	0.07	0.03	0.03

Table 1: **Type II errors** of the proposed tests and the baseline test [8] with different label budgets.

δ	0.5	0.4	0.3	0.2
Baseline	63.90	101.02	178.28	451.37
Ours-QS ¹	63.63	87.67	127.72	271.12
Ours-QS ²	63.64	88.18	131.10	276.00

Table 2: **Avg. stopping times** of the proposed tests and the baseline test [8] for a fixed label budget of 1000.

Label budget	200	400	600	800	1000
Synthetic dataset					
Ours-QS ¹	0.010	0.008	0.010	0.008	0.012
Ours-QS ²	0.008	0.012	0.008	0.008	0.012
MNIST					
Ours-QS ¹	0.020	0.020	0.020	0.020	0.020
Ours-QS ²	0.020	0.020	0.020	0.020	0.020

Table 3: **Type I errors** of the proposed tests for different label budgets N_q are upper-bounded by $\alpha = 0.05$.

5.1 Experiments on synthetic datasets

We create binary synthetic datasets with sample features generated from $p(s | Z = 0) \equiv \mathcal{N}((-\delta, 0), I)$ and $p(s | Z = 1) \equiv \mathcal{N}((\delta, 0), I)$ for two classes. We set $P(Z = 0)$ from 0.5 to 0.8 to vary the ratio of the class zero sample size to the others. We set $\delta = 0$ to create the datasets for H_0 , and vary δ from 0.2 to 0.5 to create the datasets for H_1 . All generated datasets are of size 2000. We apply the same choice of hyper-parameter setup for our proposed test and the sequential testing baseline. We ran the tests on the 200 synthetic datasets randomly generated and averaged the generated results. Herein, we present the Type II errors for the sequential tests with the logistic regression used on the dataset with $\delta = 0.2$ and $P(Z = 0) = 0.5$ for H_1 .

Table 1 shows that our active sequential two-sample test combined with the *QS* algorithm achieves the lowest Type II error rate with a smaller label budget by sequentially and actively labeling samples. Furthermore, we compare our average test-stopping time for datasets of increasing difficulties. More specifically, we vary δ from 0.5 to 0.2 and generate Type II errors with a fixed label budget of 1000. As shown in Table 2, the average test-stopping time of our test increases with decreasing δ (increasing problem difficulties). It implies that our sequential testing adaptively collects more data to test H_0 and H_1 when a considered two-sample testing problem is hard.

Lastly, we implement the proposed active sequential two-sample test on the dataset with $\delta = 0$. For this case, H_0 is true, and we ran the test 500 times on the dataset for $P(Z = 0) = 0.5$ to generate the Type I error. Table 3 presents the Type I error of the proposed test performed on the dataset with $P(Z = 0) = 0.5$. We observe that the Type I error is upper-bounded by $\alpha = 0.05$, which agrees with Theorem 1.

6 Experiments on MNIST and ADNI

N_q	Methods	Type II error	Stopping time	N_q	Methods	Type II error	Stopping time
200	Baseline	0.59	160.85	200	Baseline	0.11	95.58
	Ours-NoQS ¹	0.51	134.33		Ours-NoQS ¹	0.33	59.93
	Ours-NoQS ²	0.55	133.58		Ours-NoQS ²	0.11	74.09
	Ours-QS ¹	0.27	145.20		Ours-QS ¹	0.04	85.96
	Ours-QS ²	0.31	146.46		Ours-QS ²	0.05	74.09
400	Baseline	0.16	233.20	300	Baseline	0.01	100.89
	Ours-NoQS ¹	0.23	204.24		Ours-NoQS ¹	0.10	64.20
	Ours-NoQS ²	0.33	223.51		Ours-NoQS ²	0.09	83.72
	Ours-QS ¹	0.02	172.92		Ours-QS ¹	0.00	86.56
	Ours-QS ²	0.01	175.59		Ours-QS ²	0.01	87.37
600	Baseline	0.02	247.46	400	Baseline	0.00	101.15
	Ours-NoQS ¹	0.07	229.70		Ours-NoQS ¹	0.04	65.20
	Ours-NoQS ²	0.17	270.83		Ours-NoQS ²	0.04	90.67
	Ours-QS ¹	0.01	175.08		Ours-QS ¹	0.00	86.09
	Ours-QS ²	0.01	178.82		Ours-QS ²	0.01	87.96
800	Baseline	0.01	249.27	500	Baseline	0.00	101.15
	Ours-NoQS ¹	0.02	237.27		Ours-NoQS ¹	0.04	65.20
	Ours-NoQS ²	0.09	293.77		Ours-NoQS ²	0.03	94.53
	Ours-QS ¹	0.00	176.66		Ours-QS ¹	0.00	87.63
	Ours-QS ²	0.00	180.32		Ours-QS ²	0.00	87.75
1000	Baseline	0.01	250.27	600	Baseline	0.00	101.15
	Ours-NoQS ¹	0.02	241.27		Ours-NoQS ¹	0.04	65.20
	Ours-NoQS ²	0.07	308.05		Ours-NoQS ²	0.02	96.70
	Ours-QS ¹	0.00	173.33		Ours-QS ¹	0.00	85.67
	Ours-QS ²	0.00	183.50		Ours-QS ²	0.00	87.96

Table 4: **Type II errors** and **Avg. stopping times** of the proposed tests and the baseline test [8] for **MNIST** (Left, $P(Z = 0) = 0.6$) and **ADNI** (Right, $P(Z = 0) = 0.7$).

MNIST under H_0 and H_1 : We randomly sample 2000 images from one digit category and label them class zero. We randomly sample another 1400 images from the same category and 600 images from another category. We label these samples as class one. We resample data in class zero ($Z = 0$) and one ($Z = 1$) to simulate priors $P(Z = 0)$ ranging from 0.5 to 0.8. Similarly, we simulate data under H_0 , except that the class zero samples and the class one samples both come from the same digit category. Instead of using the raw input samples, we projected the MNIST data to a 28-dimensional space by a convolutional autoencoder. We produce 200 MNIST two-sample datasets with a size of 2000 for H_1 and 500 two-sample datasets for H_1 for different $P(Z = 0)$. **The Alzheimer’s Disease Neuroimaging Initiative (ADNI) dataset under H_1 :** We use the ADNI database [30] to demonstrate a real-world application of the proposed test. The motivation for these results stems from a desire for doctors to replace an expensive Alzheimer’s biomarker with digital test results that are inexpensive to obtain. In this experiment, we evaluate the dependency between the binarized (expensive) biomarker variable (or the label variable) Z and the digital test result variable (or the feature variable) S . Evaluating the biomarker Z with CT scans is expensive; hence a statistician assigns a label budget to the two-sample test; we use the proposed test and a fixed label budget for evaluation. We create 200 ADNI two-sample datasets with a size of 1000 for each $P(Z = 0)$ from 0.5 to 0.8.

We implement the proposed test with the hyper-parameters stated in the first paragraph in Section 5. Table 4 shows the Type II errors generated by using the logistic regression in our testing framework on the MNIST and ADNI two-sample data. We observe that the proposed tests with QS consistently generate lower or equivalent Type II errors compared to other tests for every label budget. Table 4 also presents the corresponding test-stopping times. As observed, our tests reject H_0 with fewer label queries for all label budgets, which agrees with our Theorem 3 that implies the proposed framework tends to generate a small statistic favorable to rejecting H_0 . The proposed tests without QS could lead to a smaller average stopping time, as *policy 1* or *2* has been used since the beginning; however, the resulting Type II errors could be higher than the baseline, as there is no QS to decide which policy to use and when to use. Lastly, we produce the Type I error of the proposed test performed on the MNIST two-sample data under H_0 . Table 3 shows that the Type I of our test is upper-bounded by $\alpha = 0.05$.

7 Conclusion

We propose an *active sequential two-sample hypothesis testing framework* capable of sequentially and actively labeling the samples. Experimental results demonstrate the effectiveness of the framework combined with query-switching.

References

- [1] A. Wald, “Sequential tests of statistical hypotheses,” in *Breakthroughs in Statistics*, Springer, 1992, pp. 256–298.
- [2] A. Gretton, K. M. Borgwardt, M. J. Rasch, B. Schölkopf, and A. Smola, “A kernel two-sample test,” *The Journal of Machine Learning Research*, vol. 13, no. 1, pp. 723–773, 2012.
- [3] J. H. Friedman and L. C. Rafsky, “Multivariate generalizations of the wald-wolfowitz and smirnov two-sample tests,” *The Annals of Statistics*, pp. 697–717, 1979.
- [4] F. J. Massey Jr, “The kolmogorov-smirnov test for goodness of fit,” *Journal of the American statistical Association*, vol. 46, no. 253, pp. 68–78, 1951.
- [5] H. Keselman, A. R. Othman, R. R. Wilcox, and K. Fradette, “The new and improved two-sample t test,” *Psychological Science*, vol. 15, no. 1, pp. 47–51, 2004.
- [6] H. Hotelling, “The generalization of student’s ratio,” in *Breakthroughs in statistics*, Springer, 1992, pp. 54–65.
- [7] R. R. Johnson and P. J. Kuby, *Elementary statistics*. Cengage Learning, 2011.

- [8] A. Lhéritier and F. Cazals, “A sequential non-parametric multivariate two-sample test,” *IEEE Transactions on Information Theory*, vol. 64, no. 5, pp. 3361–3370, 2018.
- [9] J Hajnal, “A two-sample sequential t-test,” *Biometrika*, vol. 48, no. 1/2, pp. 65–75, 1961.
- [10] S. Shekhar and A. Ramdas, “Game-theoretic formulations of sequential nonparametric one-and two-sample tests,” *arXiv preprint arXiv:2112.09162*, 2021.
- [11] A. Balsubramani and A. Ramdas, “Sequential nonparametric testing with the law of the iterated logarithm,” *arXiv preprint arXiv:1506.03486*, 2015.
- [12] M. Naghshvar and T. Javidi, “Active sequential hypothesis testing,” *The Annals of Statistics*, vol. 41, no. 6, pp. 2703–2738, 2013.
- [13] H. Chernoff, “Sequential design of experiments,” *The Annals of Mathematical Statistics*, vol. 30, no. 3, pp. 755–770, 1959.
- [14] S. A. Bessler, “Theory and applications of the sequential design of experiments, k-actions and infinitely many experiments. part i. theory,” Stanford Univ CA Applied Mathematics and Statistics Labs, Tech. Rep., 1960.
- [15] W. J. Blot and D. A. Meeter, “Sequential experimental design procedures,” *Journal of the American Statistical Association*, vol. 68, no. 343, pp. 586–593, 1973.
- [16] R. Keener, “Second order efficiency in the sequential design of experiments,” *The Annals of Statistics*, pp. 510–532, 1984.
- [17] J Kiefer and J Sacks, “Asymptotically optimum sequential inference and design,” *The Annals of Mathematical Statistics*, pp. 705–750, 1963.
- [18] Student, “The probable error of a mean,” *Biometrika*, pp. 1–25, 1908.
- [19] W. Li, G. Dasarathy, K. N. Ramamurthy, and V. Berisha, “A label efficient two-sample test,” in *Uncertainty in Artificial Intelligence*, PMLR, 2022, pp. 1168–1177.
- [20] R. Johari, P. Koomen, L. Pekelis, and D. Walsh, “Always valid inference: Continuous monitoring of a/b tests,” *Operations Research*, vol. 70, no. 3, pp. 1806–1821, 2022.
- [21] W. J. Welch, “Construction of permutation tests,” *Journal of the American Statistical Association*, vol. 85, no. 411, pp. 693–698, 1990.
- [22] R. L. Wasserstein and N. A. Lazar, *The asa statement on p-values: Context, process, and purpose*, 2016.
- [23] S. S. Wilks, “The large-sample distribution of the likelihood ratio for testing composite hypotheses,” *The annals of mathematical statistics*, vol. 9, no. 1, pp. 60–62, 1938.
- [24] R. Durrett, *Probability: theory and examples*. Cambridge university press, 2019, vol. 49.
- [25] J. Doob, “Jean ville, étude critique de la notion de collectif,” *Bulletin of the American mathematical society*, vol. 45, no. 11, pp. 824–824, 1939.
- [26] B. Gierlichs, L. Batina, P. Tuyls, and B. Preneel, “Mutual information analysis,” in *International Workshop on Cryptographic Hardware and Embedded Systems*, Springer, 2008, pp. 426–442.
- [27] L. Györfi, M. Kohler, A. Krzyzak, H. Walk, *et al.*, *A distribution-free theory of nonparametric regression*. Springer, 2002, vol. 1.
- [28] R. R. Snapp, S. S. Venkatesh, *et al.*, “Asymptotic expansions of the k nearest neighbor risk,” *The Annals of Statistics*, vol. 26, no. 3, pp. 850–878, 1998.
- [29] T. Hesterberg, “Bootstrap,” *Wiley Interdisciplinary Reviews: Computational Statistics*, vol. 3, no. 6, pp. 497–526, 2011.
- [30] C. R. Jack Jr, M. A. Bernstein, N. C. Fox, P. Thompson, G. Alexander, D. Harvey, B. Borowski, P. J. Britson, J. L. Whitwell, C. Ward, *et al.*, “The alzheimer’s disease neuroimaging initiative (adni): Mri methods,” *Journal of Magnetic Resonance Imaging: An Official Journal of the International Society for Magnetic Resonance in Medicine*, vol. 27, no. 4, pp. 685–691, 2008.

- [31] Aaditya Ramdas, *Martingales, ville and doob*, <https://www.stat.cmu.edu/~aramdas/martingales18/L2-martingales.pdf>, 2018.
- [32] J. Ville, “Etude critique de la notion de collectif,” *Bull. Amer. Math. Soc*, vol. 45, no. 11, p. 824, 1939.

A Proofs

A.1 Some statistical preliminaries

In probability theory, a sequence of random variables is called *martingale* if the conditional expectation of the next random variable in the sequence is the expected value of the present random variable. In other words, the conditional expectation of the next random variable only depends on the values of the present variable regardless of past variables in the sequence. The proof of Theorem 1 involves theory related to the martingale. We refer interested readers to [31] for an introduction to martingale and related theories. In the following, we present a bare minimum we need for developing Theorem 1.

Definition 3. (Martingale) *A sequence of random variables X_0, X_1, \dots is a martingale if, for any $n \geq 0$,*

$$\begin{aligned}\mathbb{E}[|X_n|] &\leq \infty \\ \mathbb{E}[X_{n+1} | X_1, X_2, \dots, X_n] &= X_n\end{aligned}$$

Theorem A.1. [32]: *If (X_n) is a nonnegative martingale, then for any $c > 0$, we have*

$$P\left(\sup_{n \in \mathbb{N}} X_n > x\right) \leq \frac{\mathbb{E}[X_0]}{c}$$

A.2 Proof of Theorem 1

Proof. Our framework sequentially and actively queries label z of a feature $s \in \mathcal{S}_u$. Our proof consists of two ordered parts: (1) Under the null hypothesis H_0 , the random variables S and Z corresponding to the feature realization s and its label realization z queried in the framework are independent. (2) Under the null, with $\mathcal{R}_0 = ((Z_i, Q_i(Z_i | S_i, \cdot)))_{i=1}^{N_0}$, we have $P_0\left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha\right) \leq P_0\left(\exists N_0, \tilde{W}_{N_0} = \prod_{i=1}^{N_0} \frac{P(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha\right) \leq \alpha$

S and Z are independent under H_0 : We use $((\mathcal{S}_u)_i)_{i=1}^N$ to denote a sequence of the random set variable corresponding to the unlabeled feature set, and use $((\mathcal{Z}_u)_i)_{i=1}^N$ to denote a sequence of label sequence random variables. Each $(\mathcal{Z}_u)_i$ is conditional on $(\mathcal{S}_u)_i$. Similarly, we use $(Q_i)_{i=1}^N$ to denote a sequence of class-probability predictors. Each $Q_i = Q_i(z | s, \cdot)$ is the latest class-probability predictor before labeling $S \in (\mathcal{S}_u)_i$. We use $((\mathcal{S}_u)_i)_{i=1}^N$ and $((\mathcal{Z}_u)_i)_{i=1}^N$ to model the progression of unlabeled feature set and its corresponding labels (unknown and waiting for query) in our framework. Likewise, we use $(Q_i)_{i=1}^N$ to model the progression of a class-probability predictor. As our framework initializes the class-probability predictor with uniformly labeled samples \mathcal{S}_w and \mathcal{Z}_w , we use $(\mathcal{S}_u)_1, (\mathcal{Z}_u)_1$ and Q_1 to denote the resulting terms after the initialization. Suppose a decision maker has $(\mathcal{S}_u)_N$ and Q_N at hand; we use the induction to prove that $Q_N \perp\!\!\!\perp (\mathcal{S}_u)_N \perp\!\!\!\perp (\mathcal{Z}_u)_N$ for $1 \leq N \leq N_q$.

Base case ($N = 1$): When $N = 1$, the decision maker selects any feature $S \in (\mathcal{S}_u)_1$ and queries its corresponding label Z in $(\mathcal{Z}_u)_1$. As both $(\mathcal{S}_u)_1$ and $(\mathcal{Z}_u)_1$ with their element $(S, Z) \sim p(s, z)$, and Q_1 is initialized by S_w and Z_w independent of $(\mathcal{S}_u)_1$ and $(\mathcal{Z}_u)_1$. Hence $Q_1 \perp\!\!\!\perp (\mathcal{S}_u)_1 \perp\!\!\!\perp (\mathcal{Z}_u)_1$ under H_0 .

Induction step ($1 < N \leq N_q - 1$): Suppose $Q_N \perp\!\!\!\perp (\mathcal{S}_u)_N \perp\!\!\!\perp (\mathcal{Z}_u)_N$. Then, if the decision maker labels a feature $S \in (\mathcal{S}_u)_N$ by the uniformly query, update Q_N with S and its label Z , and removes S and its label Z from $(\mathcal{S}_u)_N$ and $(\mathcal{Z}_u)_N$ resulting to $Q_{N+1}, (\mathcal{S}_u)_{N+1}$ and $(\mathcal{Z}_u)_{N+1}$, we have $Q_{N+1} \perp\!\!\!\perp (\mathcal{S}_u)_{N+1} \perp\!\!\!\perp (\mathcal{Z}_u)_{N+1}$. In contrast, if the decision maker uses the bimodal query to label a feature $S \in (\mathcal{S}_u)_N$, maintain Q_N , and removes S and its label Z from $(\mathcal{S}_u)_N$ and $(\mathcal{Z}_u)_N$ resulting to $Q_{N+1} = Q_N, (\mathcal{S}_u)_{N+1}$ and $(\mathcal{Z}_u)_{N+1}$, we also have $Q_{N+1} \perp\!\!\!\perp (\mathcal{S}_u)_{N+1} \perp\!\!\!\perp (\mathcal{Z}_u)_{N+1}$.

Combining the *base step* and the *induction step* leads to $(\mathcal{S}_u)_N \perp\!\!\!\perp (\mathcal{Z}_u)_N$ for $1 \leq N \leq N_q$

Next, we prove the following $P_0\left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha\right) \leq P_0\left(\exists N_0, \tilde{W}_{N_0} = \prod_{i=1}^{N_0} \frac{P(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha\right) \leq \alpha$. Suppose $((s, z)_i)_{i=1}^{N_0}$ is a sequence of realizations of (S, Z) for $S \perp\!\!\!\perp Z$ under H_0 . We use θ to denote a class-one prior probability parameter, and hence $P(z_1, \dots, z_{N_0} | \theta)$ is a likelihood function of θ . Maximizing $P(z_1, \dots, z_{N_0} | \theta)$ over the prior parameter θ leads to the solution $\theta^* = \frac{\sum_{i=1}^{N_0} z_i}{N_0}$. We

write $\prod_{i=1}^{N_0} \hat{P}(z_i) = P(z_1, \dots, z_{N_0} \mid \theta^*)$ with $\theta^* = \hat{P}(Z = 1)$ to denote the maximized likelihood for $(z)_{i=1}^{N_0}$. We use $P(Z = 1)$ to denote the true prior-one probability under H_0 , and plugging $P(Z = 1)$ to θ leads to the true likelihood $\prod_{i=1}^{N_0} P(z_i)$ for $(z_i)_{i=1}^{N_0}$ under H_0 . Obviously $\prod_{i=1}^{N_0} \hat{P}(z_i) \geq \prod_{i=1}^{N_0} P(z_i)$ thus $\prod_{i=1}^{N_0} \frac{\hat{P}(z_i)}{Q_i(z_i \mid s_i, \cdot)} \geq \prod_{i=1}^{N_0} \frac{P(z_i)}{Q_i(z_i \mid s_i, \cdot)}$ for any realizations $(z_i)_{i=1}^{N_0}$ of $(Z_i)_{i=1}^{N_0}$ under H_0 . It directly leads to $P_0 \left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \leq \alpha \right) \leq P_0 \left(\exists N_0, \tilde{W}_{N_0} = \prod_{i=1}^{N_0} \frac{P(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \leq \alpha \right)$. Lastly, we prove $P_0 \left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{P(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \leq \alpha \right) \leq \alpha$. We let $\tilde{W}'_{N_0} \equiv \frac{1}{\tilde{W}_{N_0}}$. Therefore, $\tilde{W}'_{N_0} \equiv \tilde{W}'_{N_0-1} \frac{Q_{N_0}(Z_{N_0} \mid S_{N_0}, \cdot)}{P(Z_{N_0})}$ with $\tilde{W}'_0 \equiv 1$ for $1 \leq N_0 \leq N_q$. The sequence $(\tilde{W}'_i)_{i=1}^{N_0}$ is a **nonnegative martingale** under H_0 given

$$\begin{aligned} \mathbb{E}[\tilde{W}'_{N_0} \mid \tilde{W}'_1, \dots, \tilde{W}'_{N_0-1}] &\equiv \mathbb{E} \left[\tilde{W}'_{N_0-1} \frac{Q_{N_0}(Z_{N_0} \mid S_{N_0}, \cdot)}{P(Z_{N_0})} \mid \tilde{W}'_1, \dots, \tilde{W}'_{N_0-1} \right] \\ &\equiv \tilde{W}'_{N_0-1} \mathbb{E} \left[\frac{Q_{N_0}(Z_{N_0} \mid S_{N_0}, \cdot)}{P(Z_{N_0})} \mid \tilde{W}'_1, \dots, \tilde{W}'_{N_0-1} \right] \\ &= \tilde{W}'_{N_0-1} \sum_{z=0}^1 P(Z_{N_0} = z) \frac{Q_{N_0}(Z_{N_0} = z \mid S_{N_0}, \cdot)}{P(Z_{N_0} = z)} \\ &= \tilde{W}'_{N_0-1} \end{aligned}$$

Using Ville's maximal inequality in Theorem A.1 leads to the following: For any $\alpha > 0$, we have

$$\begin{aligned} P \left(\sup_{1 \leq N_0 \leq N_q} \tilde{W}'_{N_0} > \frac{1}{\alpha} \right) &\leq \frac{\alpha}{\mathbb{E}[\tilde{W}'_0]} = \alpha \\ &\equiv P \left(\sup_{1 \leq N_0 \leq N_q} \frac{1}{\tilde{W}_{N_0}} > \frac{1}{\alpha} \right) \leq \frac{\alpha}{\mathbb{E} \left[\frac{1}{\tilde{W}_0} \right]} = \alpha \\ &\equiv P \left(\inf_{1 \leq N_0 \leq N_q} \tilde{W}_{N_0} \leq \alpha \right) \leq \alpha \end{aligned}$$

Therefore, we have $P_0 \left(\exists N_0, W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \leq \alpha \right) \leq P_0 \left(\exists N_0, \tilde{W}_{N_0} = \prod_{i=1}^{N_0} \frac{P(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \leq \alpha \right) \leq \alpha$. \square

A.3 Proof of Theorem 3

Proof. Theorem 3 states the convergence of the following two terms $\overline{W}_{N_0}^q$ and $\overline{W}_{N_p}^p$ under H_1 . Specifically, we have

$$\begin{aligned} \overline{W}_{N_0}^q &= \frac{\log(W_{N_0}^q)}{N_0} \\ &= \frac{1}{N_0} \sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i \mid S_i, \cdot)} \\ &= \frac{1}{N_0} \left(\sum_{i=1}^{N_0} \log \hat{P}(Z_i) - \sum_{i=1}^{N_0} \log Q_i(Z_i \mid S_i, \cdot) \right) \end{aligned}$$

where $(Z_i, Q_i(Z_i | S_i, \cdot))$ is a term in $\mathcal{R}_0 = ((Z_i, Q_i(Z_i | S_i, \cdot)))_{i=1}^{N_0}$. Similarly, we have

$$\begin{aligned}\bar{W}_{N_p}^p &= \frac{\log(W_{N_p}^p)}{N_p} \\ &= \frac{1}{N_p} \sum_{i=1}^{N_p} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i | S_i, \cdot)} \\ &= \frac{1}{N_p} \left(\sum_{i=1}^{N_p} \log \hat{P}(Z_i) - \sum_{i=1}^{N_p} \log Q_i(Z_i | S_i, \cdot) \right), \forall (S_i, Z_i) \sim p(s, z)\end{aligned}$$

With a decision maker using a p.c.c.p. (see Definition 2), we have $\lim_{i \rightarrow \infty} Q_i(z|s, \cdot) \rightarrow P(z | s)$. As $\hat{P}(Z = 1)$ is a class-one prior probability parameter θ^* to maximize the likelihood function $P(Z_1, \dots, Z_{N_0} | \theta^*)$ or $P(Z_1, \dots, Z_{N_p} | \theta^*)$, we have $\lim_{N_0 \rightarrow \infty} \hat{P}(Z = 1) = \lim_{N_0 \rightarrow \infty} \frac{\sum_{i=1}^{N_0} z_i}{N_0} \rightarrow P(Z = 1)$ for the proposed framework, and $\lim_{N_p \rightarrow \infty} \hat{P}(Z = 1) = \lim_{N_p \rightarrow \infty} \frac{\sum_{i=1}^{N_p} z_i}{N_p} \rightarrow P(Z = 1)$ for the passive query case. With the asymptotical properties of Q_i and $\hat{P}(Z = 0)$, it is straightforward to gain the converged value of $\bar{W}_{N_p}^p$ for the passive query where $(S_i, Z_i) \sim p(s, z)$,

$$\begin{aligned}\lim_{N_p \rightarrow \infty} \bar{W}_{N_p}^p &= \lim_{N_p \rightarrow \infty} \left(\frac{\sum_{i=1}^{N_p} \log \hat{P}(Z_i)}{N_p} - \frac{\sum_{i=1}^{N_p} \log Q_i(Z_i | S_i, \cdot)}{N_p} \right) \\ &\rightarrow \sum_{z=0}^1 P(Z = z) \log(P(Z = z)) - \int_{\mathbb{S}, \mathbb{Z}} p(z, s) \log(p(z|s)) ds dz \\ &= -(H(Z) - H(Z | S)) \\ &= -I(S, Z) \geq -1\end{aligned}$$

When $P(Z = 1) = 0.5$, $H(Z)$ is maximized to one. Combining $H(Z|S) \geq 0$, we have $-I(S, Z)$ lower-bounded by -1 , which is the **smallest normalized log statistic** a passive query scheme can only achieve in the simplest 0-hard H_1 (see Definition 1).

Now, considering $\bar{W}_{N_0}^q$ generated by the proposed framework, as $\lim_{N_0 \rightarrow \infty} \frac{M_2}{M_1} \rightarrow 0$, the statistic updated by the samples labeled by the uniform query becomes insignificant as N_0 goes to very large. In addition, with Assumption 2 hold, the bimodal query only labels samples either in \mathbb{S}_0 or \mathbb{S}_1 with a fair chance where $P(0|s) = 1, \forall s \in \mathbb{S}_0$ and $P(1|s) = 1, \forall s \in \mathbb{S}_1$ with labeled sample size becomes very large. We use $\mathcal{R}_0^u = ((Z_i, Q_i(Z_i | S_i, \cdot)))_{i=1}^{N_0^u}$ and $\mathcal{R}_0^b = ((Z_i, Q_i(Z_i | S_i, \cdot)))_{i=1}^{N_0^b}$ for $N_0^u + N_0^b = N_0$ to denote the two sequences of $(Z_i, Q_i(Z_i | S_i, \cdot))$ produced by the uniform query and the bimodal query respectively. Lastly, we write $\bar{W}_{N_0^u}^u = \frac{\sum_{\mathcal{R}_0^u(i)=(Z_i, Q_i(Z_i | S_i, \cdot)), 1 \leq i \leq N_0^u} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0^u}$ and $\bar{W}_{N_0^b}^b = \frac{\sum_{\mathcal{R}_0^b(i)=(Z_i, Q_i(Z_i | S_i, \cdot)), 1 \leq i \leq N_0^b} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0^b}$ to denote two mean variables of $\hat{P}(Z) - \log Q(Z | S, \cdot)$ incurred by the uniform query and the bimodal query. In the following, we present the steps of obtaining the convergency of $\bar{W}_{N_0}^q$.

$$\begin{aligned}\lim_{N_0 \rightarrow \infty} \bar{W}_{N_0}^q &= \lim_{N_0 \rightarrow \infty} \frac{\sum_{i=1}^{N_0} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0} \\ &= \lim_{N_0 \rightarrow \infty} \frac{\sum_{\mathcal{R}_0^u(i)=(Z_i, Q_i(Z_i | S_i, \cdot)), 1 \leq i \leq N_0^u} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0} \\ &\quad + \lim_{N_0 \rightarrow \infty} \frac{\sum_{\mathcal{R}_0^b(i)=(Z_i, Q_i(Z_i | S_i, \cdot)), 1 \leq i \leq N_0^b} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0} \\ &= \lim_{N_0 \rightarrow \infty} \frac{N_0^u \bar{W}_{N_0^u}^u}{N_0} + \lim_{N_0 \rightarrow \infty} \frac{N_0^b \bar{W}_{N_0^b}^b}{N_0}\end{aligned}$$

The condition $\lim_{N_0 \rightarrow \infty} \frac{M_2}{M_1} \rightarrow 0$ leads to $\lim_{N_0 \rightarrow \infty} \frac{N_0^u}{N_0} = 0$ and $\lim_{N_0 \rightarrow \infty} \frac{N_0^b}{N_0} = 1$. Therefore,

$$\begin{aligned}
\lim_{N_0 \rightarrow \infty} \bar{W}_{N_0}^q &= \lim_{N_0 \rightarrow \infty} \frac{N_0^u \bar{W}_{N_0^u}^u}{N_0} + \lim_{N_0 \rightarrow \infty} \frac{N_0^b \bar{W}_{N_0^b}^b}{N_0} \\
&= \lim_{N_0^b \rightarrow \infty} \bar{W}_{N_0^b}^b \\
&= \lim_{N_0^b \rightarrow \infty} \frac{\sum_{\mathcal{R}_0^b(i)=(Z_i, Q_i(Z_i|S_i)), 1 \leq i \leq N_0^b} [\log \hat{P}(Z_i) - \log Q_i(Z_i | S_i, \cdot)]}{N_0^b} \\
&= \lim_{N_0^b \rightarrow \infty} \frac{\sum_{\mathcal{R}_0^b(i)=(Z_i, Q_i(Z_i|S_i)), 1 \leq i \leq N_0^b} [\log \hat{P}(Z_i)]}{N_0^b} \\
&\quad - \lim_{N_0^b \rightarrow \infty} \frac{\sum_{\mathcal{R}_0^b(i)=(Z_i, Q_i(Z_i|S_i)), 1 \leq i \leq N_0^b} [\log Q_i(Z_i | S_i, \cdot)]}{N_0^b} \tag{3}
\end{aligned}$$

$$\begin{aligned}
&\rightarrow \sum_{z=0}^1 P^*(Z=z) \log(P^*(Z=z)) - \int_{\mathbb{S}, \mathbb{Z}} p^*(z, s) \log(p(z|s)) ds dz \\
&= -(H^*(Z) - H^*(Z|S)) \\
&= -I^*(S, Z) = -1 \tag{4}
\end{aligned}$$

The steps from (3) to (4) are due to bimodal query labeling features in \mathbb{S}_0 and \mathbb{S}_1 with a fair chance. Thus we have the converged results of $H^*(Z) = 1$, and $p^*(0, s) = 0.5, \forall s \in \mathbb{S}_0$ and $p^*(1, s) = 0.5, \forall s \in \mathbb{S}_1$ leading to $\lim_{N_0 \rightarrow \infty} \bar{W}_{N_0}^q \rightarrow -I^*(S, Z) = -1$. \square

A.4 Proof of Theorem 4

Proof. Given the conditions and Assumption 2 made in Theorem 3, the test statistic W_{N_0} constructed by $\mathcal{R}_0 = ((Z_i, Q_i(Z_i | S_i, \cdot)))_{i=1}^{N_0}$ in the proposed framework follows $W_{N_0} = \prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}$. Under H_1 , the probability P_1 (or the *testing power*) of the test to accept H_1 is as follows,

$$\begin{aligned}
\lim_{N_0 \rightarrow \infty} P_1 \left(\prod_{i=1}^{N_0} \frac{\hat{P}(Z_i)}{Q_i(Z_i | S_i, \cdot)} \leq \alpha \right) &= \lim_{N_0 \rightarrow \infty} P_1 \left(\frac{\sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}}{N_0} \leq \frac{\log \alpha}{N_0} \right) \\
&= \lim_{N_0 \rightarrow \infty} P_1 \left(-\frac{\sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}}{N_0} \geq -\frac{\log \alpha}{N_0} \right)
\end{aligned}$$

Specifically, $\lim_{N_0 \rightarrow \infty} -\frac{\sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}}{N_0} \rightarrow H^*(Z) - H^*(Z|S) = I^*(S, Z) = 1$ and $\lim_{N_0 \rightarrow \infty} -\frac{\log \alpha}{N_0} \rightarrow 0$.

Thus, there exists $\sigma > 0$, $n(\sigma)$ and $n'(\sigma)$ such that, when $\forall N_0 > n(\sigma)$, $-\frac{\sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}}{N_0} > \sigma$, and when $\forall N_0 > n'(\sigma)$, $-\frac{\log \alpha}{N_0} < \sigma$. It directly leads to

$$P_1 \left(-\frac{\sum_{i=1}^{N_0} \log \frac{\hat{P}(Z_i)}{Q_i(Z_i|S_i, \cdot)}}{N_0} \geq -\frac{\log \alpha}{N_0} \right) = 1, \quad N_0 > \max(n(\sigma), n'(\sigma)).$$

Therefore the proposed testing framework is *consistent* under the conditions and Assumption 2 made in Theorem 3. \square

B The algorithmic instantiation of the framework

B.1 The main algorithm

The main algorithm of the instantiation of the framework is shown in Algorithm 2. Algorithm 2 takes the following as input: An unlabeled feature set \mathcal{S}_u , a classification algorithm \mathcal{A} , a label budget N_q , the size N_0 of samples for initializing \mathcal{A} , the periodic time T_{sw} of using the QS algorithm 1, the number \mathcal{I} of resampling subsequence for the QS algorithm, a candidate set $\{(M^1, M^2)_i\}_{i=1}^L$ of step sizes to be verified by QS , and lastly a significance level α . Algorithm 2 outputs reject or accept H_0 .

A decision maker starts Algorithm 2 from initializing a class-probability predictor $Q(z|s, \cdot)$ by the classification algorithm \mathcal{A} with N_0 uniformly labeled samples. Then, the decision maker enters the *first stage* of the framework and continuously uses subroutine 3 to label samples uniformly, updates the statistic w after every uniform query, and updates $Q(z|s, \cdot)$ with the uniformly labeled samples. During *stage one*, the decision maker rejects H_0 if $w \leq \alpha$ or accepts H_1 if $N_q = 0$. While the test is proceeding, the decision maker uses QS algorithm 1 every T_{sw} . If the QS algorithm returns *policy 1* or *policy 2* with M^1 and M^2 , then exits *stage one* and enters *stage two*. In the second stage, the decision maker alternatively takes M^1 bimodal queries and M^2 uniform queries. More precisely, if *policy 1* was selected by QS , alternatively takes M^1 steps of Subroutine 5 (bimodal query) and M^2 steps of Subroutine 3 (uniform query); reject H_0 anytime if $w \leq \alpha$ or accept H_1 if $N_q = 0$. In contrast, if *policy 2* was selected, alternatively takes M^1 steps of Subroutine 5 (bimodal query) and M^2 steps of Subroutine 4 (uniform query), and rejects H_0 anytime if $w \leq \alpha$; if $N_q = 0$, continuously takes Subroutine 6 to retrieve uniformly labeled samples from \mathcal{R}_1 until $w \leq \alpha$ to reject H_0 or $|\mathcal{R}_1| = 0$ to accept H_1 .

C Full experimental results

In this section, we present the experimental results of implementing the proposed *active two-sample testing framework* with different algorithm choices \mathcal{A} to build the class-probability predictor $Q(z|s, \cdot)$ and with different step sizes $\{(M^1, M^2)_i\}_{i=1}^L$ to be verified by the QS algorithm 1. After that, we present an ablation study on the QS algorithm 1 to reinforce the effectiveness of the *query-switching*.

C.1 Experiments for different choices of classification algorithms \mathcal{A} and step size set $\{(M^1, M^2)_i\}_{i=1}^L$ on synthetic data

In the following, we present complete results for the synthetic data with $P(Z = 0)$ varied from 0.5 to 0.8 and δ varied from 0.2 to 0.5. We set \mathcal{A} to logistic regression and KNN classifier and set $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ (Ours-QS¹) or $\{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ (Ours-QS²). Table 5 and Table 6 shows the Type II errors generated with these setup by running 200 times. As we observe, the proposed framework consistently generates lower Type II errors than the baseline [8] for different label budgets. Furthermore, we verify the Type I errors of our framework with the same choices of \mathcal{A} and $\{(M^1, M^2)_i\}_{i=1}^L$ on the synthetic dataset for $\delta = 0$ and $P(Z = 0)$ varied from 0.5 to 0.8. We run 500 trials to generate Type I errors in Table 7 and the Type I errors are upper-bounded by $\alpha = 0.05$.

C.2 Experiments for different choices of classification algorithms \mathcal{A} and step size set $\{(M^1, M^2)_i\}_{i=1}^L$ on MNIST and ADNI

In the following, we present complete results for MNIST and ADNI with $P(Z = 0)$ varied from 0.5 to 0.8. We set \mathcal{A} to logistic regression, SVM, and KNN classifier and set $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ (Ours-QS¹) or $\{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ (Ours-QS²). Table 8 and Table 9 show the Type II errors generated with these setups by running 200 times for the MNIST and ADNI datasets. As we observe, the proposed

$P(Z = 0) = 0.5, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.83	0.53	0.30	0.11	0.04	0.40	0.03	0.01	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Ours-QS ¹	0.50	0.16	0.04	0.01	0.02	0.12	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Ours-QS ²	0.50	0.16	0.07	0.03	0.03	0.12	0.01	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.5, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	183.51	319.70	399.10	438.11	451.37	145.06	176.09	177.96	178.28	178.28	98.79	101.02	101.02	101.02	101.02	63.90	63.90	63.90	63.90	63.90
Ours-QS ¹	167.28	241.53	257.13	262.25	271.12	122.97	130.74	129.53	132.93	131.10	88.19	89.14	89.09	87.33	88.18	63.69	63.46	63.59	63.80	63.64
Ours-QS ²	166.81	237.43	257.43	272.53	276.00	122.97	130.74	129.53	132.93	131.10	88.19	89.14	89.09	87.33	88.18	63.69	63.46	63.59	63.80	63.64
$P(Z = 0) = 0.6, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.80	0.50	0.23	0.12	0.06	0.36	0.04	0.01	0.00	0.00	0.08	0.01	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
Ours-QS ¹	0.55	0.18	0.07	0.02	0.01	0.12	0.00	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Ours-QS ²	0.56	0.21	0.05	0.02	0.01	0.15	0.01	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.6, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	182.34	312.41	386.01	419.71	438.97	137.18	171.28	174.69	175.30	175.30	92.13	96.65	96.86	96.86	96.86	65.26	65.46	65.46	65.46	65.46
Ours-QS ¹	173.81	252.27	285.83	297.73	309.00	128.11	139.45	139.52	140.66	136.78	88.70	88.53	88.51	88.03	88.19	60.68	60.99	60.89	60.87	60.91
Ours-QS ²	172.57	252.22	280.65	294.20	304.22	127.96	140.20	142.46	142.12	142.19	88.98	89.07	89.00	90.13	89.975	61.06	60.98	60.84	60.88	60.90
$P(Z = 0) = 0.7, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.81	0.57	0.35	0.22	0.11	0.46	0.14	0.02	0.00	0.00	0.11	0.01	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00
Ours-QS ¹	0.62	0.24	0.11	0.06	0.04	0.15	0.01	0.00	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Ours-QS ²	0.62	0.23	0.11	0.06	0.05	0.16	0.02	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.7, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	184.01	323.33	415.54	472.21	505.04	155.06	209.34	222.64	223.61	223.61	108.78	115.41	115.71	115.71	115.71	74.58	75.68	75.68	75.68	75.68
Ours-QS ¹	175.71	270.19	304.74	325.32	337.32	130.18	142.51	139.70	142.91	143.45	92.46	93.16	93.05	92.52	93.15	66.15	66.55	66.05	66.49	66.25
Ours-QS ²	175.53	262.27	310.53	329.63	349.48	129.15	142.08	140.55	139.91	144.84	93.75	93.80	92.64	93.46	93.33	66.05	66.84	66.12	66.36	66.91
$P(Z = 0) = 0.8, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.88	0.73	0.57	0.36	0.22	0.61	0.23	0.07	0.01	0.01	0.25	0.02	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00
Ours-QS ¹	0.77	0.38	0.19	0.13	0.09	0.23	0.01	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Ours-QS ²	0.78	0.38	0.20	0.13	0.08	0.24	0.01	0.01	0.01	0.00	0.06	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.8, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	190.81	351.745	479.57	571.12	627.99	166.38	247.05	271.32	277.12	278.12	127.94	148.44	149.34	149.34	149.34	92.50	94.83	94.83	94.83	94.83
Ours-QS ¹	85.03	306.90	365.60	417.29	438.40	143.98	159.90	164.32	166.30	163.01	105.22	104.29	104.87	105.26	104.73	82.16	81.51	81.96	81.78	82.12
Ours-QS ²	185.51	302.02	361.03	407.20	414.79	142.75	164.27	172.29	165.80	167.53	105.61	103.66	104.58	104.76	107.12	82.38	81.12	81.88	82.35	81.79

Table 5: **Type II errors** and **average stopping times** of the proposed test and the baseline test [8] for different label budgets for $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. The **Logistic regression** is used.

framework consistently generates lower Type II errors than the baseline [8] for different label budgets. Furthermore, we verify the Type I errors of our framework with the same choices of \mathcal{A} and $\{(M^1, M^2)_i\}_{i=1}^L$ on the MNIST dataset for $P(Z = 0)$ varied from 0.5 to 0.8. We run 500 trials to generate Type I errors in Table 10 and the Type I errors are upper-bounded by $\alpha = 0.05$.

C.3 Abalation study on the query-switching

In this section, we implement the proposed framework without *QS-switching* algorithm 1. It leads to an instantiation of the framework to adopt either *policy 1* or *policy 2* at the beginning of the sequential testing. We generate the results of solely running *policy 1* or *policy 2* from the beginning of the testing and compare the results to those from the proposed framework combined with the *QS*-algorithm. As we observe in Table 11 and Table 12, the proposed framework combined with the *query-switching* generally generates lower Type-II errors than the baseline [8] for different label budgets and the synthetic, MNIST and ADNI datasets.

$P(Z = 0) = 0.5, \text{ Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.96	0.77	0.50	0.28	0.14	0.72	0.18	0.02	0.00	0.00	0.29	0.01	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00
Ours-QS ¹	0.83	0.46	0.23	0.09	0.06	0.38	0.04	0.01	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
Ours-QS ²	0.82	0.45	0.24	0.12	0.08	0.40	0.05	0.02	0.01	0.00	0.09	0.05	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.5, \text{ Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	198.07	374.42	500.42	578.08	619.52	185.65	270.58	285.19	287.81	287.81	151.44	166.78	167.36	167.36	167.36	115.68	116.83	116.83	116.83	116.83
Ours-QS ¹	193.08	327.57	411.07	446.68	479.46	169.68	213.13	227.77	231.08	233.73	136.54	140.83	140.22	143.38	142.30	105.77	106.06	106.09	106.75	107.14
Ours-QS ²	193.03	321.36	390.09	457.10	481.35	167.98	212.93	220.50	224.83	228.65	135.45	142.25	140.57	143.63	145.88	105.51	105.66	105.56	106.23	105.84
$P(Z = 0) = 0.6, \text{ Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.96	0.77	0.48	0.30	0.14	0.73	0.19	0.03	0.00	0.00	0.30	0.01	0.00	0.00	0.00	0.05	0.00	0.00	0.00	0.00
Ours-QS ¹	0.88	0.45	0.23	0.09	0.05	0.46	0.03	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
Ours-QS ²	0.87	0.49	0.20	0.11	0.05	0.43	0.04	0.00	0.00	0.00	0.12	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.6, \text{ Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	195.95	333.62	415.48	459.70	481.52	177.02	215.89	214.15	217.87	221.37	140.76	145.27	144.32	146.45	147.61	108.59	107.12	108.16	108.95	108.27
Ours-QS ¹	195.95	333.62	415.48	459.70	481.52	177.02	215.89	214.15	217.87	221.37	140.76	145.27	144.32	146.45	147.61	108.59	107.12	108.16	108.95	108.27
Ours-QS ²	196.04	331.68	402.19	447.00	476.26	177.06	211.50	210.53	213.31	214.25	142.71	143.24	144.12	144.14	147.05	108.71	107.57	108.07	108.48	107.35
$P(Z = 0) = 0.7, \text{ Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.97	0.82	0.58	0.37	0.28	0.79	0.36	0.11	0.02	0.01	0.43	0.04	0.00	0.00	0.00	0.14	0.00	0.00	0.00	0.00
Ours-QS ¹	0.90	0.48	0.24	0.15	0.08	0.52	0.05	0.01	0.01	0.00	0.13	0.02	0.00	0.00	0.02	0.00	0.00	0.00	0.00	0.00
Ours-QS ²	0.87	0.54	0.27	0.13	0.09	0.50	0.04	0.02	0.00	0.01	0.14	0.01	0.00	0.00	0.00	0.03	0.00	0.00	0.00	0.00
$P(Z = 0) = 0.7, \text{ Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	198.26	378.47	519.99	613.42	678.14	188.15	297.09	338.12	347.31	349.35	162.54	195.39	198.17	198.17	198.17	127.68	133.31	133.31	133.31	133.31
Ours-QS ¹	197.08	345.46	423.71	474.46	507.40	179.23	225.44	238.52	237.83	239.89	147.00	154.95	156.16	156.15	154.42	116.38	117.42	118.08	118.62	117.50
Ours-QS ²	195.86	341.41	420.99	470.49	504.33	178.88	222.67	236.71	231.12	242.68	146.07	151.69	153.57	153.55	154.15	116.71	116.59	117.09	117.13	116.92
$P(Z = 0) = 0.8, \text{ Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.98	0.90	0.77	0.59	0.49	0.87	0.60	0.30	0.08	0.03	0.67	0.16	0.01	0.00	0.00	0.34	0.01	0.00	0.00	0.00
Ours-QS ¹	0.94	0.70	0.48	0.31	0.20	0.71	0.16	0.05	0.02	0.02	0.30	0.03	0.00	0.00	0.00	0.09	0.00	0.00	0.00	0.00
Ours-QS ²	0.94	0.67	0.47	0.31	0.20	0.66	0.18	0.07	0.03	0.02	0.33	0.02	0.00	0.00	0.01	0.10	0.01	0.00	0.00	0.00
$P(Z = 0) = 0.8, \text{ Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	199.01	386.62	554.96	689.48	798.39	193.65	341.79	426.20	461.02	470.26	179.09	255.30	267.93	268.74	268.74	153.04	175.55	176.26	176.26	176.26
Ours-QS ¹	197.86	371.02	476.64	580.41	642.96	189.98	273.91	297.23	306.91	311.87	164.91	190.44	189.96	194.95	195.87	138.07	141.96	143.55	142.84	143.75
Ours-QS ²	197.36	356.70	485.85	563.87	623.55	186.92	266.28	288.77	300.70	311.54	163.97	188.15	188.52	191.85	197.06	136.43	142.54	141.20	141.98	141.88

Table 6: **Type II errors** and **average stopping times** of the proposed test and the baseline test [8] for different label budgets for $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. The **KNN** classifier is used.

Logistic regression, Type I error																					
$P(Z = 0)$		0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	
Ours-QS ¹	0.010	0.008	0.010	0.008	0.012	0.008	0.010	0.010	0.012	0.008	0.008	0.006	0.008	0.006	0.006	0.010	0.012	0.012	0.014	0.012	
Ours-QS ²	0.008	0.012	0.008	0.008	0.012	0.008	0.012	0.012	0.010	0.010	0.006	0.008	0.008	0.006	0.006	0.012	0.012	0.012	0.012	0.014	
KNN, Type I error																					
$P(Z = 0)$		0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	
Ours-QS ¹	0.000	0.004	0.004	0.006	0.01	0.000	0.004	0.006	0.004	0.006	0.002	0.004	0.002	0.008	0.008	0.000	0.000	0.000	0.002	0.000	
Ours-QS ²	0.000	0.004	0.004	0.006	0.006	0.000	0.008	0.002	0.006	0.004	0.004	0.002	0.002	0.004	0.002	0.000	0.002	0.002	0.002	0.002	

Table 7: **Type I errors** of the proposed test for different label budgets and $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹

Algorithm 2 An active sequential two-sample test

```
1: Input:  $\mathcal{S}_u, \mathcal{A}, N_q, N_0, T_{sw}, I, \{(M^1, M^2)_i\}_{i=1}^L, \alpha$ 
2: Output: Reject or accept  $H_0$ 
3: Initialization:  $\mathcal{S}_w = [\ ]$ ,  $\mathcal{Z}_w = [\ ]$ ,  $\mathcal{S}_q = [\ ]$ ,  $\mathcal{R}_0 = [\ ]$ ,  $\mathcal{R}_1 = [\ ]$ ,  $\mathcal{Q} = [\ ]$ ,  $t_{sw} = 0$ ; uniformly sample
    $N_0$  features, label the features and add the labeled features to  $\mathcal{S}_w$  and the corresponding labels to  $\mathcal{Z}_w$ ;
   remove  $\mathcal{S}_w$  from  $\mathcal{S}_u$ , add  $\mathcal{S}_w$  to  $\mathcal{S}_q$ ,  $N_q = N_q - N_0$ ,  $N_u = |\mathcal{S}_u|$ ; use a classification algorithm  $\mathcal{A}$  and  $\mathcal{S}_w$ 
   and  $\mathcal{Z}_w$  to initialize a class-probability predictor  $Q(z|s, \cdot)$ . Add  $Q(z|s, \cdot)$  to  $\mathcal{Q}$ 
4: First stage:
5: while  $N_q > 0$  do
6:    $Decision = \text{UniformQuery}^1(\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_w, \mathcal{Z}_w, \mathcal{R}_0, \mathcal{Q}, \mathcal{A}, \alpha)$ ;  $N_q = |\mathcal{S}_q|$ ,  $N_u = |\mathcal{S}_u|$ 
7:   if the Decision is to reject  $H_0$  then
8:     Return reject  $H_0$ 
9:   else
10:     $t_{sw} = t_{sw} + 1$ 
11:   end if
12:   if  $t_{sw}$  equals to  $T_{sw}$  then
13:     $switch = \text{Query-switching}(\mathcal{S}_w[N_w:], \mathcal{Z}_w[N_w:], \mathcal{Q}, \{(M^1, M^2)_i\}_{i=1}^L, N_q, N_u, I)$ 
14:    if the switch decides to enter stage 2 then
15:      break
16:    else
17:       $t_{sw} = 0$ 
18:    end if
19:   end if
20: end while
21: Second stage:
22: if the switch decides to switch to stage 2 then
23:   Set  $M^1$  and  $M^2$  the steps given by the switch
24:   while  $N_q > 0$  do
25:     for  $m = 1 \cdots M^1$  do
26:        $Decision = \text{BimodalQuery}(\mathcal{S}_u, \mathcal{S}_q, \mathcal{R}_0, \mathcal{Q}, \alpha)$ ;  $N_q = |\mathcal{S}_q|$ ,  $N_u = |\mathcal{S}_u|$ 
27:       if the Decision is to reject  $H_0$  then
28:         Return reject  $H_0$ 
29:       else if  $N_q == 0$  then
30:         Return accept  $H_1$ 
31:       end if
32:     end for
33:     for  $m = 1 \cdots M^2$  do
34:       if the policy 1 is given by the switch then
35:          $Decision = \text{UniformQuery}^1(\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_w, \mathcal{Z}_w, \mathcal{R}_0, \mathcal{Q}, \mathcal{A}, \alpha)$ 
36:       else
37:          $Decision = \text{UniformQuery}^2(\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_w, \mathcal{Z}_w, \mathcal{R}_1, \mathcal{Q}, \mathcal{A})$  ▷ the policy 2 is selected
38:       end if
39:        $N_q = |\mathcal{S}_q|$ ,  $N_u = |\mathcal{S}_u|$ .
40:       if the Decision is to reject  $H_0$  then
41:         Return reject  $H_0$ 
42:       else if  $N_q == 0$  and the policy 1 is given by the switch then
43:         Return accept  $H_1$ 
44:       end if
45:     end for
46:   end while
47:   while  $|\mathcal{R}_1| > 0$  do
48:      $Decision = \text{Retrieval}(\mathcal{R}_0, \mathcal{R}_1, \alpha)$ 
49:     if the Decision is to reject  $H_0$  then
50:       return reject  $H_0$ 
51:     end if
52:   end while
53: end if
54: Return accept  $H_0$ 
```

Sub-routine 3 UniformQuery¹

- 1: **Input:** $\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_w, \mathcal{Z}_w, \mathcal{R}_0, \mathcal{Q}, \mathcal{A}, \alpha$
 - 2: **Output:** Reject H_0 , or continue testing
 - 3: **Uniformly** samples a feature s_u from \mathcal{S}_u^* which is a concatenation of \mathcal{S}_u and \mathcal{S}_q but excluding the uniformly labeled features \mathcal{S}_w ; add s_u to \mathcal{S}_w
 - 4: **if** s_u is not in \mathcal{S}_q **then**
 - 5: Query the label z_u of s_u ; add z_u to \mathcal{Z}_w ; remove s_u from \mathcal{S}_u and add s_u to \mathcal{S}_q
 - 6: Get the latest $Q(z|s, \cdot)$ from \mathcal{Q}
 - 7: Add $(z_u, Q(z_u | s_u, \cdot))$ to \mathcal{R}_0
 - 8: $w = \prod_{\mathcal{R}_0=(z_i, Q_i(z_i|s_i)), 1 \leq i \leq N_0} \frac{\hat{P}(z_i)}{Q_i(z_i|s_i, \cdot)}$
 - 9: **if** $w \leq \alpha$ **then**
 - 10: **Return** reject H_0
 - 11: **end if**
 - 12: **end if**
 - 13: Update $Q(z | s, \cdot)$ with (s_u, z_u) or rebuild a $Q(z | s, \cdot)$ with \mathcal{S}_w and \mathcal{Z}_w by a classification algorithm \mathcal{A} ; add the new $Q(z | s, \cdot)$ to \mathcal{Q} .
 - 14: **Return** continue testing
-

Sub-routine 4 UniformQuery²

- 1: **Input:** $\mathcal{S}_u, \mathcal{S}_q, \mathcal{S}_w, \mathcal{Z}_w, \mathcal{R}_1, \mathcal{Q}, \mathcal{A}$
 - 2: **Output:** continue testing
 - 3: **Uniformly** samples a feature s_u from \mathcal{S}_u^* which is a concatenation of \mathcal{S}_u and \mathcal{S}_q but excluding the uniformly labeled features \mathcal{S}_w ; add s_u to \mathcal{S}_w
 - 4: **if** s_u is not in \mathcal{S}_q **then**
 - 5: Query the label z_u of s_u ; add z_u to \mathcal{Z}_w ; remove s_u from \mathcal{S}_u and add s_u to \mathcal{S}_q
 - 6: Get the latest $Q(z|s, \cdot)$ from \mathcal{Q}
 - 7: Add $(z_u, Q(z_u | s_u, \cdot))$ to \mathcal{R}_1
 - 8: **end if**
 - 9: Update $Q(z | s, \cdot)$ with (s_u, z_u) or rebuild a $Q(z | s, \cdot)$ with \mathcal{S}_w and \mathcal{Z}_w by a classification algorithm \mathcal{A} ; add the new $Q(z | s, \cdot)$ to \mathcal{Q} .
 - 10: **Return** continue testing
-

Sub-routine 5 BimodalQuery

- 1: **Input:** $\mathcal{S}_u, \mathcal{S}_q, \mathcal{R}_0, \mathcal{Q}, \alpha$
 - 2: **Output:** Reject H_0 , or continue testing
 - 3: Get the latest $Q(z|s, \cdot)$ from \mathcal{Q}
 - 4: **Bimodal query:** Samples a feature $s_u = s_{q_0}$ or s_{q_1} with fair chance where $s_{q_0} = \arg \max_s [Q(Z = 0|s, \cdot)], \forall s \in \mathcal{S}_u$ and $s_{q_1} = \arg \max_s [Q_n(Z = 1|s, \cdot)], \forall s \in \mathcal{S}_u$
 - 5: Query the label z_u of s_u ; remove s_u from \mathcal{S}_u and add s_u to \mathcal{S}_q ; add $(z_u, Q(z_u | s_u, \cdot))$ to \mathcal{R}_0
 - 6: $w = \prod_{\mathcal{R}_0=(z_i, Q_i(z_i|s_i)), 1 \leq i \leq N_0} \frac{\hat{P}(z_i)}{Q_i(z_i|s_i, \cdot)}$
 - 7: **if** $w \leq \alpha$ **then**
 - 8: **Return** reject H_0
 - 9: **else**
 - 10: **Return** continue testing
 - 11: **end if**
-

Sub-routine 6 Retrieval

- 1: **Input:** $\mathcal{R}_0, \mathcal{R}_1, \alpha$,
 - 2: **Output:** Reject H_0 or continue testing
 - 3: Remove the first r_1 from the sequence \mathcal{R}_1 ; add r_1 to \mathcal{R}_0 ; $w = \prod_{\mathcal{R}_0=(z_i, Q_i(z_i|s_i)), 1 \leq i \leq N_0} \frac{\hat{P}(z_i)}{Q_i(z_i|s_i, \cdot)}$
 - 4: **if** $w \leq \alpha$ **then**
 - 5: **Return** reject H_0
 - 6: **else**
 - 7: **Return** continue testing
 - 8: **end if**
-

$P(Z=0) = 0.5, \text{Type II error}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.65	0.22	0.02	0.01	0.01	0.60	0.08	0.00	0.00	0.00	0.76	0.54	0.38	0.27	0.19
Ours-QS ¹	0.52	0.05	0.01	0.01	0.01	0.37	0.02	0.01	0.01	0.00	0.60	0.48	0.37	0.36	0.33
Ours-QS ²	0.55	0.06	0.01	0.01	0.00	0.37	0.02	0.01	0.01	0.00	0.79	0.52	0.39	0.32	0.31
$P(Z=0) = 0.5, \text{Avg. stopping time}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	165.30	251.67	267.88	270.73	271.73	175.43	229.87	233.01	233.01	233.01	91.40	156.72	201.17	233.20	256.30
Ours-QS ¹	164.11	221.98	237.73	237.96	241.01	163.84	203.41	202.69	210.14	201.42	159.50	265.63	340.86	431.84	515.38
Ours-QS ²	164.36	223.04	231.94	236.13	242.92	164.68	206.17	206.35	209.96	207.77	92.55	154.86	200.40	242.33	274.88
$P(Z=0) = 0.6, \text{Type II error}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.59	0.16	0.02	0.01	0.01	0.55	0.05	0.00	0.00	0.00	0.82	0.65	0.53	0.43	0.37
Ours-QS ¹	0.27	0.02	0.01	0.00	0.00	0.26	0.03	0.01	0.01	0.00	0.51	0.42	0.38	0.37	0.41
Ours-QS ²	0.31	0.01	0.01	0.00	0.00	0.35	0.05	0.01	0.02	0.00	0.83	0.51	0.45	0.43	0.35
$P(Z=0) = 0.6, \text{Avg. stopping time}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	160.85	233.20	247.46	249.27	250.27	173.51	226.84	229.79	229.79	229.79	94.00	167.96	226.40	274.86	313.95
Ours-QS ¹	145.20	172.92	175.08	176.66	173.33	155.75	185.93	189.15	196.17	199.57	154.08	247.18	327.66	399.73	509.65
Ours-QS ²	146.46	175.59	178.82	180.32	183.49	157.73	193.10	197.00	209.14	212.33	93.25	156.24	209.01	255.30	282.02
$P(Z=0) = 0.7, \text{Type II error}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.59	0.22	0.04	0.01	0.00	0.67	0.16	0.01	0.00	0.00	0.83	0.72	0.68	0.65	0.63
Ours-QS ¹	0.16	0.01	0.01	0.00	0.00	0.25	0.03	0.01	0.00	0.01	0.48	0.25	0.17	0.16	0.15
Ours-QS ²	0.21	0.02	0.01	0.00	0.01	0.32	0.05	0.02	0.01	0.01	0.85	0.46	0.37	0.34	0.33
$P(Z=0) = 0.7, \text{Avg. stopping time}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	160.29	234.78	255.21	257.81	258.01	174.64	252.10	264.60	265.42	265.42	93.98	170.46	240.24	306.21	370.11
Ours-QS ¹	133.97	149.08	153.09	151.03	150.89	151.34	177.56	189.14	187.51	195.80	163.05	231.22	264.84	290.31	313.25
Ours-QS ²	136.98	154.38	156.31	157.79	169.71	154.02	190.88	195.60	206.36	204.73	93.95	154.73	198.48	240.57	275.40
$P(Z=0) = 0.8, \text{Type II error}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	0.66	0.24	0.05	0.02	0.01	0.77	0.32	0.10	0.02	0.01	0.89	0.84	0.79	0.77	0.76
Ours-QS ¹	0.15	0.01	0.00	0.00	0.00	0.46	0.13	0.06	0.05	0.03	0.35	0.14	0.11	0.07	0.08
Ours-QS ²	0.16	0.03	0.01	0.00	0.00	0.79	0.13	0.04	0.02	0.02	0.91	0.56	0.41	0.39	0.40
$P(Z=0) = 0.8, \text{Avg. stopping time}$															
Classification algorithm	Logistic regression					SVM					KNN				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Baseline	163.94	243.31	268.11	273.08	275.28	92.63	148.53	167.27	171.72	172.59	95.42	181.39	262.25	340.14	416.37
Ours-QS ¹	133.07	143.40	145.14	142.86	145.97	163.49	218.40	237.86	255.12	271.70	156.08	197.35	223.40	229.62	241.27
Ours-QS ²	132.58	154.98	163.19	165.22	164.95	93.67	126.54	133.53	135.72	141.02	96.94	164.97	211.41	257.43	303.54

Table 8: **Type II errors** and **average stopping times** of the proposed test and the baseline test [8] for different label budgets and MNIST with $P(Z=0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. The **Logistic regression**, **SVM** and **KNN** are used.

$P(Z = 0) = 0.5, \text{Type II error}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	0.01	0.01	0.00	0.00	0.00	0.18	0.02	0.00	0.00	0.00	0.42	0.31	0.26	0.23	0.23
Ours-QS ¹	0.02	0.00	0.00	0.00	0.00	0.12	0.00	0.00	0.00	0.00	0.37	0.34	0.30	0.29	0.28
Ours-QS ²	0.03	0.00	0.00	0.00	0.00	0.13	0.01	0.01	0.01	0.01	0.35	0.28	0.26	0.28	0.27
$P(Z = 0) = 0.5, \text{Avg. stopping time}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	83.69	85.53	85.56	85.56	85.56	127.16	135.43	136.05	136.05	136.05	132.11	167.62	195.59	219.80	242.59
Ours-QS ¹	78.79	78.78	78.61	80.35	79.43	126.79	135.83	136.60	139.28	136.01	121.37	154.79	186.25	215.58	242.81
Ours-QS ²	78.76	78.36	78.38	79.48	78.91	129.34	137.44	138.72	139.81	139.63	120.74	148.88	177.73	211.32	240.20
$P(Z = 0) = 0.6, \text{Type II error}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	0.05	0.00	0.00	0.00	0.00	0.16	0.01	0.00	0.00	0.00	0.50	0.44	0.41	0.38	0.37
Ours-QS ¹	0.02	0.00	0.00	0.00	0.00	0.11	0.00	0.00	0.00	0.00	0.45	0.42	0.41	0.39	0.40
Ours-QS ²	0.03	0.00	0.00	0.00	0.00	0.06	0.00	0.00	0.00	0.00	0.44	0.41	0.38	0.37	0.39
$P(Z = 0) = 0.6, \text{Avg. stopping time}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	83.97	86.07	86.07	86.07	86.07	120.97	127.48	127.52	127.52	127.52	138.54	184.85	227.00	266.25	303.70
Ours-QS ¹	78.98	79.66	79.95	79.22	80.07	122.56	129.96	130.36	132.45	131.53	132.21	176.93	216.80	257.91	295.13
Ours-QS ²	78.96	80.12	79.71	79.88	79.89	111.76	116.21	117.05	117.72	117.12	131.39	175.86	211.45	251.66	293.44
$P(Z = 0) = 0.7, \text{Type II error}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	0.11	0.01	0.00	0.00	0.00	0.22	0.06	0.00	0.00	0.00	0.57	0.51	0.46	0.45	0.44
Ours-QS ¹	0.04	0.00	0.00	0.00	0.00	0.13	0.03	0.01	0.00	0.00	0.49	0.47	0.42	0.42	0.45
Ours-QS ²	0.05	0.01	0.00	0.00	0.00	0.13	0.04	0.02	0.02	0.02	0.51	0.48	0.46	0.48	0.47
$P(Z = 0) = 0.7, \text{Avg. stopping time}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	95.58	100.89	101.15	101.15	101.15	126.67	139.00	141.35	141.35	141.35	144.97	198.65	246.43	291.84	336.27
Ours-QS ¹	85.96	86.56	86.09	87.63	85.67	125.75	139.98	139.69	141.21	142.53	142.14	190.93	229.66	277.65	324.70
Ours-QS ²	85.95	87.37	87.96	87.75	87.96	118.48	128.31	131.64	137.37	138.78	143.46	193.73	241.65	292.74	334.67
$P(Z = 0) = 0.8, \text{Type II error}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	0.24	0.07	0.01	0.00	0.00	0.53	0.27	0.07	0.02	0.01	0.70	0.65	0.65	0.63	0.62
Ours-QS ¹	0.12	0.01	0.00	0.00	0.00	0.36	0.12	0.04	0.02	0.01	0.41	0.30	0.28	0.27	0.25
Ours-QS ²	0.13	0.01	0.00	0.00	0.00	0.40	0.12	0.05	0.03	0.02	0.42	0.37	0.35	0.30	0.31
$P(Z = 0) = 0.8, \text{Avg. stopping time}$															
Classification algorithm		Logistic regression					SVM					KNN			
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600
Baseline	115.36	128.52	132.54	132.89	132.89	166.93	204.83	219.62	222.83	223.56	163.10	230.49	295.02	358.43	420.53
Ours-QS ¹	104.74	106.75	108.45	107.28	106.41	154.89	182.67	194.95	201.39	203.52	145.02	180.62	211.32	236.37	260.04
Ours-QS ²	105.56	108.38	108.88	107.14	109.76	155.92	183.31	198.30	200.43	204.26	145.71	188.33	230.90	257.15	289.01

Table 9: **Type II errors** and **average stopping times** of the proposed test and the baseline test [8] for different label budgets and **ADNI** with $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. The **Logistic regression**, **SVM** and **KNN** are used.

Logistic regression, Type I error																				
$P(Z = 0)$	0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-QS ¹	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.010	0.010	0.010	0.010	0.010	0.006	0.006	0.006	0.006	0.006
Ours-QS ²	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.020	0.010	0.010	0.010	0.010	0.010	0.006	0.006	0.006	0.006	0.006
SVM, Type I error																				
$P(Z = 0)$	0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-QS ¹	0.004	0.006	0.006	0.004	0.006	0.006	0.006	0.006	0.010	0.008	0.014	0.012	0.014	0.014	0.014	0.006	0.004	0.004	0.006	0.004
Ours-QS ²	0.004	0.004	0.008	0.008	0.008	0.000	0.009	0.005	0.005	0.005	0.000	0.005	0.005	0.000	0.000	0.005	0.005	0.000	0.005	0.005
KNN, Type I error																				
$P(Z = 0)$	0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-QS ¹	0.000	0.008	0.002	0.004	0.006	0.000	0.002	0.004	0.004	0.002	0.004	0.006	0.004	0.004	0.000	0.000	0.000	0.004	0.000	0.000
Ours-QS ²	0.000	0.004	0.006	0.004	0.008	0.000	0.006	0.002	0.002	0.002	0.000	0.002	0.002	0.004	0.002	0.000	0.002	0.002	0.000	0.000

Table 10: **Type I errors** of the proposed tests for different label budgets and **MNIST** with $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. The **Logistic regression**, **SVM** and **KNN** are used.

$P(Z = 0) = 0.5, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	0.55	0.35	0.26	0.18	0.14	0.14	0.03	0.01	0.0	0.0	0.02	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-NoQS ²	0.5	0.35	0.28	0.21	0.17	0.12	0.02	0.01	0.01	0.0	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ¹	0.5	0.16	0.04	0.01	0.01	0.12	0.0	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ²	0.5	0.16	0.07	0.03	0.03	0.12	0.01	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
$P(Z = 0) = 0.5, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	143.8	229.1	286.9	331.5	362.3	77.1	92.5	95.6	95.8	95.8	44.1	44.5	44.5	44.5	44.5	28.3	28.3	28.3	28.3	28.3
Ours-NoQS ²	138.8	219.3	282.9	333.4	371.5	79.1	90.7	94.5	96.0	96.3	44.3	45.1	45.1	45.1	45.1	30.8	30.8	30.8	30.8	30.8
Ours-QS ¹	167.3	241.5	257.1	262.2	271.1	122.6	127.8	131.2	129.2	127.7	88.2	87.8	87.9	87.9	87.7	63.7	63.6	63.3	63.6	63.6
Ours-QS ²	166.8	237.4	257.4	272.5	276.0	123.0	130.7	129.5	132.9	131.1	88.2	89.1	89.1	87.3	88.2	63.7	63.5	63.6	63.8	63.6
$P(Z = 0) = 0.6, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	0.55	0.36	0.28	0.23	0.17	0.14	0.04	0.02	0.01	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-NoQS ²	0.54	0.34	0.28	0.24	0.17	0.12	0.04	0.03	0.02	0.01	0.01	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ¹	0.55	0.18	0.07	0.01	0.01	0.12	0.0	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ²	0.56	0.21	0.05	0.01	0.01	0.14	0.01	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
$P(Z = 0) = 0.6, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	144.9	234.8	299.8	350.1	391.9	81.4	96.3	102.2	104.8	106.1	45.3	46.1	46.1	46.1	46.1	28.5	28.5	28.5	28.5	28.5
Ours-NoQS ²	145.1	228.5	292.7	344.7	386.1	81.3	95.0	102.2	106.5	109.5	45.0	47.4	48.5	49.3	49.3	32.0	32.0	32.0	32.0	32.0
Ours-QS ¹	173.8	252.3	285.8	297.7	309.0	128.1	139.4	139.5	140.7	136.8	88.7	88.5	88.5	88.0	88.2	60.7	61.0	60.9	60.9	60.9
Ours-QS ²	172.6	252.2	280.6	294.2	304.2	128.0	140.2	142.5	142.1	142.2	89.0	89.1	89.0	90.1	90.0	61.1	61.0	60.8	60.9	60.9
$P(Z = 0) = 0.7, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	0.63	0.46	0.36	0.27	0.21	0.21	0.07	0.03	0.01	0.01	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-NoQS ²	0.6	0.43	0.33	0.27	0.2	0.23	0.09	0.06	0.01	0.0	0.04	0.01	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ¹	0.62	0.24	0.11	0.06	0.04	0.14	0.01	0.0	0.0	0.0	0.01	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ²	0.62	0.23	0.11	0.06	0.04	0.16	0.02	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
$P(Z = 0) = 0.7, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	152.7	260.3	340.7	404.7	453.5	92.3	118.3	126.8	130.1	131.1	51.5	53.2	53.2	53.2	53.2	32.9	32.9	32.9	32.9	32.9
Ours-NoQS ²	152.3	257.3	333.0	392.8	439.6	97.8	127.1	140.8	146.2	147.6	57.6	62.4	63.4	64.1	64.1	39.9	39.9	39.9	39.9	39.9
Ours-QS ¹	175.7	270.2	304.7	325.3	337.3	130.2	142.5	139.7	142.9	143.4	92.5	93.2	93.0	92.5	93.2	66.1	66.5	66.0	66.5	66.2
Ours-QS ²	175.5	262.3	310.5	329.6	349.5	129.2	142.1	140.6	139.9	144.8	93.8	93.8	92.6	93.5	93.3	66.0	66.8	66.1	66.4	66.9
$P(Z = 0) = 0.8, \text{Type II error}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	0.76	0.61	0.54	0.46	0.41	0.32	0.14	0.07	0.04	0.02	0.08	0.01	0.0	0.0	0.0	0.01	0.0	0.0	0.0	0.0
Ours-NoQS ²	0.77	0.62	0.52	0.46	0.36	0.25	0.02	0.0	0.0	0.0	0.14	0.04	0.01	0.0	0.0	0.04	0.01	0.0	0.0	0.0
Ours-QS ¹	0.77	0.38	0.19	0.13	0.09	0.23	0.01	0.0	0.0	0.0	0.05	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Ours-QS ²	0.78	0.38	0.2	0.12	0.07	0.24	0.01	0.01	0.01	0.0	0.06	0.0	0.0	0.0	0.0	0.01	0.0	0.0	0.0	0.0
$P(Z = 0) = 0.8, \text{Avg. stopping time}$																				
σ	0.2					0.3					0.4					0.5				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000
Ours-NoQS ¹	170.6	311.4	426.6	526.7	613.5	115.8	159.7	180.7	191.0	195.6	67.8	73.9	74.3	74.3	74.3	38.8	39.2	39.2	39.2	39.2
Ours-NoQS ²	173.9	315.2	430.1	527.2	610.2	129.6	182.7	209.5	225.9	237.1	83.2	98.6	102.0	102.2	102.2	51.7	56.2	56.4	56.4	56.4
Ours-QS ¹	185.0	306.9	365.6	417.3	438.4	144.0	159.9	164.3	166.3	163.0	105.2	104.3	104.9	105.3	104.7	82.2	81.5	82.0	81.8	82.1
Ours-QS ²	185.5	302.0	361.0	407.2	414.8	142.8	164.3	172.3	165.8	167.5	105.6	103.7	104.6	104.8	107.1	82.4	81.1	81.9	82.3	81.8

Table 11: **Type II errors** and average stopping times of the proposed test with *query-switching* and without *query-switching* for different label budgets and the synthetic datasets with $P(Z = 0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. Ours-NoQS¹ uses *policy 1* with $M^1 = 1$ and $M^2 = 1$, and Ours-NoQS² uses *policy 2* with $M^1 = 1$ and $M^2 = 1$ from the beginning of the test. The **Logistic regression** is used.

MNIST, Type II error																					
$P(Z=0)$		0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	
Ours-NoQS ¹	0.67	0.48	0.25	0.07	0.02	0.51	0.23	0.07	0.02	0.02	0.33	0.1	0.04	0.04	0.04	0.2	0.09	0.06	0.06	0.06	
Ours-NoQS ²	0.71	0.53	0.36	0.2	0.12	0.55	0.33	0.17	0.09	0.07	0.42	0.2	0.12	0.1	0.09	0.3	0.19	0.15	0.12	0.11	
Ours-QS ¹	0.52	0.05	0.01	0.01	0.01	0.27	0.01	0.01	0.0	0.0	0.16	0.01	0.01	0.0	0.0	0.15	0.01	0.0	0.0	0.0	
Ours-QS ²	0.55	0.06	0.01	0.01	0.0	0.3	0.01	0.01	0.0	0.0	0.21	0.01	0.01	0.0	0.01	0.16	0.03	0.01	0.0	0.0	
MNIST, Avg. stopping time																					
$P(Z=0)$		0.5					0.6					0.7					0.8				
Label budget	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	200	400	600	800	1000	
Ours-NoQS ¹	152.1	271.5	343.6	375.1	383.0	134.3	204.2	229.7	237.3	241.3	119.8	159.5	171.1	180.0	188.8	90.7	116.2	130.7	142.7	154.7	
Ours-NoQS ²	161.5	286.0	374.8	430.3	461.7	135.6	223.5	270.8	293.8	308.1	121.4	182.5	216.5	238.5	256.6	111.6	158.2	193.3	221.0	243.8	
Ours-QS ¹	164.1	222.0	237.7	238.0	241.0	145.2	172.9	175.1	176.7	173.3	160.3	234.8	255.2	257.8	258.0	163.9	243.3	268.1	273.1	275.3	
Ours-QS ²	164.4	223.0	231.9	236.1	242.9	146.5	175.6	178.8	180.3	183.5	137.0	154.4	156.3	157.8	169.7	132.6	155.0	163.2	165.2	164.9	
ADNI, Type II error																					
$P(Z=0)$		0.5					0.6					0.7					0.8				
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600	
Ours-NoQS ¹	0.03	0.01	0.0	0.0	0.0	0.02	0.0	0.0	0.0	0.0	0.33	0.1	0.04	0.04	0.04	0.15	0.09	0.06	0.04	0.04	
Ours-NoQS ²	0.07	0.04	0.01	0.01	0.0	0.06	0.04	0.02	0.01	0.01	0.11	0.09	0.04	0.03	0.02	0.26	0.17	0.12	0.1	0.08	
Ours-QS ¹	0.01	0.0	0.0	0.0	0.0	0.02	0.0	0.0	0.0	0.0	0.04	0.0	0.0	0.0	0.0	0.12	0.01	0.0	0.0	0.0	
Ours-QS ²	0.03	0.0	0.0	0.0	0.0	0.03	0.0	0.0	0.0	0.0	0.04	0.01	0.0	0.0	0.0	0.12	0.01	0.0	0.0	0.0	
ADNI, Avg. stopping time																					
$P(Z=0)$		0.5					0.6					0.7					0.8				
Label budget	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600	200	300	400	500	600	
Ours-NoQS ¹	55.3	56.5	56.8	56.8	56.8	53.9	54.3	54.3	54.3	54.3	59.9	64.2	65.2	65.2	65.2	79.0	90.7	97.1	102.1	106.0	
Ours-NoQS ²	70.2	75.4	78.0	78.9	79.3	62.6	67.2	70.0	71.7	72.6	74.1	83.7	90.7	94.5	96.7	96.1	116.9	131.0	142.1	151.4	
Ours-QS ¹	78.8	78.8	78.6	80.3	79.4	79.0	79.7	79.9	79.2	80.1	86.0	86.6	86.1	87.6	85.7	104.7	106.7	108.5	107.3	106.4	
Ours-QS ²	78.8	78.4	78.4	79.5	78.9	79.0	80.1	79.7	79.9	79.9	86.0	87.4	88.0	87.7	88.0	105.6	108.4	108.9	107.1	109.8	

Table 12: **Type II errors** and average stopping times of the proposed test with *query-switching* and without *query-switching* for different label budgets and the MNIST and ADNI datasets with $P(Z=0)$ varied from 0.5 to 0.8. Ours-QS¹ implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(3, 1), (2, 1), (1, 1), (1, 2), (1, 3)\}$ and Ours-QS² implements the framework with $\{(M^1, M^2)_i\}_{i=1}^L = \{(5, 1), (4, 1), (3, 1), (2, 1), (1, 1)\}$. Ours-NoQS¹ uses *policy 1* with $M^1 = 1$ and $M^2 = 1$, and Ours-NoQS² uses *policy 2* with $M^1 = 1$ and $M^2 = 1$ from the beginning of the test. The **Logistic regression** is used.