





# Rapid Identification and Classification of Eccentric Gravitational Wave Inspirals with Machine Learning

Adhrit Ravichandran <sup>1,2</sup> Aditya Vijaykumar <sup>1,3</sup> Shasvath J. Kapadia <sup>4,1</sup> and Prayush Kumar <sup>1</sup>

<sup>1</sup>*International Centre for Theoretical Sciences, Tata Institute of Fundamental Research, Bangalore 560089, India*

<sup>2</sup>*Center for Scientific Computing and Data Science Research,  
University of Massachusetts, Dartmouth, MA 02747, USA*

<sup>3</sup>*Department of Physics, University of Chicago, Chicago, IL 60637, USA*

<sup>4</sup>*The Inter-University Centre for Astronomy and Astrophysics, Post Bag 4, Ganeshkhind, Pune 411007, India*

Current templated searches for gravitational waves (GWs) emanated from compact binary coalescences (CBCs) assume that the binaries have circularized by the time they enter the sensitivity band of the LIGO-Virgo-KAGRA (LVK) network. However, certain formation channels predict that in future observing runs (O4 and beyond), a fraction of detectable binaries could enter the sensitivity band with a measurable eccentricity  $e$ . Constraining  $e$  for each GW event with Bayesian parameter estimation methods is computationally expensive and time-consuming. This motivates the need for a machine learning based identification and classification scheme, which could weed out the majority of GW events as non-eccentric and drastically reduce the set of candidate eccentric GWs. As a proof of principle, we train a separable-convolutional neural network (SCNN) with spectrograms of synthetic GWs added to Gaussian noise characterized by O4 representative PSDs. We use the trained network to (i) segregate candidates as either eccentric or non-eccentric (henceforth called the detection problem) and (ii) classify the events as non-eccentric ( $e = 0$ ), moderately eccentric ( $e \in (0, 0.2]$ ), and highly eccentric ( $e \in (0.2, 0.5]$ ). On the detection problem, our best performing network detects eccentricity with 0.986 accuracy and true and false positive rates of 0.984 and  $1.6 \times 10^{-3}$ , respectively. On the classification problem, the best performing network classifies signals with 0.962 accuracy. We also find that our trained classifier displays close to ideal behavior for the data we consider.

## I. INTRODUCTION

The LIGO-Virgo-KAGRA network [1–3] of ground-based interferometric detectors has completed three observing runs. These have recorded  $\mathcal{O}(100)$  gravitational wave (GW) signals, all of which were produced by compact binary coalescences (CBCs) [4–11]. While the majority of these are binary black hole (BBH) mergers, binary neutron stars (BNS) [12, 13] and neutron-star black-hole (NSBH) binaries [14] have also been observed.

Bayesian parameter estimation analyses (see, e.g. [15]) of these signals have revealed some of them to have interesting source parameter values that could have important astrophysical implications. These include binaries with component masses that may lie in the upper and lower mass-gaps [16, 17], signals where subdominant modes of GW radiation have been observed (see, e.g., [18]), binaries with anti-aligned and precessing spins [6, 19], and one signal that may contain non-standard signatures including (but not restricted to) dynamical captures [20], or (speculatively) even exotic compact objects [21].

Compact-object binaries evolved from stellar binaries radiate away orbital eccentricity early during their inspiral and circularize their orbits [22]. This is why most of the merger events recorded so far have not conclusively exhibited signatures of residual eccentricity (with the notable exception of GW190521 [23, 24] and a few other events [25, 26]). There is, however, a prominent class of binary black holes that are formed in dense stellar environments, such as core-collapsed globular clusters or galactic nuclei, that are expected to enter the frequency

band of ground-based GW detectors with non-negligible eccentricity [27–53]. Studies from just the first two observing runs of the LIGO-Virgo detectors have suggested that we might expect merger rates for eccentric BBHs up to  $100 \text{Gpc}^{-3} \text{yr}^{-1}$  [54] and for eccentric BNS mergers up to  $1700 \text{Gpc}^{-3} \text{yr}^{-1}$  [55]. While analyses with recent data would revise these limits, future observation runs are expected to progressively reduce the lower limit of the frequency band of the LIGO-Virgo detectors [56, 57], increasing the probability of detecting eccentric signals in O4, O5 and beyond (see, e.g., [58] and references therein).

A robust way to constrain this eccentricity is via Bayesian parameter estimation (PE), where one samples the GW likelihood/posterior for each individual event. While doable in principle, in practice such an approach has two non-trivial hurdles. The first is that currently, there do not exist any robust GW waveform models that adequately span the entire range of possible eccentricity values. This necessitates an un-physical cutoff on the prior outside the regime of validity, thus preventing the sampling of the likelihood in that range. The second is computational cost. Bayesian PE, especially when involving eccentricity as a free parameter in addition to the standard source-parameters, is expensive both in terms of wall-clock time and number of CPU cycles required. This is a direct result of waveform approximants being slow to evaluate, and challenges the practicability of sampling the posterior of each and every detected event ( $\mathcal{O}(100)$  in O4 and  $\mathcal{O}(1000)$  in O5).

In order to address the second hurdle, we propose a scheme involving machine learning (ML) that could

rapidly rule out the majority of events as non-eccentric, leaving the remaining to be further analysed with PE. As a proof of principle, we present a neural network architecture, primarily using separable convolutional layers [59], to detect eccentricity, and also separately classify eccentricity into non-eccentric ( $e = 0$ ), moderately-eccentric ( $e \in (0, 0.2]$ ), and highly-eccentric ( $e \in (0.2, 0.5]$ ).

We use time-frequency representations of the detector strain, called Q-transform spectrograms (henceforth also called Q-scans in the paper) [60], as our primary data representation (See Figure 1 for an illustrative example.) Broadly, Q-transforms divide the time-frequency space into bins, and record the signal energy in each tile. The expectation is that eccentricity modulates the shape of these Q-transform patterns in a detectable way (see Figure 2).

We train a separable-convolutional (based) neural network (SCNN) with spectrograms of synthetic GWs added to Gaussian noise (characterized by the O4 representative noise power spectral density (PSD)) to (i) segregate candidates as either non-eccentric or eccentric, which is henceforth called the *detection problem* (ii) classify the events as non-eccentric ( $e = 0$ ), moderately eccentric ( $e \in (0, 0.2]$ ) and highly eccentric ( $e \in (0.2, 0.5]$ ), which is henceforth called the *classification problem*.

These synthetic GW signals injected in Gaussian noise constructed from the O4 representative noise power spectral-density. We find that on the detection problem, our best performing network, at the default threshold value, detects eccentricity with 0.986 accuracy and true and false positive rates of 0.984 and  $1.6 \times 10^{-3}$  respectively. For the classification problem, the best performing network classifies signals with 0.962 accuracy. We also find that after sufficient training, the receiver operating characteristic curves for both problems depict behaviors close to an ideal classifier, with area under curve value very close to 1 consistently.

The rest of this paper is organized as follows: Section II summarizes the numerical methods we adapt in our approach, Section III contains results on the detection and classification performance of the neural network architecture used, Section IV contains a summary of our results and some avenues for future extensions.

## II. METHODOLOGIES

### A. Data Generation

Following Ref. [61], and employing PyCBC [62], we generate the training data for the neural network. We use the `EccentricTD` [63] approximant, as implemented in `LALSuite` [64], to produce templates. For the detection problem, the eccentricity was uniformly sampled from  $[0.01, 0.5]$  ( $[0.001, 0.01]$ ) for eccentric (non-

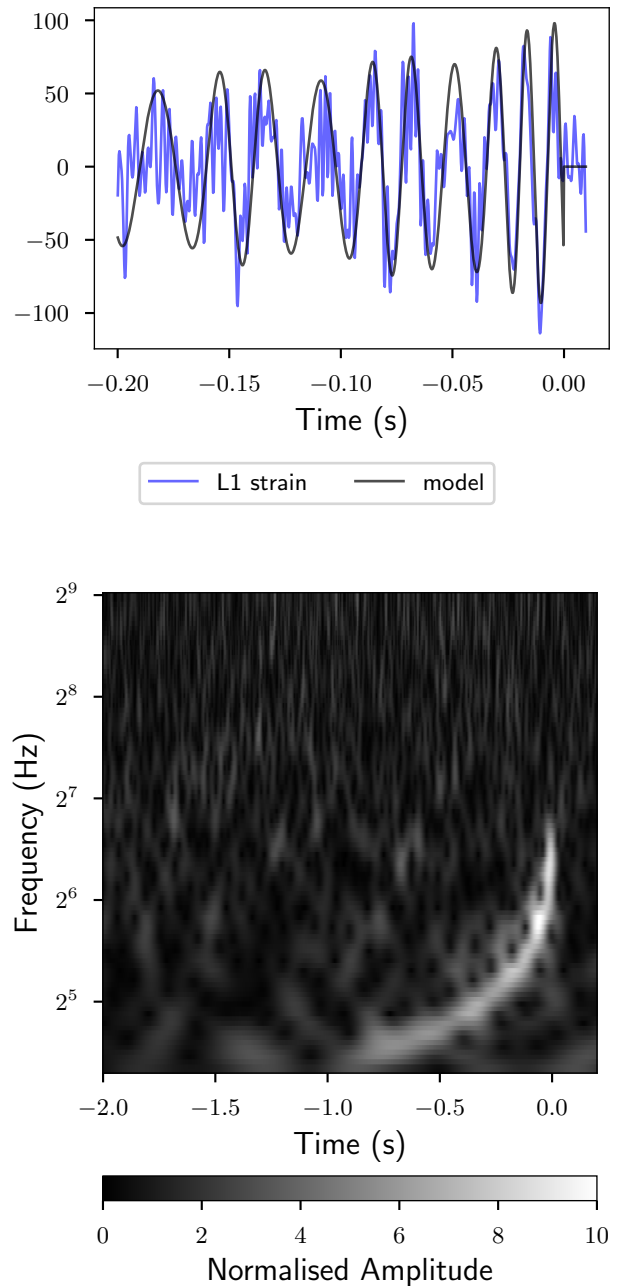


Figure 1. Whitened Strain in Livingston (L1) Detector with corresponding Q-scan. (Top) Plot of waveform generated using the model `EccentricTD`, with the parameters  $m_1 = 20.1 M_\odot$ ,  $m_2 = 28.3 M_\odot$ ,  $injection\_snr = 30$ ,  $e = 0.15$ . This waveform was embedded in Gaussian noise drawn from a LIGO-O4 representative PSD [56], and then whitened with that PSD. (Bottom) The corresponding Q-transform spectrogram, where the space is divided into logarithmically spaced time-frequency tiles, and each tile has a pixel value that encodes the power of that tile. These Q-transforms are used as input images for training our neural network.

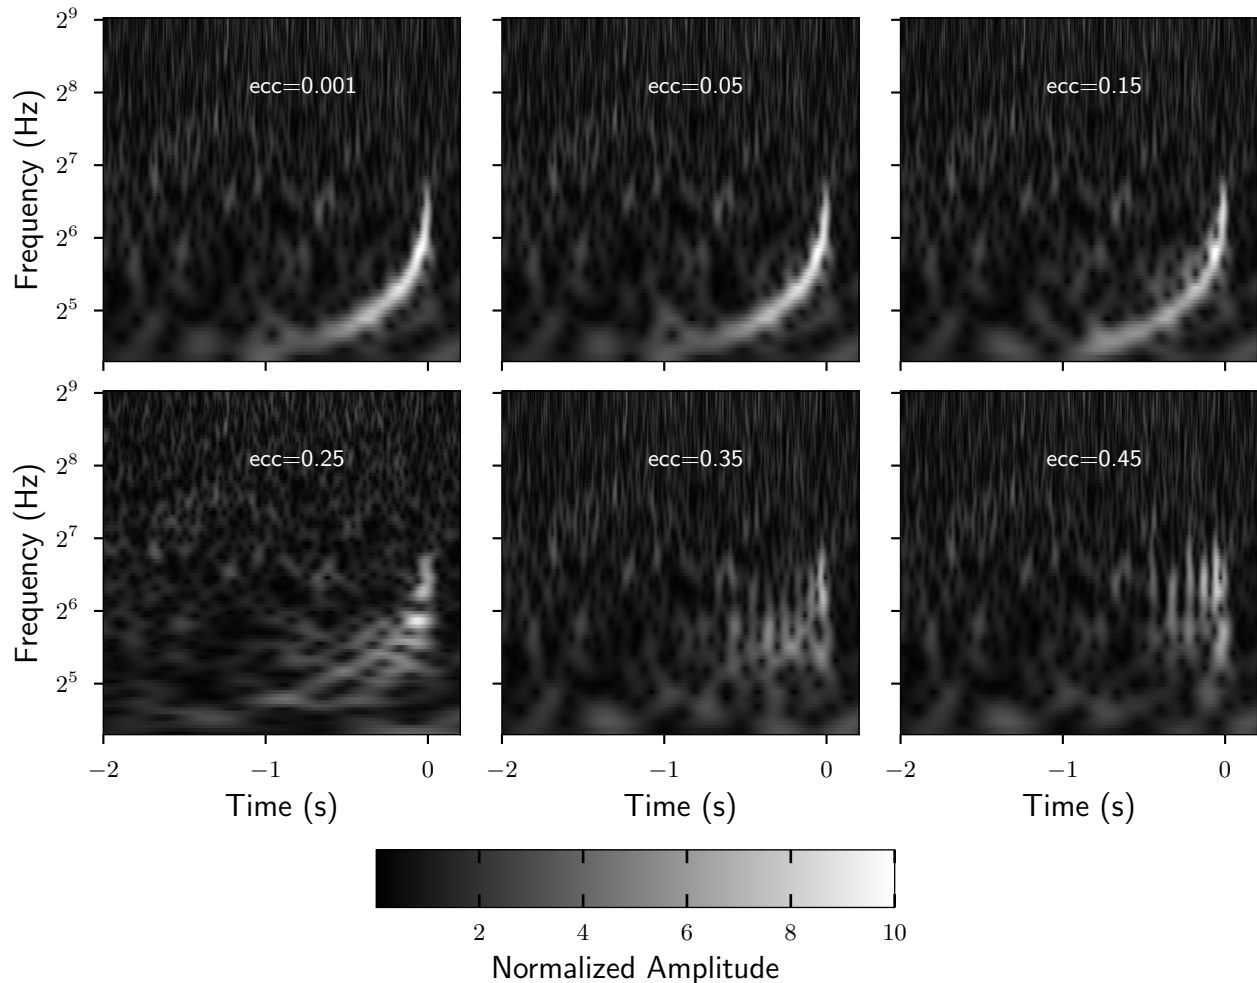


Figure 2. Q-scans are plotted by varying eccentricity and keeping all other parameters fixed (to the values  $m_1 = 20.1M_\odot$ ,  $m_2 = 28.3M_\odot$ ,  $\text{SNR}=30$ ) in Figure 1. There is a visually observable modulation of the Q-scans as one changes the eccentricity, and hence the use of a Deep Neural Network for classification of these samples is justified.

eccentric) samples<sup>1</sup>. Similarly for the classification problem, the eccentricity was uniformly sampled from  $[0.01, 0.2]$  ( $[0.2, 0.5]$ ) for moderately-eccentric (**mod-ecc**) (significantly-eccentric (**sig-ecc**)) samples. For non-eccentric (**non-ecc**) samples, the eccentricity was sampled as before.

The masses of the binaries were individually sampled from a uniform random distribution in the  $10 - 40M_\odot$  range. We only consider non-spinning black holes in this work, and leave the treatment of black holes with spin

spin and orbital precession to future work. The sky locations were sampled uniformly over a two-sphere. The coalescence phase was uniformly sampled, and the inclination was sampled from a cosine distribution. The luminosity distance to the sources were sampled implicitly by sampling the three-detector signal-to-noise ratio (SNR) over the range  $15 - 85$ .

The three-detector SNR (also referred to as the injection-SNR throughout the paper) is  $\sqrt{\text{SNR}_L^2 + \text{SNR}_H^2 + \text{SNR}_V^2}$ , where the individual terms under the square-root correspond to the SNR value of the signal detected by the Livingston, Hanford and Virgo detectors respectively. This injection SNR ( $\rho$ ) was sampled from the ‘universal’ distribution,  $p(\rho) \propto \rho^{-4}$

<sup>1</sup> We make this choice because the **EccentricTD** model has pathologies at  $e = 0$ .

distribution [65] (tagged as **real**), appropriate for volumetrically distributed astrophysical sources. We also draw from a  $p(\rho) = \text{constant}$  distribution (tagged as **uniform**).

The waveform length was fixed to 16 seconds at a sampling rate of 4096 Hz. A 32 second long (gaussian) noise sample was generated using the zero-detuning high-power design sensitivity curve for LIGO detectors [66], at the same sample rate. The signal was then embedded into the noise timeseries after tapering the signal, with the merger time fixed at  $t = 0$ . An 8 second long slice was extracted from this,  $-6$  to  $2$  seconds around the merger time. The signal was then bandpass-filtered between 20 Hz and 512 Hz and whitened. The Q-transform was constructed from this signal, and the image was cropped to fix the image size to  $256 \times 256 \times 3$  (where the third index/dimension corresponds to the three detectors).

## B. Neural Network Architecture

Deep learning allows computational models that are composed of multiple processing layers to learn representations of data with multiple levels of abstraction [67], image classification being one of its major applications. In particular, classification on the ImageNet dataset through Deep Convolutional Neural Networks [68]. It can also be shown that a Deep Convolutional Neural Network (CNN) is universal, in that it can be used to approximate any continuous function to an arbitrary accuracy when the depth of the neural network is large enough [69]. Deep learning techniques are proving to be of crucial importance in astronomy research. In the context of GW data analysis, there have been multiple works that use deep learning and other learning techniques to detect GW sources (eg. [70–74], estimate source parameters (eg. [75–78]), and also identify and alleviate noise artifacts in data (eg. [79]).

Our model architecture **ecc\_sepcnn**, as depicted in Figure 3, primarily uses **Separable-Convolutional** (**SeparableConv2d**) layers instead of the usual **Convolutional** layers. A (depthwise-) separable convolution consists of a depthwise convolution, performed independently over each channel of an input, followed by a pointwise  $1 \times 1$ -convolution. The former consists of using a separate convolutional kernel for each input channel and the latter consists of linearly combining all pixel data with linear coefficients being learn-able parameters. This is different to the normal convolution, where each kernel has depth equal to the number of input channels. And the mixing of channels is done in the same step as the convolution operation. In a sense, the depthwise-separable convolution factorizes the task of a regular convolution, and this factorization has the effect of drastically reducing computation and model size while not sacrificing much on accuracy (for details on the degree of reduction, refer to [80]). These layers work like inception modules, and are known to

efficiently extract cross channel correlations, with fewer parameters when compared to regular **Convolutional** (**Conv2D**) layers [59]. In this architecture, as one moves through the network, the number of channels in layers continues to increase while the height and width of the layer decrease.

All convolutional layers are followed by batch normalization layers. **Batch Normalization** is known to have a regularization-like effect by keeping the input to the next layer close to 0, like the L1 and L2 regularization schemes. [81]

The activation function chosen for the **Convolutional** layers was **ReLU**, whereas the activation for **Dense** layers was **ELU**, since the latter has been known to work better for image classification tasks on the **ImageNet** dataset. [82]

The input layer takes in the  $256 \times 256 \times 3$  image, where 3 channels correspond to LIGO-Hanford (H1), LIGO-Livingston (L1) and Virgo (V1) detectors. This layer will need to be modified to a greater number of channels if data from more or different detectors needs to be added to the input in the future.

The first part consists of a convolutional block, which consists of the following. A convolutional layer (16 filters with  $1 \times 1$  kernels) followed batch normalization and an exponential linear unit (**ELU**) layer. The intuition behind this was to linearly combine the pixel data from each detector, with the linear coefficients being learn-able parameters.

The next part contains separable-convolutional blocks, which consist of the following. A **SeparableConv2D** layer followed by **Batch Normalization**, Rectified Linear Unit (**ReLU**) activation, and a **Max Pooling** layer. The filter sizes in the **SeparableConv2D** go from  $5 \times 5 \rightarrow 5 \times 5 \rightarrow 5 \times 5 \rightarrow 3 \times 3 \rightarrow 3 \times 3$ , where the intuition of moving from bigger filters to smaller filters is drawn from **AlexNet**[83]. In the same, the channel numbers go from  $32 \rightarrow 64 \rightarrow 128 \rightarrow 128 \rightarrow 256$ .

To connect the **SeparableConv2D** to **Dense** layers, a **Global Average Pooling** is implemented. 3 **Dense** layers are connected, with decreasing number of nodes in the network. **Dropout** is implemented before the dense layer with high number of parameters to prevent any potential overfitting. Also, each convolutional and separable convolutional layer has **L2** kernel and bias regularizers implemented to reduce overfitting.

The output layer is a 1 unit **Softmax** for the eccentricity detection problem, where 1 corresponds to an eccentric signal (eccentricity  $\in (0.001, 0.5)$ ) and 0 to a non-eccentric signal. **Binary Cross-Entropy** is used as the error function, and **Adam’s Optimizer** [84] was used with an initial learning rate of  $5 \times 10^{-4}$ .

For the eccentricity classification problem, the output layer is a 3 unit **Softmax**, where the labels are the one-hot-encodings for the 3 classes. These 3 classes are non-eccentric signals (label =  $[1, 0, 0]$ ), moderately eccentric signals with eccentricity  $\in (0.001, 0.2)$  (label =  $[0, 1, 0]$ ), and significantly eccentric signals with ec-

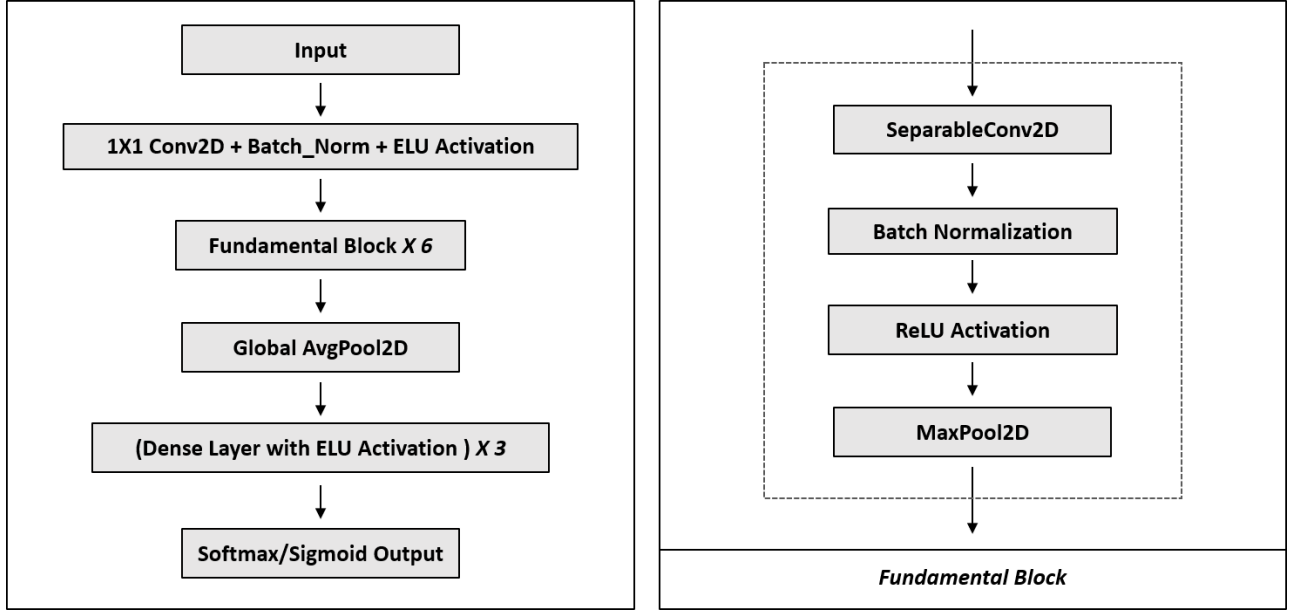


Figure 3. The **ecc\_sepcnn** NN Architecture. This architecture takes in a  $256 \times 256 \times 3$  image data as the input, where the 3 channels in the image correspond to the Q-scans of the three detectors. The architecture consists of a  $1 \times 1$  convolutional block, followed by 6 iterations of the fundamental block, followed by dense layers. These lead into a 1 unit **Sigmoid** output for the detection problem, and a 3 unit **Softmax** output for the classification problem. The final model was 1.2 MB in size, and had 85,559 trainable parameters.

centricity  $\in (0.2, 0.5)$  (label =  $[0, 0, 1]$ ). **Categorical Cross-Entropy** is used as the error function, and **Adam's Optimizer** [84] was used with an initial learning rate of  $5 \times 10^{-4}$ .

The final model was 1.2 MB in size, and had 86,807 parameters, out of which 85,559 were trainable. The block diagram representation of this network is given in Figure 3

### III. RESULTS

#### A. Training and Testing

The training and testing processes were implemented via the machinery of **tensorflow.keras** [85], on 48 cores of an AMD EPYC 7352 processor. The training sets for both problems contained 100,000 samples of  $256 \times 256 \times 3$  images, where the total samples were divided equally between the 2 (binary/detection problem) or 3 (ternary/-classification problem) classes. As previously mentioned, the training sets were labelled **real** for indicating a  $\rho^{-4}$  injection SNR distribution; and **uniform** for a uniform injection SNR distribution. The batch size was fixed to 500, and the Adam Optimizer was implemented with an initial learning rate of  $5 \times 10^{-4}$ . Training was carried out for 30 epochs for the detection problem and 100 epochs for the classification, and the training accuracies converged to 1 and 0.98 respectively within the given epochs. The networks were also separately trained on **uniform** and **real**

sets to observe which yields better testing accuracies.

For the detection problem, the accuracies were evaluated with the default threshold value of 0.5 (meaning that for an input sample, if the sigmoid output of the NN was greater than 0.5, it was assigned the eccentric-class and for values smaller than 0.5, the non-eccentric class was assigned.) For the classification problem, each sample was assigned the class that corresponded to the softmax node with the largest output.

The test sets contained 20,000 and 30,000 samples for the detection and classification problems, where the batch size was again fixed to 500 for both. The testing was only done on **real** sets, because one expects the set of observed GW signals to follow the  $\rho^{-4}$  distribution. It was observed that **real** training produced better performing networks for both problems, in that the peak testing accuracy is better and the convergence to the peak is faster.

The training time for the detection problem was 8 seconds per batch, while that for the classification problem was 11 seconds per batch. The testing time for both problems was observed to be  $0.82 - 2$  ms per batch. The training times are different because the loss functions for the two problems are different; the detection problem uses “binary-cross-entropy”, whereas the classification problem uses “categorical-cross-entropy”. The latter involves a greater number of arithmetic operations, hence leading to greater training time due to a more involved back-propagation step. The testing times are roughly the same because the network architectures except the output layer are exactly the same, and time difference due



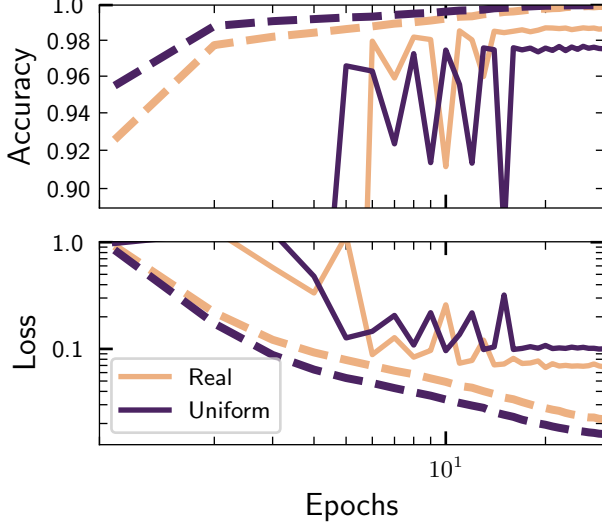


Figure 4. Accuracy and Loss Plots for the detection problem (dashed and solid lines respectively correspond to training and testing accuracy/loss). The training accuracies, for both distributions, converged to  $\sim 1$  around 15 epochs. The network at 20 epochs of **real** training showed the least testing loss (which was defined as the best performing NN). The testing accuracy at this best performing NN was 0.987. We observed better performance (lower testing loss and higher testing accuracy) for **real** training in general. We also observed the onset of overfitting around the 20<sup>th</sup> epoch with the divergence in the training and testing lines (for a given training set distribution), which is why we stop training at 30 epochs.

to the higher number of operations in the output layer for the classification problem while forward-propagation is not significant.

For the detection problem, the training accuracies, for both distributions, converged to  $\sim 1$  around 15 epochs. The network at 20 epochs of **real** training showed the least testing loss (which was defined as the best performing NN). The testing accuracy at this best performing NN was 0.987. We observe better performance for **real** training, where better performance is defined as having lower testing loss and higher testing accuracy.

For the classification problem, the training accuracies, for **real** and **uniform** training set distribution respectively, rose to  $\sim 0.98$  and  $\sim 0.96$  around 40 epochs. The network at 94 epochs of **real** training showed the least testing loss (which was defined as the best performing NN). The testing accuracy at this best performing NN was 0.966. We again observe better performance (lower testing loss and higher testing accuracy) for **real** training. The **uniform** training converges to a higher accuracy and lower loss while training, but the testing lines are observed to be worse (higher testing loss and lower testing accuracy). We also observe the onset of overfitting around the 90<sup>th</sup> epoch with the divergence in the training and testing lines (for a given training set distribution),

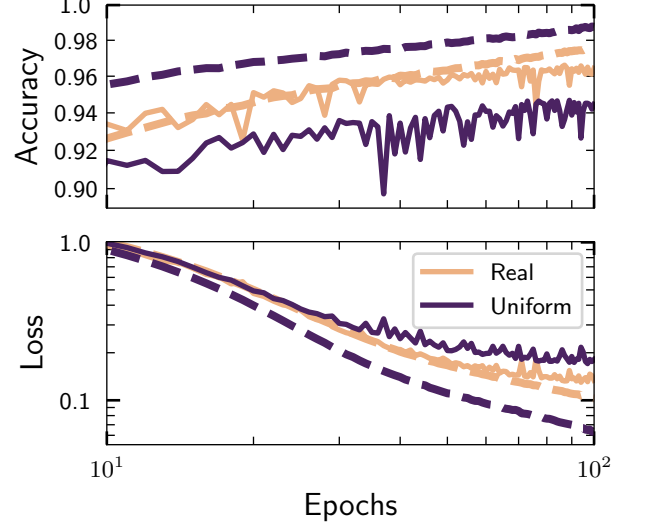


Figure 5. Accuracy and Loss Plots for the classification problem (dashed and solid lines respectively correspond to training and testing accuracy/loss). The training accuracies for **real** and **uniform** training set distribution respectively, rose to  $\sim 0.98$  and  $\sim 0.96$  around 40 epochs. The network at 94 epochs of **real** training showed the least testing loss (which was defined as the best performing NN). The testing accuracy at this best performing NN was 0.966. We again observed better performance (lower testing loss and higher testing accuracy) for **real** training. We also observe the onset of overfitting around the 90<sup>th</sup> epoch with the divergence in the training and testing lines (for a given training set distribution), which is why we stop training at 100 epochs.

which is why we stop training at 100 epochs.

## B. Testing the networks with TEOBResumS

To test whether the detection and classification learned by our model was specific to the waveform model it was trained on, or whether the patterns learned were general to other eccentric waveform models as well, we generated a test set with a different waveform model, TEOBResumS [86–91], and ran it through our trained networks. The reason behind running this test set through all trained networks as opposed to just the best performing one was to show that the best network didn't just happen to give out a good accuracy value at the best EccentricTD trained epoch, but that the accuracy and loss converged to max and min values respectively around the best trained epoch.

For the detection problem, Figure 6, the testing accuracy for best performing NN (**real** trained for 20 epochs) was observed to be 0.9706. The loss and accuracy for both training datasets converged after  $\sim 15$  epochs. **real** training again performed better (lower loss and higher testing accuracies). For the classification problem, Fig-

ures 7, the testing accuracy for best performing NN (**real** trained for 94 epochs) was observed to be 0.9202. The loss and accuracy for both training datasets converged after  $\sim 50$  epochs. **real** training again performed better (lower loss and higher testing accuracies).

The slight decrease in accuracy on **TEOBResumS** waveforms could be attributed to the the presence of all three, the Inspiral, Merger and Ringdown, in this model. Whereas the model we trained our network on, **EccentricTD**, only contains the Inspiral part. However the high accuracy implies that waveform systematics do not affect network performance significantly, at least the SNRs and detector network configurations considered in this work.

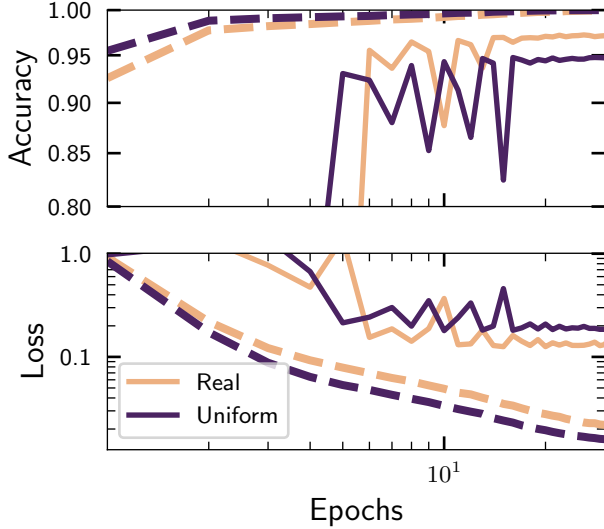


Figure 6. Accuracy and Loss Plots for the detection problem on **TEOBResumS** test-sets (dashed and solid lines respectively correspond to training and testing accuracy/loss). The testing accuracy for best performing NN (**real** trained for 20 epochs) was observed to be 0.9706. The loss and accuracy for both training datasets converged after  $\sim 15$  epochs. **real** training again performed better (lower loss and higher testing accuracies).

### C. Confusion Matrices

Confusion matrices are tools to estimate the performance of a supervised machine learning algorithm. The rows enumerate the true labels of inputs, and the columns enumerate the predicted classes. Each sample when run through a neural network conforms to a cell in such a matrix, since it has an original and known label, and a predicted label of the class that the network classifies it into. In our convention, the value in each cell of the confusion matrix is the number of samples that fall into that category normalized with the total number of samples in that row. An ideal classifier hence corresponds to a con-

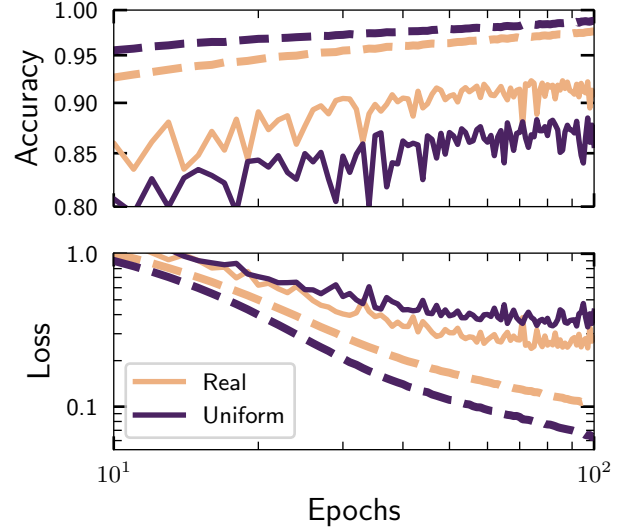


Figure 7. Accuracy and Loss Plots for the classification problem on **TEOBResumS** test-sets (dashed and solid lines respectively correspond to training and testing accuracy/loss). The testing accuracy for best performing NN (**real** trained for 94 epochs) was observed to be 0.9202. The loss and accuracy for both training datasets converged after  $\sim 50$  epochs. **real** training again performed better (lower loss and higher testing accuracies).

fusion matrix that is the Identity matrix of dimension equal to the number of classes in the problem ( $\mathbb{1}_n$ , where  $n$  is the number of classes). Furthermore, for the confusion matrices for the detection problem, the numerical values in each cell also correspond to the category-rates. For example, the value in the True-True cell corresponds to the True Positive Rate (TPR) for the network on the detection problem. We plot the confusion matrices for the best performing network (defined as the one displaying lowest testing loss), after running a set containing 20,000 samples through the network, and collecting the true and predicted label information. The confusion matrices are plotted in Fig. 8.

For the detection problem, the number of classes is 2, and hence the confusion matrix for the ideal classifier is  $\mathbb{1}_2$ . We observe that the confusion matrix is very close to an ideal classifier, with the diagonal elements  $> 0.98$  which is also the True-Positive Rate (TPR). For the classification problem, the number of classes is 3, and hence the confusion matrix for the ideal classifier is  $\mathbb{1}_3$ . We observe that the confusion matrix to again be close to an ideal classifier, with the diagonal elements  $> 0.93$ . We also observe that the true **mod-ecc** class has the most misclassifications, with  $\sim 4\%$  and  $\sim 2\%$  samples classified as **non-ecc** and **sig-ecc** respectively. Most signals are also misclassified to **mod-ecc** predicted class, with 1.4% **non-ecc** samples and 2.6% **sig-ecc** samples classified as **mod-ecc**.

We note that of the small number false negatives, al-

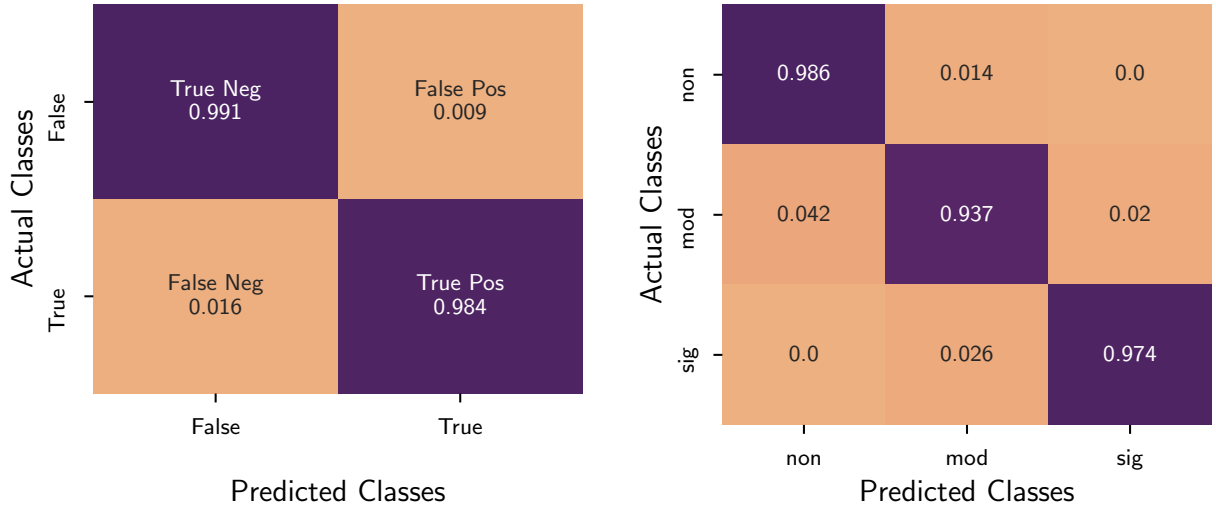


Figure 8. Confusion Matrices for the detection and classification problem. For the detection problem (left plot), the number of classes is 2, and hence the confusion matrix for the ideal classifier is  $\mathbb{1}_2$ . We observe that the confusion matrix is very close to an ideal classifier, with the diagonal elements  $> 0.98$  which is also the True-Positive Rate (TPR). For the confusion problem (right plot), the number of classes is 3, and hence the confusion matrix for the ideal classifier is  $\mathbb{1}_3$ . We observe that the confusion matrix to again be close to an ideal classifier, with the diagonal elements  $> 0.93$ . We also observe that the true **mod-ecc** class has the most misclassifications, with  $\sim 4\%$  and  $\sim 2\%$  samples classified as **non-ecc** and **sig-ecc** respectively. Most signals are also misclassified to **mod-ecc** predicted class.

most all have eccentricity near category boundaries. This means that if we do have false classification of an eccentric event as being non-eccentric, it likely will have a very small eccentricity. In a follow-up Bayesian parameter estimation analysis, estimating such a small eccentricity will have associated statistical uncertainties that will make the posterior distribution on  $e$  consistent with 0. Only if this rare mis-classification event has a sufficiently high SNR (which is rare in itself), these false negatives will lead to a loss in the astrophysical information extracted from the GW event. Furthermore, for the detection problem, the confusion matrix was computed using the default threshold value on the output of the neural network. This threshold can be treated as a tunable hyper-parameter, in that, its value can be tweaked to get a desired high True Positive Rate, at the cost of an increase in the False Positive Rate.

#### D. Receiver Operating Characteristic (ROC) Curves

The ROC curve is a plot between the True-Positive-Rate (TPR) and False-Positive-Rate (FPR), based on the output of a machine learning algorithm on a given problem, where each point corresponds to a certain threshold value that is used to assign a class label for the value output by the algorithm [92]. The ROC curve encapsulates the information about roughly how different and far apart are the NN output values for samples from different classes. For an ideal classifier, the ROC curve is just

a straight line at TPR=1 for all FPRs. Physically, this indicates that intersection of the set of all NN output values corresponding to the positive class with the set of all NN output values corresponding to the negative class is  $\phi$  or null. The Area Under Curve (AUC), as the name suggests, is just the area bounded by an ROC curve. For an ideal classifier, the AUC value is 1.

For a binary classification problem, the ROC is simply a plot of the values in the second column of the confusion matrices generated by varying the threshold value between the two extremes 0 and 1. On an ROC plot, the points (1,1) and (0,0) correspond to a threshold values of 0 and 1 respectively, with the remaining points on the curve corresponding to the threshold values in between. For a multi-class problem, the ROC is plotted using the “one-vs-all” method, where each class is separately considered the positive class and the others are considered the negative classes for the particular case. For a problem with  $N$  classes, this method hence generates  $N$  ROC plots.

The detection problem ROC for our best performing network (defined as the one displaying lowest testing loss) are plotted in Figure 9. The observed behavior is close to an ideal binary classifier, with TPR values as high as .97 for FPRs as low as .001. The AUC values are consistently observed to be  $> 0.99$  for networks with greater than 20 epochs of training, which signals proximity to ideal behavior. The classification problem ROCs are plotted in Figures 10. The **non-ecc**, and **mod-ecc** and **sig-ecc** classes were respectively considered as the positive class for the left, middle and right figures. The TPRs are



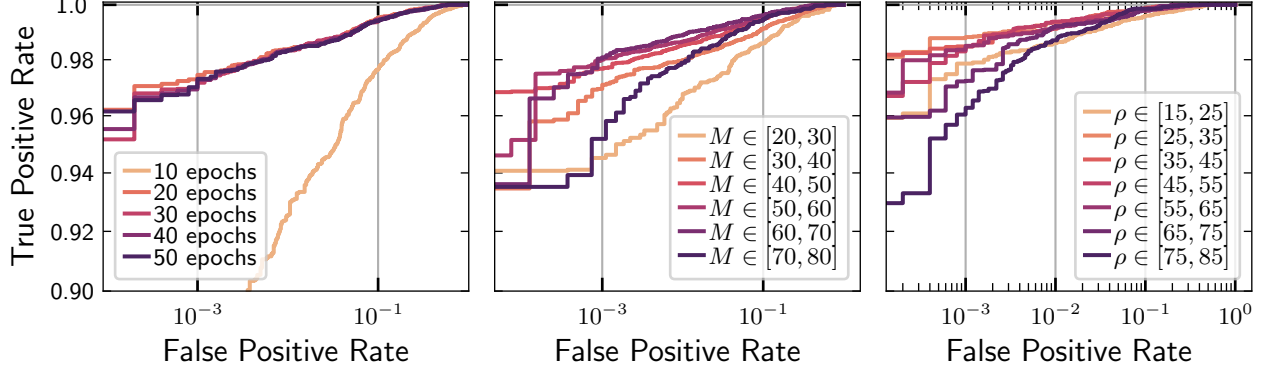


Figure 9. ROC curves for the detection problem. (Left) The observed behavior is close to an ideal binary classifier, with TPR values as high as .97 for FPRs as low as .001. The AUC values are consistently observed to be  $> 0.99$  for networks with greater than 20 epochs of training, which signals proximity to ideal behavior. (Middle) The  $20-30M_{\odot}$  and  $70-80M_{\odot}$  slices have ROCs with lowest TPRs. This lower performance can be attributed to the signals patterns being very long and very short respectively (hence making the pattern in the Q-scan either spread out beyond the range of our Q-scan or too localised respectively). It can also be attributed to comparatively lower number of samples in the training set since the total mass distribution is triangular distribution in  $[20, 80]$ . (Right) The loudest signals in the SNR range  $\in [65, 85]$  has the lowest TPRs. This can be attributed to comparatively lower number of signals in that SNR range in a  $\rho^{-4}$  distribution.

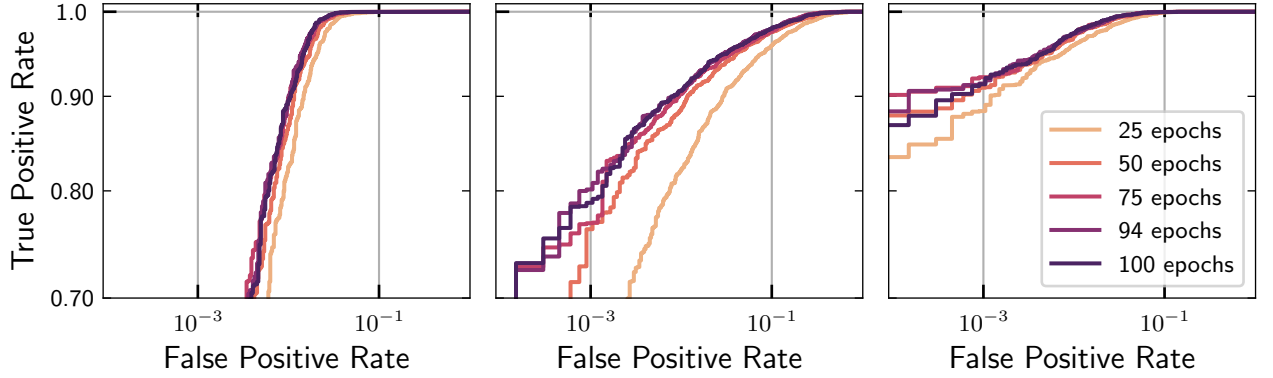


Figure 10. ROC curves for the classification problem. The **non-ecc**, and **mod-ecc** and **sig-ecc** classes were respectively considered as the positive class for the left, middle and right figures. The TPRs are observed to be higher than .9 for FPRs as low as .01. The AUC values are observed to be  $> 0.99$  for networks with greater than 25 epochs of training, which again signals proximity to ideal behavior.

observed to be higher than .9 for FPRs as low as .01. The AUC values are observed to be  $> 0.99$  for networks with greater than 25 epochs of training, which again signals proximity to ideal behavior.

#### E. Neural Network Output with Eccentricity and Injection SNR

For the detection problem, the sigmoid output of the neural network is a scalar number  $\in [0, 1]$ . Based on a threshold ( $= 0.5$  by default), the signals are classified as follows,

```
if output >= threshold:
```

```
    predicted_class:= eccentric
else:
    predicted_class:= non-eccentric
```

Hence for an ideal detector, to retain an accuracy of 1 independent of the threshold, all eccentric signals should correspond to an output=1 and all-non eccentric signals should correspond to output=0.

For the classification problem, the softmax output of the neural network is a 3-tuple ( $\equiv \text{out}[i], i = 0, 1, 2$ ), with each element of the tuple  $\in [0, 1]$ . The signals are classified as follows,

```
if out[0] == max(out[0],out[1],out[2]):
    predicted_class:= non-eccentric
```

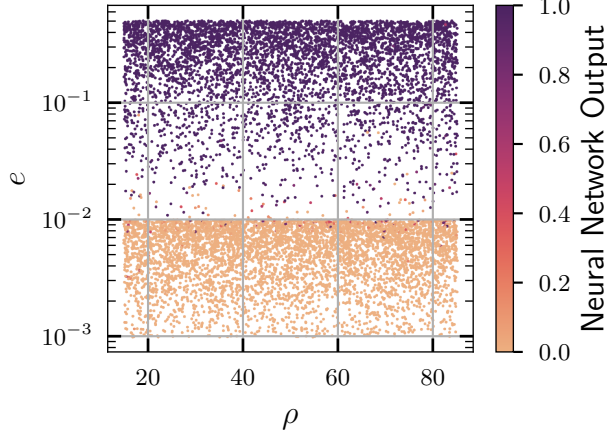


Figure 11. Output of the best-performing neural network for the detection problem. Nearly all eccentric samples have an output close to 1, and the non-eccentric samples have an output close to 0, as was expected out of a good detector. Samples at the boundary of the eccentricity classes ( $e \sim 0.01$ ) are the ones that are observed to have an intermediate output value. This overall behavior is also observed to be uniform across SNR.

```

else if out[1] == max(out[0],out[1],out[2]):
    predicted_class:= moderately-eccentric
else:
    predicted_class:= significantly-eccentric

```

Hence for an ideal classifier, all **non-ecc**, **mod-ecc** and **sig-ecc** signals should correspond to an  $(1, 0, 0)$ ;  $(0, 1, 0)$ ; and  $(0, 0, 1)$  respectively.

We hence plot a scatter-plot of the NN-output (of our best performing networks) with eccentricity and injection SNR, to observe how close our network is to the ideal detector and classifier, and to observe how the output scales with eccentricity, particularly at the boundaries of the eccentricity-classes.

Figure 11 is the plot for the detection problem. Nearly all eccentric samples have an output close to 1, and the non-eccentric samples have an output close to 0, as was expected out of a good detector. Samples at the boundary of the eccentricity classes ( $e \sim 0.01$ ) are the ones that are observed to have an intermediate output value. This overall behavior is also observed to be uniform across SNR.

Figure 12 is the plot for the classification problem. Again, away from the boundaries, nearly all positive samples in each class have an output close to 1, and other samples have an output close to 0, as was expected out of a good classifier. Samples at and around the boundary of the eccentricity classes ( $e \sim 0.01$  and  $e \sim 0.2$ ) are the ones that are observed to have an intermediate output value.

## F. Testing Accuracies and ROC Curves for Parameter Subspaces:

For our network architectures, to test whether learning to detect and classify signals on a specific subspace of input parameters was especially difficult, we plotted the testing accuracies for different parameter sub-spaces, viz. eccentricity, total mass and injection SNR. Once again, these accuracies were evaluated at the default threshold value of 0.5 for the binary problem.

The plots corresponding to the detection problem are in Figure 13. All observations are consistent with NN output plots and slice ROC plots. The eccentricity slice  $0 - 0.1$  has the lowest testing accuracy, since it forms the border between the two detection classes. All other slices have testing accuracies  $> 0.99$  after 20 epochs. The accuracy across SNRs is almost uniform, with testing accuracies of all slices converging to  $> 0.98$ , with the loudest signals  $\rho \in [75, 85]$  performing the worst comparatively. The accuracies of the  $20 - 30M_\odot$  and  $70 - 80M_\odot$  total mass slices are comparatively the lowest, but the behaviour is more or less uniform across slices with all testing accuracies converging to  $> 0.97$ . The ones corresponding to the classification problem can be found in Figures 14. The eccentricity slices  $0 - 0.1$  and  $0.2 - 0.3$  have the lowest testing accuracies, since they form the borders between the classes. We also continue to observe oscillations across the 100 epoch, which does not seem to die out even at the onset of overfitting Figure 5. But around the  $80 - 90$  epoch range, these oscillations occur at  $> 0.9$  accuracy. The accuracies across SNR slices are almost uniform, with testing accuracies of all slices converging to  $> 0.94$ . The loudest signals  $\rho \in [65, 85]$  are again the worst performing slice. The accuracy of the  $20 - 30M_\odot$  total mass slice is again comparatively the lowest, but even this slice has a testing accuracy of  $\sim 0.92$ . The other slices have testing accuracies  $> 0.95$ .

We further plot the ROCs of the best performing network, for subspaces (also referred to as slices) of total mass and injection SNR, to check for erroneous behaviors at different thresholds. For the detection problem, in Figure 9, we observe the  $20 - 30M_\odot$  and  $70 - 80M_\odot$  slices have ROCs with lowest TPRs. This lower performance can be attributed to the signal patterns being very long and very short respectively (hence making the pattern in the Q-scan either spread out beyond the range of our Q-scan, or too localised, respectively). It can also be attributed to comparatively lower number of samples in the training set since the total mass distribution is a triangular distribution in  $[20, 80]$ . Also, the loudest signals in the SNR range  $\in [65, 85]$  has the lowest TPRs. This can be attributed to comparatively lower number of signals in that SNR range in a  $\rho^{-4}$  distribution. For the classification problem, in Figure 15, for FPRs as low as 0.1, the TPRs are as high as  $> 0.9$ . The  $20 - 30M_\odot$  and  $70 - 80M_\odot$  slices have lowest TPRs across all thresholds and across choices for positive class. For FPRs as low as 0.01, the TPRs are as high as  $> 0.9$ . The loudest signals

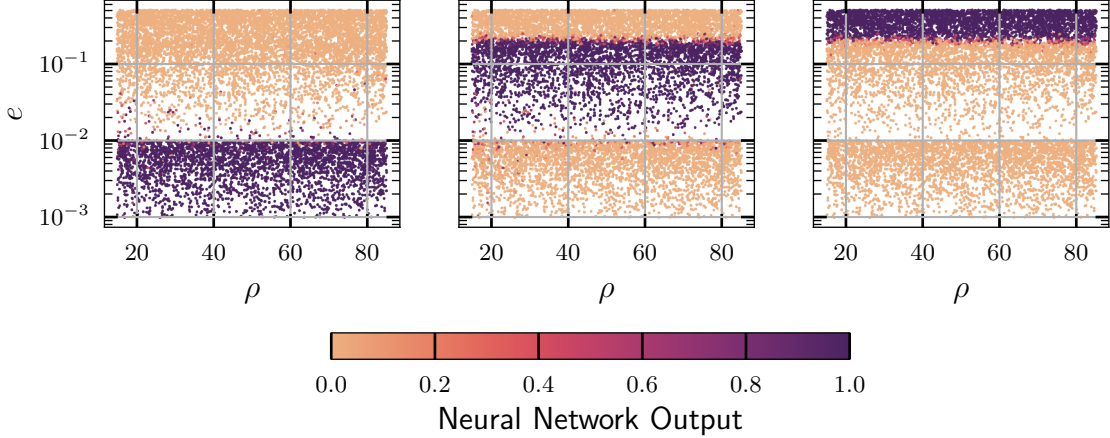


Figure 12. Output of the best-performing neural network for the classification problem. Here the first, second and third element of the output tuple is plotted with eccentricity and SNR, for the left, middle and right plots, which correspond to **non-ecc**, **mod-ecc** and **sig-ecc** respectively. Away from the boundaries, nearly all positive samples in each class have an output close to 1, and other samples have an output close to 0, as was expected out of a good classifier. Samples at and around the boundary of the eccentricity classes ( $e \sim 0.01$  and  $e \sim 0.2$ ) are the ones that are observed to have an intermediate output value.

Table I. Summary statistics for the best detection problem neural network, grouped by eccentricity, total mass, and SNR. The best performing network was defined as the one displaying lowest testing loss, which for the classification problem was the **real** trained network trained for 20 epochs.

$e$	Accuracy	$M$	Accuracy	$\rho$	Accuracy
0	0.992	20-30	0.979	15-25	0.988
0-0.1	0.912	30-40	0.984	25-35	0.994
0.1-0.2	0.999	40-50	0.988	35-45	0.992
0.2-0.3	1.000	50-60	0.989	45-55	0.993
0.3-0.4	1.000	60-70	0.991	55-65	0.991
0.4-0.5	0.999	70-80	0.983	65-75	0.991
				75-85	0.989

slice  $\rho \in [65, 85]$  is the worst performing slice in the middle and right plots. For the left plot, the quietest signals slice  $\rho \in 15 - 25$  performs the worst.

#### IV. DISCUSSION AND FUTURE WORK

In this work, we trained a separable convolutional neural network to distinguish eccentric GW signals from non-eccentric ones (detection problem), as well as to classify signals as non-eccentric, moderately eccentric, or highly/significantly eccentric (classification problem). Summary statistics for both problems are described in Tables I and II respectively. The cross-model accuracy tests indicate that waveform systematics do not impact network performance for the SNRs and detector networks considered in the work.

We notice that samples on a real SNR data-set lead

Table II. Summary statistics for the best classification problem neural network, grouped by eccentricity, total mass, and SNR. The best performing network was defined as the one displaying lowest testing loss, which for the classification problem was the **real** trained network trained for 94 epochs.

$e$	Accuracy	$M$	Accuracy	$\rho$	Accuracy
0	0.983	20-30	0.932	15-25	0.969
0-0.1	0.914	30-40	0.957	25-35	0.975
0.1-0.2	0.958	40-50	0.968	35-45	0.977
0.2-0.3	0.920	50-60	0.971	45-55	0.975
0.3-0.4	1.000	60-70	0.968	55-65	0.972
0.4-0.5	0.999	70-80	0.959	65-75	0.968
				75-85	0.963

to better results, and hence we restrict to only the **real** trained networks in the discussion. The better performance was an indicator of the network requiring more samples in the low-SNR range to learn patterns in that subspace. This is because the neural network performs better when the distributions of the training set match the distributions of the test sets.

We observed jumpiness in the early epochs for the binary classifier. The reasons for the same could be one or a combination of the following:

1. The loss surface for the binary-cross-entropy function happens to be extremely uneven, hence initial gradient descent iterations at initial epochs cause large changes in the loss/accuracy.
2. It could also be the case that the initial starting point (initial learnable parameter values) lies in an uneven region of the loss function, and the gradient

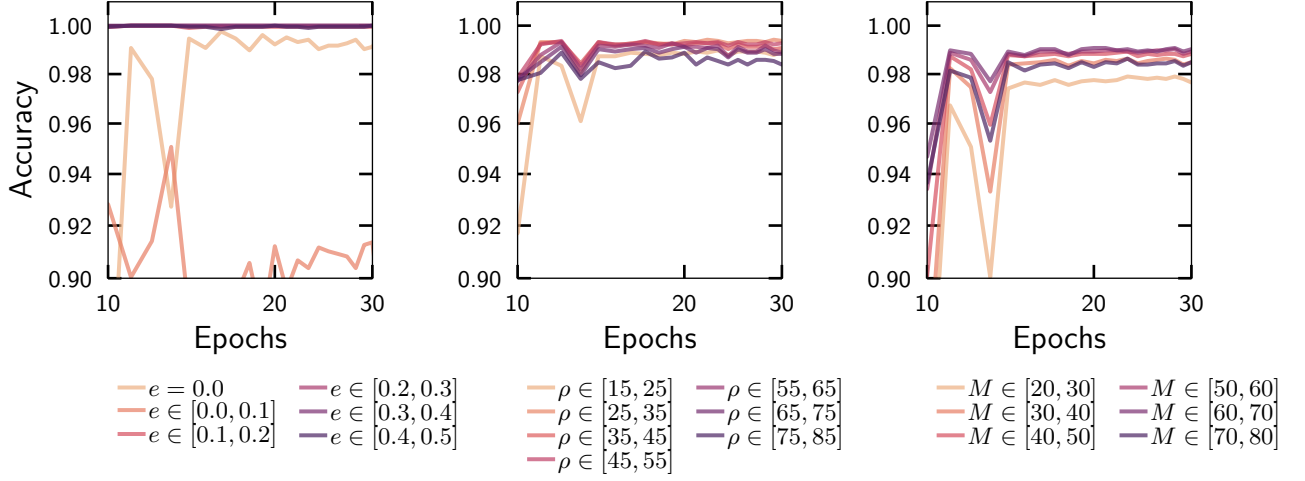


Figure 13. Accuracies for the detection problem grouped by eccentricity (left), SNR (middle) and mass (right) ranges. All observations are consistent with NN output plots and slice ROC plots. The eccentricity slice 0 – 0.1 has the lowest testing accuracy, since it forms the border between the two detection classes. All other slices have testing accuracies  $> 0.99$  after 20 epochs. The accuracy across SNRs is almost uniform, with testing accuracies of all slices converging to  $> 0.98$ , with the loudest signals  $\rho \in [75, 85]$  performing the worst comparatively. The accuracies of the  $20 - 30M_{\odot}$  and  $70 - 80M_{\odot}$  total mass slices are comparatively the lowest, but the behaviour is more or less uniform across slices with all testing accuracies converging to  $> 0.97$ .

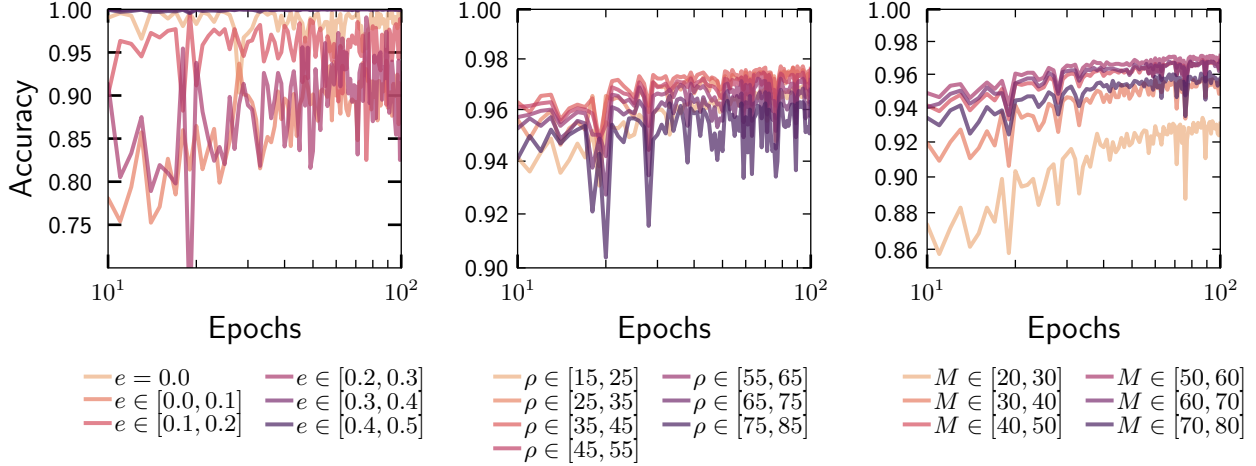


Figure 14. Accuracies for the classification problem grouped by eccentricity (left), SNR (middle) and mass (right) ranges. The eccentricity slices 0 – 0.1 and 0.2 – 0.3 have the lowest testing accuracies, since they form the borders between the classes. We also continue to observe oscillations across the 100 epoch, which does not seem to die out even at the onset of overfitting Figure 5. But around the 80 – 90 epoch range, these oscillations occur at  $> 0.9$  accuracy. The accuracies across SNR slices are almost uniform, with testing accuracies of all slices converging to  $> 0.94$ . The loudest signals  $\rho \in [65, 85]$  are again the worst performing slice. The accuracy of the  $20 - 30M_{\odot}$  total mass slice is again comparatively the lowest, but even this slice has a testing accuracy of  $\sim 0.92$ . The other slices have testing accuracies  $> 0.95$ .

descent iterations move the NN state to a more uniform region of the loss function as iterations go by.

3. It could also be that the initial learning rate is high for the binary problem, which leads to big jumps on the loss surface; since Adam’s optimizer brings

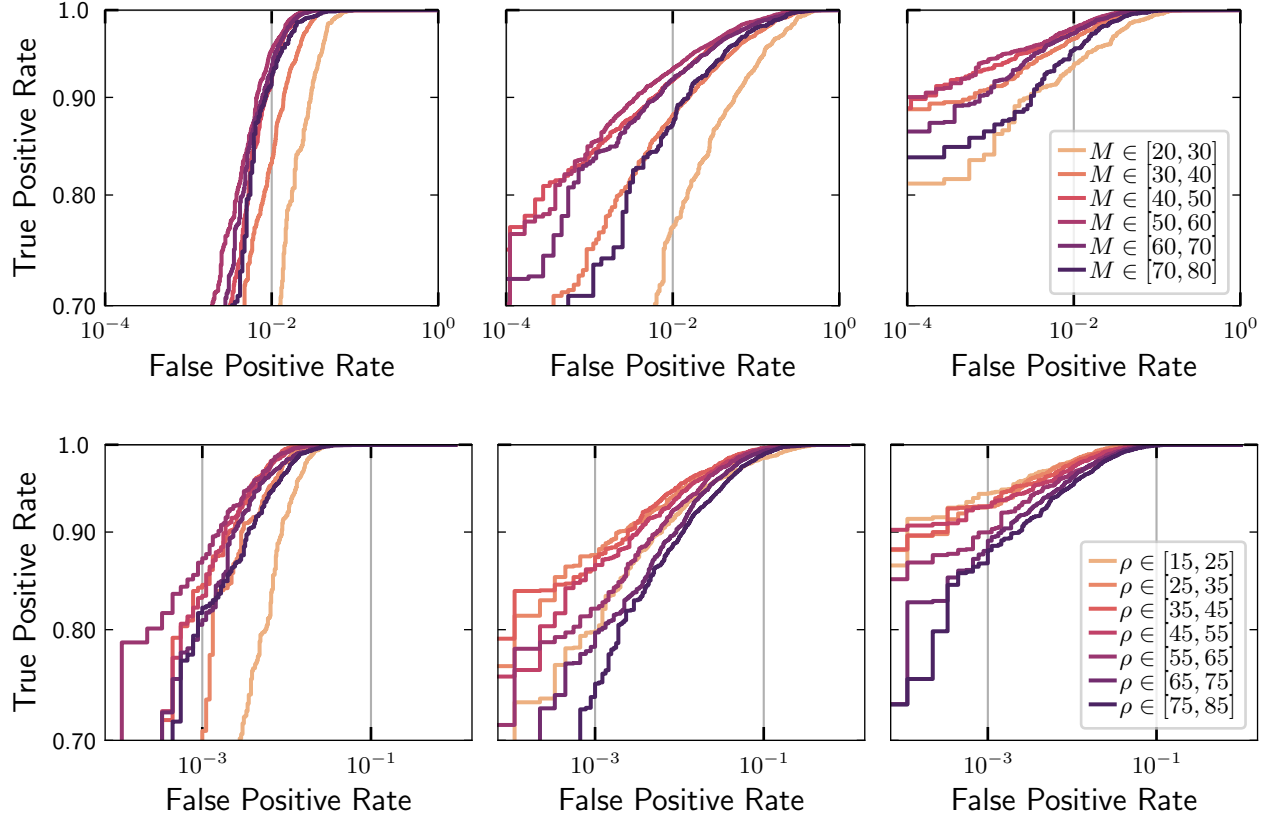


Figure 15. ROC curves for the classification problem grouped by mass and SNR ranges. (Top) For FPRs as low as 0.1, the TPRs are as high as  $> 0.9$ . The  $20 - 30M_{\odot}$  and  $70 - 80M_{\odot}$  slices lowest TPRs across all thresholds and across choices for positive class. (Bottom) For FPRs as low as 0.01, the TPRs are as high as  $> 0.9$ . The loudest signals slice  $\rho \in [65, 85]$  is the worst performing slice in the middle and right plots. For the left plot, the quietest signals slice  $\rho \in 15 - 25$  performs the worst.

the learning rate down to a smaller value as iterations go by, the size of the jumps on the loss surface reduces and the testing accuracy line becomes smoother.

Confusion Matrices are extremely close to identity matrices of the appropriate dimension for both the detection and classification problem. This indicates proximity to the behavior of an ideal classifier. Most results on the binary classifier corresponded to the default threshold value of 0.5. But if one requires the detector to have an extremely good true positive rate at the cost of a non-negligible false-positive-rate, (which would correspond to detecting nearly all true eccentric signals even if some non-eccentric signals are incorrectly detected), the threshold value could be decreased accordingly. The degree to which it could be decreased can be estimated from the ROC curves in Figures 9, 10 and 15, based on the tolerance that one sets for the False Positive Rate.

For the detection problem slice accuracy tests, the eccentricity slice  $e \in (0, 0.1)$  has a comparatively poorer behavior. This can be understood because essentially the boundary between the eccentric and non-eccentric classes, and hence these signals are the most difficult to

classify correctly. The total-mass slices in  $(20M_{\odot}, 30M_{\odot})$  have the poorest performance. This is because the total length of a signal scales inversely with the total mass, and hence less massive systems produce longer signals. This implies that the information is spread over a longer duration, which would require longer Q-scan images to be trained on the network. Hence these are the most difficult to classify correctly. The performance of all injection SNR slices was almost the same, with the loudest (75-85 SNR) signals have comparatively the lowest accuracy. These observations on comparative performance were backed up by the slice ROC test plots 9.

For the classification problem slice accuracy tests, the eccentricity slices  $(0, 0.1)$  and  $(0.2, 0.3)$  have comparatively poorer behavior. This is because these slices form the boundaries between classes, and hence these signals are the most difficult to classify correctly. The total-mass slices in  $(20M_{\odot}, 30M_{\odot})$  again have the poorest performance. The slices around the high SNR end again had comparatively the lowest accuracy. These observations on comparative performance were backed up by the slice ROC test plots in Figure 15.

If advanced training procedures, like curriculum learn-



ing, are to be implemented on similar network architectures for similar tasks, the slice accuracy and ROC curves can be referred to for information on which parameter-subspaces contain “difficult” samples for the network to classify. In particular, it was observed that the samples near the eccentricity class boundaries had the poorest performance, and hence could be labeled “difficult” for the network to learn. What could also help is modifying the training set parameter distributions to have more samples from “difficult to learn” parameter subspaces.

Testing our network on real catalogue events is beyond the scope of this paper, but is certainly an avenue for future work. Specifically, since we trained on synthetic Gaussian noise using O4 representative PSDs, our current network may not be optimal for real events. Additionally, the real events would also require the training data to include spin, which hasn’t been included in this work.

We end by mentioning avenues for future work:

1. One way to extend this work would be to build a regressive network to extract the numerical value of the eccentricity to a certain accuracy.
2. We also plan to extend the parameter ranges of the GW signals, in particular the binary masses and component binary spins. But since the length of the signal roughly scales with the total mass, the NN architecture will need to be modified to accommodate the longer and shorter Q-scans of less and more massive binary systems respectively.
3. At the moment, our training samples were embedded in Gaussian noise generated using representative power-spectral-densities. A possible avenue is to use real detector noise to train the samples on noise that the detectors actually record.
4. As the *EccentricTD* waveform template extends to include spins of the binary objects, there will be some changes in the Q-transforms. And the NNs will have to be retrained on the newly generated samples. The currently trained NN could be used at the base network for that problem.

5. Since it is known that there might be some degeneracy between eccentric and precessing signals (see eg. [93, 94], training a modified network, using this as the base architecture, to distinguish between the two could be a topic of future work.

6. As more GW-detectors become operational, the network will have to be retrained using augmented training data, in particular, the number of channels of the input images will increase and each new channel will correspond to a new detector. As for the network architecture, only the first layer will have to be modified to accept images with more than 3 channels as detectors [61].

## ACKNOWLEDGEMENTS

We thank Shreejit Jadhav for carefully reviewing this work, and Viola Sordini for useful comments. This work is supported by the Department of Atomic Energy, Government of India, under Project No. RTI4001. AV is also supported by a Fulbright Program grant under the Fulbright-Nehru Doctoral Research Fellowship, sponsored by the Bureau of Educational and Cultural Affairs of the United States Department of State and administered by the Institute of International Education and the United States-India Educational Foundation. PK is also supported by Ashok and Gita Vaish Early Career Faculty Fellowship at ICTS. AR is also partially supported by the Department of Mathematics, University of Massachusetts, Dartmouth. We thank the International Centre for Theoretical Sciences, Tata Institute of Fundamental Research, Bangalore; for access to their computing cluster, which was used for all computing in this work. This work was presented at the (bi-)weekly meetings of LIGO CBC-R-D subgroup and the LIGO-India Scientific Collaboration. We thank the attendees of those meeting for their inputs and suggestions.

## REFERENCES

- 
- [1] J. Aasi *et al.*, “Advanced LIGO,” *Classical and Quantum Gravity* **32**, 074001 (2015), [arXiv:1411.4547 \[gr-qc\]](#).
  - [2] F. Acernese *et al.*, “Advanced Virgo: a second-generation interferometric gravitational wave detector,” *Classical and Quantum Gravity* **32**, 024001 (2015), [arXiv:1408.3978 \[gr-qc\]](#).
  - [3] T. Akutsu *et al.* (KAGRA), “Overview of KAGRA: Detector design and construction history,” *PTEP* **2021**, 05A101 (2021), [arXiv:2005.05574 \[physics.ins-det\]](#).
  - [4] B. P. Abbott *et al.*, “GWTC-1: A Gravitational-Wave Transient Catalog of Compact Binary Mergers Observed by LIGO and Virgo during the First and Second Observing Runs,” *Physical Review X* **9**, 031040 (2019), [arXiv:1811.12907 \[astro-ph.HE\]](#).
  - [5] R. Abbott *et al.*, “GWTC-2: Compact Binary Coalescences Observed by LIGO and Virgo During the First Half of the Third Observing Run,” *arXiv e-prints*, [arXiv:2010.14527 \(2020\)](#), [arXiv:2010.14527 \[gr-qc\]](#).
  - [6] R. Abbott, T. D. Abbott, F. Acernese, K. Ackley, C. Adams, N. Adhikari, R. X. Adhikari, V. B. Adya, C. Affeldt, D. Agarwal, *et al.*, “Gwtc-3: Compact binary coalescences observed by ligo and virgo during the second part of the third observing run,” *arXiv preprint arXiv:2111.03606* (2021).
  - [7] Barak Zackay, Liang Dai, Tejaswi Venumadhav, Javier Roulet, and Matias Zaldarriaga, “Detecting Gravitational Waves With Disparate Detector Responses: Two New Binary Black Hole Mergers,” *arXiv e-prints*

- , arXiv:1910.09528 (2019), arXiv:1910.09528 [astro-ph.HE].
- [8] Tejaswi Venumadhav, Barak Zackay, Javier Roulet, Liang Dai, and Matias Zaldarriaga, “New binary black hole mergers in the second observing run of Advanced LIGO and Advanced Virgo,” *Phys. Rev. D* **101**, 083030 (2020), arXiv:1904.07214 [astro-ph.HE].
  - [9] Tejaswi Venumadhav, Barak Zackay, Javier Roulet, Liang Dai, and Matias Zaldarriaga, “New search pipeline for compact binary mergers: Results for binary black holes in the first observing run of Advanced LIGO,” *Phys. Rev. D* **100**, 023011 (2019), arXiv:1902.10341 [astro-ph.IM].
  - [10] Barak Zackay, Tejaswi Venumadhav, Liang Dai, Javier Roulet, and Matias Zaldarriaga, “Highly spinning and aligned binary black hole merger in the Advanced LIGO first observing run,” *Phys. Rev. D* **100**, 023007 (2019), arXiv:1902.10331 [astro-ph.HE].
  - [11] Alexander H. Nitz, Sumit Kumar, Yi-Fan Wang, Shilpa Kastha, Shichao Wu, Marlin Schäfer, Rahul Dhurkunde, and Collin D. Capano, “4-OGC: Catalog of gravitational waves from compact-binary mergers,” (2021), arXiv:2112.06878 [astro-ph.HE].
  - [12] B. P. Abbott *et al.*, “GW170817: Observation of Gravitational Waves from a Binary Neutron Star Inspiral,” *Phys. Rev. Lett.* **119**, 161101 (2017), arXiv:1710.05832 [gr-qc].
  - [13] B. P. Abbott *et al.* (LIGO Scientific, Virgo), “GW190425: Observation of a Compact Binary Coalescence with Total Mass  $\sim 3.4M_{\odot}$ ,” *Astrophys. J. Lett.* **892**, L3 (2020), arXiv:2001.01761 [astro-ph.HE].
  - [14] R. Abbott *et al.* (LIGO Scientific, KAGRA, VIRGO), “Observation of Gravitational Waves from Two Neutron Star–Black Hole Coalescences,” *Astrophys. J. Lett.* **915**, L5 (2021), arXiv:2106.15163 [astro-ph.HE].
  - [15] Curt Cutler and Eanna E. Flanagan, “Gravitational waves from merging compact binaries: How accurately can one extract the binary’s parameters from the inspiral wave form?” *Phys. Rev. D* **49**, 2658–2697 (1994), arXiv:gr-qc/9402014.
  - [16] R. Abbott *et al.* (LIGO Scientific, Virgo), “GW190521: A Binary Black Hole Merger with a Total Mass of  $150M_{\odot}$ ,” *Phys. Rev. Lett.* **125**, 101102 (2020), arXiv:2009.01075 [gr-qc].
  - [17] R. Abbott *et al.* (LIGO Scientific, Virgo), “GW190814: Gravitational Waves from the Coalescence of a 23 Solar Mass Black Hole with a 2.6 Solar Mass Compact Object,” *Astrophys. J. Lett.* **896**, L44 (2020), arXiv:2006.12611 [astro-ph.HE].
  - [18] R. Abbott *et al.* (LIGO Scientific, Virgo), “GW190412: Observation of a Binary-Black-Hole Coalescence with Asymmetric Masses,” *Phys. Rev. D* **102**, 043015 (2020), arXiv:2004.08342 [astro-ph.HE].
  - [19] Mark Hannam *et al.*, “General-relativistic precession in a black-hole binary,” *Nature* **610**, 652–655 (2022), arXiv:2112.11300 [gr-qc].
  - [20] Rossella Gamba, Matteo Breschi, Gregorio Carullo, Piero Rettengo, Simone Albanesi, Sebastiano Bernuzzi, and Alessandro Nagar, “GW190521 as a dynamical capture of two nonspinning black holes,” *Nature Astronomy* (2022), 10.1038/s41550-022-01813-w, arXiv:2106.05575 [gr-qc].
  - [21] Juan Calderón Bustillo, Nicolas Sanchis-Gual, Alejandro Torres-Forné, José A. Font, Avi Vajpeyi, Rory Smith, Carlos Herdeiro, Eugen Radu, and Samson H. W. Leong, “GW190521 as a Merger of Proca Stars: A Potential New Vector Boson of  $8.7 \times 10^{-13}$  eV,” *Phys. Rev. Lett.* **126**, 081101 (2021), arXiv:2009.05376 [gr-qc].
  - [22] Luc Blanchet, “Gravitational Radiation from Post-Newtonian Sources and Inspiralling Compact Binaries,” *Living Rev. Rel.* **17**, 2 (2014), arXiv:1310.1528 [gr-qc].
  - [23] R. Abbott *et al.* (LIGO Scientific, Virgo), “Properties and Astrophysical Implications of the  $150 M_{\odot}$  Binary Black Hole Merger GW190521,” *Astrophys. J. Lett.* **900**, L13 (2020), arXiv:2009.01190 [astro-ph.HE].
  - [24] Isobel M. Romero-Shaw, Paul D. Lasky, Eric Thrane, and Juan Calderon Bustillo, “GW190521: orbital eccentricity and signatures of dynamical formation in a binary black hole merger signal,” *Astrophys. J. Lett.* **903**, L5 (2020), arXiv:2009.04771 [astro-ph.HE].
  - [25] Isobel M. Romero-Shaw, Paul D. Lasky, and Eric Thrane, “Four Eccentric Mergers Increase the Evidence that LIGO–Virgo–KAGRA’s Binary Black Holes Form Dynamically,” *Astrophys. J.* **940**, 171 (2022), arXiv:2206.14695 [astro-ph.HE].
  - [26] Isobel M. Romero-Shaw, Paul D. Lasky, and Eric Thrane, “Signs of Eccentricity in Two Gravitational-wave Signals May Indicate a Subpopulation of Dynamically Assembled Binary Black Holes,” *Astrophys. J. Lett.* **921**, L31 (2021), arXiv:2108.01284 [astro-ph.HE].
  - [27] Anna C. Sippel and Jarrod R. Hurley, “Multiple stellar-mass black holes in globular clusters: theoretical confirmation,” *Monthly Notices of the Royal Astronomical Society: Letters* **430**, L30–L34 (2012).
  - [28] Jay Strader, Laura Chomiuk, Thomas J. Maccarone, James C. A. Miller-Jones, and Anil C. Seth, “Two stellar-mass black holes in the globular cluster m22,” *Nature* **490**, 71–73 (2012).
  - [29] Johan Samsing, Daniel J. D’Orazio, Abbas Askar, and Mirek Giersz, “Black hole mergers from globular clusters observable by lisa and ligo: Results from post-newtonian binary-single scatterings,” (2018).
  - [30] Johan Samsing and Enrico Ramirez-Ruiz, “On the assembly rate of highly eccentric binary black hole mergers,” *The Astrophysical Journal* **840**, L14 (2017).
  - [31] Johan Samsing, Morgan MacLeod, and Enrico Ramirez-Ruiz, “THE FORMATION OF ECCENTRIC COMPACT BINARY INSPIRALS AND THE ROLE OF GRAVITATIONAL WAVE EMISSION IN BINARY-SINGLE STELLAR ENCOUNTERS,” *The Astrophysical Journal* **784**, 71 (2014).
  - [32] Johan Samsing and Daniel J D’Orazio, “Black hole mergers from globular clusters observable by LISA i: Eccentric sources originating from relativistic n-body dynamics,” *Monthly Notices of the Royal Astronomical Society* **481**, 5445–5450 (2018).
  - [33] Johan Samsing and Teva Ilan, “Double Gravitational Wave Mergers,” *Mon. Not. Roy. Astron. Soc.* **482**, 30–39 (2019), arXiv:1709.01660 [astro-ph.HE].
  - [34] Johan Samsing and Teva Ilan, “Topology of black hole binary–single interactions,” *Mon. Not. Roy. Astron. Soc.* **476**, 1548–1560 (2018), arXiv:1706.04672 [astro-ph.HE].
  - [35] Johan Samsing, Morgan MacLeod, and Enrico Ramirez-Ruiz, “Formation of Tidal Captures and Gravitational Wave Inspirals in Binary-Single Interactions,” *Astrophys. J.* **846**, 36 (2017), arXiv:1609.09114 [astro-ph.HE].
  - [36] Lisa Randall and Zhong-Zhi Xianyu, “Induced Ellipticity for Inspiring Binary Systems,” *Astrophys. J.* **853**, 93 (2018), arXiv:1708.08569 [gr-qc].

- [37] Johan Samsing, Morgan MacLeod, and Enrico Ramirez-Ruiz, “Dissipative Evolution of Unequal-mass Binary-single Interactions and Its Relevance to Gravitational-wave Detections,” *Astrophys. J.* **853**, 140 (2018), [arXiv:1706.03776 \[astro-ph.HE\]](#).
- [38] Johan Samsing, Abbas Askar, and Mirek Giersz, “MOCCA-SURVEY Database. I. Eccentric Black Hole Mergers during Binary-Single Interactions in Globular Clusters,” *Astrophys. J.* **855**, 124 (2018), [arXiv:1712.06186 \[astro-ph.HE\]](#).
- [39] N. W. C. Leigh *et al.*, “On the rate of black hole binary mergers in galactic nuclei due to dynamical hardening,” *Mon. Not. Roy. Astron. Soc.* **474**, 5672–5683 (2018), [arXiv:1711.10494 \[astro-ph.GA\]](#).
- [40] Fabio Antonini, Sourav Chatterjee, Carl L. Rodriguez, Meagan Morscher, Bharath Pattabiraman, Vicky Kalogera, and Frederic A. Rasio, “Black hole mergers and blue stragglers from hierarchical triples formed in globular clusters,” *Astrophys. J.* **816**, 65 (2016), [arXiv:1509.05080 \[astro-ph.GA\]](#).
- [41] László Gondán, Bence Kocsis, Péter Raffai, and Zolt Frei, “Eccentric Black Hole Gravitational-Wave Capture Sources in Galactic Nuclei: Distribution of Binary Parameters,” *Astrophys. J.* **860**, 5 (2018), [arXiv:1711.09989 \[astro-ph.HE\]](#).
- [42] Fabio Antonini, Mark Gieles, and Alessia Gualandris, “Black hole growth through hierarchical black hole mergers in dense star clusters: implications for gravitational wave detections,” *Mon. Not. Roy. Astron. Soc.* **486**, 5008–5021 (2019), [arXiv:1811.03640 \[astro-ph.HE\]](#).
- [43] E. A. Huerta, Prayush Kumar, Sean T. McWilliams, Richard O’Shaughnessy, and Nicolás Yunes, “Accurate and efficient waveforms for compact binaries on eccentric orbits,” *Physical Review D* **90** (2014), 10.1103/physrevd.90.084016.
- [44] Zhuo Chen, E. A. Huerta, Joseph Adamo, Roland Haas, Eamonn O’Shea, Prayush Kumar, and Chris Moore, “Observation of eccentric binary black hole mergers with second and third generation gravitational wave detector networks,” *Phys. Rev. D* **103**, 084018 (2021), [arXiv:2008.03313 \[gr-qc\]](#).
- [45] Ádám Takács and Bence Kocsis, “Isotropic–Nematic Phase Transitions in Gravitational Systems. II. Higher Order Multipoles,” *Astrophys. J.* **856**, 113 (2018), [arXiv:1712.04449 \[astro-ph.GA\]](#).
- [46] Manuel Arca-Sedda, Gongjie Li, and Bence Kocsis, “Order in the chaos - Eccentric black hole binary mergers in triples formed via strong binary–binary scatterings,” *Astron. Astrophys.* **650**, A189 (2021), [arXiv:1805.06458 \[astro-ph.HE\]](#).
- [47] Fabio Antonini and Frederic A. Rasio, “Merging black hole binaries in galactic nuclei: implications for advanced-LIGO detections,” *Astrophys. J.* **831**, 187 (2016), [arXiv:1606.04889 \[astro-ph.HE\]](#).
- [48] László Gondán and Bence Kocsis, “Measurement Accuracy of Inspiral Eccentric Neutron Star and Black Hole Binaries Using Gravitational Waves,” *Astrophys. J.* **871**, 178 (2019), [arXiv:1809.00672 \[astro-ph.HE\]](#).
- [49] Lisa Randall and Zhong-Zhi Xianyu, “An Analytical Portrait of Binary Mergers in Hierarchical Triple Systems,” *Astrophys. J.* **864**, 134 (2018), [arXiv:1802.05718 \[gr-qc\]](#).
- [50] Bao-Minh Hoang, Smadar Naoz, Bence Kocsis, Frederic A. Rasio, and Fani Dosopoulou, “Black Hole Mergers in Galactic Nuclei Induced by the Eccentric Kozai–Lidov Effect,” *Astrophys. J.* **856**, 140 (2018), [arXiv:1706.09896 \[astro-ph.HE\]](#).
- [51] Martin Lopez, Aldo Batta, Enrico Ramirez-Ruiz, Irvin Martinez, and Johan Samsing, “Tidal Disruptions of Stars by Binary Black Holes: Modifying the Spin Magnitudes and Directions of LIGO Sources in Dense Stellar Environments,” *Astrophys. J.* **877**, 56 (2019), [arXiv:1812.01118 \[astro-ph.HE\]](#).
- [52] Carl L. Rodriguez, Pau Amaro-Seoane, Sourav Chatterjee, Kyle Kremer, Frederic A. Rasio, Johan Samsing, Claire S. Ye, and Michael Zevin, “Post-Newtonian Dynamics in Dense Star Clusters: Formation, Masses, and Merger Rates of Highly-Eccentric Black Hole Binaries,” *Phys. Rev. D* **98**, 123005 (2018), [arXiv:1811.04926 \[astro-ph.HE\]](#).
- [53] Michael Zevin, Johan Samsing, Carl Rodriguez, Carl-Johan Haster, and Enrico Ramirez-Ruiz, “Eccentric Black Hole Mergers in Dense Star Clusters: The Role of Binary–Binary Encounters,” *Astrophys. J.* **871**, 91 (2019), [arXiv:1810.00901 \[astro-ph.HE\]](#).
- [54] B. P. Abbott *et al.* (LIGO Scientific, Virgo), “Search for Eccentric Binary Black Hole Mergers with Advanced LIGO and Advanced Virgo during their First and Second Observing Runs,” *Astrophys. J.* **883**, 149 (2019), [arXiv:1907.09384 \[astro-ph.HE\]](#).
- [55] Alexander H. Nitz, Amber Lenon, and Duncan A. Brown, “Search for Eccentric Binary Neutron Star Mergers in the first and second observing runs of Advanced LIGO,” *Astrophys. J.* **890**, 1 (2019), [arXiv:1912.05464 \[astro-ph.HE\]](#).
- [56] B. P. Abbott *et al.* (KAGRA, LIGO Scientific, Virgo, VIRGO), “Prospects for observing and localizing gravitational-wave transients with Advanced LIGO, Advanced Virgo and KAGRA,” *Living Rev. Rel.* **21**, 3 (2018), [arXiv:1304.0670 \[gr-qc\]](#).
- [57] Evan D. Hall and Matthew Evans, “Metrics for next-generation gravitational-wave detectors,” *Class. Quant. Grav.* **36**, 225002 (2019), [arXiv:1902.09485 \[astro-ph.IM\]](#).
- [58] Michela Mapelli, “Binary black hole mergers: formation and populations,” *Frontiers in Astronomy and Space Sciences* **7**, 38 (2020), [arXiv:2105.12455 \[astro-ph.HE\]](#).
- [59] François Chollet, “Xception: Deep learning with depth-wise separable convolutions,” in *Proceedings of the IEEE conference on computer vision and pattern recognition* (2017) pp. 1251–1258.
- [60] S. Chatterji, L. Blackburn, G. Martin, and E. Katsavounidis, “Multiresolution techniques for the detection of gravitational-wave bursts,” *Class. Quant. Grav.* **21**, S1809–S1818 (2004), [arXiv:gr-qc/0412119](#).
- [61] Timothy D Gebhard, Niki Kilbertus, Ian Harry, and Bernhard Schölkopf, “Convolutional neural networks: A magic bullet for gravitational-wave detection?” *Physical Review D* **100**, 063015 (2019).
- [62] Alex Nitz, Ian Harry, Duncan Brown, Christopher M. Biwer, Josh Willis, Tito Dal Canton, Collin Capano, Thomas Dent, Larne Pekowsky, Andrew R. Williamson, Soumi De, Miriam Cabero, Bernd Machenschalk, Duncan Macleod, Prayush Kumar, Steven Reyes, Francesco Pannarale, Gareth S Cabourn Davies, dfinstad, Sumit Kumar, Márton Tápai, Leo Singer, Sebastian Khan, Stephen Fairhurst, Alex Nielsen, Shashwat Singh, Thomas Massinger, Koustav Chandra, shasvath, and veronica villa, “[gwastro/pycbc: v2.0.4 release of pycbc](#),” (2022).



- [63] Sashwat Tanay, Maria Haney, and Achamveedu Gopakumar, “Frequency and time-domain inspiral templates for comparable mass compact binaries in eccentric orbits,” *Physical Review D* **93**, 064031 (2016).
- [64] LIGO Scientific Collaboration, “*LIGO Algorithm Library - LALSuite*,” free software (GPL) (2018).
- [65] Bernard F. Schutz, “Networks of gravitational wave detectors and three figures of merit,” *Class. Quant. Grav.* **28**, 125023 (2011), [arXiv:1102.5421 \[astro-ph.IM\]](#).
- [66] Lisa Barsotti, Peter Fritschel, Matthew Evans, and Slawomir Gras, “Updated advanced ligo sensitivity design curve,” <https://dcc.ligo.org/LIGO-T1800044/public> (2018).
- [67] Yann Lecun, Yoshua Bengio, and Geoffrey Hinton, “Deep learning,” *Nature (London)* **521**, 436–444 (2015).
- [68] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E. Hinton, “Imagenet classification with deep convolutional neural networks,” *Commun. ACM* **60**, 84–90 (2017).
- [69] Ding-Xuan Zhou, “Universality of deep convolutional neural networks,” (2018).
- [70] Daniel George and E. A. Huerta, “Deep Learning for Real-time Gravitational Wave Detection and Parameter Estimation: Results with Advanced LIGO Data,” *Phys. Lett. B* **778**, 64–70 (2018), [arXiv:1711.03121 \[gr-qc\]](#).
- [71] Hunter Gabbard, Michael Williams, Fergus Hayes, and Chris Messenger, “Matching matched filtering with deep networks for gravitational-wave astronomy,” *Phys. Rev. Lett.* **120**, 141103 (2018), [arXiv:1712.06041 \[astro-ph.IM\]](#).
- [72] Marlin B. Schäfer *et al.*, “MLGWSC-1: The first Machine Learning Gravitational-Wave Search Mock Data Challenge,” (2022), [arXiv:2209.11146 \[astro-ph.IM\]](#).
- [73] Shreejit Jadhav, Nikhil Mukund, Bhooshan Gadre, Sanjit Mitra, and Sheelu Abraham, “Improving significance of binary black hole mergers in Advanced LIGO data using deep learning: Confirmation of GW151216,” *Phys. Rev. D* **104**, 064051 (2021), [arXiv:2010.08584 \[gr-qc\]](#).
- [74] Chayan Chatterjee, Linqing Wen, Damon Beveridge, Foivos Diakogiannis, and Kevin Vinsen, “Rapid localization of gravitational wave sources from compact binary coalescences using deep learning,” (2022), [arXiv:2207.14522 \[gr-qc\]](#).
- [75] Hunter Gabbard, Chris Messenger, Ik Siong Heng, Francesco Tonolini, and Roderick Murray-Smith, “Bayesian parameter estimation using conditional variational autoencoders for gravitational-wave astronomy,” *Nature Phys.* **18**, 112–117 (2022), [arXiv:1909.06296 \[astro-ph.IM\]](#).
- [76] Stephen R. Green and Jonathan Gair, “Complete parameter inference for GW150914 using deep learning,” *Mach. Learn. Sci. Tech.* **2**, 03LT01 (2021), [arXiv:2008.03312 \[astro-ph.IM\]](#).
- [77] Stephen R. Green, Christine Simpson, and Jonathan Gair, “Gravitational-wave parameter estimation with autoregressive neural network flows,” *Phys. Rev. D* **102**, 104057 (2020), [arXiv:2002.07656 \[astro-ph.IM\]](#).
- [78] Maximilian Dax, Stephen R. Green, Jonathan Gair, Jakob H. Macke, Alessandra Buonanno, and Bernhard Schölkopf, “Real-Time Gravitational Wave Science with Neural Posterior Estimation,” *Phys. Rev. Lett.* **127**, 241103 (2021), [arXiv:2106.12594 \[gr-qc\]](#).
- [79] Michael Zevin *et al.*, “Gravity Spy: Integrating Advanced LIGO Detector Characterization, Machine Learning, and Citizen Science,” *Class. Quant. Grav.* **34**, 064003 (2017), [arXiv:1611.04596 \[gr-qc\]](#).
- [80] Andrew G. Howard, Menglong Zhu, Bo Chen, Dmitry Kalenichenko, Weijun Wang, Tobias Weyand, Marco Andreetto, and Hartwig Adam, “Mobilenets: Efficient convolutional neural networks for mobile vision applications,” *CoRR* **abs/1704.04861** (2017), 1704.04861.
- [81] Sergey Ioffe and Christian Szegedy, “Batch normalization: Accelerating deep network training by reducing internal covariate shift,” in *International conference on machine learning* (PMLR, 2015) pp. 448–456.
- [82] Dmytro Mishkin, Nikolay Sergievskiy, and Jiri Matas, “Systematic evaluation of convolution neural network advances on the imagenet,” *Computer vision and image understanding* **161**, 11–19 (2017).
- [83] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton, “Imagenet classification with deep convolutional neural networks,” in *Advances in Neural Information Processing Systems*, Vol. 25, edited by F. Pereira, C.J. Burges, L. Bottou, and K.Q. Weinberger (Curran Associates, Inc., 2012).
- [84] Diederik P Kingma and Jimmy Ba, “Adam: A method for stochastic optimization,” *arXiv preprint arXiv:1412.6980* (2014).
- [85] Martín Abadi, Ashish Agarwal, Paul Barham, Eugene Brevdo, Zhifeng Chen, Craig Citro, Greg S. Corrado, Andy Davis, Jeffrey Dean, Matthieu Devin, Sanjay Ghemawat, Ian Goodfellow, Andrew Harp, Geoffrey Irving, Michael Isard, Yangqing Jia, Rafal Jozefowicz, Lukasz Kaiser, Manjunath Kudlur, Josh Levenberg, Dandelion Mané, Rajat Monga, Sherry Moore, Derek Murray, Chris Olah, Mike Schuster, Jonathon Shlens, Benoit Steiner, Ilya Sutskever, Kunal Talwar, Paul Tucker, Vincent Vanhoucke, Vijay Vasudevan, Fernanda Viégas, Oriol Vinyals, Pete Warden, Martin Wattenberg, Martin Wicke, Yuan Yu, and Xiaoqiang Zheng, “*TensorFlow: Large-scale machine learning on heterogeneous systems*,” (2015), software available from tensorflow.org.
- [86] Gunnar Riemenschneider, Piero Rettengo, Matteo Breschi, Angelica Albertini, Rossella Gamba, Sebastiano Bernuzzi, and Alessandro Nagar, “Assessment of consistent next-to-quasicircular corrections and postadiabatic approximation in effective-one-body multipolar waveforms for binary black hole coalescences,” *Phys. Rev. D* **104**, 104045 (2021), [arXiv:2104.07533 \[gr-qc\]](#).
- [87] Alessandro Nagar, Gunnar Riemenschneider, Geraint Pratten, Piero Rettengo, and Francesco Messina, “Multipolar effective one body waveform model for spin-aligned black hole binaries,” *Phys. Rev. D* **102**, 024077 (2020), [arXiv:2001.09082 \[gr-qc\]](#).
- [88] Alessandro Nagar, Geraint Pratten, Gunnar Riemenschneider, and Rossella Gamba, “Multipolar effective one body model for nonspinning black hole binaries,” *Phys. Rev. D* **101**, 024041 (2020), [arXiv:1904.09550 \[gr-qc\]](#).
- [89] Alessandro Nagar *et al.*, “Time-domain effective-one-body gravitational waveforms for coalescing compact binaries with nonprecessing spins, tides and self-spin effects,” *Phys. Rev. D* **98**, 104052 (2018), [arXiv:1806.01772 \[gr-qc\]](#).
- [90] Alessandro Nagar, Thibault Damour, Christian Reisswig, and Denis Pollney, “Energetics and phasing of nonprecessing spinning coalescing black hole binaries,” *Phys. Rev. D* **93**, 044046 (2016), [arXiv:1506.08457 \[gr-qc\]](#).
- [91] Thibault Damour and Alessandro Nagar, “New effective-one-body description of coalescing nonprecessing spin-

- ning black-hole binaries,” *Phys. Rev. D* **90**, 044018 (2014), [arXiv:1406.6913 \[gr-qc\]](#).
- [92] Tom Fawcett, “An introduction to roc analysis,” *Pattern Recognition Letters* **27**, 861–874 (2006), rOC Analysis in Pattern Recognition.
- [93] Eamonn O’Shea and Prayush Kumar, “Correlations in parameter estimation of low-mass eccentric binaries: GW151226 & GW170608,” (2021), [arXiv:2107.07981 \[astro-ph.HE\]](#).
- [94] Juan Calderón Bustillo, Nicolas Sanchis-Gual, Alejandro Torres-Forné, and José A. Font, “Confusing Head-On Collisions with Precessing Intermediate-Mass Binary Black Hole Mergers,” *Phys. Rev. Lett.* **126**, 201101 (2021), [arXiv:2009.01066 \[gr-qc\]](#).