

# Inference of Partial Colexifications from Multilingual Wordlists

Johann-Mattis List<sup>12</sup>

<sup>1</sup> Chair of Multilingual Computational Linguistics / University of Passau

<sup>2</sup> Department of Linguistic and Cultural Evolution / Max Planck Institute for Evolutionary Anthropology Leipzig

2023

The past years have seen a drastic rise in studies devoted to the investigation of colexification patterns in individual languages families in particular and the languages of the world in specific. Specifically computational studies have profited from the fact that colexification as a scientific construct is easy to operationalize, enabling scholars to infer colexification patterns for large collections of cross-linguistic data. Studies devoted to partial colexifications – colexification patterns that do not involve entire words, but rather various parts of words–, however, have been rarely conducted so far. This is not surprising, since partial colexifications are less easy to deal with in computational approaches and may easily suffer from all kinds of noise resulting from false positive matches. In order to address this problem, this study proposes new approaches to the handling of partial colexifications by (1) proposing new models with which partial colexification patterns can be represented, (2) developing new efficient methods and workflows which help to infer various types of partial colexification patterns from multilingual wordlists, and (3) illustrating how inferred patterns of partial colexifications can be computationally analyzed and interactively visualized.

**Keywords:** partial colexification, loose colexification, colexification networks, computational comparative linguistics

## 1 Introduction

The past years have seen a drastic rise in studies devoted to the investigation of colexification patterns in individual languages families and the languages of the world. The concept of *colexification* has proven specifically useful for computational and quantitative approaches in lexical typology. The term *colexification* was originally proposed by François (2008) as a cover term for all cases where multiple senses

are expressed by one word form, no matter whether the multitude of senses results from polysemy or homophony. Colexifications can be easily computed from large collections of lexical data, specifically from multilingual wordlists, in which a certain number of concepts is translated into several target languages (see List 2014, 22-24). Through the aggregation of several multilingual wordlists, it is straightforward to assemble large amounts of cross-linguistic colexification data, as witnessed by the growth in recent versions of the Database of Cross-Linguistic Colexifications (CLICS, List et al. 2018; Rzymiski et al. 2020, <https://clics.clld.org>), as well as by the increase in studies which exploit colexification data assembled from different sources (Di Natale et al., 2021; Bao et al., 2021). Quantitative studies on colexification patterns have also shown that it is straightforward to extract those colexifications that are most likely to result from polysemy by searching for colexifications recurring across several language families – as opposed to frequent colexifications inside one and the same language family, which might reflect wide-spread cases of homophony (List et al., 2013). This means in turn that large colexification networks can be treated as polysemy networks that give us direct insights into certain aspects of lexical semantics (Youn et al., 2016; Jackson et al., 2019; Harvill et al., 2022).

Up to today, however, most studies dealing with colexifications focus on colexifications of *entire words*. Colexifications involving only certain parts of the words in a given language – *partial colexifications*, also called *loose colexifications* (François, 2008) – have rarely been investigated (see Urban 2011 for an exception) and rarely been computed automatically from larger collections of cross-linguistic data (see List et al. 2022 for initial attempts).

Two major factors seem to account for the problems involving studies with partial or loose colexifications. On the one hand, it is less straightforward to model partial colexifications in networks, since the relations between words that share common parts may at times be asymmetric, with one word being entirely repeated in the other word. Not only are different network types needed to model partial colexification networks, it is also much less straightforward to interpret them. On the other hand, it is difficult to *infer* partial colexifications networks from large collections of cross-linguistic data, since partial commonalities between words easily arise by chance or reflect grammatical distinctions (noun classes, gender marking, part of speech). As a result, a method that naively searches for similarities between words in the same language variety in a large corpus typically provides very densely connected noisy networks in which one barely finds any signal that would be interesting from a semantic or cognitive perspective. Thus, while it is easy to handle noise due to homophony in the case of full colexification networks by using strict thresholds for the occurrence of particular colexifications in combination with normalized weights, it is difficult to use the same criteria when creating partial colexification networks.

This study attempts to address at least some of these problems by proposing new models with which certain kinds of partial colexification patterns can be represented in networks, and by developing new efficient methods and workflows that help to infer different types of partial colexification patterns from multilingual wordlists. Having inferred these patterns, the study further shows how they can be visualized and analyzed.

## 2 Materials and Equipment

### 2.1 Multilingual Wordlists

The starting point of our new workflow for the inference of partial colexifications are multilingual wordlists. A wordlist is hereby understood as a collection of word forms which are arranged by their meaning. Unlike a dictionary, in which the word form (the *headword*) constitutes the primary linguistic unit by which data are ordered, a wordlist orders words by their meaning. While a dictionary starts from the form, following a semasiological or form-based perspective, a wordlist starts from the meaning, following an onomasiological, or concept-based perspective. As a result, a multilingual wordlist allows us to compare how certain *concepts* (which are thought to be generally comparable across languages, even if this may be problematic in practice) are translated into certain languages.

The compilation and aggregation of multilingual wordlists has made a remarkable progress during the last decade and the number of digitally available wordlist collections is constantly increasing. On the one hand, large unified multilingual wordlist collections have been proposed in the past years (Key and Comrie, 2016; Dellert et al., 2020; Haspelmath and Tadmor, 2009), on the other hand, standards for cross-linguistic data formats have been constantly improved (Forkel et al., 2018) and applied to many smaller or growing data collections (Ferraz Gerardi et al., 2021) and for the purpose of *retro-standardization* (Geisler et al., 2021).

### 2.2 Cross-Linguistic Data Formats

For the exploration of partial colexification patterns across multiple languages, a modified version of the well-known *Intercontinental Dictionary Series* (IDS) was prepared (Key and Comrie, 2016). While the original version mixes phonetic transcriptions with language-specific phonological transcriptions and orthographic entries, the entries in the modified version were semi-automatically converted to the International Phonetic Alphabet in the variant proposed by the Cross-Linguistic Transcription Systems (CLTS) reference catalog (<https://clts.cild.org>, List et al. 2023, see Anderson et al. 2018). The conversion was done by applying the Lexibank workflow of creating standardized wordlists in Cross-Linguistic Data Formats (List et al., 2022). In this workflow, originally non-standardized datasets are semi-automatically standardized by applying a mix of software tools (based on CLDFBench, Forkel and List 2020) and manual annotation in order to convert the data into the formats recommended by the Cross-Linguistic Data Formats initiative (Forkel et al., 2018).

The updated version of the IDS provides wordlists for 329 language varieties for up to 1310 concepts. The standardized phonetic transcriptions consist of a total of 558 distinct sounds (types) which occur 2 902 306 times in the data (tokens), with an average phoneme inventory size of 50.76 sounds per variety. Although – strictly speaking – partial colexifications could in theory also be identified from orthographic data, being able to work with a larger multilingual wordlist available in phonetic transcriptions has two major advantages, even if the transcriptions may contain certain errors. On the

one hand, it is easier to evaluate the findings, if transcriptions are harmonized for one dataset, on the other hand, knowing that sounds are represented in segmented form makes it easier to select the thresholds by which partial colexifications are preliminarily accepted or discarded. The revised version of the Intercontinental Dictionary Series is currently curated on GitHub, where it can be accessed at <https://github.com/intercontinental-dictionary-series/ids-segmented>. The version used in this study is v0.2 (<https://github.com/intercontinental-dictionary-series/idssegmented/tree/0.1>).

For developmental purposes and in order to test certain technical aspects of the new methods proposed here, a smaller wordlist by Allen (2007) was used. This list – also converted to CLDF (see <https://github.com/lexibank/allenbai>) – offers data for 9 Bai dialect varieties in standardized phonetic transcriptions.

### 3 Methods

Full colexifications across languages can be handled in an efficient way that has shown to provide very interesting insights into semantic relations. Partial (or loose) colexifications, however, suffer from noise, resulting from the fact that partial similarities between words in the same language may result from a large number of factors (coincidence, grammatical markers) that do not reflect specific semantic relations between the words in question. As a result, the well-established workflows for the inference of full colexification networks cannot be used to infer partial colexification networks. In order to handle this problem, I propose a three-stage approach that starts from the *modeling* of partial colexifications – which helps to reduce the search space and provides a consistent *representation* of distinct types of partial colexifications in networks –, offers efficient methods for the *inference* of specific partial colexification types, and finally allows us to *analyse* different kinds of partial colexification networks in various ways. In this context, modeling, inference, and analysis reflect a general approach to scientific problem solving in the historical sciences that was inspired by its application in evolutionary biology (Dehmer et al., 2011).

#### 3.1 Modeling Partial Colexifications Across Languages

##### 3.1.1 Major Types of Partial Colexification

When modeling words as sequences of sounds, we can define major sequence relations in a formal way. Since sequences play a crucial role in many scientific fields – ranging from computer science (Gusfield, 1997) via bioinformatics (Durbin et al., 2002[1998]) to physics (Kruskal and Liberman, 1999[1983]) – basic relations between sequences have been independently identified and discussed long ago. In the following, we will distinguish the term *partial colexification* from the term *loose colexification* (the latter originally termed by François 2008). According to this distinction, partial colexifications are restricted to concatenative morphology, while loose colexifications would also allow for non-concatenative (paradigmatic) morphology. The narrower notion of partial colexifications has the advantage that we can use existing models and insights from earlier studies on sequence and string relations and adopt them to the notion

of partial colexifications.

When comparing three fictitious sequences **ABC**, **XYABCD**, and **ZABCEF**, it is easy to see that the first sequence **ABC** recurs in both the second and the third one. In computer science and bioinformatics, **ABC** is called a *common substring* of **XYABCD** and **ZABCEF**. Since there is no longer substring than **ABC**, it is furthermore the *longest common substring* between both sequences. Regarding the specific relation between **XYABCD** and **ZABCEF**, we can say that they share a common substring of length 3. The sequence **ABC** also shares substrings of length 3 with the two other sequences **ZABCEF** and **XYABCD**. In addition, however, we can see that the sequence **ABC** is *identical* with the common substring, and we can say that **ABC** is a part of **XYABCD** and **ZABCEF**. While the former relation between sequences (sharing a substring of a given length) is commutable, the latter relation isn't: saying that one sequence A is part of another sequence B is not the same as saying that sequence B is part of sequence A.

Given their importance for a wide range of scientific and industrial applications, many efficient algorithms for the computation of common substrings and the identification of part-of relations (or parthood relations, see Hoehndorf et al. 2009) in sequences have been proposed (see the overview in Gusfield 1997, 89-121). Common substrings and part-of relations are two fundamental relations between sequences that cover the notion of partial colexification in parts. The exact relation between common substring and part-of relations on the one hand and the notion of partial colexification on the other hand depends on the way in which we define the latter. If we insist that the material shared between words from the same language should reflect *lexical morphemes* – that is, smallest form-meaning pairs in a given language that bear a lexical meaning – we can say that any instance of a partial colexification between two word forms in a given language also corresponds to a common substring relation between the sound sequences representing the two forms. If two sound sequences exhibit a common substring relation, however, this does not automatically mean that we are dealing with a partial colexification in this narrower sense, since word forms can have common substrings for other reasons. The common substring can reflect purely grammatical morphemes (various forms of affixes, compare verbs in German, sharing all the infinitive ending, like *lauf-en* “run”, *geh-en* “walk”, etc.), or the similarity can be accidental (compare German *Herbst* “autumn” sharing a common substring *st* with *Wurst* “sausage”).

While it seems that scholars implicitly use the term *loose colexification* in a way that restricts the relation to shared lexical morphemes across words in the same language (François, 2008), it is important to note that such a narrow sense is in fact not needed. Colexification was deliberately chosen as a term to describe the relation of words with different senses sharing the same pronunciation. As a result, terms like *partial colexification* or *loose colexification* should also be used in a neutral, overarching form, while semantically more interesting relations should be inferred from partial colexification patterns in a second step.

### 3.1.2 Affix and Overlap Colexifications

When trying to develop methods that search for meaningful partial colexifications, that is, partial colexifications which reflect similar processes of lexical motivation (Koch, 2001) underlying the formation of words in a given language, it is useful to work with a narrower notion of shared similarity than the one reflected in the common substring and part-of relations between sequences introduced above. Thus, instead of searching whether a word form A expressing a concept X is part of a word form B expressing a concept Y, we can ask if A is a *prefix* or a *suffix* of B, thus, if A is identical with the beginning or the end of B. Similarly, we can ask if A and B *overlap*, that is, if they share a common substring which is either a prefix or a suffix of both sequences.

The search for linguistically relevant affix and overlap colexifications can be further restricted by setting thresholds for the length of the substring which the sequences colexify, and by setting thresholds for the length of the remaining parts of the sequences which do *not* colexify. Here, the fact that our multilingual wordlist is now available in the form of fully segmented, standardized phonetic transcriptions, comes in handy, since it allows us to set up thresholds for a certain number of *sounds* rather than a certain number of *symbols* which often reflect individual sounds only in combination.

### 3.1.3 Representing Partial Colexifications in Networks

Similar to substring colexifications and part-of colexifications, the fundamental difference between affix colexification and overlap colexification is that the former entails a *directional relation* (one sequence is a part of the other sequence, in this specific case, appearing in the beginning or the end), while the direction of the latter (two sequences share a common part) cannot be directly determined. When representing affix colexifications in networks, we can account for the directionality of the relation by using directed network models.

In contrast to the well-known undirected weighted network models used for the representation of full colexification networks (List et al., 2013) which can be easily visualized, both interactively (Mayer et al., 2014) and statically (using edge thickness to account for differences in the weights for the links connecting individual concepts, see List et al. 2018), weighted *directed* networks draw a link from one concept A to another concept B only in those cases where an affix colexification from A to B can be attested. As an example, consider German the words German *Finger* “finger” and *Fingernagel* “fingernail”. Here, the former word form is an affix of the latter word form (since the latter word starts with the former word), and we can therefore draw a link from the concept “FINGER” to the concept “FINGERNAIL” in an affix colexification network, in which both words in German are attested. When visualizing these networks, we may have links pointing in both directions (since there might well be languages in which the word for “fingernail” appears as an affix of the word for “finger”, although we do not expect to find many examples), and we can use arrows at the tips of the links indicating the direction of individual links in our network.

Overlap colexifications can be handled in the same way in which one would handle full colexifications.

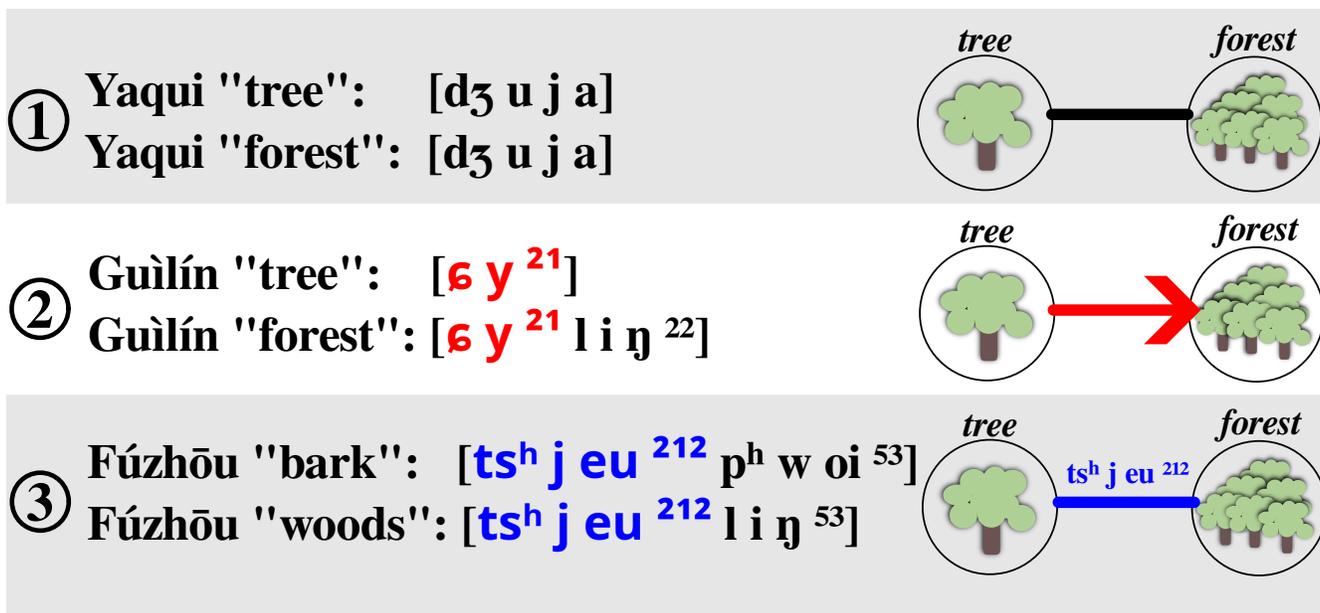


Figure 1: Overview of 3 major colexification type discussed in this stud. (1) provides an example for a full colexification in Yaqui (data from CLICS<sup>3</sup> Rzymiski et al. 2020), (2) shows an example for the directional representation of affix colexifications with an example from Guìlín Chinese (data from Liú Lǐ et al. 2007), and (3) shows an example for overlap colexification in Fúzhōu Chinese (data from Liú Lǐ et al. 2007).

The difference is that one should internally store the individual suffixes that make up for the overlap connection. Thus, while it is enough to store one word form for a colexification in a full colexification network (since words colexifying two or more concepts are by definition identical), it is important – for the sake of transparency – to indicate the actual suffix that recurs across two words in an overlap colexification network. Figure 1 contrasts the three types of colexification networks along with some simplified examples.

### 3.2 Efficient Inference of Full and Partial Colexification Networks

A naive implementation of a simple search for partial colexifications (be they affix or overlap colexifications) would take all word forms from one language and then compare each word against each other word in the sample, storing observed commonalities. While this procedure is easy to understand and certainly yields the desired results, it is far away from being efficient. As a result, specifically when dealing with large cross-linguistic data collections, it is advisable to use efficient search strategies.

For the computational of full colexifications, an efficient search strategy consists in the use of *associative arrays* as a major data structure, which consists of a key that allows to access a given value. In the Python implementation used by the CLICS database (List et al., 2018; Rzymiski et al., 2020), the keys consist of the individual word forms for a given language, while the values are a list of the concepts that the form

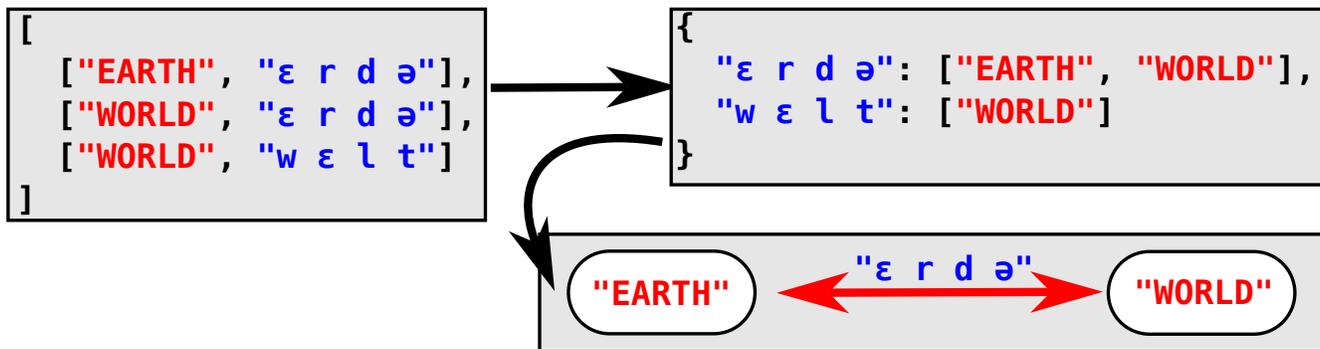


Figure 2: Efficient search for full colexifications using associative arrays. Data are represented in JSON format for a wordlist consisting of three German word forms *Erde* “EARTH”, *Erde* “WORLD”, and *Welt* “WORLD”. The top-left box shows the initial format of the data (a wordlist consisting of two columns, one storing the concept and one storing the word form in IPA). The top-right box shows the resulting associative array, in which the forms serve as a key and concepts expressing this form are added to the same array as a value. The bottom-right box shows the resulting colexification inferred from this example.

links to. In order to infer colexifications for a given language, the method iterates over all words for a given language in a wordlist and subsequently adds them to the associative array, storing the concept that the word form expresses in the list that serves as the value. If a given word form has already been added to the array, the associated list is expanded by adding the new concept in question. In a second stage, the method iterates over all keys in the associative array and adds all pairs of diverging concepts in the list to the growing network of colexifications across several languages. Detailed descriptions of this procedure can be found in a tutorial accompanying Jackson et al. (2022) and in List (2022). Figure 2 shows the structure resulting from applying this method to a small wordlist of three German words.

In our approach to partial colexifications, we proceed in a similar fashion, by iterating over the wordlist of each individual language twice. In order to find affix colexifications, however, the associative arrays are filled with affixes of varying size, and the list serving as the value is then filled with tuples of the corresponding full word form and its concept. The affixes are computed by iterating from the left and the right of the sound sequence representing the word form. Affix sizes are limited by two thresholds. The first threshold (default set to 2) limits the minimum size of the affix to 3 sounds. The second threshold makes sure that the size of the remaining word part is larger than a certain minimum (default set to 2). In combination, both thresholds guarantee that the affix we infer has a reasonably large size, and that the full word form to which we link it is also large enough to increase the chances that we detect compounding structures rather than cases of inflection. With these thresholds, we can detect all potential *affix candidates* for a given word in a first run and store them in our associative array. In a second step, we then iterate over all original words in the data, sorted by length, starting with the longest word. For each of the word forms, we then check if it occurs in the array of affix candidates. If this is the case, this means that the word appears as the affix of one of word forms linked as a value to this array, and we can

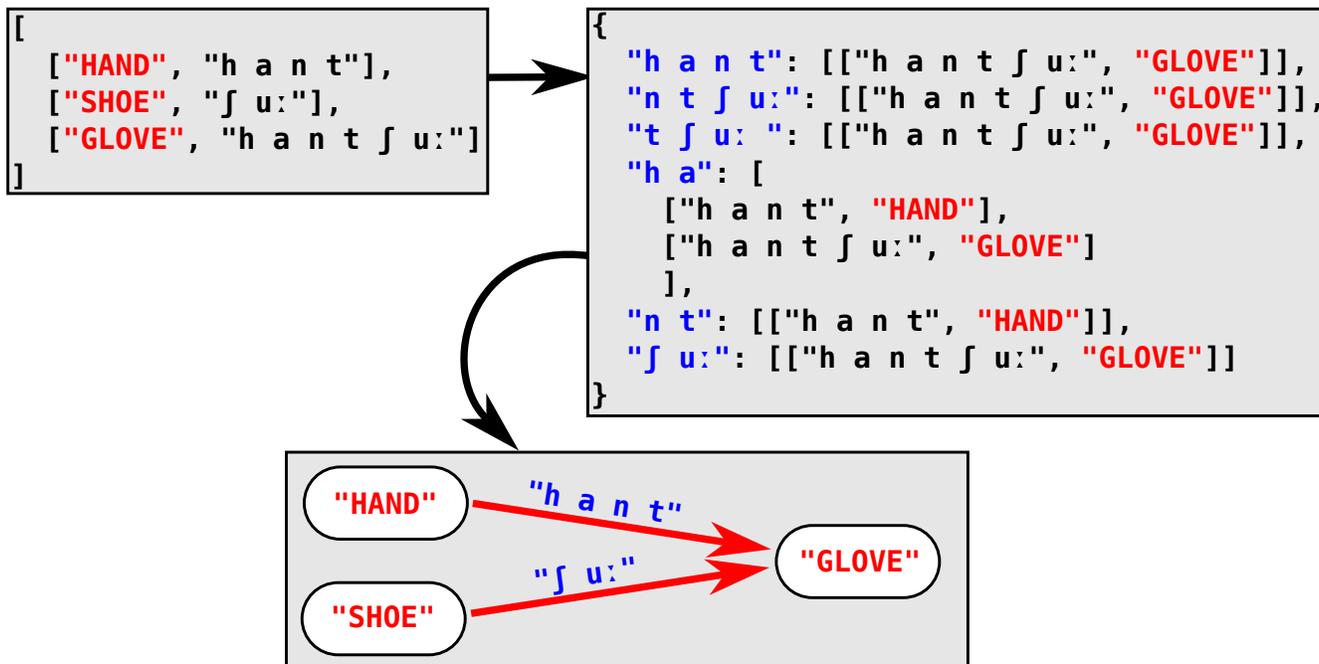


Figure 3: Efficient search for affix colexifications, illustrated for a wordlist of three German words *Hand* “HAND”, *Schuh* “SHOE”, and *Handschuh* “GLOVE” (lit. “hand-shoe”). Starting from the original wordlist in the top-left box, each word form is represented by all possible prefixes and suffixes that match the two-threshold criterion (see text) in the associative array in the top-right box. When iterating over the word forms in the original concept list, we find that two words, *Hand* and *Schuh* are stored in the array and we can therefore infer an affix relation between the two words and the word *Handschuh*, represented in the form of a directed graph in the box at the bottom of the figure.

add them to our network, by adding a link from the word recurring as affix to the word containing the affix.

For the computation of overlap colexifications, we pursue the same strategy as for affix colexifications in the first stage, by populating an associative array with affix candidates for the word forms in our wordlist. Due to the increase in noise when searching for overlap colexifications the default thresholds for the length of the affix are set to 4 and the threshold for the length of the remaining part are set to 3. In the second stage, we iterate over the array with affix candidates itself, which has been sorted by the length of the affixes serving as keys in reverse order (starting from the longest affix found in the data for a given language). For each affix, we then compare all word pairs in which this affix recurs and check that neither of the two forms appears as a suffix or a prefix of the other form. If these conditions are met and the forms are also not identical (which would correspond to a full colexification), we store the forms as overlap colexifications along with the affix by which the forms overlap.

As can be easily seen from the descriptions, the complexity of the three methods for the inference of full colexifications, affix colexifications, and overlap colexifications differs. The search for full colexifications

requires the least amount of computation time, followed by the search for affix colexifications, and by the search for overlap colexifications.

With the methods for the inference of full and partial colexifications in individual languages above, we can construct full and partial colexifications networks by applying the search strategies to multiple languages and iteratively growing a colexification network, in which we add edges when new edges are inferred for a particular language, or increase edge weights when edges have been already attested during the iteration. The networks computed in this form are all annotated in various ways. For the nodes, we store the number of word forms that can be found in the data, the number of language families in which these words are attested, and the actual word forms in each language. For the links between the nodes, we store the number of concrete word forms which exhibit the colexification relation, the number of language families, in which these colexifications can be found, and the actual word forms (including the colexifying parts for partial colexifications) in which the colexifications occur. For affix colexifications, we infer a directed network, while the network for full and overlap colexifications is undirected.

### 3.3 Analyzing Partial Colexification Networks

In order to understand major differences between full colexification networks and the two new types networks introduced here, one can compare their *degree distributions*. The degree of a node in a network is the number of its edges (Newman, 2010, 133-135). The weighted degree of a node in a network is the sum of the edge weights of its edges. While we have only one type of degree for undirected networks, we have two possible degrees for network with directed edges, the *in-degree* and the *out-degree*, with the former representing the number (or the sum of the edge weights) of incoming edges of a given node, and the latter representing the number (or the sum of the edge weights) of outgoing edges of a given node in the network. In order to compare the degree distributions of two networks constructed from the same set of nodes, we can compute the Spearman rank correlation (Spearman, 1904), which tell us to which degree those nodes that show a very high degree in one network also show a high degree in the other network, and to which degree nodes with low degrees in one network also tend to show low degrees in the other one.

In addition to the comparison of degree distributions, it is also useful to visualize the networks and to zoom in to interesting parts that illustrate where major differences can be found. This can be done quite conveniently now with the help of software packages for network visualization, such as Gephi (Bastian et al., 2009) or Cytoscape (Shannon et al., 2003; Smoot et al., 2011). For the visualizations reported here, Cytoscape is used.

### 3.4 Implementation

The methods reported here are implemented in Python and shared in the form of Python library that can be used as a plugin to the CL Toolkit package (<https://pypi.org/project/cltoolkit>, List and Forkel 2021). CL Toolkit was designed to allow to access CLDF Wordlists that conform to the standards

proposed by the Lexibank repository (List et al., 2022) conveniently from Python scripts or from the Python interactive console. For the handling of graphs, the NetworkX package was used (Hagberg, 2009), and for the inference of communities, the Igraph package was used (Csárdi and Nepusz, 2006). The computation of rank correlations was done with SciPy (Virtanen et al., 2020). The supplementary offers access to all data and code necessary to replicate the results reported here.

## 4 Results

### 4.1 Computation Time of Efficient Colexification Inference

In order to test whether the newly proposed method for the inference of affix colexifications is indeed more efficient than a conceptually much simpler comparison of all word against all words in a word list, a small experiment was designed in which the CLDF dataset of Bai dialects derived from Allen (2007) was analyzed several times and computation times were calculated. The results of this test indicate that the new method is indeed much more efficient in terms of computation time than the naive iteration. In various experiments on different Linux machines, computation time differences show that the naive all-to-all word comparison needs more than five times as much time than the new efficient approach, while both produce exactly identical results. While computation time may be less important when working with small datasets of only about a dozen of languages, it can become a bottleneck when working with large datasets such as the Intercontinental Dictionary Series. For this reason, the efficient solution proposed here, is proving very useful. This does not mean, however, that the solution is perfect, and it may well be the case that there are more efficient solutions available (e.g., using *suffix trees*, see Gusfield 1997, 122-180) that could be implemented in the future.

### 4.2 Comparing Degree Distributions

Having computed colexification networks for full colexifications, affix colexifications, and overlap colexifications, the Spearman rank correlation was computed for the weighted degree distributions of all three colexification types, splitting affix colexifications into two types of degree distributions, the in-degree and the out-degree. The results of this comparison are given in Table 1. As can be seen from this table, two moderate correlations can be observed for the total of six pairings. The degree distribution of the full colexification network correlates moderately with the out-degree distribution of the affix colexification network ( $r = 0.50$ ,  $p < 0.0001$ ), and the degree distribution of the overlap colexification network correlates moderately with the in-degree distribution of the affix colexification network ( $r = 0.42$ ,  $p < 0.0001$ ).

Interpreting these results may not seem straightforward at the first sight. The correlation between the weighted degree of concepts in full colexification networks and the out-degree of concepts in affix colexification networks points to a tendency according to which concepts that are often fully colexified with other concepts *also* seem to be frequently *reused* as compounds or affixes in complex words. While this finding may seem to be quite reasonable or even obvious, it was so far not possible to confirm it in

Colexification Type A	Colexification Type B	Nodes	R	P-Value
Full Colexification	Affix Colexification (In-Degree)	1308	0.0960	< 0.0001
Full Colexification	Affix Colexification (Out-Degree)	1308	0.5034	< 0.0001
Full Colexification	Overlap Colexification	1307	0.1179	< 0.0001
Affix Colexification (In-Degree)	Affix Colexification (Out-Degree)	1308	-0.0830	< 0.0001
Affix Colexification (In-Degree)	Overlap Colexification	1307	0.4212	< 0.0001
Affix Colexification (Out-Degree)	Overlap Colexification	1307	-0.0488	0.0104

Table 1: Comparing the Spearman rank correlations for the four different kinds of degree distributions. As can be seen, we can observe significant moderate correlations for Full Colexifications as compared to the Out-Degree of Affix Colexifications (0.5) and for the In-Degree of Affix Colexifications compared to Overlap Colexifications (0.42). For the other pairings, no significant correlations can be observed.

cross-linguistic studies. Partial colexification networks thus point us to an important property of concepts that tend to colexify frequently across the languages in the world: their propensity to be reused in word formation processes to form new words. This property, which I propose to call *lexical root productivity* (the term is inspired by a discussion with Alexandre François, see List 2019a and List 2019b), plays a key role in lexical motivation, the process underlying the formation of new word forms in the languages of the world (Koch, 2001).

The correlation between the weighted degree distribution of overlap colexifications with the out-degree distribution of affix colexifications has an even more straightforward explanation. Concepts that exhibit many overlap colexifications across a larger sample of languages are concepts that are often expressed with the help of compounds or morphologically complex words. The same holds for those concepts that have many incoming edges in an affix colexification network. As a result, the correlation between the two degree distributions is not very surprising. It shows, however, that both the weighted in-degree of affix colexification networks and the weighted degree of overlap colexification networks can be used as a proxy to measure the *compoundhood of concepts* (a term inspired by Martin Haspelmath, p. c.), that is, the tendency of concepts to be expressed by compound words or morphologically complex words.

### 4.3 Inspecting Colexifications through Subgraphs

While the investigation of the degree distributions already gives us a nice impression about the commonalities and differences between different kinds of colexification networks, a closer investigation of smaller parts of the graphs can help us to see these differences much more clearly. In order to provide a fruitful sample, the Infomap algorithm (Rosvall and Bergstrom, 2008) was used to compute communities from the full colexification network. In a second step, 23 concepts which show different properties with respect to their full and partial colexifications, were selected and the corresponding subgraphs for full, affix, and overlap colexification networks were extracted and visualized with the help of Cytoscape (Shannon et al., 2003; Smoot et al., 2011).

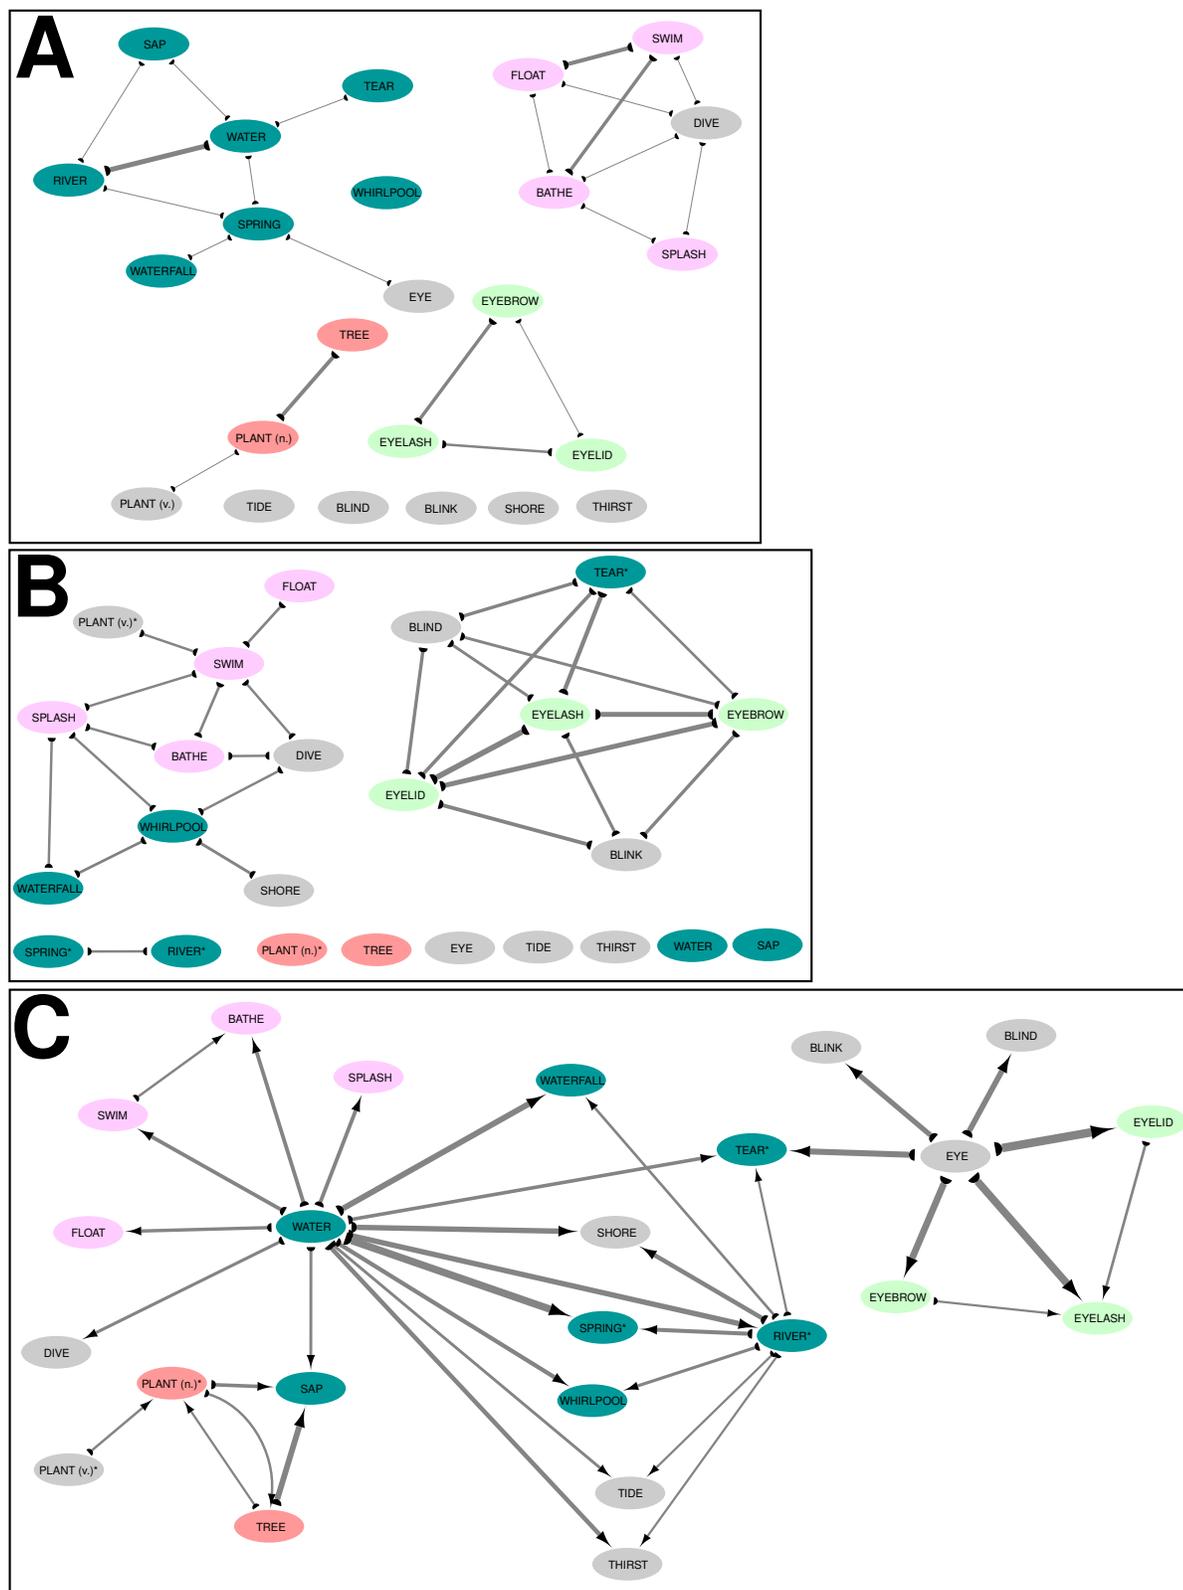


Figure 4: Comparing full (A), overlap (B), and affix (C) colexifications for subgraphs of the IDS dataset. Line width indicates the weight of the colexifications, colors other than light gray indicate communities inferred for the full colexification network, and link directions in the affix colexification network (B) are displayed with the help of arrows. Concept labels are taken from the Conception project. Concept labels with an asterisk were modified to to enhance the visualization.

As can be seen from the visualizations shown in Figure 4, the three networks show a remarkable difference in their individual structures, although they all involve the same concepts. Thus, while the concept **EYE** has only one spurious link in the full colexification network to **SPRING** (A), it is completely isolated in the overlap colexification network (B), while appearing as a rather central concept with a high out-degree in the affix colexification network (C). When inspecting connected components in all three networks, we find huge differences between the concepts that are fully connected with each other, while it is easy to spot semantic or morphological connections that give rise to these patterns. Thus, we find a cluster of **BLIND**, **TEAR**, **EYELASH**, **EYEBROW**, **EYELID**, and **BLINK** in the overlap colexification network that clearly seems to result from the fact that the words expressing these concepts all contain a morpheme for **EYE**. The central position of **EYE** in the affix colexification network confirms this role, and we find similar structures for **WATER** as another central concept in the affix colexification network. A systematic comparison of these different kinds of colexification networks allows us to identify semantic *key players* that play an important role in contributing morphological material to the construction of the lexicon of many of the world’s languages.

## 5 Discussion

This study has presented new ideas regarding the inference of partial colexification networks from multilingual wordlists. It has introduced new models that can be used to handle partial colexification patterns and proposed new efficient methods and workflows for the inference of partial colexification networks. Two new ways to handle partial colexification patterns in networks were introduced, namely *affix colexifications* and *overlap colexifications*. Using these new types of colexification patterns to infer affix and overlap colexification networks from large multilingual wordlist revealed some interesting properties of both network types. While overlap colexification networks allow us to measure the *compoundhood* of individual concepts across the world’s languages, affix colexification networks could be used as an initial proxy to measure *lexical root productivity* across languages. Apart from being interesting for people working in the field of lexical typology, we assume that these new types of colexification networks can be very useful for many additional scientific fields in the future, including most notably computer science (and approaches to computational semantics) and psychology.

## Funding

This research was supported by the Max Planck Society Research Grant *CALC*<sup>3</sup> (JML, <https://digling.org/calc/>), the ERC Consolidator Grant *ProduSemy* (JML, Grant No. 101044282, see <https://cordis.europa.eu/project/id/101044282>).

## Acknowledgments

I thank Robert Forkel for helpful comments on parts of the code base and the creation of the segmented version of the Intercontinental Dictionary Series.

## Supplementary Materials

The data and code used in this study are curated on GitHub, where they can be accessed at <https://github.com/lingpy/pacs/releases/tag/v0.1> (Version 0.1). Upon publication, data and code will also be archived with Zenodo.

## Data Availability Statement

Data and code accompanying the study are made freely available. The data and code used in this study are curated on GitHub, where they can be accessed at <https://github.com/lingpy/pacs/releases/tag/v0.1> (Version 0.1). Upon publication, data and code will also be archived with Zenodo.

## References

- Allen, B. (2007). *Bai Dialect Survey* (Dallas: SIL International)
- Anderson, C., Tresoldi, T., Chacon, T. C., Fehn, A.-M., Walworth, M., Forkel, R., et al. (2018). A Cross-Linguistic Database of Phonetic Transcription Systems. *Yearbook of the Poznań Linguistic Meeting* 4, 21–53
- Bao, H., Hauer, B., and Kondrak, G. (2021). On universal colexifications. In *Proceedings of the 11th Global Wordnet Conference* (University of South Africa (UNISA): Global Wordnet Association), 1–7
- Bastian, M., Heymann, S., and Jacomy, M. (2009). Gephi: An Open Source Software for Exploring and Manipulating Networks. In *Proceedings of the Third International AAAI Conference on Weblogs and Social Media* (Association for the Advancement of Artificial Intelligence), 1–2
- Csárdi, G. and Nepusz, T. (2006). The igraph software package for complex network research. *InterJournal. Complex Systems*
- Dehmer, M., Emmert-Streib, F., Graber, A., and Salvador, A. (2011). *Applied statistics for network biology. Methods in systems biology. Introduction* (Weinheim: Wiley-Blackwell)
- Dellert, J., Daneyko, T., Münch, A., Ladygina, A., Buch, A., Clarius, N., et al. (2020). Northeuralex: a wide-coverage lexical database of northern eurasia. *Language Resources & Evaluation* 54, 273–301. doi:10.1007/s10579-019-09480-6

- Di Natale, A., Pellert, M., and Garcia, D. (2021). Colexification networks encode affective meaning. *Affective Science* doi:10.1007/s42761-021-00033-1
- Durbin, R., Eddy, S. R., Krogh, A., and Mitchinson, G. (2002[1998]). *Biological sequence analysis. Probabilistic models of proteins and nucleic acids* (Cambridge: Cambridge University Press), 7 edn.
- Ferraz Gerardi, F., Reichert, S., Aragon, C., List, J.-M., Forkel, R., and Wientzek, T. (2021). *TuLeD: Tupian Lexical Database [Dataset, Version 0.11]* (Leipzig: Max Planck Institute for Evolutionary Anthropology). doi:10.5281/zenodo.4629306
- Forkel, R. and List, J.-M. (2020). Cldfbench. give your cross-linguistic data a lift. In *Proceedings of the Twelfth International Conference on Language Resources and Evaluation* (Luxembourg: European Language Resources Association (ELRA)), 6997–7004
- Forkel, R., List, J.-M., Greenhill, S. J., Rzymiski, C., Bank, S., Cysouw, M., et al. (2018). Cross-Linguistic Data Formats, advancing data sharing and re-use in comparative linguistics. *Scientific Data* 5, 1–10
- François, A. (2008). Semantic maps and the typology of colexification: intertwining polysemous networks across languages. In *From polysemy to semantic change*, ed. M. Vanhove (Amsterdam: Benjamins). 163–215
- Geisler, H., Forkel, R., and List, J.-M. (2021). A digital, retro-standardized edition of the tableaux phonétiques des patois suisses romands (tpps). In *Nouveaux regards sur la variation dialectale*, eds. M. Avanzi, N. LoVecchio, A. Millour, and A. Thibault (Strasbourg: Éditions de Linguistique et de Philologie). 13–36
- Gusfield, D. (1997). *Algorithms on strings, trees and sequences* (Cambridge: Cambridge University Press)
- [Dataset] Hagberg, A. (2009). NetworkX. High productivity software for complex networks. Distributed by the author.
- Harvill, J., Girju, R., and Hasegawa-Johnson, M. (2022). Syn2Vec: Synset colexification graphs for lexical semantic similarity. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies* (Seattle, United States: Association for Computational Linguistics), 5259–5270. doi:10.18653/v1/2022.naacl-main.386
- Haspelmath, M. and Tadmor, U. (2009). *World Loanword Database* (Leipzig: Max Planck Institute for Evolutionary Anthropology)
- Hoehndorf, R., Kelso, J., and Herre, H. (2009). The ontology of biological sequences. *BMC Bioinformatics* 10. doi:10.1186/1471-2105-10-377
- Jackson, J. C., Watts, J., Henry, T. R., List, J.-M., Mucha, P. J., Forkel, R., et al. (2019). Emotion semantics show both cultural variation and universal structure. *Science* 366, 1517–1522

- Jackson, J. C., Watts, J., List, J.-M., Puryear, C., Drabble, R., and Lindquist, K. (2022). From text to thought: How analyzing language can advance psychological science. *Perspectives on Psychological Science* 17, 805–826
- Key, M. R. and Comrie, B. (2016). *The Intercontinental Dictionary Series* (Leipzig: Max Planck Institute for Evolutionary Anthropology)
- Koch, P. (2001). Lexical typology from a cognitive and linguistic point of view. In *Linguistic typology and language universals* (Berlin and New York: de Gruyter), no. 20.2 in Handbook of Linguistics and Communication Science. 1142–1178
- Kruskal, J. B. and Liberman, M. (1999[1983]). The symmetric time-warping problem. from continuous to discrete. In *Time warps, string edits, and macromolecules. The theory and practice of sequence comparison*, eds. D. Sankoff and J. B. Kruskal (Stanford: CSLI Publications). reprint edn., 125–161
- List, J.-M. (2014). *Sequence comparison in historical linguistics* (Düsseldorf: Düsseldorf University Press)
- List, J.-M. (2019a). Open problems in computational diversity linguistics: Conclusion and outlook. *The Genealogical World of Phylogenetic Networks* 6
- List, J.-M. (2019b). Typology of semantic promiscuity (Open problems in computational diversity linguistics 10). *The Genealogical World of Phylogenetic Networks* 6
- List, J.-M. (2022). How to compute colexifications with CL Toolkit (How to do x in linguistics 10). *Computer-Assisted Language Comparison in Practice* 5
- List, J.-M., Anderson, C., Tresoldi, T., and Forkel, R. (2023). *Cross-Linguistic Transcription Systems [Dataset, Version 2.3.0]* (Jena: Max Planck Institute for Evolutionary Anthropology). doi:10.5281/zenodo.3515744
- List, J.-M. and Forkel, R. (2021). *CL Toolkit. A Python Library for the Processing of Cross-Linguistic Data [Software Library, Version 0.1.1]* (Geneva: Zenodo). doi:10.5281/zenodo.5156028
- List, J.-M., Forkel, R., Greenhill, S. J., Rzymiski, C., Englisch, J., and Gray, R. D. (2022). Lexibank, a public repository of standardized wordlists with computed phonological and lexical features. *Scientific Data* 9, 1–31
- List, J.-M., Greenhill, S. J., Anderson, C., Mayer, T., Tresoldi, T., and Forkel, R. (2018). CLICS<sup>2</sup>. An improved database of cross-linguistic colexifications assembling lexical data with help of cross-linguistic data formats. *Linguistic Typology* 22, 277–306
- List, J.-M., Terhalle, A., and Urban, M. (2013). Using network approaches to enhance the analysis of cross-linguistic polysemies. In *Proceedings of the 10th International Conference on Computational Semantics – Short Papers* (Stroudsburg: Association for Computational Linguistics), 347–353

- Liú Lǐlǐ, Wáng Hóngzhōng, and Bǎi Yíng (2007). *Xiàndài Hànyǔ fāngyán héxīncí, tèzhēng cíjǐ* [Collection of basic vocabulary words and characteristic dialect words in modern Chinese dialects] (Nánjīng: Fènghuáng)
- Mayer, T., List, J.-M., Terhalle, A., and Urban, M. (2014). An interactive visualization of cross-linguistic colexification patterns. In *Visualization as added value in the development, use and evaluation of Linguistic Resources. Workshop organized as part of the International Conference on Language Resources and Evaluation* (Association for Computational Linguistics). 1–8
- Newman, M. E. J. (2010). *Networks. An Introduction* (Oxford: Oxford University Press)
- Rosvall, M. and Bergstrom, C. T. (2008). Maps of random walks on complex networks reveal community structure. *Proc. Natl. Acad. Sci. U.S.A.* 105, 1118–1123
- Rzyski, C., Tresoldi, T., Greenhill, S., Wu, M.-S., Schweikhard, N. E., Koptjevskaja-Tamm, M., et al. (2020). The Database of Cross-Linguistic Colexifications, reproducible analysis of cross-linguistic polysemies. *Scientific Data* 7, 1–12
- Shannon, P., Markiel, A., Ozier, O., Baliga, N. S., Wang, J. T., Ramage, D., et al. (2003). Cytoscape: A software environment for integrated models of biomolecular interaction networks. *Genome Research* 13, 2498–2504
- Smoot, M. E., Ono, K., Ruscheinski, J., Wang, P.-L., and Ideker, T. (2011). Cytoscape 2.8: new features for data integration and network visualization. *Bioinformatics* 27, 431–432. doi:10.1093/bioinformatics/btq675
- Spearman, C. (1904). The proof and measurement of association between two things. *The American Journal of Psychology* 15, 72–101
- Urban, M. (2011). Asymmetries in overt marking and directionality in semantic change. *Journal of Historical Linguistics* 1, 3–47
- Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., et al. (2020). SciPy 1.0: Fundamental Algorithms for Scientific Computing in Python. *Nature Methods* 17, 261–272. doi:10.1038/s41592-019-0686-2
- Youn, H., Sutton, L., Smith, E., Moore, C., Wilkins, J. F., Maddieson, I., et al. (2016). On the universal structure of human lexical semantics. *Proceedings of the National Academy of Sciences of the United States of America* doi:10.1073/pnas.1520752113