

Distributed CONGEST Algorithm for Finding Hamiltonian Paths in Dirac Graphs and Generalizations

Noy Biton* Reut Levi† Moti Medina‡

Abstract

We study the problem of finding a Hamiltonian cycle under the promise that the input graph has a minimum degree of at least $n/2$, where n denotes the number of vertices in the graph. The classical theorem of Dirac states that such graphs (a.k.a. Dirac graphs) are Hamiltonian, i.e., contain a Hamiltonian cycle. Moreover, finding a Hamiltonian cycle in Dirac graphs can be done in polynomial time in the classical centralized model.

This paper presents a randomized distributed CONGEST algorithm that finds w.h.p. a Hamiltonian cycle (as well as maximum matching) within $O(\log n)$ rounds under the promise that the input graph is a Dirac graph. This upper bound is in contrast to general graphs in which both the decision and search variants of Hamiltonicity require $\tilde{\Omega}(n^2)$ rounds as shown by Bachrach et al. [PODC'19].

In addition, we consider two generalizations of Dirac graphs: Ore graphs and Rahman-Kaykobad graphs [IPL'05]. In Ore graphs, the sum of the degrees of every pair of non-adjacent vertices is at least n , and in Rahman-Kaykobad graphs, the sum of the degrees of every pair of non-adjacent vertices plus their distance is at least $n + 1$. We show how our algorithm for Dirac graphs can be adapted to work for these more general families of graphs.

Keywords— the CONGEST model; Hamiltonian Path; Hamiltonian Cycle; Dirac graphs; Ore graphs; graph-algorithms

1 Introduction

The Hamiltonian path and Hamiltonian cycle problems are fundamental in computer science and appeared in Karp's 21 NP-complete problems [Kar72]. A Hamiltonian path is a path that visits every vertex in the graph exactly once and a Hamiltonian cycle is a cycle that visits every vertex in the graph exactly once. We say that a graph is *Hamiltonian* if it contains a Hamiltonian cycle.

While the problem is hard in general (assuming $P \neq NP$), for some classes of graphs, it is guaranteed that all their members are Hamiltonian. In particular, the classical theorem of Dirac states that every graph in which the minimum degree is at least $n/2$ is Hamiltonian (we refer to graphs that satisfy this condition as DIRAC graphs). This condition is tight in the sense that if we are only guaranteed that the minimum degree is at least αn for any $0 < \alpha < 1/2$, then the problem remains NP-complete [DHK93].

In FOCS'87 Goldberg proposed the question of whether there is an NC-algorithm for finding a Hamiltonian cycle in DIRAC graphs.¹ This question was answered affirmatively by Dahlhaus et al. [DHK88, DHK93], who gave a fast parallel algorithm on CREW-PRAM to find a Hamiltonian cycle in Dirac graphs. Their algorithm works in $O(\log^4 n)$ parallel time and uses $O(n + m)$ number of processors where m denotes the number of edges of the graphs.

*Efi Arazi School of Computer Science, Reichman University, Israel. Email: Noy.Biton@post.idc.ac.il

†Efi Arazi School of Computer Science, Reichman University, Israel. Email: reut.levi@idc.ac.il

‡Faculty of Engineering, Bar-Ilan University, Ramat Gan, Israel. Email: moti.medina@biu.ac.il

¹See [DHK93] and [Sár09] for more details.

Aside from the theoretical appeal of the problem, finding a Hamiltonian cycle in a graph also provides us with a maximum matching of the graph (and even perfect matching when n is even). Therefore, it is natural to ask whether the algorithm of Dahlhaus et al. [DHK93] can be translated to the CONGEST model. To this end, one may attempt to use the PRAM simulation of Lotker, Patt-Shamir, and Peleg [LPSP06] for diameter-2 graphs (which applies for DIRAC graphs). However, this simulation is only valid when the number of processors is linear in the number of vertices in the graph. Another attempt is to use the more general transformation of Ghaffari and Li [GL18] that provide a randomized CONGEST algorithm that simulates any CRCW-PRAM algorithm that uses $2m$ processors, runs in T parallel rounds, and operates on the input graph G that is stored in the PRAM's shared memory. The round complexity of the attained CONGEST algorithm is $T \cdot \tau_{\text{mix}}(G) \cdot 2^{O(\sqrt{\log n})}$, where $\tau_{\text{mix}}(G)$ is the mixing-time of G . Since the mixing time of Dirac's graphs is constant, this yields a simulation of the algorithm of [DHK93] in CONGEST with $2^{O(\sqrt{\log n})}$ rounds. The question is whether we can improve upon this round complexity by directly designing an algorithm for the CONGEST model. We answer this question affirmatively by providing an algorithm with an exponential improvement in the round complexity. Specifically, we provide an algorithm for finding a Hamiltonian cycle in Dirac graphs that runs in $O(\log n)$ rounds. More specifically, when the algorithm terminates, each vertex outputs the identifier of the vertex that is before it and the vertex that is after it on the cycle ².

In the CONGEST model, it is standard to assume that the processors have unbounded computational power. Therefore, one may wonder whether finding a Hamiltonian cycle in general graphs in $o(n^2)$ rounds is possible. It was recently shown by Bachrach et al. [BCD⁺19] that even the problem of testing Hamiltonicity in the CONGEST model [Pel00] requires $\Omega(n^2)$ rounds. Therefore, it is natural to focus on restricted families of graphs such as DIRAC graphs and their generalizations. Since the classical result of Dirac, there have been many generalizations of Dirac's theorem (see [Li13] and references therein), e.g., graph families that are defined by sufficient conditions on degrees, neighborhoods, and other graph parameters [Oys60, Ber76, Bon71, Lin76, BC76, Bon80, FF85, FJL91]. The first important generalization of Dirac's theorem is by Ore [Oys60] who proved that every graph in which the sum of degrees of each pair of non-adjacent vertices is at least n is Hamiltonian. A more recent generalization, which also generalizes Ore's theorem, and allows graphs with less edges, is by Rahman and Kaykobad [RK05] who proved that every graph in which the sum of degrees of each pair of non-adjacent vertices plus their distance is at least $n+1$ has a Hamiltonian path. We refer to graphs that satisfy these conditions as ORE graphs and RK graphs, respectively. We prove that our distributed CONGEST algorithm and its analysis can be adapted (without changing the round complexity asymptotically) for these generalizations of DIRAC graphs as well.

Our Results. Our main result is stated in the following theorem.

Theorem 1. *There exists a distributed algorithm for computing a Hamiltonian cycle in DIRAC graphs that runs in $O(\log n)$ rounds in the CONGEST model. The algorithm succeeds with high probability.* ³

We also prove the following, more general, theorem.

Theorem 2. *There exists a distributed algorithm for computing a Hamiltonian cycle in ORE graphs and a Hamiltonian path in RK graphs that runs in $O(\log n)$ rounds in the CONGEST model. The algorithm succeeds with high probability.*

A nice outcome of Theorem 2 is that a sequential simulation of the CONGEST algorithm for the RK graphs yields a polynomial time sequential algorithm for finding a Hamiltonian path in these graphs as well.

1.1 High-level Description of the Algorithm

Our algorithm maintains a path-cover of the graph, where a path-cover is a set of paths in the graph such that each vertex of the graph belongs to exactly one of the paths in the set.

Initially, the path-cover consists of paths of constant length. Hence the size of the initial path-cover is linear in n . Then the algorithm proceeds in iterations, where in each iteration, the size of the path-cover

²We note that although the input graph is undirected, the outputs of the vertices yield an oriented Hamiltonian cycle (or path).

³We say that an event occurs *with high probability (w.h.p.)* if it occurs with probability at least $1 - 1/\text{poly}(n)$.

decreases by a constant factor, with constant probability. Consequently, after $\Theta(\log n)$ iteration, the size of the path-cover is 1. Namely, a Hamiltonian path is found. The decrease in the size of the path-cover occurs as in each iteration (with constant probability) a constant fraction of the paths are merged into other paths, as we describe next.

We consider three types of merges. An *elementary merge* occurs when a path P is merged into a path Q by connecting the endpoints of P to the endpoints of an edge of Q . A *concatenation merge* occurs when two paths are merged by connecting their endpoints. Finally, a *cycle merge* occurs when merging two cycles that are connected with an edge into a single path.

In each iteration, the algorithm proceeds as follows. First, the paths of the path-cover are paired. Now, two phases are performed, as follows. In the first phase of each iteration, only pairs of paths for which a special condition (which we describe momentarily) holds are merged. The special condition guarantees that each one of these pairs can be merged into a single path. Specifically, a pair of paths, (P, Q) satisfy this special condition if the subgraph induced on the vertices of each one of them has a Hamiltonian cycle and additionally P and Q are connected with an edge to each other.

In the second phase of each iteration, concatenations and elementary merges are performed. The merges that are performed in this phase are selected as follows. Let P be a path in the path cover. The *elements* of P consists of its edges and its endpoints. Initially, each element of P reserves itself to at most a single path, Q . The path Q is selected as follows. If the (reserved) element is an endpoint of P , v , then Q is a path with an endpoint incident to v , chosen uniformly at random from the set of such paths. Otherwise, if the (reserved) element is an edge⁴ of P , (u, v) , then Q is a path with an endpoint incident to u , chosen uniformly at random from the set of such paths. A reservation of an element of P to a path Q grants Q the exclusive right to be merged into P using this element. The purpose of these reservations is to avoid a scenario in which two different paths are trying to merge into another path by using the same element.

We say that a reservation of an element is *useful* for a path Q if Q can be merged into another path via this element. By construction, all reservations of endpoints are useful. However, a reservation of an edge may be non-useful since the decision to reserve an edge to a path, Q , is done only by one of the endpoints of e . Hence, it might be the case that the other endpoint of e is not adjacent to the other endpoint of Q . Nonetheless, we show that on expectation, a constant fraction of the paths will have at least one useful reservation. After setting the reservations, each path is notified of the set of its useful reservations (if any). This can be carried out without congestion because of the exclusivity of the reservations. Then each path arbitrarily selects one of its useful reservations.

At this point, each path that has a useful reservation can be merged into another path via the respective reserved element exclusively. However, there are two problems with executing these merges. The first problem is that we want to avoid lengthy sequences of merges as this blows up the round complexity of the algorithm. Roughly speaking, this comes from the fact that when we merge paths (possibly many) into a single new path, all vertices of the corresponding (old) paths are updated about the identity of the new path. Moreover, for each new path (which is an outcome of possibly many merging operations), the algorithm constructs a spanning tree, of depth 2, which spans the vertices of the path. See more details in Section 5 on the role of these spanning trees in our algorithm.

The second problem is that these sequences of merges may be conflicting. A simple example of a conflict is when a graph P tries to merge into Q via an edge of Q , and Q tries to merge into P via an edge of P . Clearly, these two merges cannot be carried out simultaneously. Moreover, this example can be extended into arbitrarily long cycles.

Fortunately, these two problems can be remedied by the following simple idea. Each path tosses a fair coin. Then each path, P , is merged via its selected (reserved) element only if P tossed **tails** and Q tossed **heads**, where Q is the path of the respective element. On expectation $1/4$ of the merges will be in the “right” orientation. In our analysis, we prove that this suffices for our needs (see more details on Subsection 4.3). This completes the description of the second phase of each iteration and concludes the description of the algorithm.

⁴We note that although the graph is undirected, we keep an orientation on the edges of the paths of the path cover (so the obtained paths are directed).

1.2 Correctness and Analysis of the Algorithm

The analysis of the algorithm has two main ingredients. The first ingredient is showing that on expectation, on each iteration a constant fraction of the paths are merged into other paths (which implies that the size of the path cover decreases by a constant factor). If this is indeed the case, we call the iteration *successful*. The second ingredient is showing that after $\Theta(\log n)$ iterations, with high probability, all paths are merged into a single Hamiltonian path. To this end, we use martingale analysis and show that with high probability sufficiently many iterations are successful, and hence we obtain the desired outcome. We note that, although the algorithm uses independent coin tosses between different iterations, the success of two different iterations are random variables that may be dependent. Therefore we cannot use concentration bounds that assume the independence of the random variables (such as Chernoff's bound). Roughly speaking, the dependence comes from the fact that the constructed path cover depends on the coin tosses of previous iterations. Fortunately, this dependence is small enough and thus we can show that $\Theta(\log n)$, with high probability, the number of iterations is sufficient (Lemma 5).

For the first ingredient of the analysis, we define the notion of being a *good path*. Roughly speaking, a path is good if there are sufficiently many edges connecting its endpoints to vertices of other paths (the actual definition is more cumbersome than this, but this is essentially the property that we need). This property guarantees that any good path has many options for merging into other paths. In particular, the number of options is linear in the size of the current path cover (Lemma 3). We use this fact to show that, on any fixed iteration, a good path receives a useful reservation with constant probability (Claim 2).

Finally, we prove that there are sufficiently many good paths. Recall that at the beginning of each iteration, the paths are paired. In the algorithm analysis, we prove that for each one of the pairs of paths, (P, Q) , that were not merged in the first phase, either P or Q are good with respect to the current path-cover. We then show that consequently, this guarantees that with constant probability, a constant fraction of these paths will be merged into other paths in the second phase of the algorithm.

1.3 Adaptation of the algorithm for ORE and RK graphs

Since the family of RK graphs contains ORE graphs we, from now on, focus on RK graphs. We begin by proving some structural properties of RK graphs. One of these properties is that the vertices in RK graphs can be partitioned into 3 sets A , C , and H where all the vertices in H satisfy Dirac's condition and the subgraph induced on each one of the sets A and C , form a clique. This structure allows us to perform as in the algorithm for DIRAC graphs with the only difference that at the beginning of each iteration, we get rid of (almost) all the paths in which one endpoint is not in H . Another technicality that we need to handle is the fact that our algorithm for DIRAC graphs uses spanning trees to manage the communication within the different paths in the path cover. In RK graphs these spanning trees may not span the entire respective paths. However, we show that with a slight adaptation, it is possible to maintain communication within the paths while adding only a constant factor blow-up in the round complexity.

1.4 Other Related Work

Parallel Algorithms. As mentioned above, Dahlhaus et al. [DHK93] gave a $O(\log^4 n)$ CREW-PRAM algorithm that uses a linear number of processors to find a Hamiltonian cycle in Dirac graphs. Another generalization of Dirac graphs are *Chvátal graphs*. A graph is called a Chvátal graph if its degree sequence $d_1 \leq d_2 \leq \dots \leq d_n$ satisfies that for every $k < n/2$, $d_k \leq k$ implies that $d_{n-k} \geq n-k$. Chvátal proved (see e.g., [Bol04]) that Chvátal graphs are also Hamiltonian. In [BC76] a sequential polynomial time algorithm that finds Hamiltonian cycles in Chvátal graphs has been shown. Sárközy [Sár09] proved that a deterministic $O(\log^4 n)$ time EREW-PRAM algorithm with a polynomial number of processors that finds a Hamiltonian cycle in a η -Chvátal graphs exists. A graph is called η -Chvátal graphs if for every $k < n/2$, $d_k \leq \min\{k + \eta n, n/2\}$, it holds that $d_{n-k-\eta n} \geq n-k$, where $0 < \eta < 1$.

Distributed Algorithms with a Promise. It is known that a random $G(n, p)$ graph contains w.h.p. a Hamiltonian cycle if p is at least $(\log n + \log \log n + t(n))/n$, for any divergent function $t(n)$ [Bol11]. Thus for any such p , the problem of deciding whether the graph is Hamiltonian becomes trivial; however, finding the

Hamiltonian path or cycle, in this case, is still non-trivial. The problem of finding a Hamiltonian cycle in the distributed setting was initially studied by Levy et al. [LLP05] that provided an upper bound whose round complexity is $O(n^{3/4+\epsilon})$ that w.h.p. finds a Hamiltonian cycle given that $p = \omega(\sqrt{\log n}/n^{1/4})$. Thereafter, other upper bounds were designed in the CONGEST model (in which the message size is bounded) for dealing with various ranges of p , as described next. The algorithm of Chatterjee et al. [CFPP18] works for $p \leq \frac{c \ln n}{n^\delta}$, ($0 < \delta \leq 1$) and finds a Hamiltonian cycle w.h.p. in $\tilde{O}(n^\delta)$ rounds. For p in $\tilde{\Omega}(1/\sqrt{n})$, Turau [Tur20], provides an algorithm that finds w.h.p. a Hamiltonian cycle in $O(\log n)$ rounds. More recently, Ghaffari and Li [GL18] showed the existence of a distributed algorithm for finding a Hamiltonian cycle, w.h.p., in $G(n, d)$ for $d = C \log n$ whose round complexity is $2^{O(\sqrt{\log n})}$, where C is a sufficiently large constant.

Lower bounds in CONGEST model. It is well known that certain properties can not be decided in the CONGEST model in a number of rounds which is $o(n^2)$ [Pel00]. As mentioned above, Bachrach et al. [BCD⁺19] proved a lower bound of $\tilde{\Omega}(n^2)$ rounds for various problems in the CONGEST model, including Testing Hamiltonicity in general graphs.

1.5 Comparison with the Algorithm of Dahlhaus et al. [DHK93]

As mentioned above, our algorithm builds on ideas from the algorithm of Dahlhaus et al. [DHK93] for finding a Hamiltonian path in Dirac’s graphs. Their algorithm also proceeds in iterations such that at each iteration it first performs cycle merges, then it performs concatenation merges and finally, it performs elementary merges. However, the specific structure of their algorithm and how these merges are selected are quite different from our algorithm.

We shall demonstrate several structural differences without going into all the details of their algorithm (which is more involved than our algorithm). These differences serve us in obtaining an improved round complexity and a simpler algorithm. Thereafter we shall emphasize the specific differences that arise from the fact that our algorithm works in the CONGEST model rather than the PRAM model.

The first structural difference is that on each iteration, before their algorithm turns into performing elementary merges it first has to exhaust most of the cycle merges, which requires an inner loop of $\Theta(\log n)$ steps and thereafter it exhausts most of the concatenation merges by executing a special subroutine of Israeli and Shiloach [IS86] which returns both a vertex cover and an approximated maximum matching.

This subroutine is executed twice. One time on the subgraph induced on the endpoints of the paths in the path cover and another time on an auxiliary graph where on one side we have the set of paths and on the other side we have the set of edges composing the paths.

The reason that their algorithm exhausts the three types of merges in phases is that the progress of each phase relies on the exhaustion of the merges of the previous step.

For comparison, per iteration, our algorithm performs only one step of cycle merges and then one step in which both concatenation and elementary merges are performed simultaneously. We prove that this is sufficient to make enough progress per iteration.

Another difference is that in their algorithm, at the beginning of each iteration, every path is classified into one of two types. We are able to avoid this classification altogether and use a somewhat different classification only in the analysis.

We next list several challenges that arise specifically in the CONGEST model and in particular do not allow us to easily translate the algorithm of [DHK93] into the CONGEST model.

The first problem is that we do not have shared memory among the processors so how can we efficiently merge even a pair of paths? To this end, our algorithm maintains spanning trees, of depth 2, on each one of the paths in the constructed path cover. Therefore, initially, we have a linear (in n) number of spanning trees (and this number decreases as the algorithm progresses). We show that each edge participates in at most 2 different spanning trees and so communication within vertices of the same path can be maintained without causing congestion.

Another problem is concerned with elementary merges. Consider a path cover \mathcal{P} and an edge (u, v) on a path $P \in \mathcal{P}$. An elementary merge of a path Q into P can be performed via (u, v) only if one endpoint of Q is adjacent to u and the other is adjacent to v . However, there might be many endpoints that are adjacent to u or v , so how can we find the set of paths that can be merged via (u, v) into P without communicating too much between u and v ? As mentioned above, we show that we don’t have to find this set. Specifically, we

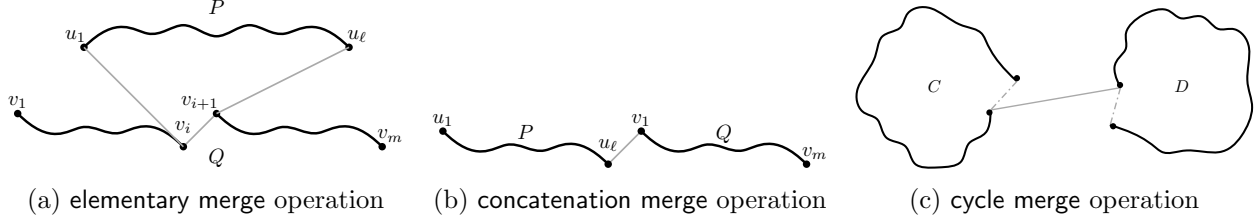


Figure 1: Path merging types.

show that when u reserves the edge (u, v) to an endpoint that is adjacent to u , picked uniformly at random, then every path receives a useful reservation with constant probability. We remark that in this case, we rely on the randomness of our algorithm while the algorithm of [DHK93] is deterministic.

Finally, we want to avoid long sequences of merges so we won't have to deal with long sequences of updates. To this end, we use the coin tosses of the vertices and perform merge operations only if they agree with the orientation defined by the coin tosses. As described above, this is also useful for avoiding conflicting merges. Consequently, the merges can be carried out simultaneously with very little and local coordination.

2 Paths-Merge Types and Paths Classification

Notation. Let $G = (V, E)$ be an undirected simple graph, where V is the vertex set, and $E \subseteq \{\{u, v\} \mid u, v \in V\}$ is the edge set. Let n denote $|V|$ and let m denote $|E|$. For a path $P = (u_1, \dots, u_\ell)$, we denote by $V(P)$ the vertex set of P , i.e., $V(P) \triangleq \{u_1, \dots, u_\ell\}$. For $v \in V$, let $N(v)$ denote the neighbors set of v in G , that is $N(v) = \{u \in V \mid \{v, u\} \in E\}$. Let $d(v)$ denote the degree of v , i.e., $d(v) = |N(v)|$. For a pair of vertices u and v , let $\delta(u, v)$ denote the length of a shortest path between u and v . We say that a set of paths in G , $\{P_i\}_{i=0}^{k-1}$, is a *path-cover* of G if its union covers the vertex set of G , that is, if $\bigcup_{i=1}^{k-1} V(P_i) = V(G)$. For a path P in G , let $d_P(v)$ denote the number of neighbours of v in P . For a path $P = (u, \dots, v)$, we refer to the vertices u and v as the *endpoints* of P .

Path Merging Types. Through the course of the algorithm's execution, the algorithm performs three kinds of path merging depending on the paths at hand: an elementary merge, a concatenation, and cycle merging (see Figure 1). These merge operations are defined as follows.

Definition 1 (Elementary merge [DHK93]). *Let $P = (u_1, \dots, u_\ell)$ and $Q = (v_1, \dots, v_m)$ be two disjoint paths. If $\{u_1, v_i\}, \{u_\ell, v_{i+1}\} \in E$, then $(v_1, \dots, v_i, u_1, \dots, u_\ell, v_{i+1}, \dots, v_m)$ is a path. If $\{u_1, v_{i+1}\}, \{u_\ell, v_i\} \in E$, then $(v_1, \dots, v_i, u_\ell, \dots, u_1, v_{i+1}, \dots, v_m)$ is a path. In either case, we say that we merged P into Q along the edge $\{v_i, v_{i+1}\}$. We call this step an elementary merging operation.*


Definition 2 (Concatenation [DHK93]). *Let $P = (u_1, \dots, u_\ell)$ and $Q = (v_1, \dots, v_m)$ be two disjoint paths. If there is an edge connecting an endpoint of P (either u_1 , or u_ℓ) and an endpoint $v \in \{v_1, v_m\}$ of Q , then we can use any of these edges to concatenate P and Q and say that we concatenated P to Q along vertex v . We call this operation a concatenation.*

Definition 3 (Cycle Merging [DHK93]). *Let C and D be two disjoint cycles. If there is an edge connecting a vertex from C and a vertex from D , we can use this edge to get a path that passes through all the vertices of C and D . We call this operation a cycle merging.*

Paths Classification. For the sake of the analysis of the algorithm we classify the paths that the algorithm maintains as *sociable paths* (à la Dahlhaus et al. [DHK93]) or as *cycled paths*, as follows.

Definition 4 ([DHK93]). *Let $P = (u, \dots, v)$ be a path in a graph G . We say that the path P is sociable if*

$$d_P(u) + d_P(v) + 1 \leq |V(P)|.$$

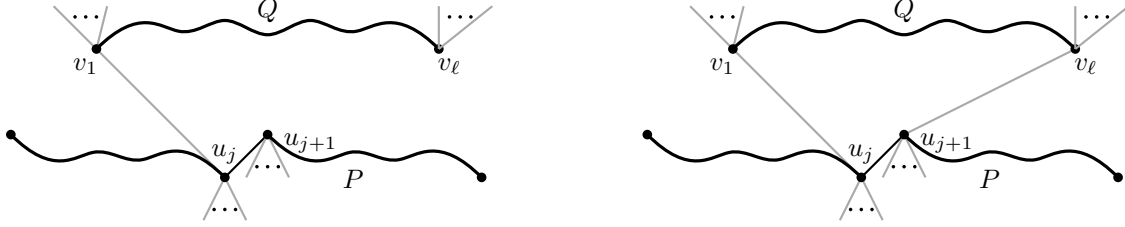

(a) The vertex u_j reserves the edge $\{u_j, u_{j+1}\}$ for v_1 (an endpoint of Q). However, $\{u_j, u_{j+1}\}$ is non-useful for Q since v_l (the other endpoint of Q) is not connected with an edge to u_{j+1} . (b) The vertex u_j reserves the edge $\{u_j, u_{j+1}\}$ for v_1 (an endpoint of Q). The edge $\{u_j, u_{j+1}\}$ is useful for Q since v_l is connected with an edge to u_{j+1} and so Q can be merged into P via $\{u_j, u_{j+1}\}$.

Figure 2: Useful versus non-useful reservations.

Definition 5 (Cycled Path). Let $P = (u_1, \dots, u_\ell)$ be a path in a graph G . We say that the path P is cycled if $\{u_1, u_\ell\} \in E$ or if there exists an edge of P , $\{u_i, u_{i+1}\}$ such that both $\{u_1, u_{i+1}\}, \{u_i, u_\ell\} \in E$.

It is easy to see that if a path P is cycled, then the subgraph induced on $V(P)$ is Hamiltonian. We shall use the following basic claim.

Claim 1. Let $P = (u_1, \dots, u_\ell)$ be a path that is not cycled. Then P is sociable.

Proof. We prove the contra-positive claim. Assume the P is not sociable. Then $d_P(u_\ell) > (|V(P)| - 1) - d_P(u_1)$.

Consider the $d_P(u_1)$ vertices on P , u_j , that u_1 is connected to. For each such u_j , if u_ℓ is connected to u_{j-1} then it follows that P is cycled. Otherwise, $d_P(u_\ell)$ is at most $(|V(P)| - 1) - d_P(u_1)$ in contradiction to our assumption. \square

3 The Algorithm

In this section, we list our distributed algorithm (see Algorithm 1) without giving all the details of implementation. We then prove its correctness in Section 4 and in Section 5 we discuss in more detail how the algorithm is implemented in the CONGEST model. We establish the following theorem.

Theorem 1. There exists a distributed algorithm for computing a Hamiltonian cycle in DIRAC graphs that runs in $O(\log n)$ rounds in the CONGEST model. The algorithm succeeds with high probability.

3.1 Listing of the Distributed Algorithm

Our algorithm begins with finding an initial path-cover of the graph in which each path is of length at least 2, denoted by \mathcal{P}_0 . Then the algorithm proceeds in $\Theta(\log n)$ iterations (in which the size of the path-cover decreases by a constant fraction with constant probability).

We denote the path-cover at the beginning of the i -th iteration by \mathcal{P}_i . At the beginning of each iteration, the paths in \mathcal{P}_i are partitioned into pairs. Each pair of paths (P, Q) such that P and Q are connected with an edge, and both P and Q are cycled are merged (Step 5). We denote by \mathcal{P}_i^a the resulting path-cover.

Thereafter, each edge and endpoint of a path in \mathcal{P}_i^a reserves itself to an endpoint of another path in \mathcal{P}_i^a , which is picked uniformly at random.

Then, each path P in the path-cover selects out of the elements that were reserved to it (i.e., either an edge or an endpoint) a single element, ℓ , such that P can be merged to another path via ℓ (we refer such elements as *useful* for P).

Each path, P , tosses a random fair coin, y_P . Next, all the merges are performed simultaneously where a path P is merged via its selected element, ℓ , to a path Q only if $y_P = \mathbf{tails}$ and $y_Q = \mathbf{heads}$.

Remark 1. When a path P is merged to a path Q where $y_P = \text{tails}$ and $y_Q = \text{heads}$, the orientation of Q is kept, and the orientation of P may be reversed to maintain consistency with the orientation of Q . For example, if $P = (y_1, \dots, y_\ell)$ is merged to Q via $\{u, v\}$ where the orientation of $\{u, v\}$ is from u to v and y_1 is connected to v and y_ℓ is connected to u then the orientation of P is reversed after the merge.

4 Correctness of the Algorithm

In this section, we prove the correctness of our algorithm.

We begin by giving a lower bound on the number of possible merges for each path in the path-cover. We then use this bound to give a lower bound on the expected number of merges that are carried out in each iteration. Finally, we prove that with high probability after $\Theta(\log n)$ iterations all paths are merged into a single path.

4.1 Number of Possible Merges for Good Paths

In this section, we provide the proof of Lemma 2 which gives a lower bound on the number of possible ways a path P can be merged into a path Q . We then define the notion of *good* paths (Definition 7). Roughly speaking, a path is good if its endpoints are neighbors of sufficiently many vertices that belong to other paths in the path cover. Thereafter, we use Lemma 2 to give a lower bound on the total number of ways a good path, P , can be merged into any other path in the path-cover (Lemma 3).

Let $P = (u, \dots, v)$ and $Q = (a, \dots, b)$ be disjoint paths in G . Let $M(P, Q)$ denote the number of edges along which one can merge P into Q via elementary merging plus the number of vertices along which one can concatenate P to Q (see Definitions 1 and 2, respectively). Let $d(P, Q)$ denote the number of endpoints of Q connected with an edge to an endpoint of P .

We begin with extending the following lemma from [DHK93].

Lemma 1 (Lemma. 5.2.5 [DHK93], restated). *Let $P = (u, \dots, v)$ and Q be disjoint paths in G . If $d(P, Q) = 0$, then the number of edges along which one can merge P into Q via elementary merging operations is at least $d_Q(u) + d_Q(v) - |V(Q)| + 1$.*

To achieve better round complexity, our algorithm performs concatenation and elementary merges simultaneously. To this end, we prove the following lemma, which extends Lemma 1 so that it also applies to cases where $d(P, Q) > 0$.

Lemma 2. *Let $P = (u, \dots, v)$ and $Q = (a, \dots, b)$ be disjoint paths in G such that $|V(P)|, |V(Q)| \geq 2$. Then,*

$$M(P, Q) \geq d_Q(u) + d_Q(v) - |V(Q)| + 1. \quad (1)$$

Proof. We consider two cases: (1) $d(P, Q) = 0$, and (2) $d(P, Q) > 0$.

The case where $d(P, Q) = 0$ follows from Lemma 1.

Let us assume that $d(P, Q) = 1$, and that w.l.o.g. one of the endpoints of P is adjacent to a . We add a new vertex a' and a new edge $\{a', a\}$ to Q . Let Q' denote the resulting path. Now, paths P and Q' satisfy the conditions of Lemma 1, i.e., $d(P, Q') = 0$. It holds that $M(P, Q') = M(P, Q) - 1$ since by extending the path Q we eliminate a single possible concatenation operation while not changing the possible merging operations. Now, due to the first case of this proof and since $d_{Q'}(u) = d_Q(u)$ and $d_{Q'}(v) = d_Q(v)$ we obtain that

$$\begin{aligned} d_{Q'}(u) + d_{Q'}(v) - |V(Q) \cup \{a'\}| + 1 &\leq M(P, Q') \Leftrightarrow \\ d_Q(u) + d_Q(v) - |V(Q)| - 1 + 1 &\leq M(P, Q) - 1, \end{aligned}$$

as required. For the case where $d(P, Q) = 2$ we simply apply the previous case twice. The lemma follows. \square

We next give a lower bound on the number of merging operations which applies for a subset of paths in the path cover. We shall use the following definition.

Algorithm 1: Finding a Hamiltonian path in a Dirac graph.

Input: A Dirac graph $G = (V, E)$.

Invariant: The algorithm maintains a path-cover \mathcal{P}_i for every $i \geq 0$. The path-cover \mathcal{P}_{i+1} is computed from \mathcal{P}_i via elementary merges, cycle merges and concatenation merges operations.

Output: $\mathcal{P}_{\Theta(\log n)}$ is a Hamiltonian path. w.h.p. // For the exact constant within the Θ notation we refer the reader to Lemma 5.

- 1 Compute a path-cover, \mathcal{P}_0 in the graph such that each path is of size at least 2.
 - 2 **for** $i \leftarrow 0$ **to** $\ell = \Theta(\log n)$ **do**
 - 3 Pair all paths (except for at most one) and let \mathcal{I}_i denote the set of these pairs of paths.
 - 4 Let $\mathcal{L}_i \subseteq \mathcal{I}_i$ denote the set of paired paths that have an edge between them and for which both paths are cycled.
 - 5 Perform cycle merges on all pairs in \mathcal{L}_i . // see Definition 3
 - 6 Let \mathcal{P}_i^a denote the current path-cover
 - 7 For every $v \in V$ let $D_i(v)$ denote the subset of endpoints of paths in \mathcal{P}_i^a , u , such that $\{u, v\} \in E$
 - 8 **for every** $P \in \mathcal{P}_i^a$ where $P = (u_1, \dots, u_\ell)$ **do**
 - 9 Every u_j for $j \in \{1, \dots, \ell - 1\}$ picks an endpoint v u.a.r. from $D_i(u_j)$ and reserves the edge (u_j, u_{j+1}) for v .
 - 10 Additionally, each endpoint of P , v , reserves itself to an endpoint which is picked u.a.r. from $D_i(v)$.
 - 11
$$y_P \leftarrow \begin{cases} \text{heads,} & \text{w.p. } 1/2, \\ \text{tails,} & \text{o.w.} \end{cases}$$
 - 12 $M_i \leftarrow \emptyset$
 - 13 **for every** $P \in \mathcal{P}_i^a$ **do**
 - 14 We say that an endpoint or an edge, x , is useful for P (w.r.t. \mathcal{P}_i^a) if P can be concatenated or merged along x to another path in \mathcal{P}_i^a .
 - 15 Let $S_i(P)$ denote the set of elements reserved for the endpoints of P in Steps 8-10 which are also *useful* for P .
 - 16 P picks arbitrarily one of the elements in $S_i(P)$ (assuming it is not empty) and adds it to M_i .
 - 17 Perform concatenation merges and elementary merges with accordance to M_i and the y_P variables: a path P_1 merges into a path P_2 if there is a corresponding merge operation in M_i and if $y_{P_1} = \text{tails}$ and $y_{P_2} = \text{heads}$. // see Definitions 1, 2
 - 18 **return** \mathcal{P}_ℓ .
-

Definition 6. Let \mathcal{P} be a path cover and let $A(\mathcal{P})$ denote the set of paths, $P = (u, \dots, v)$, in \mathcal{P} such that there exists a path $P' \in \mathcal{P}$ for which $|V(P')| \geq |V(P)|$ and $d_{P'}(u) + d_{P'}(v) = 0$.

In words, $A(\mathcal{P})$ is the set of paths, $P \in \mathcal{P}$ for which there exists another path, $P' \in \mathcal{P}$, which is not shorter than P and for which the endpoints of P are not adjacent to any of the vertices composing P' . We next define the notion of *good path*.

Definition 7 (good path). Let \mathcal{P} be a path cover. A path $P \in \mathcal{P}$ is good (w.r.t. \mathcal{P}) if it is sociable or in $A(\mathcal{P})$.

The following lemma gives a lower bound on the number of merging operations for any path which is good. In the proof of the lemma, we extend ideas from Corollary 5.2.6 and Lemma 5.2.7 of Dahlhaus et al. [DHK93]. Our extension allows us to drop the stringent requirement of Dahlhaus et al. [DHK93] that the endpoints of P are not adjacent to endpoints of any other path in the path cover. This allows us to support the execution of both concatenations and elementary merging operations simultaneously.

Lemma 3. Let \mathcal{P} be a path-cover of G . For $P \in \mathcal{P}$ define $M(P) \stackrel{\text{def}}{=} \sum_{Q \in \mathcal{P} \setminus \{P\}} M(P, Q)$. Then, for every good path, $P \in \mathcal{P}$ it holds that $M(P) \geq |\mathcal{P}|$.

Proof. Let $P = (u, \dots, v)$. We first consider the case in which P is sociable. Namely, the case in which $d_P(u) + d_P(v) - |V(P)| + 1 \leq 0$. By Lemma 2,

$$\begin{aligned} M(P) &\geq \sum_{Q \in \mathcal{P} \setminus \{P\}} (d_Q(u) + d_Q(v) - |V(Q)| + 1) \\ &= \left(\sum_{Q \in \mathcal{P}} (d_Q(u) + d_Q(v) - |V(Q)| + 1) \right) \\ &\quad - (d_P(u) + d_P(v) - |V(P)| + 1). \end{aligned}$$

Since $\sum_{Q \in \mathcal{P}} (d_Q(u) + d_Q(v)) = d(u) + d(v) \geq n$ and $\sum_{Q \in \mathcal{P}} |V(Q)| = n$ it follows that

$$\sum_{Q \in \mathcal{P}} (d_Q(u) + d_Q(v) - |V(Q)| + 1) \geq |\mathcal{P}|. \quad (2)$$

Thus, $M(P) \geq |\mathcal{P}| - (d_P(u) + d_P(v) - |V(P)| + 1)$. Therefore, the claim follows from the fact that P is sociable.

We now consider $P \in A(\mathcal{P})$. Let P' denote the path in \mathcal{P} such that $|V(P')| \geq |V(P)|$ and $d_{P'}(u) + d_{P'}(v) = 0$.

$$\begin{aligned} \sum_{Q \in \mathcal{P} \setminus \{P, P'\}} M(P, Q) &\geq \sum_{Q \in \mathcal{P} \setminus \{P, P'\}} (d_Q(u) + d_Q(v) - |V(Q)| + 1) \\ &= \left(\sum_{Q \in \mathcal{P}} (d_Q(u) + d_Q(v) - |V(Q)| + 1) \right) \\ &\quad - (d_P(u) + d_P(v) - |V(P)| + 1) \\ &\quad - (d_{P'}(u) + d_{P'}(v) - |V(P')| + 1). \end{aligned}$$

Since $d_{P'}(u) + d_{P'}(v) = 0$ and $d_P(u) + d_P(v) \leq 2(|V(P)| - 1)$ it follows that $(d_P(u) + d_P(v) - |V(P)| + 1) + (d_{P'}(u) + d_{P'}(v) - |V(P')| + 1) \leq 0$.

Thus by Equation (2), $M(P) \geq \sum_{Q \in \mathcal{P} \setminus \{P, P'\}} M(P, Q) \geq |\mathcal{P}|$, as desired. This concludes the proof of the lemma. \square

4.2 Expected Number of Merges

In this section, we prove Claim 3 which states that the expected number of merges of each iteration is sufficiently large.

More specifically, for a fixed iteration i , we prove that if the number of cycle-merges performed at Step 5 is below some threshold (specifically if $|\mathcal{L}_i| \leq |\mathcal{P}_i|/12$), then the expected size of M_i (the set of concatenation merges and elementary merges added in Step 16) is a constant fraction of the size of \mathcal{P}_i . We first prove the following claim which gives a lower bound on the probability that a good path receives a useful reservation.

Claim 2. Fix an iteration i . For any P which is good with respect to $A(\mathcal{P}_i^a)$, it holds that P receives a useful reservation for at least one element with probability at least $1/3$.

Proof. Fix an iteration i and let P be a good path with respect to $A(\mathcal{P}_i^a)$. Let F denote the set of edges and endpoints that P can be merged to (see Definitions 1, 2) in \mathcal{P}_i^a . By Lemma 3, it holds that $|F| \geq |\mathcal{P}_i^a|$. Let $x = 2|\mathcal{P}_i^a|$ denote the total number of endpoints of paths in \mathcal{P}_i^a . Since every edge and endpoint in F is reserved for P with a probability of at least $1/x$, the probability that P received at least one reservation of an element in F is at least $1 - (1 - 1/x)^{|F|}$. since $(1 - 1/x)^{|F|} \leq (1 - 1/(2|\mathcal{P}_i^a|))^{|P_i^a|} \leq 1/\sqrt{e}$, it holds that this probability is at least $1/3$. \square

Claim 3. Fix an iteration i . If $\mathcal{L}_i \leq |\mathcal{P}_i|/12$ then $\mathbb{E}(|M_i|) \geq |\mathcal{P}_i|/36$.

Proof. We first observe that in every pair $(P, Q) \in \mathcal{I}_i \setminus \mathcal{L}_i$ at least one path is good with respect to \mathcal{P}_i^a . To see this, observe that there are two cases. The first case is that P and Q are not connected with an edge. This implies that at least one of them is in $A(\mathcal{P}_i^a)$. The second case is that at least one of them is not cycled, which by Claim 1 implies that at least one of them is sociable, as desired. We next lower bound the number of pairs in $\mathcal{I}_i \setminus \mathcal{L}_i$. Since the number of pairs is at least $(|\mathcal{P}_i| - 1)/2 \geq |\mathcal{P}_i|/4$ and $|\mathcal{L}_i| < |\mathcal{P}_i|/12$ it holds that $|\mathcal{I}_i \setminus \mathcal{L}_i| \geq |\mathcal{P}_i|/4 - |\mathcal{P}_i|/12 = |\mathcal{P}_i|/6$.

Therefore, by Claim 2, the expected size of merges that are added to M_i is at least $|\mathcal{I}_i \setminus \mathcal{L}_i|/2 \cdot (1/3) \geq |\mathcal{P}_i|/36$, as required. \square

4.3 Progress of Each Iteration

In this section, we prove the following lemma.

Lemma 4. Fix an iteration i of Algorithm 1. With probability at least $1/288$, $|\mathcal{P}_{i+1}| \leq (1 - 1/288)|\mathcal{P}_i|$.

Proof. Fix an iteration i . If $\mathcal{L}_i \geq |\mathcal{P}_i|/12$ then at least $|\mathcal{P}_i|/12$ paths of \mathcal{P}_i are merged and so $|\mathcal{P}_{i+1}| \leq (1 - 1/12)|\mathcal{P}_i|$, as desired.

Otherwise, by Claim 3, $\mathbb{E}(|M_i|) \geq |\mathcal{P}_i|/36$. Consider a merge operation in M_i in which path P is merged into path Q . This merge is carried only if $y_P = \mathbf{tails}$ and $y_Q = \mathbf{heads}$, which happens with probability $1/4$. Thus the expected number of paths that are merged into another path in Step 17 is at least $|\mathcal{P}_i|/(36 \cdot 4) = |\mathcal{P}_i|/144$.

Since the number of paths that can be merged is at most $|\mathcal{P}_i|$ it holds that with probability at least $1/(2 \cdot 144) = 1/288$ at least $|\mathcal{P}_i|/288$ paths are merged, as desired (assume otherwise and reach a contradiction to the lower bound on the expectation of the number of merged paths as $|\mathcal{P}_i| \cdot (1/288) + (|\mathcal{P}_i|/288) \cdot (1 - 1/288) < 2|\mathcal{P}_i|/288 = |\mathcal{P}_i|/144$). \square

4.3.1 Number of Successful Iterations

We say that an iteration i is *successful* if $|\mathcal{P}_{i+1}| \leq (1 - 1/288)|\mathcal{P}_i|$. By Lemma 4, the probability of success p_i is at least $\eta = 1/288$, for every iteration $i \geq 1$.

In this section we prove if the for-loop in Step 2 of Algorithm 1 performs $\frac{8}{\eta^2} \ln n$ iterations, then at least $4 \log_{1/(1-\eta)} n$ of these iterations are successful w.h.p. Since the algorithm starts with at most $n/2$ paths it follows that the path that is returned at the end of the algorithm is Hamiltonian w.h.p.

The proof of our main theorem (Theorem 1) follows directly from the following lemma.

Lemma 5. Out of the $\frac{8}{\eta^2} \ln n$ iterations that Algorithm 1 performs in Step 2, at least $4 \log_{1/(1-\eta)} n$ are successful w.p. at least $1 - \frac{1}{n}$, i.e., the path returned in Step 18 is Hamiltonian w.h.p.

Martingales and Azuma-Hoeffding Inequality [MU05]. A sequence of random variables Z_0, Z_1, \dots is called *martingale* if for all $n \geq 0$ it holds: $\mathbb{E}(|Z_n|) < \infty$, and $\mathbb{E}(Z_{n+1} | Z_0, \dots, Z_n) = Z_n$. The following theorem states a simplified version of the Azuma-Hoeffding Inequality.

Theorem 3 (Coro. 12.5 [MU05], restated). Let Z_0, Z_1, \dots a martingale. If there is $c \geq 0$ for all $k \geq 1$ such that $|Z_k - Z_{k-1}| \leq c$. Then, for all $t \geq 1$ and $\lambda \geq 0$, $\Pr(Z_t - Z_0 \geq \lambda c \sqrt{t}) \leq e^{-\lambda^2/2}$.

Application of the Azuma-Hoeffding Inequality. In the following we bound the number of successful iterations (from above): we first define a sequence of random variables Z_0, Z_1, \dots , and show that it is a martingale. We then apply the Azuma-Hoeffding Inequality and show that in $\Theta(\log n)$ iterations there are $\Theta(\log n)$ successful iterations, that is, Algorithm 1 is successful and returns a Hamiltonian path.

For $i \geq 1$, let Y_i be the random variable that takes the value $-1/p_i + 1$ if the i -th iteration is successful and takes the value 1 otherwise (note that Y_i can take negative values). Let $Y_0 \triangleq 1$, and let $Z_i \triangleq \sum_{j=0}^i Y_j$, then $\mathbb{E}(Z_k | Z_0, \dots, Z_k) = Z_{k-1} + 1 \cdot (1 - p_k) + (1 - 1/p_k) \cdot p_k = Z_{k-1}$, and $|Z_k - Z_{k-1}| \leq \frac{1}{\eta}$ for every $k \geq 1$. Hence, the sequence Z_0, Z_1, \dots is indeed a martingale. Applying Theorem 3 with $\lambda = \frac{\eta}{2}\sqrt{t}$, $c = \frac{1}{\eta}$, and $t = \frac{8}{\eta^2} \ln n$ yields $\Pr\left(Z_t - 1 \geq \frac{\eta}{2}\sqrt{t} \cdot \frac{1}{\eta} \cdot \sqrt{t}\right) \leq \frac{1}{n}$. Hence, $\Pr\left(Z_t - 1 < \frac{t}{2}\right) \geq 1 - \frac{1}{n}$. Let s denote the number of successful iterations. Since for every $i \geq 1$ it holds that $\frac{1}{p_i} \leq \frac{1}{\eta}$, then $Z_t - 1 \geq (t - s) + s\left(1 - \frac{1}{\eta}\right) = t - \frac{s}{\eta}$. Thus, we obtain that $t - \frac{s}{\eta} < \frac{t}{2}$ w.p. at least $1 - \frac{1}{n}$. We conclude that with probability at least $1 - \frac{1}{n}$, the number of successful iterations is at least $t \cdot \eta - \frac{t\eta}{2} = \frac{\eta}{2} \cdot \ln n \geq 4 \log_{1/(1-\eta)} n$, where the last inequality follows since $\ln(x) \geq 1 - \frac{1}{x}$, and since $\log_{1/(1-\eta)} n = \frac{\ln n}{\ln \frac{1}{1-\eta}}$, $\ln\left(\frac{1}{1-\eta}\right) \geq 1 - \frac{1}{1-\eta} = \eta$, as required.

5 A Detailed Description of the Distributed Implementation of Algorithm 1

In this section, we elaborate more on how each step of the algorithm is implemented in the distributed CONGEST model. We begin with describing the construction and maintenance of spanning trees which our algorithm uses implicitly.

5.1 Spanning Trees

Algorithm 1 implicitly uses spanning trees for coordination of the paths and coordination of vertices within a path. In this section, we describe the spanning trees the algorithm uses and how it constructs and maintains them. We begin with the following basic claim.

Claim 4. *Let $G = (V, E)$ be a graph. Then for any pair of vertices u, v such that $d(u) + d(v) \geq n$ it holds that $\delta(u, v) \leq 2$.*

Proof. Let $G = (V, E)$ be a graph, and let $v \in V$ and $u \in V$ be a pair of vertices in G . If $u \in N(v)$ then the claim follows. Otherwise, since $d(u) + d(v) \geq n$ and $u \notin N(u) \cup N(v)$ it has to be that $N(u) \cap N(v) \neq \emptyset$. The claim follows. \square

Corollary 1. *The diameter of a Dirac's graph is at most 2.*

5.1.1 The Global Spanning Tree

The first tree the algorithm uses is a tree that spans the entire graph. This tree remains fixed throughout the entire execution of the algorithm. We first pick the leader of the graph to be the vertex whose identifier is minimal. This takes $O(D)$ rounds, where D denotes the diameter of the graph (which is a constant in our case). Once the leader has been selected, a spanning tree of the graph is constructed in $O(D)$ rounds. By Corollary 1 the spanning tree has depth at most 2.

The global spanning tree is used implicitly for pairing the paths in Step 3 (see Section 5.3 for more details).

5.1.2 Maintaining a Spanning Tree for Each Path in \mathcal{P}_i

Algorithm 1 also implicitly uses spanning trees of depth at most 2 for spanning each one of the paths in the path-cover.

Specifically, each iteration i starts such that each path $P \in \mathcal{P}_i$ has a spanning tree (of depth at most 2). We denote the spanning tree corresponding to P by $T(P)$. The root of $T(P)$ is the leader of P which is defined by the following process.

Initially, the length of each path in \mathcal{P}_0 is constant and so the leader of each path can be selected to be the identifier of an arbitrary vertex in the path.

When path P_1 is merged into path P_2 the new leader of the new (merged) path P' is taken to be the leader of P_2 . By using $T(P_1)$ all vertices in P_1 are notified with the id of the new leader.

The spanning-tree $T(P')$ is then constructed as follows. Let r denote the leader of P' . Each vertex v in P' which is not a neighbor of r sends the id of r to all its neighbors. In response, each $u \in N(v)$ sends to v whether u is a neighbor of r or not. Then v picks arbitrarily $w \in N(v) \cap N(r)$ to be its parent and notifies w about it.

Consider any P and any e which is an edge of $T(P)$. Observe that e has at least one of its endpoints in P (either it is an edge incident to the root or it is an edge which is incident to the leaves of the tree). Therefore each edge can belong to at most 2 different spanning trees (of paths of the current path-cover).

Hence, all merges in Step 5 as well as for Step 17 can be carried out simultaneously without creating congestion.

5.2 Finding the Initial path-cover (Step 1)

In Step 1, the algorithm computes an initial path-cover \mathcal{P}_0 such that each path consists of at least two vertices. This path-cover is constructed as follows.

First Step. At the first step, we find a maximal matching of the graph (by e.g. running Luby's [Lub86] algorithm for finding maximal independent set on the line graph of G w.h.p.). Let F denote the set of edges of the matching of this first step. Let F' denote the set of vertices that were matched in the first step.

Second Step. In the next step, we remove all edges in $F' \times F'$ and find again a maximal matching on the resulting graph. Let S denote the set of edges of this second matching. Let S' denote the set of vertices that were not matched in the first step but were matched in the second step.

Claim 5. *The subgraph induced by the edges in $F \cup S$ is a path-cover of G in which each path consists of at least 2 and at most 4 vertices.*

Proof. We first prove that every vertex in the graph is in $F' \cup S'$ (which implies that the length of each path in the path-cover is at least 2). Assume towards contradiction that there exists $v \in V \setminus (F' \cup S')$. Since v was not matched in the first step we conclude that all its neighbors are in F' (by the maximality of the matching). Thus $|F'| \geq n/2$ (since $d(v) \geq n/2$). Since v was not matched in the second step we conclude that all its neighbors were matched again in the second step. Each one of these neighbors had to be matched in the second step to a vertex not in F' (since we removed the edges in $F' \times F'$), thus, we conclude that $|S'| \geq n/2$. Thus $|F' \cup S'| \geq n$, a contradiction.

To prove an upper bound on the length of each path we first observe that every vertex $v \in S'$ has to be an endpoint of a path (since it belongs only to a single edge in $F \cup S$). Thus the inner vertices of paths are only from F' . Since each vertex in F' is matched only to a single vertex in F' (when considering both the first and the second matching) it holds that any path can contain at most 4 vertices, as desired. \square

5.3 Pairing the Paths (Step 3)

The pairing of the paths is performed by using the global spanning tree (see Section 5.1.1). More specifically, each leader of a path sends up the tree its identifier. The vertices in the middle layer of the tree pair up all the paths from which they received a message except for at most one (depending on the parity). The leftovers (namely, unpaired paths) are sent up to the root which pairs them and sends them back to the leaves.

5.4 Selecting the Merge Operations (Steps 8- 16)

We assume that during the entire execution of the algorithm, every vertex v knows to which path it belongs in the current path-cover, and for every $u \in N(v)$, v knows to which path u belongs and whether u is an endpoint of a path.

This can be implemented by letting each vertex send updates to its neighbors after performing each one of the merging steps (i.e., Steps 5 and 17). Therefore, we may assume that every $v \in V$ knows $D_i(v)$ at Step 10.

We next describe how the merging operations are selected. For every $P \in \mathcal{P}_i$ where $P = (u_1, \dots, u_\ell)$ every u_j for $j \in \{1, \dots, \ell - 1\}$ picks u.a.r. an endpoint $v \in D_i(u_j)$ and reserves the edge (u_j, u_{j+1}) for v . Let Q denote the path of v . The vertex u_j sends the identity of Q and v to u_{j+1} and if the other endpoint of Q , w is in $D_i(u_{j+1})$, then u_{j+1} notifies w that (u_j, u_{j+1}) has been reserved for Q .

Similarly, each endpoint of P , v , picks u.a.r. a vertex $w \in D_i(v)$ and sends w its identity and a notification of a reservation.

Therefore each edge and an endpoint of a path in \mathcal{P}_i is reserved for at most one path in \mathcal{P}_i .

Note that it might be the case that an edge e is reserved for P although P can not be merged via e to another path. However, by construction, in this case, the endpoints of P are not notified about the reservation of e .

By Step 16, each path in \mathcal{P}_i adds to M_i at most one merging operation (which corresponds to one of the reservations it received).

Specifically, for each $P \in \mathcal{P}_i$, after receiving the reservations, the endpoints of P send up the tree $T(P)$ one of the reservations they received. The leader then picks one reservation and sends its details down the tree $T(P)$.

5.5 Putting Things Together

Lemma 5 states that within $O(\log n)$ rounds w.h.p. a Hamiltonian path is found. We showed in Section 5 that our algorithm can be implemented in the CONGEST model. In order to get a Hamiltonian cycle from the found Hamiltonian path we observe that the endpoints of the found Hamiltonian path, u , and v , satisfy that $d(u) + d(v) \geq n$ (this is true for both DIRAC and ORE graphs). Claim 1 implies that this computed Hamiltonian path is cycled. In turn, it can be transformed into a Hamiltonian cycle in a constant number of rounds. This observation is formalized in the following claim.

Claim 6. *Let $P = (u, \dots, v)$ denote a Hamiltonian path computed by Algorithm 1. If $d(u) + d(v) \geq n$, then P can be transformed into a Hamiltonian cycle in a constant number of rounds in the CONGEST model.*

This concludes the proof of Theorem 1.

6 Rahman-Kaykobad (RK) Graphs

A graph family that generalizes Ore graphs was introduced by Rahman and Kaykobad [RK05] which we refer to as RK *graphs*. RK graphs are defined as follows.

Definition 8 ([RK05]). *Let $G = (V, E)$ be a connected graph with n vertices. We say that G is an RK graph if for all pairs of distinct nonadjacent vertices $u, v \in V$ it holds that $d(u) + d(v) + \delta(u, v) \geq n + 1$.*

For every RK graph, Rahman and Kaykobad [RK05] showed that a Hamiltonian path exists.

Theorem 4 (Thm. 1.6 [RK05], restated). *Let $G = (V, E)$ be an RK graph. Then G has a Hamiltonian path.*

In this section, we design and analyze a distributed CONGEST algorithm that finds a Hamiltonian path in RK graphs. We start by showing several structural properties of RK graphs and then describe how to adapt Algorithm 1 so that it finds a Hamiltonian path also in RK graphs. We note that similarly to DIRAC graphs, in case the output of the algorithm for a given instance satisfies the condition of Claim 6 then the resulting path can be turned into a Hamiltonian cycle. This is always the case for ORE graphs, as formalized in the following theorem.

Theorem 2. *There exists a distributed algorithm for computing a Hamiltonian cycle in ORE graphs and a Hamiltonian path in RK graphs that runs in $O(\log n)$ rounds in the CONGEST model. The algorithm succeeds with high probability.*

6.1 Structural Properties of RK graphs

Throughout this section we assume w.l.o.g. that there is a vertex $v^* \in V$ such that $d(v^*) < \frac{n}{2}$ (otherwise, this is a DIRAC graph).

Notation. Let $G = (V, E)$ be an RK graph. Let $v^* \in V$ be such that $d(v^*) < \frac{n}{2}$. We define $A \triangleq \{u \in V \mid \delta(u, v^*) = 1\}$, $B \triangleq \{u \in V \mid \delta(u, v^*) = 2\}$, and $C \triangleq \{u \in V \mid \delta(u, v^*) = 3\}$. Let $H \triangleq \{u \in V \mid d(u) \geq \frac{n}{2}\}$. We refer to the vertices in H as “heavy”. Let $\hat{A} \triangleq A \setminus H$, $\hat{B} \triangleq B \setminus H$, and $\hat{C} \triangleq C \setminus H$. Let $\hat{A}_+ \triangleq \hat{A} \cup \{v^*\}$.

Claim 7. *The set $\hat{B} \cap V$ is empty, i.e., all vertices in B are in H .*

Proof. Let $u \in B$. By Definition 8 and the definition of the set B it is implied that $d(v^*) + d(u) \geq n - 1$. Since $d(v^*) < \frac{n}{2}$, it follows that $d(u) \geq n - 1 - d(v^*) > n - 1 - \frac{n}{2} = \frac{n}{2} - 1$, i.e., $d(u) \geq \frac{n}{2}$, as required. \square

In the following claim, we argue that the subgraph induced on C is a clique, and the subgraph induced on $B \cup C$ contains a fully bipartite graph between B and C .

Claim 8. *For each $c \in C$ it holds that $N(c) = (B \cup C) \setminus \{c\}$.*

Proof. By Definition 8 and the definition of the sets A and C it is implied that $d(v^*) + d(c) \geq n + 1 - 3 = n - 2$. Since $|A| = d(v^*)$, it follows that $d(c) \geq n - 2 - |A|$. On the other hand, the vertex c is not a neighbor of itself, nor of v^* , hence the degree of c can be bounded from above, as follows $d(c) \leq n - 1 - 1 - |A| = n - 2 - |A|$. Hence, $d(c) = n - 2 - |A|$. Put differently, the neighbors of each vertex $c \in C$ are all of the rest of the vertices in V which are not in A , not v^* , and not c itself, i.e., the neighbors of c are all the vertices in $(B \cup C) \setminus \{c\}$, as required. \square

A corollary of Claim 8 is that the vertex set V of an RK graph $G = (V, E)$ can be partitioned to the corresponding A, B , and C sets.

Corollary 2. $V = \{v^*\} \cup A \cup B \cup C$.

Claim 9. *The subgraph induced on \hat{A}_+ is a clique.*

Proof. Let us assume towards a contradiction that there are two vertices $a_1, a_2 \in \hat{A}_+$ such that $\delta(a_1, a_2) = 2$ (obviously, $\delta(a_1, a_2) \leq 2$, since v^* is connected to all the vertices in A). Definition 8 implies that $d(a_1) + d(a_2) \geq n + 1 - 2 = n - 1$. Hence, it cannot be that both a_1 and a_2 have degrees that are strictly less than $\frac{n}{2}$, as required. \square

6.2 Spanning sub-graphs

Before we describe how Algorithm 1 can be adapted to work for RK graphs, we first describe how we modify the spanning trees (see Section 5.1) to support paths in which not all vertices have a degree of at least $n/2$.

By the proof of Claim 4 for any pair of vertices u, v in H it holds that $\delta(u, v) \leq 2$. Therefore it is possible to maintain for each path P in the path cover a tree that spans the vertices in $P \cap H$ while each edge is participating in at most 2 different trees.

In addition, Claim 9 and Claim 8 imply that there is a spanning tree of depth 1 for the vertices in $P \cap \hat{A}_+$ and a spanning tree of depth 1 for the vertices in $P \cap \hat{C}$.

Therefore, the merges can be carried out just as before while having a constant factor blow-up in the round complexity. Specifically, the updates are performed in three phases, where there is a phase for the vertices of each one of the sets: H , \hat{A}_+ , and \hat{C} .

Regarding the global spanning tree, it suffices that it spans just the vertices in H . This is because it is used for pairing paths in which both endpoints are in H . Therefore, its construction remains unchanged.

6.3 Adaptation of Algorithm 1 to RK graphs

In this section, we describe how Algorithm 1 can be adapted to work under the promise that the input graph satisfies the RK condition.

As in Algorithm 1, let \mathcal{P}_i denote the path cover of the graph at the beginning of iteration i . Let \mathcal{H}_i denote the paths in \mathcal{P}_i for which both endpoints are in H . If $\mathcal{P}_i = \mathcal{H}_i$, then in iteration i , we can proceed as we did in Algorithm 1.⁵

Consequently, at the beginning of each iteration, our goal is to first handle the paths in \mathcal{P}_i which are not in \mathcal{H}_i and to get rid of them. We merge these paths into paths where both endpoints are in H (while leaving at most 2 paths that do not have this property).

These merging operations are quite straightforward and are performed in two stages. In the first stage, we deal with paths with an endpoint in \hat{A}_+ , as follows. Given a list of endpoints in \hat{A}_+ and the ids of their corresponding paths, one can merge these paths greedily and obtain paths in which both endpoints are in $H \cup \hat{C}$ and at most a single path for which this property does not hold (namely, it has at least one endpoint in \hat{A}_+). In the second stage, we repeat the same merging process with respect to paths with endpoints in \hat{C} and obtain a path cover in which for all paths, except for at most 2 paths (i.e., one with an endpoint in \hat{A}_+ and one with an endpoint in \hat{C}), both endpoints are in H .

Since both \hat{A}_+ and \hat{C} are cliques, it is not hard to see that these merges can be carried out in a constant number of rounds.

Termination of the algorithm. It remains to deal with the cases in which the path cover consists of two paths, one with an endpoint in \hat{A}_+ and one with an endpoint in \hat{C} . Let P_1 and P_2 denote these paths, respectively, and x_1 and x_2 denote the respective endpoints.

The first case is when the other endpoint of P_2 , denoted by y_2 , is in \hat{A}_+ . Since the subgraph induced on \hat{A}_+ forms a clique, in this case, we can merge P_1 and P_2 by a concatenation merge.

The second case is when the other endpoint of P_1 , y_1 , is in $B \cup C$. In this case, we can also concatenate P_1 and P_2 (by connecting x_2 to y_1).

Otherwise, we show that either we can merge P_1 and P_2 with an elementary merge or the subgraph induced on the vertices of P_1 contains a Hamiltonian cycle and likewise for P_2 . Since the graph is connected, these cycles can be merged into a single Hamiltonian path.

We first consider P_1 . If $y_1 \in \hat{A}_+$, then we are done. Otherwise, it follows that $y_1 \in A \cap H$. Therefore it holds that $\delta(x_1, y_1) = 2$, and so the sum of their degrees is at least $n - 1$. It follows that either P_1 is cycled or there is an edge e in P_2 such that P_1 can be merged to P_2 via e .

Similarly, in P_2 , if $y_2 \in B \cup C$ then we are done. Otherwise, it follows that $y_2 \in A \cap H$. Therefore $\delta(x_2, y_2) = 2$, which implies that either P_2 is cycled or that there is an edge e in P_1 such that P_2 can be merged to P_1 via e .

This completes the case analysis of the (end) cases of the termination of the algorithm.

References

- [BC76] J Adrian Bondy and Vasek Chvátal. A method in graph theory. *Discrete Mathematics*, 15(2):111–135, 1976.
- [BCD⁺19] Nir Bachrach, Keren Censor-Hillel, Michal Dory, Yuval Efron, Dean Leitersdorf, and Ami Paz. Hardness of distributed optimization. In Peter Robinson and Faith Ellen, editors, *Proceedings of the 2019 ACM Symposium on Principles of Distributed Computing, PODC 2019, Toronto, ON, Canada, July 29 - August 2, 2019*, pages 238–247. ACM, 2019.
- [Ber76] Jean-Claude Bermond. On hamiltonian walks. In *5th British Combinatorial Conference, 1975, Congressus Numerantium 15, Utilitas Math Pub.*, pages 41–51, 1976.
- [Bol04] Béla Bollobás. *Extremal graph theory*. Courier Corporation, 2004.

⁵The correctness of this case follows from the proof of Lemma 3.

- [Bol11] Béla Bollobás. *Random Graphs, Second Edition*, volume 73 of *Cambridge Studies in Advanced Mathematics*. Cambridge University Press, 2011.
- [Bon71] J Adrian Bondy. Large cycles in graphs. *Discrete Mathematics*, 1(2):121–132, 1971.
- [Bon80] John Adrian Bondy. *Longest paths and cycles in graphs of high degree*. Department of Combinatorics and Optimization, University of Waterloo, 1980.
- [CFPP18] Soumyottam Chatterjee, Reza Fathi, Gopal Pandurangan, and Nguyen Dinh Pham. Fast and efficient distributed computation of hamiltonian cycles in random graphs. In *2018 IEEE 38th International Conference on Distributed Computing Systems (ICDCS)*, pages 764–774. IEEE, 2018.
- [DHK88] E Dahlhaus, P Hajnal, and M Karpinski. Optimal parallel algorithm for the hamiltonian cycle problem on dense graphs. In *[Proceedings 1988] 29th Annual Symposium on Foundations of Computer Science*, pages 186–193. IEEE, 1988.
- [DHK93] Elias Dahlhaus, Peter Hajnal, and Marek Karpinski. On the parallel complexity of hamiltonian cycle and matching problem on dense graphs. *Journal of Algorithms*, 15(3):367–384, 1993.
- [FF85] Irène Fournier and Pierre Fraisse. On a conjecture of bondy. *Journal of Combinatorial Theory, Series B*, 39(1):17–26, 1985.
- [FJL91] Evelyne Flandrin, HA Jung, and Hao Li. Hamiltonism, degree sum and neighborhood intersections. *Discrete mathematics*, 90(1):41–52, 1991.
- [GL18] Mohsen Ghaffari and Jason Li. New distributed algorithms in almost mixing time via transformations from parallel algorithms. In *32nd International Symposium on Distributed Computing*, 2018.
- [IS86] Amos Israeli and Yossi Shiloach. An improved parallel algorithm for maximal matching. *Information Processing Letters*, 22(2):57–60, 1986.
- [Kar72] Richard M Karp. Reducibility among combinatorial problems. In *Complexity of computer computations*, pages 85–103. Springer, 1972.
- [Li13] Hao Li. Generalizations of dirac’s theorem in hamiltonian graph theory—a survey. *Discrete Mathematics*, 313(19):2034–2053, 2013. Cycles and Colourings 2011.
- [Lin76] Nathan Linial. A lower bound for the circumference of a graph. *Discrete Mathematics*, 15(3):297–300, 1976.
- [LLP05] Eythan Levy, Guy Louchard, and Jordi Petit. A distributed algorithm to find hamiltonian cycles in $G(n, p)$ random graphs. In Alejandro López-Ortiz and Angèle M. Hamel, editors, *Combinatorial and Algorithmic Aspects of Networking*, pages 63–74, Berlin, Heidelberg, 2005. Springer Berlin Heidelberg.
- [LPSP06] Zvi Lotker, Boaz Patt-Shamir, and David Peleg. Distributed MST for constant diameter graphs. *Distributed Computing*, 18(6):453–460, 2006.
- [Lub86] Michael Luby. A simple parallel algorithm for the maximal independent set problem. *SIAM journal on computing*, 15(4):1036–1053, 1986.
- [MU05] Michael Mitzenmacher and Eli Upfal. Probability and computing: Randomized algorithms and probabilistic analysis, 2005.
- [Oys60] Ore Oystein. Note on hamilton circuits. *The American Mathematical Monthly*, 67(1):55, 01 1960.
- [Pel00] David Peleg. *Distributed computing: a locality-sensitive approach*. SIAM, 2000.

- [RK05] M Sohel Rahman and Mohammad Kaykobad. On hamiltonian cycles and hamiltonian paths. *Information Processing Letters*, 94(1):37–41, 2005.
- [Sár09] Gábor N Sárközy. A fast parallel algorithm for finding hamiltonian cycles in dense graphs. *Discrete Mathematics*, 309(6):1611–1622, 2009.
- [Tur20] Volker Turau. A distributed algorithm for finding hamiltonian cycles in random graphs in $O(\log n)$ time. *Theoretical computer science*, 846:61–74, 2020.