
PREDICTING MOLECULE-TARGET INTERACTION BY LEARNING BIOMEDICAL NETWORK AND MOLECULE REPRESENTATIONS

✉ Jinjiang Guo*, Jie Li

Data Science group

Global Health Drug Discovery Institute, Beijing, China

jinjiang.guo@ghddi.org and jie.li@ghddi.org

ABSTRACT

The study of molecule-target interaction is quite important for drug discovery in terms of target identification, hit identification, pathway study, drug-drug interaction, etc. Most existing methodologies utilize either biomedical network information or molecule structural features to predict potential interaction link. However, the biomedical network information based methods usually suffer from cold start problem, while structure based methods often give limited performance due to the structure/interaction assumption and data quality. To address these issues, we propose a pseudo-siamese Graph Neural Network method, namely MTINet+, which learns both biomedical network topological and molecule structural/chemical information as representations to predict potential interaction of given molecule and target pair. In MTINet+, 1-hop subgraphs of given molecule and target pair are extracted from known interaction of biomedical network as topological information, meanwhile the molecule structural and chemical attributes are processed as molecule information. MTINet+ learns these two types of information as embedding features for predicting the pair link. In the experiments of different molecule-target interaction tasks, MTINet+ significantly outperforms over the state-of-the-art baselines. In addition, in our designed network sparsity experiments, MTINet+ shows strong robustness against different sparse biomedical networks.

Keywords Pseudo-Siamese Graph Neural Networks · Biomedical Network · Molecule Target Interaction Prediction

1 Introduction

In domains of medicine and pharmacology, the biomedical network [1, 2] is widely studied in terms of drug-target interaction, drug-drug interaction, protein-protein interaction, etc., which help researchers to better understand the disease interactome and drug action mechanisms. Such studies [3, 4, 5, 6, 7, 8, 9] have great potency in drug repurposing, target identification, biomarker discovery, omics analysis, and drug side effects, etc. Meanwhile, in the studies of these biomedical networks, *link prediction* [10, 11] is one of the important network-based computing and modelling approaches for analysing biomedicine relationships. To our knowledge, researchers usually refer to two kinds of recommendation algorithms [12], i.e., content-based recommendation methods [13] and collaborative filtering models [14], as *link prediction* methods. Content-based recommendation methods consider the attributes of molecule (compound, peptide, protein, etc.) and target (compound, peptide, protein, etc.) as side information, find optimal projections between molecule and target, and to predict the molecule potential action on the target, i.e., interactions between molecule and target. Collaborative filtering models utilize collective molecule-target links to predict potential interactions in the bipartite molecule-target network. However, since collaborative filtering models largely rely on the known molecule-target relations and consider no side information, such models often suffer from *cold start* problem, which means, when a new molecule is given, the models can hardly predict its potential interacted targets.

To address these issues, we propose a pseudo-siamese Graph Neural Network (GNN) method, namely Molecule-Target Interaction Network plus (MTINet+). In this work, we convert collective molecule-target links from biomedical network into partially observed matrix, and address the *Matrix Completion* task with link prediction on graphs. Molecule-target interactions, such as Drug-Target Interaction (DTI), Compound-Virus Inhibition (CVI), etc., can be described as bipartite molecule-target network where edges denote observed links and nodes represent either molecule or target

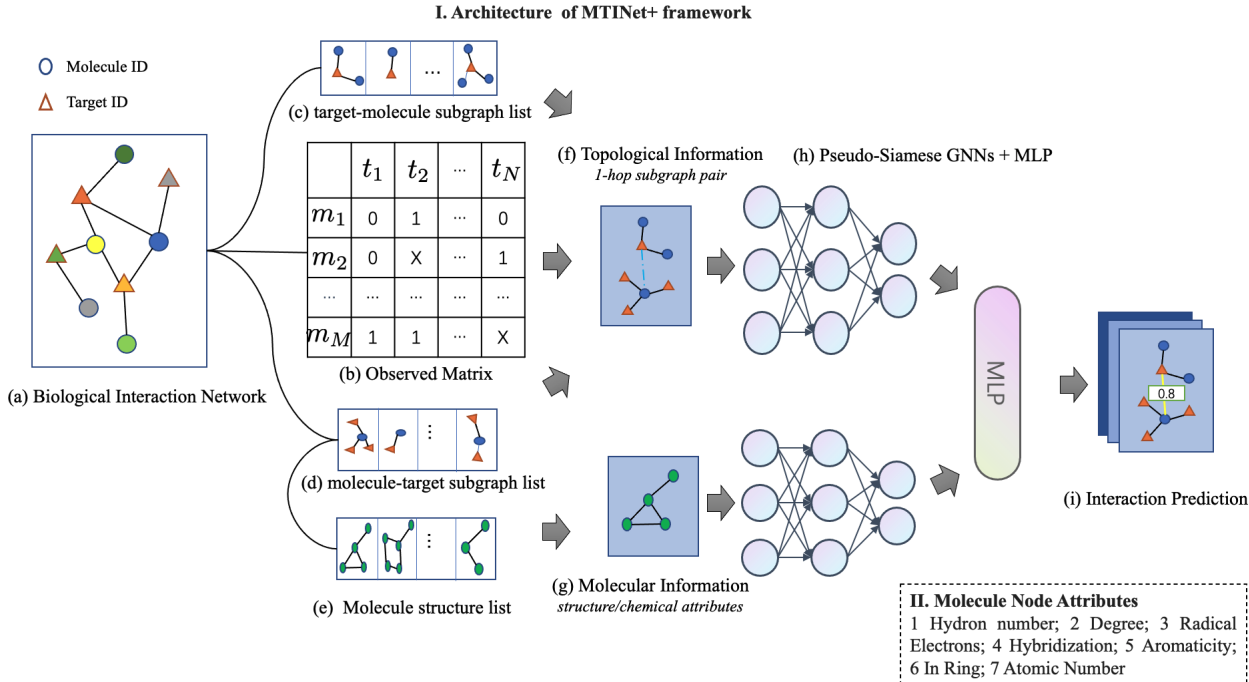


Figure 1: I. Illustration of MTINet+: a pseudo-siamese graph neural network framework. (a) Heterogeneous biomedical network is firstly converted into (b) observed interaction matrix between molecules and targets. Then, the extracted 1-hop subgraphs ((d) $G_{m \rightarrow t}^M$ and (c) $G_{t \rightarrow m}^N$) around each molecule and target are paired as (f) one graph $\hat{G}_{m,t}^{M \times N}$, which is used as topological information, meanwhile each molecule SMILES are converted to (g) a graph S_m^M integrated with chemical attributes, which is used as molecule information. Then, $\hat{G}_{m,t}^{M \times N}$ and S_m^M are respectively fed to (h) two different GNN branches for learning biomedical network and molecule representations. Finally, these two kinds of representations are concatenated and infused to a MLP functional head for learning to predict (i) link probabilities between new input molecule and target pairs. II. Molecule node attributes.

IDs. In our proposed MTINet+ framework, 1-hop subgraph is extracted around each node (molecule or target) in the bipartite molecule-target network. Such 1-hop subgraphs contain *local topological pattern* which is deterministic for inferring missing links, and independent on molecule and target side information as well [15]. Exhaustively around each molecule and target node pair, 1-hop subgraphs are extracted for one MTINet+ GNN branch to learn the topological representations. Meanwhile, MTINet+ converts molecule line notation sequence (i.e., SMILES) into 2D graph formula, in which each node incorporates different chemical attributes (shown in Figure 1(II)). The converted molecule 2D graph is input to the other MTINet+ GNN branch to learn the molecule representations. Then, two kinds of representations are hybridized and learnt by Multi-Layer Perceptron (MLP) classifier (or regressor) for predicting potential links. Figure 1 (I) illustrates the framework of our method.

The main contributions of our work are:

- We developed a novel end-to-end pseudo-siamese GNN method for predicting potential/missing links in biomedical network.
- MTINet+ tactfully treats both biomedical network topological information and molecule structural/chemical information as unified graph information, and learns the hybrid graph information as embedding features for link prediction.
- MTINet+ naturally solves the cold start problem and shows strong robustness against different sparse biomedical networks.
- We curated a 56 species antiviral compound-phenotype network for researchers to fight against the COVID-19 pandemic.

This paper is organized as follows: Section 2 introduces the related work. Section 3 gives detailed description of our MTINet+ framework. Methods comparison results on different biomedical networks are shown in Section 4. Robustness analysis of MTINet+ and future work are discussed in Section 5.

2 Related work

In this section, we briefly introduce theories of graph neural networks (GNN) and matrix completion (MC) methods used in the studies of complex system and chemical/biological structures, such as quantitative structure-activity relationships (QSAR), recommendation systems and biomedical networks. Also, we give a discussion on motivations of using GNN methods to fulfil MC tasks.

2.1 Matrix Completion

Matrix Completion (MC) is a kind of task formulation [16] commonly used in recommender systems, which converts heterogeneous network datasets into observed matrix \mathcal{M} , and aims to fill the missing entries of \mathcal{M} . In the matrix \mathcal{M} , the rows and columns represent users (molecules) and items (targets) respectively, each element in \mathcal{M} denotes the interaction between corresponding (molecule, target) pair coordinate. To fulfil the MC tasks, well-known Matrix Factorization (MF) methods decompose the low-rank \mathcal{M} into the product of two lower dimensionality of rectangular matrices [17, 18]. Later on, Singular Value Decomposition (SVD) is adopted in MF families [19, 20, 21], which decompose \mathcal{M} into the inner product of three matrices X , Y and P (i.e., $\mathcal{M} = XPY^T$), where X and Y contain the latent features of molecules and targets respectively, P is the association matrix. The idea is to find the projections from X to Y by determining the optimal P from \mathcal{M} . SVD based MF methods can integrate latent features of molecules and targets, and therefore partially solve the *cold-start* problem [19].

Also, SVD based MF methods successfully solved many biomedical problems, such as Drug-Target Interaction (DTI) prediction [12], Gene-Disease Association prediction [22], etc. In the work [12], the low-dimensional latent features of drug (molecule) and target is obtained by integrating heterogeneous data, such like drug-drug interaction, drug-side-effect, drug-disease association, drug similarities for molecule, and protein-protein interaction, protein-disease association, protein similarities for target. The integrated features describe topological properties for each molecule and target respectively. Similarly, for predicting Gene-Disease Association [22], microarray measurements of gene expression, gene-phenotype associations of other species and HumanHet [23] features (incorporating mRNA expression, protein-protein interactions, protein complex data, and comparative genomics) serve as latent gene (molecule) features, while disease similarities from MimMiner [24] and features collected from OMIM diseases [25] are used as latent disease (target) features. As we can see, the performance of MF methods is highly dependent upon the integrated latent features as representations of molecules and targets. Usually, the feature construction procedure are manually designed, and separate from the optimization of association matrix P in MF procedure as well.

2.2 Spatial based Graph Neural Networks

Recently, GNN based methods [26, 27, 28, 29, 30, 31] have demonstrated breakthroughs in many tasks regarding to network/structure datasets [32], such like the studies of quantitative structure-activity relationships (QSAR), knowledge graph, physical systems [33, 34], etc. And the GNN methods have outperformed against traditional machine learning methods such as random forest (RF) [35] and support vector machines (SVM) [36]. There are mainly three reasons to use GNN methods in network datasets: (1) Most complex systems datasets (biomedical network data, etc.) are in the form of graph structure; (2) Molecule (compound, peptide, protein, etc.) structure can be described as graph structure as well; (3) Most importantly, GNN methods are featured at processing topological connections among nodes, and learning graph representations [32], and therefore they can treat both biomedical network data and molecule data as unified graph information, and learn the hybrid graph information as embedding features for link prediction task.

Existing GNN methods can be categorized into two types: spectral based methods and spatial based methods [32]. For spectral based GNNs, graphs are projected into Fourier domain where the convolution operation is conducted by computing Laplacian eigendecomposition [37, 38]. Due to the high computational complexity of Laplacian eigendecomposition, the Chebyshev polynomials are adopted as an approximation [37, 38]. Spatial based GNN methods imitate convolutional neural networks (CNN) by aggregating and updating neighborhood message from central node [28, 29, 39, 30, 31, 40], and construct the whole graph representation through read-out function. General operations of spatial based GNN can be expressed as below:

$$h_v^k = \mathbf{C}^k(h_v^{k-1}, \mathbf{A}^k(\{(h_u^{k-1}, e_{uv}), u \in \mathcal{N}(v)\})) \quad (1)$$

where h_v^k is the node feature of center node v at k th layer, e_{uv} is the edge feature between v and its neighbor node u . $\mathcal{N}(v)$ denotes the neighborhood of node v , usually 1-hop neighbors. Aggregating function $\mathbf{A}(\cdot)$ aggregates node

features over neighborhood of v , while updating function $\mathbf{C}(\cdot)$ integrates features both from center node v and its neighboring features aggregated by $\mathbf{A}(\cdot)$. Various mathematical operations have been adopted as $\mathbf{A}(\cdot)$ and $\mathbf{C}(\cdot)$. For instances, in work [28], mean-pooling and attention mechanisms are used as $\mathbf{A}(\cdot)$, whereas GRU [41], concatenation [28] and summation are usually applied as $\mathbf{C}(\cdot)$.

For obtaining whole graph representation, a pooling function, namely read-out, is used at the last K th layer:

$$h_G = \mathbf{R}(\{h_v^K | v \in G\}) \quad (2)$$

h_G means the whole representation of input graph G . $\mathbf{R}(\cdot)$ represents the read-out function.

Spectral based GNN methods require Fourier transform on graph, meaning that all the input graph samples should be static (i.e., fixed topological structure) [38]. In contrast, spatial based GNN methods have no such restriction, and are able to extract features on graphs with varied structures. Hence, spatial based GNNs are suitable for the 1-hop subgraph pairs from bipartite networks in our work.

2.3 Molecule Representation

For the molecule chemical representation, current GNN methods [42, 43, 44] usually process 2D graph as description of natural chemical graph, in which nodes represent atoms integrating different chemical attributes, and edges represent bonds connecting atoms to one another. There are mainly three advantages of using 2D graph description: (1) graph preserves clear and stable information of chemical structure, (2) it represents invariant molecule regardless of entry position in line notation (e.g., SMILES [45]), (3) it can be easily computed and optimized by GNN methods. In our chemical formulation, we take similar 2D graph representation, meanwhile we adopt bidirectional graph where the bond connection from atom A to atom B is the same as the bond connection from atom B and atom A. Moreover, 7 atomic chemical attributes, listed in Figure 1 (II), are considered as node initial features of input graph. Our GNN method learns and aggregates these attributes to be proper molecular features. For data preprocessing, we convert SMILES sequence into 2D graph formula, and node attributes in Figure 1:II can be used for distinguishing those compounds with same molecular structures. Hence, each molecule representation in our method is unique.

3 Molecule-Target Interaction Network plus (MTINet+)

In this part, we introduce our end-to-end pseudo-siamese GNN method, namely MTINet+, for predicting potential/missing links in biomedical network. For a given bipartite biomedical network \mathcal{G} , we constructed the observed interaction matrix $\mathcal{M} \subset \mathbb{R}^{M \times N}$, where M is the molecule number and N is the target number, each row index ($m \in \mathbb{Z}^M$) and column index ($t \in \mathbb{Z}^N$) denote the sequential identical numbers of molecules (Ω^M) and targets (Γ^N) respectively, and each entry $y_{m,t}$ in \mathcal{M} represents whole possible interaction of (m, t) pair. In our case, $y_{m,t} \in [0, 1, x]$, 1 denotes observed positive label meaning active interaction between m and t , whereas 0 is the observed negative label meaning the inactive interaction. Here x means the unobserved (missing) interaction waiting for prediction.

3.1 1-hop Subgraphs Pair Construction

In the bipartite network \mathcal{G} , for each molecule m and target t we respectively exact their 1-hop subgraphs $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$, in which the edges $E_{m \rightarrow t}^M$ and $E_{t \rightarrow m}^N$ mean the links (active interactions) of neighbouring target nodes ($\hat{t} \in G_{m \rightarrow t}^M$) around center node m , and neighbouring molecule nodes ($\hat{m} \in G_{t \rightarrow m}^N$) around center node t respectively. Then for each (m, t) , we pair $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$ as a regrouped graph $\hat{G}_{m,t}^{M \times N}$, and label $\hat{G}_{m,t}^{M \times N}$ with (m, t) corresponding $y_{m,t}$ in \mathcal{M} . We feed the paired subgraph dataset to the GNN model for training or prediction. Note that after pairing the subgraphs, if $y_{m,t}$ is positive, the (m, t) edge and corresponding nodes should be removed from both $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$. It is to make sure that GNN model cannot see any link for prediction in the training subgraphs pair. In Figure 1 (I), steps (a), (b), (c) and (f) show MTINet+ procedures that convert the bipartite network into graph structure data for one MTINet+ GNN branch to learn the network topological representation.

3.2 Molecule Structural and Chemical Representation

For each molecule m , we utilize Python RDkit [46] tool kit to process molecule SMILES as input data format, and convert the data into bidirectional graph S_m^M based on Deepchem and Chemprop [47, 48] processing ways. The graph mainly consists of index lists of nodes and edges. For each node, each attribute in Figure 1 (II) is converted into identical number, and all 7 numeric attributes are combined as initial node feature vector f_{init} . The node feature f_{init} is then delivered to node embedding layer of our framework for learning optimal attribute combination, from which we can obtain an aligned node feature vector f_v . In Figure 1(I), steps (e) and (g) show MTINet+ procedures that convert the

molecule SMILES into bidirectional graph structure data for the other MTINet+ GNN branch to learn the molecule structural and chemical representation.

3.3 Pseudo-Siamese Graph Neural Networks Architecture

As mentioned above, the MTINet+ backbone consists of two Graph Neural Networks branches, they have the same algorithm structure, a variant of GIN [29], which belongs to spatial based graph neural networks. As the two GNN branches do not share weights, the MTINet+ backbone forms a pseudo-siamese GNN architecture. Such architecture has demonstrated good performance on learning cross-domain features [49].

Each GNN branch aggregates features by taking both summation and maxima of neighbouring features, and thus enhances the message propagation from shallow layers to deep layers. Respectively, for each node v in graph $\hat{G}_{m,t}^{M \times N}$ or graph S_m^M , its features h_v^k out of k th layer can be uniformly written as:

$$h_v^k = \phi(\text{concat}(h_v^{k-1}, (\sum_{u \in \mathcal{N}(v)} h_u^{k-1} + \max_{u \in \mathcal{N}(v)} h_u^{k-1}))) \quad (3)$$

where $\phi(\cdot)$ is the MLP function, and $\text{concat}(\cdot)$ concatenates features of node v from $(k-1)$ th layer and k th layer, u denotes a neighbouring node in node v 's neighbourhood $\mathcal{N}(v)$. The output node feature h_v^k are concatenated with node features from all the previous layers, i.e., $H_v^k = \text{concat}(h_v^k, h_v^{k-1}, \dots, h_v^1)$. Then we use mean pooling *read-out* function to obtain final representations $H_{\hat{G}_{m,t}}$ of graph $\hat{G}_{m,t}^{M \times N}$, and H_{S_m} of graph S_m^M respectively. As mentioned in 3.1, $\hat{G}_{m,t}^{M \times N}$ consists of $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$ pairs. Thus $H_{\hat{G}_{m,t}}$ is learnt as one representation for both $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$.

Finally, the representations $H_{\hat{G}_{m,t}}$ and H_{S_m} are concatenated and fed to a 3-layer MLP $\Phi(\cdot)$ functional head for learning to predict interaction (link) probability $\hat{y}_{m,t}$:

$$\hat{y}_{m,t} = \Phi(\text{concat}(H_{\hat{G}_{m,t}}, H_{S_m})) \quad (4)$$

3.4 Loss Function and Optimization

Since the link prediction in our case is a binary classification task, i.e. predicting active or inactive interaction, we adopt cross-entropy [50] as our loss function, which can be described as:

$$\mathcal{L}_{m,t} = -(y_{m,t} \log \hat{y}_{m,t} + (1 - y_{m,t}) \log (1 - \hat{y}_{m,t})) \quad (5)$$

where $y_{m,t}$ is the observed interaction, and $\hat{y}_{m,t}$ is the predicted link probability. For optimization on model parameters, we tried SGD [51], Adam [52] as optimizers, and find that Adam gives the best optimized model with highest evaluation performance and most stable convergence during training and testing.

4 Dataset and Experiments

We conducted experiments on three heterogeneous biomedical networks: Drug-Target Interaction (DTI) dataset from DTINet [12], National Toxicology Program (NIH) Tox21 challenge dataset [53], and GHDDI constructed Compound-Virus Inhibition (CVI56) Dataset. We trained our MTNet+ models on each dataset respectively, and tuned each model's parameters with different protocols. In details, we took a 80-20 split on datasets of DTI and CVI56 respectively, where 80% of dataset was used for training and the remaining 20% was used for testing. For model training on NIH Tox21 dataset, we followed the 5-cross validation protocol from the baseline work [54]. We took a random shuffle on each dataset for ensuring each input data sample give an independent change on the model in each training batch. Also, we resampled the training positive and negative data samples, balancing their number ratio to 1:1, it avoids the model's skewness towards the class with majority number during training. For the hyperparameters configuration, we set 5 GNN layers for each backbone branch, and selected Adam optimizer with learning rate $\eta = 0.001$, $\xi = 10^{-16}$, $(\beta_0, \beta_1) = (0.9, 0.999)$ and weight decay $\lambda = 0.0001$. The training batch size and epoch number were fixed to 256 and 1,000 for all datasets. This work is publicly available on GitHub: <https://github.com/GHDDI-AILab/MTINetplus>.

4.1 DTI Dataset from DTINet

We chose the heterogeneous network constructed in the work [12]. The network includes 12,015 nodes and 1,895,445 edges in total, for predicting missing drug-target interactions. It incorporates 4 types of nodes (i.e., drugs, proteins, diseases and side-effects) and 6 types of edges (i.e., drug-protein interactions, drug-drug interactions, drug-disease

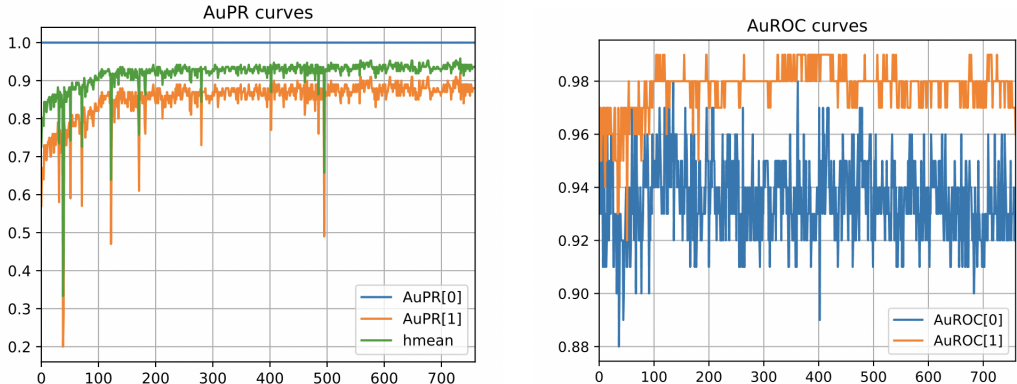


Figure 2: Traing procedure of MTINet+ model on DTI dataset.

Table 1: Different methods comparison on DTI dataset. Our MTINet+ outperforms other state-of-the-art methods for DTI prediction.

Methods	BLMNII [56]	NetLapRLS [57]	HNH [5]	CMF [58]	DTINet [12]	GPLP [55]	MTINet+(ours)
AUROC	0.67	0.83	0.86	0.87	0.91	0.95	0.96
AUPR	0.74	0.88	0.88	0.86	0.93	0.92	0.94

associations, drug-side- effect associations, protein-disease associations and protein-protein interactions). Besides other well known link prediction methods, we also introduced our previously designed GPLP [55] method as comparison. GPLP is a topological information based GNN framework, and independent on node’s side information. Figure 2 shows the convergence of AUROC and AUPR curves during the training procedure of MTINet+ model. Compared with all the counterparts, our MTINet+ model constantly outperforms in terms of AUROC and AUPR, reaching up to 96% and 93% respectively. The AUROC and AUPR we computed are the harmonic average between positive and negative performances. Our MTINet+ model performs nearly 5% higher than DTINet and 2% higher than GPLP in terms of AUROC, and and 1% higher than DTINet and 2% higher than GPLP in terms of AUPR. MTINet+ also beats other Random Walk based methods (e.g., HNM[5]), see details in Table 1.

4.2 NIH Tox21 Challenge Dataset

For NIH Tox21 Challenge Dataset [53], a dataset with 12,707 chemical compounds, which consisted of a training dataset of 11,764, a leaderboard set of 296, and a test set of 647 compounds. For the training dataset, the chemical structures and assay measurements for 12 different toxic effects were fully available at the beginning of the challenge, so were the chemical structures of the leaderboard set. To fulfil the challenge, the common methods, no matter what kind: descriptor based [59, 60, 61] or deep learning methods [53, 54], focus on extracting effective representations of chemical compounds under certain toxicity task. In contrast, our prospective takes an insight into the interactions (toxic or non-toxic) between compound (molecule) and toxicity task (target), regardless of compound chemical structures and task properties. In the experimental results, we find that our MTINet+ model significantly outperforms against the chemical structure based deep models (e.g., DeepTox [53], PotentialNet [54]), achieving AUROC of 96.7% and AUPR of 95.8%. In addition to GPLP, we previously designed a chemical structure based GNN model for multi-task prediction, namely STID-Net, which can compete with other chemical structure based deep methods. Hence, we also added performance of STID-Net into comparison (see Figure 3).

4.3 CVI56 Dataset

During COVID-19 pandemic broke-out in the year 2020, we constructed an antiviral compound-phenotype network, which collected 9,196 drugs (molecule), 56 virus families (target) and their observed 12,196. interactions. The training dataset contains 7,234 active ($IC_{50} \leq 1\mu M$) and 4,962 inactive ($IC_{50} > 1\mu M$) interactions. For this newly constructed dataset, we conducted the experiments with our MTNet+ model and GPLP as benchmark. MTINet+ model achieved 93.1% in AUROC, while GPLP performs a little better, got 94.6% in AUROC. The CVI56 Dataset is publicly available on GitHub: <https://github.com/GHDDI-AILab/MTINetplus>.

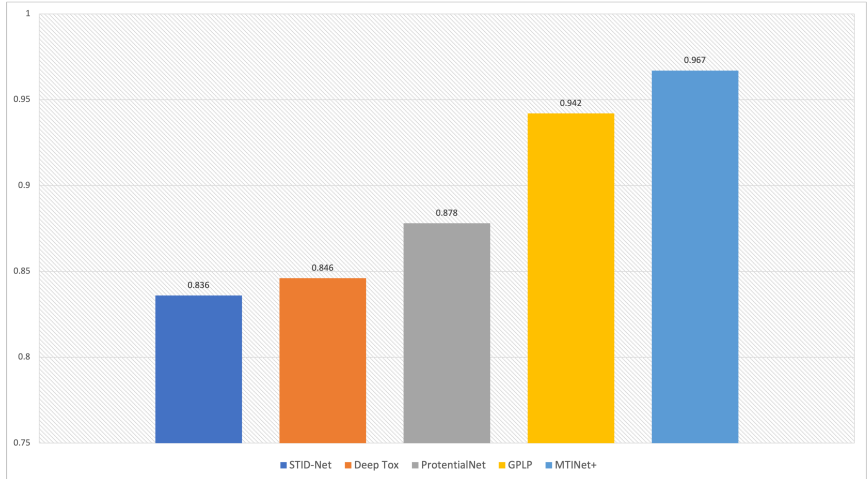


Figure 3: Different methods AUROC comparison on NIH Tox21 dataset. MTINet+ outperforms other state-of-the-art methods for toxicity prediction.

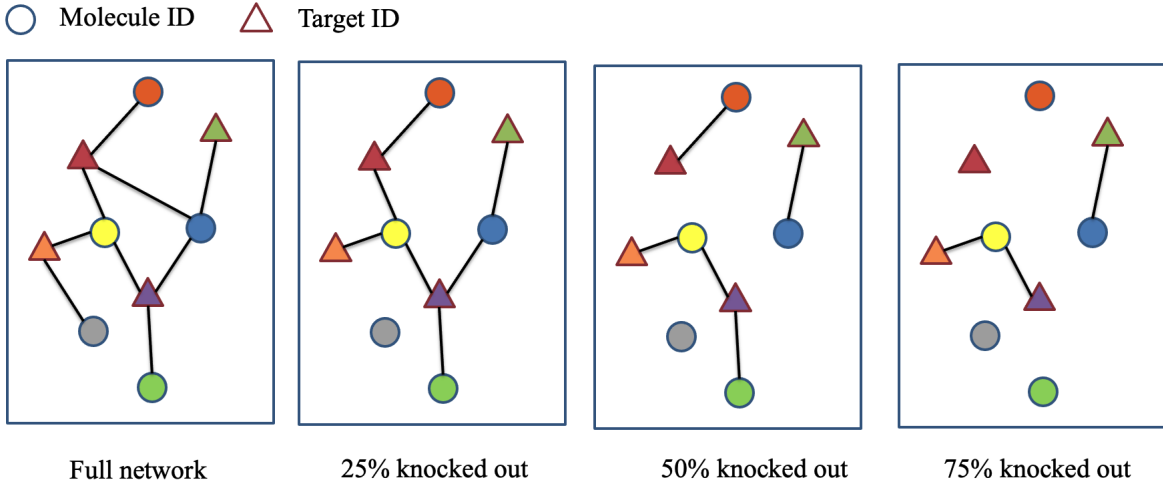


Figure 4: Different extents of knocking out links in the network to simulate the partially observed networks in the real world scenarios.

5 Discussion and Future Work

5.1 Robustness Verification and Comparison

As in practical biomedical problems, usually the observed links in the network are rather limited and incomplete, and thus it causes a sparse observed matrix [12]. It implies that the observed links only cover a very small portion of real biomedical network (i.e., the observed matrix is of very low-rank). This fact results in a problem that *local graph pattern* learnt from training data cannot fully reveal the reality. However, besides the network information, MTINet+ also takes the molecule structural/chemical information for predicting interaction link. Therefore, MTINet+ should overcome the sparse biomedical network issue. Unfortunately, the network that covers the *whole* connections can be never obtained in real world as our experimental dataset. To analyse our MTINet+ model’s robustness against real scenarios, we assume that original network we have covers the *whole* connections, and we randomly knock-out connections in the network to simulate the partially observed network in reality (see Figure 4). Then, we trained MTINet+ model on these partial network datasets.

To implement the knocking-out protocol, we firstly convert the whole network into subgraph pairs $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$, and then randomly knock-out the edges of $G_{m \rightarrow t}^M$ and $G_{t \rightarrow m}^N$ respectively, obtaining $G_{m \rightarrow t}^{\prime M}$ and $G_{t \rightarrow m}^{\prime N}$. However, in the biomedical dataset, the degree distribution of all the $G_{m \rightarrow t}^M$ (or $G_{t \rightarrow m}^N$) usually appears as long-tail. For instance,

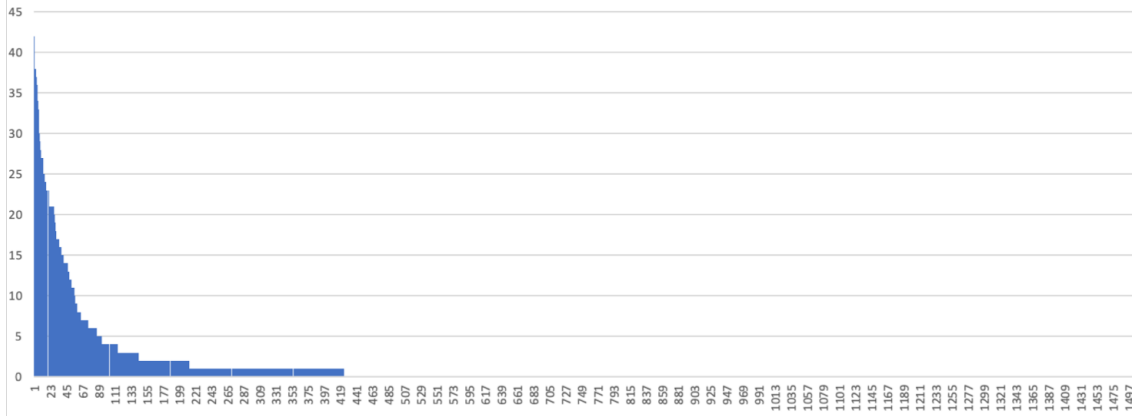


Figure 5: molecule-target subgraph $G_{m \rightarrow t}^M$ degree distribution on DTI dataset. A long-tail distribution.

Figure 5 shows $G_{m \rightarrow t}^M$ degree distribution of DTI dataset, where horizontal axis denotes the molecule (drug) ID and vertical axis means the degree of $G_{m \rightarrow t}^M$. As we can see, most of molecules have 1 or even 0 interaction with any target. In order to equally knock each subgraph, we invented a knocking-out method by random sampling a knocking-out portion according to the mixture distributions of $G_{m \rightarrow t}^M$ edges, which is conducted as:

$$\begin{aligned} E'_{m \rightarrow t}^M &= \rho_\delta \odot E_{m \rightarrow t}^M \\ \rho_\delta &= \frac{C_\Delta^\delta}{2^\Delta - 1}, \delta \in \Delta \end{aligned} \quad (6)$$

where $E'_{m \rightarrow t}^M$ denotes the edges after knocking-out on original edges $E_{m \rightarrow t}^M$ of $G_{m \rightarrow t}^M$. ρ_δ is a probabilistic function which determines the knocking-out portion of $E_{m \rightarrow t}^M$, sign \odot means the random edge removal according to ρ_δ , Δ is the degree of $G_{m \rightarrow t}^M$, while C_Δ^δ means the δ -combinations over Δ . The knocking-out operation on $G_{t \rightarrow m}^N$ follows the same way as $G_{m \rightarrow t}^M$.

We compared the performance of MTINet+ and GPLP (only network information based GNN method) with this knocking-out protocol on the NIH Tox21 dataset. As was expected, the performances of both MTINet+ and GPLP models trained on knocked-out datasets declined w.r.t. AUROC and AUPR, since the topological information was constantly lost with varying degrees during training. Specifically, the MTINet+ model got the stable AUROC of 92% (5% decreased) and AUPR of 78% (dropping 18%), whereas the GPLP model converged at the AUROC of 86% (8% decreased) and AUPR of 70% (dropping 15%). Figure 6 shows the robustness comparison of MTINet+ and GPLP. As we can see, even though the performances of both MTINet+ and GPLP models dropped on partially knocked-out networks, MTINet+ still gives better results than GPLP, which implies that the molecule information contributes to the resistance of limited network information. Thus, MTINet+ demonstrates the robustness in real world scenarios.

5.2 Conclusions and Future Work

In this work, we have introduced our pseudo-siamese Graph Neural Network framework, namely MTINet+, for predicting potential/missing links in biomedical networks. MTINet+ learns both biomedical network topological and molecule structural/chemical information as representations to predict potential interaction of given molecule and target pair. Our method has demonstrated an out-performance compared to the counterparts. In addition, since MTINet+ incorporates both molecule and network information, it naturally solves the cold start problem and shows strong robustness against different sparse biomedical networks. However, it is also important to consider target information (protein sequence, pocket structure, etc.) for providing more robust and accurate link prediction. Hence, our key work in future is to incorporate this three heterogeneous information (molecule, target and their biomedical network) and build a competent deep learning framework. Finally, MTINet+ shows a novel perspective for revealing the underlying interaction mechanisms of complex biomedical system.

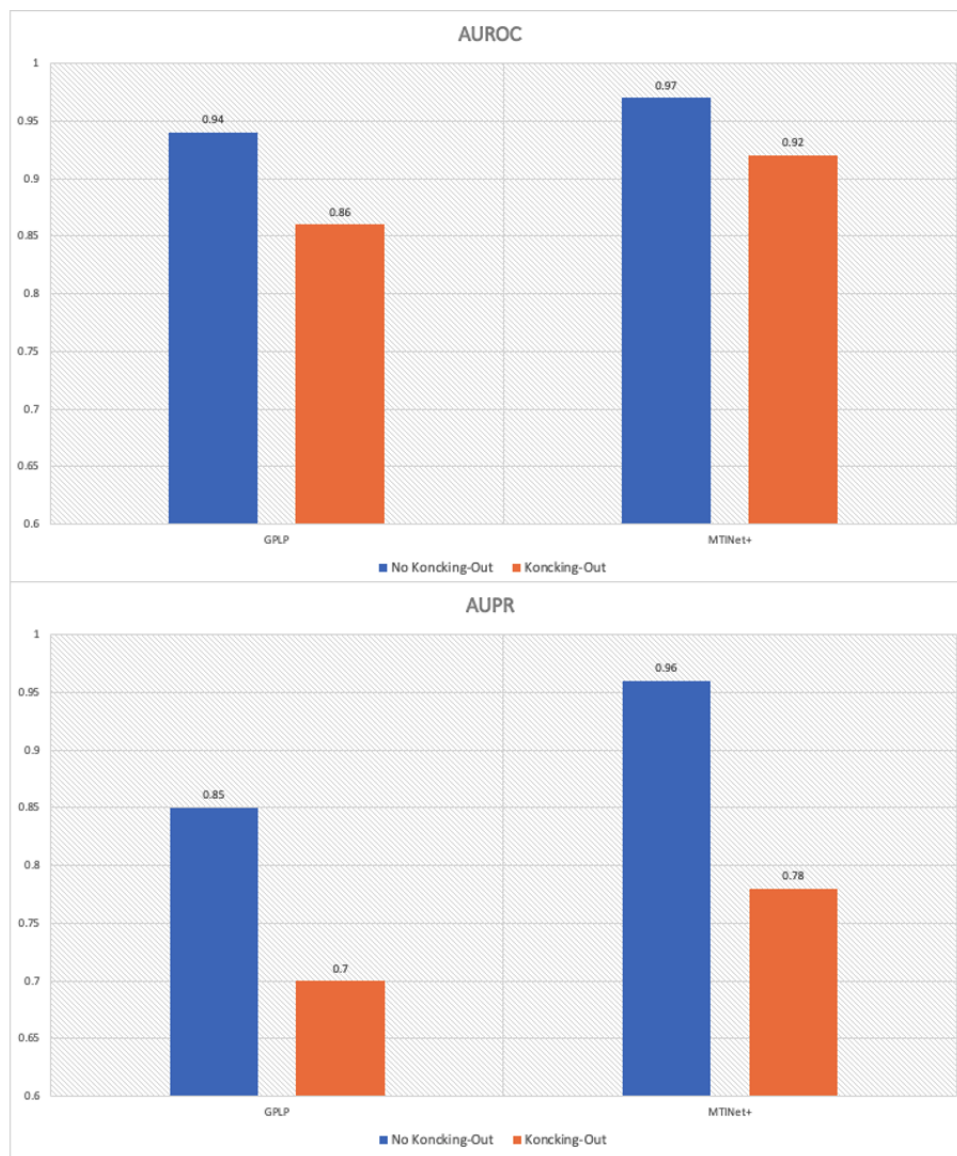


Figure 6: The robustness comparison of MTINet+ and GPLP with the knocking-out protocol on NIH Tox21 dataset.

References

- [1] Albert-László Barabási, Natali Gulbahce, and Joseph Loscalzo. Network medicine: a network-based approach to human disease. *Nature reviews genetics*, 12(1):56–68, 2011.
- [2] Andrew L Hopkins. Network pharmacology: the next paradigm in drug discovery. *Nature chemical biology*, 4(11):682–690, 2008.
- [3] Monica Campillos, Michael Kuhn, Anne-Claude Gavin, Lars Juhl Jensen, and Peer Bork. Drug target identification using side-effect similarity. *Science*, 321(5886):263–266, 2008.
- [4] Garrett M Morris, Ruth Huey, William Lindstrom, Michel F Sanner, Richard K Belew, David S Goodsell, and Arthur J Olson. Autodock4 and autodocktools4: Automated docking with selective receptor flexibility. *Journal of computational chemistry*, 30(16):2785–2791, 2009.
- [5] Wenhui Wang, Sen Yang, Xiang Zhang, and Jing Li. Drug repositioning by integrating target information through a heterogeneous network model. *Bioinformatics*, 30(20):2923–2930, 2014.
- [6] Yadi Zhou, Fei Wang, Jian Tang, Ruth Nussinov, and Feixiong Cheng. Artificial intelligence in covid-19 drug repurposing. *The Lancet Digital Health*, 2020.

- [7] Siqin Zhang, Kuo Yang, Zhenhong Liu, Xinxing Lai, Zhen Yang, Jianyang Zeng, and Shao Li. Drugai: a multi-view deep learning model for predicting drug–target activating/inhibiting mechanisms. *Briefings in Bioinformatics*, 2022.
- [8] Edward L Huttlin, Raphael J Bruckner, Joao A Paulo, Joe R Cannon, Lily Ting, Kurt Baltier, Greg Colby, Fana Gebreab, Melanie P Gygi, Hannah Parzen, et al. Architecture of the human interactome defines protein communities and disease networks. *Nature*, 545(7655):505–509, 2017.
- [9] Jie Li, Kecheng Lei, Zengrui Wu, Weihua Li, Guixia Liu, Jianwen Liu, Feixiong Cheng, and Yun Tang. Network-based identification of micrnas as potential pharmacogenomic biomarkers for anticancer drugs. *Oncotarget*, 7(29):45584, 2016.
- [10] Xiang Yue, Zhen Wang, Jingong Huang, Srinivasan Parthasarathy, Soheil Moosavinasab, Yungui Huang, Simon M Lin, Wen Zhang, Ping Zhang, and Huan Sun. Graph embedding on biomedical networks: methods, applications and evaluations. *Bioinformatics*, 36(4):1241–1251, 2020.
- [11] Ali Ezzat, Min Wu, Xiao-Li Li, and Chee-Keong Kwoh. Computational prediction of drug–target interactions using chemogenomic approaches: an empirical survey. *Briefings in bioinformatics*, 20(4):1337–1357, 2019.
- [12] Yunan Luo, Xinbin Zhao, Jingtian Zhou, Jinglin Yang, Yanqing Zhang, Wenhua Kuang, Jian Peng, Ligong Chen, and Jianyang Zeng. A network integration approach for drug-target interaction prediction and computational drug repositioning from heterogeneous information. *Nature communications*, 8(1):1–13, 2017.
- [13] Michael J Pazzani and Daniel Billsus. Content-based recommendation systems. In *The adaptive web*, pages 325–341. Springer, 2007.
- [14] David Goldberg, David Nichols, Brian M Oki, and Douglas Terry. Using collaborative filtering to weave an information tapestry. *Communications of the ACM*, 35(12):61–70, 1992.
- [15] Muhan Zhang and Yixin Chen. Inductive matrix completion based on graph neural networks. *arXiv preprint arXiv:1904.12058*, 2019.
- [16] Emmanuel J Candès and Benjamin Recht. Exact matrix completion via convex optimization. *Foundations of Computational mathematics*, 9(6):717–772, 2009.
- [17] Deepak Agarwal and Bee-Chung Chen. Regression-based latent factor models. In *Proceedings of the 15th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 19–28, 2009.
- [18] Dietmar Jannach, Lukas Lerche, Fatih Gedikli, and Geoffroy Bonnin. What recommenders recommend—an analysis of accuracy, popularity, and sales diversity effects. In *International conference on user modeling, adaptation, and personalization*, pages 25–37. Springer, 2013.
- [19] Daniel Kluver and Joseph A Konstan. Evaluating recommender behavior for new users. In *Proceedings of the 8th ACM Conference on Recommender Systems*, pages 121–128, 2014.
- [20] Xuan Bi, Annie Qu, Junhui Wang, and Xiaotong Shen. A group-specific recommender system. *Journal of the American Statistical Association*, 112(519):1344–1353, 2017.
- [21] Li Pu and Boi Faltings. Understanding and improving relational matrix factorization in recommender systems. In *Proceedings of the 7th ACM Conference on Recommender Systems*, pages 41–48, 2013.
- [22] Nagarajan Natarajan and Inderjit S Dhillon. Inductive matrix completion for predicting gene–disease associations. *Bioinformatics*, 30(12):i60–i68, 2014.
- [23] Insuk Lee, U Martin Blom, Peggy I Wang, Jung Eun Shim, and Edward M Marcotte. Prioritizing candidate disease genes by network-based boosting of genome-wide association data. *Genome research*, 21(7):1109–1121, 2011.
- [24] Marc A Van Driel, Jorn Bruggeman, Gert Vriend, Han G Brunner, and Jack AM Leunissen. A text-mining analysis of the human phenome. *European journal of human genetics*, 14(5):535–542, 2006.
- [25] Ada Hamosh, Alan F Scott, Joanna S Amberger, Carol A Bocchini, and Victor A McKusick. Online mendelian inheritance in man (omim), a knowledgebase of human genes and genetic disorders. *Nucleic acids research*, 33(suppl_1):D514–D517, 2005.
- [26] Zhenqin Wu, Bharath Ramsundar, Evan N Feinberg, Joseph Gomes, Caleb Geniesse, Aneesh S Pappu, Karl Leswing, and Vijay Pande. Moleculenet: a benchmark for molecular machine learning. *Chemical science*, 9(2): 513–530, 2018.
- [27] Ke Liu, Xiangyan Sun, Lei Jia, Jun Ma, Haoming Xing, Junqiu Wu, Hua Gao, Yax Sun, Florian Boulnois, and Jie Fan. Chemi-net: a molecular graph convolutional network for accurate drug property prediction. *International journal of molecular sciences*, 20(14):3389, 2019.

- [28] William L Hamilton, Rex Ying, and Jure Leskovec. Inductive representation learning on large graphs. *arXiv preprint arXiv:1706.02216*, 2017.
- [29] Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural networks? *arXiv preprint arXiv:1810.00826*, 2018.
- [30] Christopher Morris, Martin Ritzert, Matthias Fey, William L Hamilton, Jan Eric Lenssen, Gaurav Rattan, and Martin Grohe. Weisfeiler and leman go neural: Higher-order graph neural networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pages 4602–4609, 2019.
- [31] Ekagra Ranjan, Soumya Sanyal, and Partha Talukdar. Asap: Adaptive structure aware pooling for learning hierarchical graph representations. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 5470–5477, 2020.
- [32] Shiwen Wu, Wentao Zhang, Fei Sun, and Bin Cui. Graph neural networks in recommender systems: A survey. *arXiv preprint arXiv:2011.02260*, 2020.
- [33] Peter W Battaglia, Razvan Pascanu, Matthew Lai, Danilo Rezende, and Koray Kavukcuoglu. Interaction networks for learning about objects, relations and physics. *arXiv preprint arXiv:1612.00222*, 2016.
- [34] Alvaro Sanchez-Gonzalez, Nicolas Heess, Jost Tobias Springenberg, Josh Merel, Martin Riedmiller, Raia Hadsell, and Peter Battaglia. Graph networks as learnable physics engines for inference and control. In *International Conference on Machine Learning*, pages 4470–4479. PMLR, 2018.
- [35] Mahesh Pal. Random forest classifier for remote sensing classification. *International journal of remote sensing*, 26(1):217–222, 2005.
- [36] William S Noble. What is a support vector machine? *Nature biotechnology*, 24(12):1565–1567, 2006.
- [37] Michaël Defferrard, Xavier Bresson, and Pierre Vandergheynst. Convolutional neural networks on graphs with fast localized spectral filtering. *arXiv preprint arXiv:1606.09375*, 2016.
- [38] Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. *arXiv preprint arXiv:1609.02907*, 2016.
- [39] Weihua Hu, Bowen Liu, Joseph Gomes, Marinka Zitnik, Percy Liang, Vijay Pande, and Jure Leskovec. Strategies for pre-training graph neural networks. *arXiv preprint arXiv:1905.12265*, 2019.
- [40] Dawei Leng, Jinjiang Guo, Lurong Pan, Jie Li, and Xinyu Wang. Enhance information propagation for graph neural network by heterogeneous aggregations. *arXiv preprint arXiv:2102.04064*, 2021.
- [41] Yujia Li, Daniel Tarlow, Marc Brockschmidt, and Richard Zemel. Gated graph sequence neural networks. *arXiv preprint arXiv:1511.05493*, 2015.
- [42] Artem Cherkasov, Eugene N Muratov, Denis Fourches, Alexandre Varnek, Igor I Baskin, Mark Cronin, John Dearden, Paola Gramatica, Yvonne C Martin, Roberto Todeschini, et al. Qsar modeling: where have you been? where are you going to? *Journal of medicinal chemistry*, 57(12):4977–5010, 2014.
- [43] Mariia Matveieva and Pavel Polishchuk. Benchmarks for interpretation of qsar models. *Journal of cheminformatics*, 13(1):1–20, 2021.
- [44] Bowen Tang, Skyler T Kramer, Meijuan Fang, Yingkun Qiu, Zhen Wu, and Dong Xu. A self-attention based message passing neural network for predicting molecular lipophilicity and aqueous solubility. *Journal of cheminformatics*, 12(1):1–9, 2020.
- [45] David Weininger. Smiles, a chemical language and information system. 1. introduction to methodology and encoding rules. *Journal of chemical information and computer sciences*, 28(1):31–36, 1988.
- [46] Greg Landrum et al. Rdkit: A software suite for cheminformatics, computational chemistry, and predictive modeling, 2013.
- [47] Bharath Ramsundar, Peter Eastman, Patrick Walters, and Vijay Pande. *Deep learning for the life sciences: applying deep learning to genomics, microscopy, drug discovery, and more*. O’Reilly Media, 2019.
- [48] Kevin Yang, Kyle Swanson, Wengong Jin, Connor Coley, Philipp Eiden, Hua Gao, Angel Guzman-Perez, Timothy Hopper, Brian Kelley, Miriam Mathea, et al. Analyzing learned molecular representations for property prediction. *Journal of chemical information and modeling*, 59(8):3370–3388, 2019.
- [49] Yuxuan Gong, Yuqi Yue, Weidong Ji, and Guohui Zhou. Cross-domain few-shot learning based on pseudo-siamese neural network. *Scientific Reports*, 13(1):1427, 2023.
- [50] Kevin P Murphy. *Machine learning: a probabilistic perspective*. MIT press, 2012.

- [51] Krzysztof C Kiwiel. Convergence and efficiency of subgradient methods for quasiconvex minimization. *Mathematical programming*, 90(1):1–25, 2001.
- [52] Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [53] Andreas Mayr, Günter Klambauer, Thomas Unterthiner, and Sepp Hochreiter. Deeptox: toxicity prediction using deep learning. *Frontiers in Environmental Science*, 3:80, 2016.
- [54] Evan N Feinberg, Debnil Sur, Zhenqin Wu, Brooke E Husic, Huanghao Mai, Yang Li, Saisai Sun, Jianyi Yang, Bharath Ramsundar, and Vijay S Pande. Potentialnet for molecular property prediction. *ACS central science*, 4(11):1520–1530, 2018.
- [55] Jinjiang Guo, Jie Li, Dawei Leng, and Lurong Pan. Heterogeneous graph based deep learning for biomedical network link prediction. *arXiv preprint arXiv:2102.01649*, 2021.
- [56] Jian-Ping Mei, Chee-Keong Kwoh, Peng Yang, Xiao-Li Li, and Jie Zheng. Drug–target interaction prediction by learning from local information and neighbors. *Bioinformatics*, 29(2):238–245, 2013.
- [57] Zheng Xia, Ling-Yun Wu, Xiaobo Zhou, and Stephen TC Wong. Semi-supervised drug-protein interaction prediction from heterogeneous biological spaces. In *BMC systems biology*, volume 4, pages 1–16. BioMed Central, 2010.
- [58] Xiaodong Zheng, Hao Ding, Hiroshi Mamitsuka, and Shanfeng Zhu. Collaborative matrix factorization with multiple similarities for predicting drug-target interactions. In *Proceedings of the 19th ACM SIGKDD international conference on Knowledge discovery and data mining*, pages 1025–1033, 2013.
- [59] Dong-Sheng Cao, Jian-Hua Huang, Jun Yan, Liang-Xiao Zhang, Qian-Nan Hu, Qing-Song Xu, and Yi-Zeng Liang. Kernel k-nearest neighbor algorithm as a flexible sar modeling tool. *Chemometrics and Intelligent Laboratory Systems*, 114:19–23, 2012.
- [60] Rachid Darnag, EL Mostapha Mazouz, Andreea Schmitzer, Didier Villemin, Abdellah Jarid, and Driss Cherqaoui. Support vector machines: development of qsar models for predicting anti-hiv-1 activity of tibo derivatives. *European journal of medicinal chemistry*, 45(4):1590–1597, 2010.
- [61] Iban Sagardia, Rubén H Roa-Ureta, and Carlos Bald. A new qsar model, for angiotensin i-converting enzyme inhibitory oligopeptides. *Food chemistry*, 136(3-4):1370–1376, 2013.